

DME&JDE Easy-Flex Velcro Sleeve

Easy-Flex Velcro Sleeve is produced from polyamide with Polyester and nylon Velcro fasteners which make it very easy and fast to install on hose assemblies afterwards and repeatedly.

- Material: Polyester and nylon Velcro
- UV protected
- Resistant to acids, oil and solvents
- Pin-hole protection ISO 3457 and ISO 4413
- Abrasion resistance: >100 000 cycles
- Temperature range: -20 °C to +180 °C
- Color: black



Why Easy-Flex Velcro Sleeve?

Easy-Flex Velcro Sleeve is very easy and fast to install on hose assemblies afterwards and repeatedly. This makes it a very cost-effective solution for hose protection and hose bundling.

This product is tailor-made and we can offer you different solutions by adding for example mounting eyelets and / or bundling straps.

Easy-Flex Velcro Sleeve Features

- 100% Polyamide with PU coating and Velcro type fasteners
- Fulfil the demands of standard ISO 3457 (pin hole –approved)
- Excellent tensile strength (EN ISO 13934-1)
- Water repellence of the fabric is 100 % (EN 24920)
- Abrasion resistant
- Recommended temperature range from -20 °C to +120 °C



Specifications

Available Colors

Black with white printing only. Own printing possible (MOQ apply)

Available Sizes and Lengths

- Standard diameters ID: 20 mm, 40 mm, 50 mm, 60 mm, 80 mm, 100 mm, 120 mm and 150 mm.
- Other diameters (from ID 20 mm to 400 mm in 5 mm intervals) are available on request
- Standard roll lengths are 10 m and 25 m. Other roll lengths up to 50 m and all fixed lengths (MOQ apply) are produced after order.

Table 1: Easy-Flex Velcro Sleeve Specifications

Part No.	I.D. (mm)	Width (mm)	Wall Thickness (mm)	Roll Length (Meters)	MOQ (Meters)	Color
D&J-VELCRO-017	16	17	1	50	500	Black
D&J-VELCRO-020	20	22	1	50	500	Black
D&J-VELCRO-026	25	27	1	50	500	Black
D&J-VELCRO-027	30	32	1	50	500	Black
D&J-VELCRO-029	35	37	1	50	500	Black
D&J-VELCRO-030	40	42	1	50	500	Black
D&J-VELCRO-036	45	47	1	50	500	Black
D&J-VELCRO-039	50	52	1	50	500	Black
D&J-VELCRO-042	55	57	1	50	500	Black
D&J-VELCRO-046	60	62	1	50	500	Black
D&J-VELCRO-048	65	67	1	50	500	Black

Accessories

Hose clamp

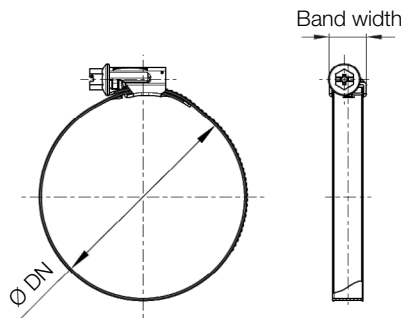


Table 2: Hose Clamp Materials

Part	W1	W2	W3	W4	W5
Hose Clamp Band & Accessory	Galvanized Steel	Stainless steel AISI 430	Stainless steel AISI 430	Stainless steel AISI 304	Stainless steel AISI 316
Screw & Lock Washer	Galvanized Steel	Galvanized low carbon steel	Stainless steel AISI 403	Stainless steel AISI 304	Stainless steel AISI 316

Table 3: Hose Clamp Specifications

Band Width mm	Description	Gripping Range DN (mm)	DME&JDE Group Code					Package Qty. pcs
			W1	W2	W3	W4	W5	
7.5	SHIELD-FLEX® 8-12	8-12	—	0116*7602*010	0116*7603*010	—	—	100
7.5	SHIELD-FLEX® 10-16	10-16	—	0116*7602*013	0116*7603*013	—	—	100
7.5	SHIELD-FLEX® 12-18	12-18	—	0116*7602*015	0116*7603*015	—	—	100
7.5	SHIELD-FLEX® 12-22	12-22	—	0116*7602*017	0116*7603*017	—	—	100
7.5	SHIELD-FLEX® 16-27	16-27	—	0116*7602*021	0116*7603*021	—	—	100
9	SHIELD-FLEX® 8-12	8-12	0126*7565*010	0126*7702*010	0126*7703*010	0126*7704*010	—	100
9	SHIELD-FLEX® 10-16	10-16	0126*7565*013	0126*7702*013	0126*7703*013	0126*7704*013	0126*7705*013	100
9	SHIELD-FLEX® 12-22	12-22	0126*7565*017	0126*7702*017	0126*7703*017	0126*7704*017	0126*7705*017	100
9	SHIELD-FLEX® 16-27	16-27	0126*7565*021	0126*7702*021	0126*7703*021	0126*7704*021	0126*7705*021	100
9	SHIELD-FLEX® 20-32	20-32	0126*7565*026	0126*7702*026	0126*7703*026	0126*7704*026	0126*7705*026	100
9	SHIELD-FLEX® 25-40	25-40	0126*7565*032	0126*7702*032	0126*7703*032	0126*7704*032	0126*7705*032	100
9	SHIELD-FLEX® 30-45	30-45	0126*7565*037	0126*7702*037	0126*7703*037	0126*7704*037	0126*7705*037	100
9	SHIELD-FLEX® 35-50 (32-50)	35-50	0126*7565*043	0126*7702*041	0126*7703*041	0126*7704*041	0126*7705*041	50
9	SHIELD-FLEX® 40-60	40-60	0126*7565*050	0126*7702*050	0126*7703*050	0126*7704*050	0126*7705*050	50
9	SHIELD-FLEX® 50-70	50-70	0126*7565*060	0126*7702*060	0126*7703*060	0126*7704*060	0126*7705*060	50
9	SHIELD-FLEX® 60-80	60-80	0126*7565*070	0126*7702*070	0126*7703*070	0126*7704*070	0126*7705*070	25
9	SHIELD-FLEX® 70-90	70-90	0126*7565*080	0126*7702*080	0126*7703*080	0126*7704*080	0126*7705*080	25
9	SHIELD-FLEX® 80-100	80-100	0126*7565*090	0126*7702*090	0126*7703*090	0126*7704*090	0126*7705*090	25
9	SHIELD-FLEX® 90-110	90-110	0126*7565*100	0126*7702*100	0126*7703*100	0126*7704*100	0126*7705*100	25
9	SHIELD-FLEX® 100-120	100-120	0126*6565*110	0126*6702*110	0126*6703*110	0126*6704*110	0126*6705*110	25
9	SHIELD-FLEX® 110-130	110-130	0126*6565*120	0126*6702*120	0126*6703*120	0126*6704*120	0126*6705*120	25
9	SHIELD-FLEX® 120-140	120-140	0126*6565*130	0126*6702*130	0126*6703*130	0126*6704*130	0126*6705*130	25
9	SHIELD-FLEX® 130-150	130-150	0126*6565*140	0126*6702*140	0126*6703*140	0126*6704*140	0126*6705*140	25
9	SHIELD-FLEX® 140-160	140-160	0126*6565*150	0126*6702*150	0126*6703*150	0126*6704*150	0126*6705*150	25
12	SHIELD-FLEX® 16-27	16-27	0136*7352*021	0136*7702*021	0136*7703*021	0136*7704*021	0136*7705*021	50
12	SHIELD-FLEX® 20-32	20-32	0136*7352*026	0136*7702*026	0136*7703*026	0136*7704*026	0136*7705*026	50
12	SHIELD-FLEX® 25-40	25-40	0136*7352*032	0136*7702*032	0136*7703*032	0136*7704*032	0136*7705*032	50
12	SHIELD-FLEX® 30-45	30-45	0136*7352*037	0136*7702*037	0136*7703*037	0136*7704*037	0136*7705*037	50
12	SHIELD-FLEX® 35-50	35-50	0136*7352*043	0136*7702*043	0136*7703*043	0136*7704*043	0136*7705*043	50
12	SHIELD-FLEX® 40-60	40-60	0136*7352*050	0136*7702*050	0136*7703*050	0136*7704*050	0136*7705*050	25
12	SHIELD-FLEX® 50-70	50-70	0136*7352*060	0136*7702*060	0136*7703*060	0136*7704*060	0136*7705*060	25
12	SHIELD-FLEX® 60-80	60-80	0136*7352*070	0136*7702*070	0136*7703*070	0136*7704*070	0136*7705*070	25
12	SHIELD-FLEX® 70-90	70-90	0136*7352*080	0136*7702*080	0136*7703*080	0136*7704*080	0136*7705*080	25
12	SHIELD-FLEX® 80-100	80-100	0136*7352*090	0136*7702*090	0136*7703*090	0136*7704*090	0136*7705*090	25
12	SHIELD-FLEX® 90-110	90-110	0136*7352*100	0136*7702*100	0136*7703*100	0136*7704*100	0136*7705*100	25
12	SHIELD-FLEX® 100-120	100-120	0136*6352*110	0136*6702*110	0136*6703*110	0136*6704*110	0136*6705*110	20
12	SHIELD-FLEX® 110-130	110-130	0136*6352*120	0136*6702*120	0136*6703*120	0136*6704*120	0136*6705*120	20
12	SHIELD-FLEX® 120-140	120-140	0136*6352*130	0136*6702*130	0136*6703*130	0136*6704*130	0136*6705*130	20
12	SHIELD-FLEX® 130-150	130-150	0136*6352*140	0136*6702*140	0136*6703*140	0136*6704*140	0136*6705*140	20
12	SHIELD-FLEX® 140-160	140-160	0136*6352*150	0136*6702*150	0136*6703*150	0136*6704*150	0136*6705*150	20