



Telephone:
+86-411-82714513

Mobile: +86-19133858816 (WhatsApp & WeChat)

E-Mail: Info@dmejde.com

Web: www.dme-industries.com [www.dmejde.com\(Global Market\)](http://www.dmejde.com(Global Market))

DME&JDE Group Headquarters:
1705, Special Business Zone, 211 Youhao Road, Zhongshan District, Dalian, Liaoning, China.

DME&JDE Hydraulic fluid connector production base:
DME INDUSTRIES CO., LTD
Qiaodong Village, Paotai Town, Puwan New District, Dalian, Liaoning, China.

DME&JDE Hydraulic fluid hose production base:
HENGSHUI JIDIER SPECIAL RUBBER HOSE CO., LTD.
Qian Me Tou Economic Industrial Zone, Hengshui, Hebei, China.

DME&JDE Hydraulic fluid assembly production base:
DME&JDE FLUID CO., LTD.
Qian Me Tou Economic Industrial Zone, Hengshui, Hebei, China.

DME&JDE FLUID CO.,LTD:
A-1008 huizhong Plaza Business, Hengshui City,
Hebei Province, China.



Global Market



Wechat Public Account

CERTIFICATE



DME&JDE FLUID CONNECTOR CATALOGUE



FLUID CONNECTORS & SOLUTIONS

Powered by DME&JDE Group

☒ HYDRAULIC CONNECTORS

☐ HYDRAULIC FLEXIBLE HOSE

☐ HYDRAULIC ASSEMBLY & CRIMPER



CONTENTS

01

Corporate.....	01
Honor&Certificate.....	04
Global Business.....	05
MS System.....	07
Product Selection.....	09
Hydraulic Adaptors.....	11
Code System.....	13

02

Fluid Connector

Hydraulic Adaptors.....	15
Hydraulic Flange & Adaptors.....	739
Hose Fittings.....	781

03

Image & Video Gallery.....	927
Become A distributor.....	931

DME&JDE GROUP
YOUR CONNECTORS & HOSES OEM SOLUTIONS



MAKE FLUID TRANSMISSION EFFICIENT

DME&JDE is committed to design, manufacture and support fluid transmission solutions. We insist on application-orientation to solve all problems during transmission. Advanced Production technology, wide ranges of flexible hoses, fluid connectors and rich export and projects experience guarantee our capacity to design right OEM fluid solutions for all transmission difficulty.

DME&JDE continuously expands our product ranges and value-added service and improve technologies and equipment to supply products outperform industry standards and exceed customers' demanding expectations.



Hydraulic Hose & Connector Stocks



60,000,000

More than 60,000,000 worth of inventory of fluid connectors support massive storage system

200 Million

Annual Sales

More than 200,000,000 annual sales evidence corporate strength and establish higher goals

Professional Engineers



20

Professional and senior engineers solve all technical technological difficulties and customers problems

Exclusive Distributor

100+



More than 100 exclusive distributors (including those under negotiation) cover all global markets

Industry Covering

200+



More than 200 kinds of customers cover main host manufacture and maintenance industries

Hoses Monthly Output

1,000,000

Up to 1,000,000 flexible hoses monthly output satisfy large orders and guarantee timely delivery

Headquarters



FLUID CONNECTORS & SOLUTIONS
Powered by DME&JDE Group

Fluid Connection Division

DME INDUSTRIES CO., LTD
Dalian, China

DME was established in 1993. Fluid connectors are manufactured by standard automation equipment and in accordance to SAE, ISO, BSI and DIN standards and fittings are of JIC, BSP, ORFS and Bite type.

DME is the main supplier of main vendors in Europe and America.

Fluid Connection



FLEXIBLE HOSE & FLUID SOLUTIONS
Powered by DME&JDE Group

Fluid Hose Division

HENGSHUI JIDIER SPECIAL RUBBER HOSE CO., LTD.
Hengshui, China

JDE, founded in 2009, is dedicated to hydraulic hoses, industrial hoses and other industrial hoses manufacturing.

JDE adopts German, American and Italian advanced equipment, all products line exceed I SAE J517, DIN/EN853, EN854, EN857, ISO, GB and other industries requirements.

Fluid Hose



YOUR FLUID OEM SOLUTIONS
Powered by DME&JDE Group

Fluid OEM Solution Division

DME&JDE FLUID CO., LTD.
Hengshui, China

DME&JDE FLUID CO., LTD. is established in 2021. The investors are DME and JDE. Working with "ONE STOP SOLUTION": Assembly, Hose-Crimper, Hose-Cutting, Hose-Pressure test, Hose-Skive and assembly parts.

We aim to design hydraulic fluid solutions, provide long-lasting and stable motivation for all industries and guarantee our dealers and end users. Ensure that free from hydraulic traffic accidents, unexpected shutdowns, and significantly reduce procurement costs, quality assurance costs, and other issues.

Fluid OEM Solution

HONOR & CERTIFICATE



ISO 9001
Fluid connector

IATF 16949

ISO 14001

ISO 50001




IATF Certificate

BV Certificate

UK EUTEST Certificate

IATF Certificate

GOST Certificate

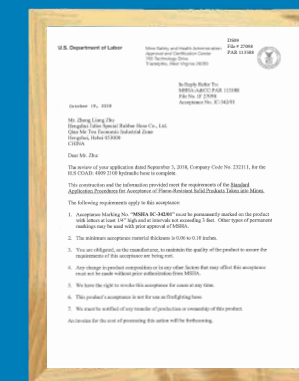

MSHA Certificate



MA Certificate



GLOBAL BUSINESS


DME&JDE Worldwide (Ranked by A-Z)

Australia | Bolivia | Brazil | Cambodia | Canada | Chile | China | Colombia | Denmark | Dubai | Ecuador | France | Ghana | Guatemala | Hungary | India | Indonesia | Ireland | Italy | Mexico | Myanmar | New Zealand | Peru | Philippines | Poland | Romania | Russia | Seychelles | South Africa | South Korea | Spain | Thailand | Turkey | United Kingdom | United States | Vietnam



MS SYSTEM

Each Product of DME&JDE uniquely encoded tracking label to supply strong data support, products traceability and order transparency. And it can effectively reducing equipment downtime and avoid of quality problems.

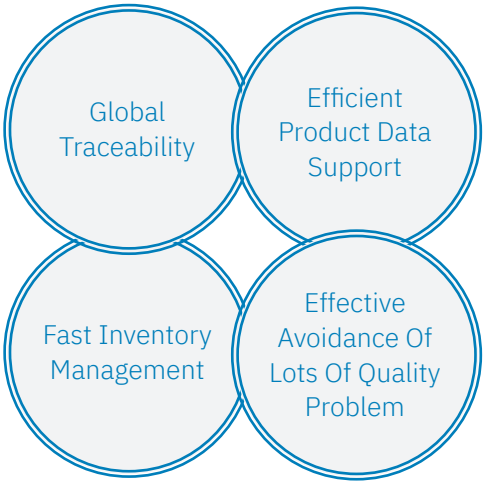

DME&JDE Product Quality Control Traceability System Services for Global Customers



DME&JDE Product Quality
Control Traceability & ERP System / Services for Global Customers

PRODUCT SELECTION

DME&JDE fluid connectors, (including adaptors, hose fittings and flanges) are designed for reliable and effective connections and a tailored fit to your DME&JDE hydraulic (or industrial) hoses and assemblies. Now, we have developed and manufactured thousands of product ranges of fluid connectors to keep your fluid power transfer smooth and efficient and reduce downtime. We aim to supply fluid connectors to connect and sealing all ports and equipment.



Hydraulic Adaptors

An adaptor allows you to connect your hose of one size to a port, hose or fitting of a different size. And it can help to change your transfer line.



Hydraulic Flange & Adaptor

Flange connections generally are used with tubing that has an O.D. greater than 7/8" or for applications involving extremely high pressures.



Hose Fittings

Full ranges of crimping hose fittings and removable fittings can perfectly compatible with your current flexible hoses and hose assemblies.





Hydraulic Adaptors

Hydraulic adaptors are fittings with connection threads on two or more sides. Hydraulic adaptor is mainly used for following applications: change thread types to another. Be used at a port connection, simplify orientation and accommodate several lines. DME&JDE offers large range of adaptors, which includes a wide variety of sizes, end styles, thread, and connection types.

Our adaptors cover an extensive range which includes:

BSP, NPT & NPSM, JIC, METRIC, ORFS, SAE Threads.



Changing thread type to another

This is the common use in an in-line connection from a port connection. And it makes hoses more adaptable and with a wider application.



Port Connection

Using at a port connection where a straight hose fitting will be connected

- Eliminates stress on both port and looks more streamlined.



Simplifying orientation

Instead of using two bent tubes, it's easier to use a bent tube flange adapter. It's also faster and easier to make and install hose assemblies.



Accommodating several lines.

A "Tee" or "Cross" adapter is used to accommodate several lines, such as connecting two hose assemblies into a common port.



Straight



45° Elbow



90° Elbow



Tee



Cross



Adaptor With O Ring



Adaptor With Flange



Male Plug

CODE SYSTEM

e.g. DAJCML28F-0404

D

Brand



A

Product Range

Hydraulic Adaptor

JC

JIC

Thread Types	
Code	Description
BP	BSPP
BT	BSPT
JC	JIC
UN	SAE
NP	NPTF
NPS	NPSM
OF5	ORFS
JSB	JIS BSPP
JSM	JIS Metric
M	Metric
JCM	74° Cone Metric

M

Male

Thread Types	
Code	Description
M	Male
F	Female
1	Swivel Female

L

Run Tee

Adaptor Structure	
Code	Description
1	Straight
4	45° Elbow
9	90° Elbow
T	Branch Tee
L	Run Tee
X	Cross

28

NPTF

Thread Types	
Code	Description
05	BSPP
061	BSPP + Retaining Ring
07	BSPT
081	BSPP Swivel
28	NPTF
30	SAE
25	JIC
251	JIC Swivel
24	ORFS
241	ORFS Swivel
52	Metric
521	Metric + ED Ring
52J	JIS Metric
071	Metric Swivel
091	NPS Swivel
041	BSP Swivel

F

Female

Connection Type	
Code	Description
M	Male
F	Female
5	O ring
Q	O Ring + Retaining Ring
T	Bulkhead
S	Butt Welding
B	Socket Welding
J	Long Type + O Ring
Y	Long Type + O Ring + Retaining Ring

0404

For Straight Adaptor

XXXX-0406,
① 04 ② 06

For Elbow Adaptor

XXXX-0406,
① 04 ② 06

For Tee

XXXX-040608,
① 04 ② 06 ③ 08
XXXX-0406,
① ② 04 ③ 06

-

Other

Code	Description
000	Plug
LN	Bulkhead Nut
FR	Bushing
TP	Test Point Adaptor
B	Swept Elbow
SS	Stainless Steel Material



Hydraulic Adaptors


BSP »



Certificate:

DABPM105M


P26



Straight Connector BSPP Male
60° Cone - BSPP Male 60° Cone

DABPM128M


P27



Straight Connector BSPP Male
60° - NPTF Male Large Hexagon

DABPM152M


P28



Straight Connector BSPP Male
60° Cone-Metric Male 60°Cone

DABPM107M-LH


P29



Straight Connector BSPP Male
60° Cone - BSPT Male 60° Large
Hexagon

DABPM152JM


P31



Straight Connector BSPP Male 60°
Cone - JIS Metric Male 60°Cone

DABPM107M


P32



Straight Connector BSPP Male 60° -
BSPT Male 60°

DABPM1305


P33



Straight Connector BSPP Male 60° -
BSPT Male 60°

DABPM106Q


P34



Straight Connector BSPP Male 60° -
BSPP Male + O Ring + Retaining Ring

DABPM152Q


P35



Straight Connector BSPP Male 60° -
Metric Male + O Ring + Retaining Ring

DABPM1525


P36



Straight Connector BSPP Male 60° -
Metric Male + O Ring

DABPM105M-ED


P37



Straight Connector BSPP Male 60°
with ED Ring

DABPM107M-ED


P38



Straight Connector BSPP Male 60°
with ED Ring - BSPT Male 60°

DABPM1061


P39



Straight Connector BSPP Male 60°
Cone- BSPP Male with ED Seal

DABPM1521


P40



Straight Connector BSPP Male 60°
Cone-Metric Male 60°Cone

DABTM107M


P41



Straight Connector BSPT Male 60°
-BSPT Male 60°

DABTM128M


P42



Straight Connector BSPT Male 60° -
NPTF Male 60°

DABTM1305


P43



Straight Connector BSPT Male 60° - SAE Male + O Ring

DABPM1000


P44



Male Plug BSPP Male 60°

DABPM1000-ED


P45



Male Plug BSPP Male 60° ED Seal

DABT21000-HHP


P46



Male Plug with Hexagon Socket Head BSPT

DABPM105F


P47



Straight Connector BSPP Male 60° - BSPP Fixed Female

DABPM105FR


P48



Straight Bushing Connector BSPP Male 60° - BSPP Fixed Female

DABPM128F


P49



Straight Connector BSPP Male 60° - NPTF Female

DABPM107F


P50



Straight Connector BSPP Male 60° Cone-BSPT Female Cone

DABPM1081


P51



Straight Connector BSPP Male 60° - BSPP Swivel Female 60°

DABPM1251


P52



Straight Connector BSP Male 60° - JIC Swivel Female 74°

DABTM107F


P53



Straight Connector BSPT Male 60° - BSPT Fixed Female

DABTM107FR


P54



Straight Bushing Connector BSPT Male 60° - BSPT Fixed Female

DABTM105F


P55



Straight Connector BSPT Male 60° - BSPP Fixed Female

DABTM105FR


P56



Straight Bushing Connector BSPT Male 60° - BSPP Fixed Female

DABTM152F


P57



Straight Adaptor BSPT Male 60° - Metric Fixed Female

DABTM152FR


P58



Straight Bushing Connector BSPT Male 60° - Metric Fixed Female

DABTM128F


P59



Straight Connector BSPT Male 60° - NPTF Female

DABPF152M


P60



Straight Connector BSPP Fixed Female - Metric Male 60°

DABPF1305


P61



Straight Adaptor BSPP Fixed Female - SAE Male O Ring

DABP11065


P62



Straight Connector BSPP Swivel Female 60° - BSPP Male + O Ring

DABP1106Q


P63



Straight Connector BSPP Swivel Female 60° - BSPP Male + O Ring + Retaining Ring

DABP11305


P64



Straight Connector BSP Swivel Female 60° - SAE Male O Ring Boss

DABP1152Q


P65



Straight Connector BSPP Swivel Female 60° - Metric Male + O Ring + Retaining Ring

DABP11525


P66



Straight Connector BSPP Swivel Female 60° - Metric Male + O Ring

DABP1107M


P67



Straight Connector BSPP Swivel Female 60° - BSPT Male 60°

DABPD0000


P68



NUT BSPP

DABP31000


P69



Female Cap BSPP

DABP31000-C


P70



Female Cap BSPP

DABPF105F


P71



Straight Connector BSPP Female Fixed

DABPF128F


P72



Straight Coupling BSPP Fixed Female - NPTF Fixed Female

DABPF1081


P73



Straight Connector BSPP Fixed Female - BSPP Swivel Female 60°

DABP11081


P74



Straight Connector BSPP Swivel Female 60° - BSPP Swivel Female 60°

DABP11251


P75



Straight Connector BSPP Swivel
Female 60° - JIC Swivel Female 74°

DABTF107F


P76



Straight Connector BSPT Female
Fixed

DABPM100S


P77



Straight Adaptor BSPP Male 60° -
Butt Welding

DABPM100B


P78



Bonding (socket welding) Connector
BSPP Male 60° - Metric / Imperial
Tube

DABTM100B


P79



Bonding (socket welding) Connector
BSPT Male 60° - Metric / Imperial
Tube

DABTM1000


P80



Male Plug BSPT Male 60°

DABP1100B


P81



Straight Welding Connector BSPP
Swivel Female - Metric/Imperial
Tube

DABPM105T


P82



Straight Bulkhead Connector BSPP
Male 60° - BSPP Male 60°

DABPM105T-ED

P83



Straight Bulkhead Connector BSPP
Male 60° ED Seal - BSPP 60° Male

DABPLN


P84



BSPP Bulkhead Nut

DABPM405M


P85



45° Elbow Connector BSPP Male 60°
- BSPP 60° Male

DABPM407M


P86



45° Elbow Connector BSPP Male 60°
- BSPT Male 60°

DABPM428M


P87



45° Elbow Connector BSPP Male 60° -
NPTF Male 60°

DABTM407M


P88



45° Elbow Connector BSPT Male 60° -
BSPT Male 60°

DABPM406Q


P89



45° Adjustable Elbow BSPP Male 60°
- BSPP Male + O Ring + Retaining Ring

DABPM406S


P90



45° Adjustable Elbow BSPP Male 60°
- BSPP Male + O Ring

DABPM430S


P91



45° Adjustable Elbow BSPP Male 60°
- SAE Male + O Ring

DABPM452Q


P92



45° Adjustable Elbow BSPP Male
60° - Metric Male + O Ring +
Retaining Ring

DABPM452S


P93



45° Adjustable Elbow BSPP Male
60° - Metric Male + O Ring

DABPM4081


P94



45° Elbow Connector BSPP Male
60° - BSPP Swivel Female 60°

DABPM4251


P95



45° Elbow Connector BSPP Male 60°
Cone - JIC Swivel Female 74°

DABTM4081


P96



45° Elbow Connector BSPT Male 60°
- BSPP Swivel Female 60°

DABPF428M


P97



45° Elbow Connector BSPP Fixed
Female - NPTF Male 60°

DABPF407M


P98



45° Elbow Connector BSPP Fixed
Female - BSPT Male

DABP1430S


P99



45° Adjustable Elbow BSPP Swivel
Female 60° - SAE Male O Ring

DABP1406Q


P100



45° Adjustable Elbow BSPP Swivel
Female 60° - BSPP Male + O Ring +
Retaining Ring

DABP1452S


P101



45° Adjustable Elbow BSPP Swivel
Female - Metric Male + O Ring

DABP1452Q


P102



45° Adjustable Elbow BSPP Swivel
Female 60° - Metric Male + O Ring +
Retaining Ring

DABP1406S


P103



45° Adjustable Elbow BSPP Swivel
Female 60° - BSPP Male + O Ring

DABPF405F


P104



45° Elbow Connector BSPP Fixed
Female - BSPP Fixed Female

DABP14081


P105



45° Elbow Connector BSPP Swivel
Female 60° - BSPP 60° Swivel Female
45°

DABTF407F


P106



45° Elbow Connector BSPT Fixed
Female - BSPT Fixed Female

DABPM905M


P107



90° Elbow Connector BSPP Male 60° -
BSPP 60° Male

DABPM905M-SQ


P108



90° Elbow Connector Square BSPP
Male 60° - BSPP 60° Male

DABPM907M


P109



90° Elbow Connector BSPP Male
60° - BSPT Male 60°

DABPM928M


P110



90° Elbow Connector BSPP Male 60° -
NPTF Male 60°

DABPM9065


P111



90° Adjustable Elbow BSPP Male 60°
- BSPP Male + O Ring

DABPM906Q


P112



90° Adjustable Elbow BSPP Male 60°
- BSPP Male + O Ring + Retaining
Ring

DABPM9305


P113



90° Adjustable Elbow BSPP Male 60°
- SAE Male O Ring

DABPM952Q


P114



90° Adjustable Elbow BSPP Male 60°
- Metric Male + O Ring + Retaining
Ring

DABPM9525


P115



90° Adjustable Elbow BSPP Male 60°
- Metric Male + O Ring

DABPM930J


P116



90° Adjustable Long Elbow BSPP Male
60° - SAE Male + O Ring

DABPM906Y


P117



90° Adjustable Long Elbow BSPP
Male 60° - BSPP Male + O Ring +
Retaining Ring

DABPM906J


P118



90° Adjustable Long Elbow BSPP
Male 60° - BSPP Male + O Ring

DABPM952Y


P119



90° Adjustable Long Elbow BSPP Male
60° - Metric Male + O Ring + Retaining
Ring

DABPM952J


P120



90° Adjustable Long Elbow BSPP Male
60° - Metric Male + O Ring

DABPM905T


P121



90° Bulkhead Elbow BSPP Male 60° -
BSPP 60° Male

DABTM907M


P122



90° Elbow BSPT Male 60° - BSPT Male
60°

DABTM928M


P123



90° Elbow BSPT Male 60° - NPTF
Male 60°

DABTM9305


P124



90° Adjustable Elbow BSPT Male
60° - SAE Male + O Ring

DABTM906Q


P125



Adjustable 90° Elbow BSPT Male 60°
- BSPP Male + O Ring + Retaining
Ring

DABPM905F


P126



90° Elbow Connector BSPP Male
60° - BSPP Fixed Female

DABPM925I


P127



90° Elbow Connector BSPP Male
60° Cone - JIC Swivel Female 74°

DABPM9081


P128



90° Elbow Connector BSPP Male 60°
- BSPP Swivel Female 60°

DABPM9081-B


P129



90° Swept Elbow BSPP Male 60°
Cone - BSPP Swivel Female 60°

DABPM9081-SQ


P130



90° Elbow Connector BSPP Male 60°
Cone - BSPP Swivel Female 60°

DABTM9081


P131



90° Elbow Connector BSPT Male 60° -
BSPP Swivel Female 60°

DABPF907M


P132



90° Elbow Connector BSPP Fixed
Female - BSPT Male

DABPF906Q


P133



90° Adjustable Elbow BSPP Fixed
Female - BSPP Male + O Ring +
Retaining Ring

DABP19065


P134



90° Adjustable Elbow BSPP Swivel
Female 60° - BSPP Male + O Ring

DABP1906Q


P135



90° Adjustable Elbow BSPP Swivel
Female 60° - BSPP Male + O Ring +
Retaining Ring

DABP1952Q


P136



90° Adjustable Elbow BSPP Swivel
Female 60° - Metric Male + O Ring +
Retaining Ring

DABP19525


P137



90° Adjustable Elbow BSPP Swivel
Female 60° - Metric Male + O Ring

DABP19305


P138



90° Adjustable Elbow BSPP
Swivel Female 60° - SAE Male +
O Ring

DABPF905F


P139



90° Elbow Connector BSPP Fixed Female - BSPP Fixed Female

DABP19081


P140



90° Elbow BSPP Swivel Female 60° - BSPP Swivel Female 60°

DABP19081-B


P141



90° Swept Elbow BSPP Swivel Female 60° - BSPP Swivel Female 60°

DABTF907F


P142



90° Elbow BSPT Fixed Female - BSPT Fixed Female

DABTM907F


P143



90° Elbow BSPT Male 60° - BSPT Fixed Female

DABPMT05M


P144



Branch Tee Connector BSPP Male 60° - BSPP Male 60°

DABPMT05M-SQ


P145



Branch Tee Connector Square BSPP Male 60° - BSPP Male 60°

DABPMT081


P146



Branch Tee Connector BSPP Male 60° - BSPP Swivel Female 60°

DABPMT081-SQ


P147



Branch Tee Connector Square BSPP Male 60° - BSPP Swivel Female 60°

DABPMT07M


P148



Branch Tee Connector BSPP Male 60° - BSPT Male 60°

DABPMT28M


P149



Branch Tee Connector BSPP Male 60° - NPTF Male 60°

DABPML07M


P150



Run Tee Connector BSPP Male 60° - BSPT Male 60°

DABPML28M


P151



Run Tee Connector BSPP Male 60° - NPTF Male 60°

DABPFT07M


P152



Branch Tee Connector BSPP Fixed Female - BSPT Male 60°

DABPFT28M


P153



Branch Tee Connector BSPP Fixed Female - NPTF Male 60°

DABPFL07M


P154



Run Tee Connector BSPP Fixed Female - BSPT Male 60°

DABPFL28M


P155



Run Tee Connector BSPP Fixed Female - NPTF Male 60°

DABPFT05F


P156



Equal Tee Connector BSPP Fixed Female - BSPP Fixed Female

DABP1T081


P157



Branch Tee BSPP Swivel Female 60° - BSPP Swivel Female 60°

DABPMT305


P158



Branch Adjustable Tee BSPP Male 60° - SAE Male + O Ring

DABPMT06Q


P159



Branch Adjustable Tee BSPP Male 60° - BSPP Male + O Ring

DABPMT065


P160



Branch Adjustable Tee BSPP Male 60° - BSPP Male + O Ring

DABPMT52Q


P161



Branch Adjustable Tee BSPP Male 60° - Metric Male + O Ring

DABPMT525


P162



Branch Adjustable Tee BSPP Male 60° - Metric Male + O Ring

DABPMT05T


P163



Branch Bulkhead Tee Connector BSPP Male 60° - BSPP Male 60°

DABPML181


P164



Run Tee Connector BSPP Male 60° - BSPP Swivel Female 60°

DABPML081


P165



Run Tee Connector BSPP Male 60° - BSPP Swivel Female 60°

DABPML081-SQ


P166



Run Tee Connector Square BSPP Male 60° - BSPP Swivel Female 60°

DABPFT06Q


P167



Branch Adjustable Tee Connector BSPP Fixed Female - BSPP Male + O Ring

DABPML305


P168



Run Adjustable Tee BSPP Male 60° - SAE Male + O Ring + Retaining Ring

DABPML06Q


P169



Run Adjustable Tee BSPP Male 60° - BSPP Male + O Ring + Retaining Ring

DABTML06Q


P170



Run Adjustable Tee BSPT Male 60° - BSPP Male + O Ring + Retaining Ring

DABPML065


P171



Run Adjustable Tee BSPP Male 60° -
BSPP Male + O Ring

DABPML52Q


P172



Run Adjustable Tee BSPP Male 60°
- Metric Male + O Ring + Retaining
Ring

DABPML525


P173



Run Adjustable Tee BSPP Male 60° -
Metric Male + O Ring

DABPMT181


P174



Branch Tee Connector BSPP Swivel
Female 60° - BSPP Swivel Female
60° - BSPP Male 60°

DABPML05T


P175



Run Bulkhead Tee BSPP Male 60° -
BSPP Male 60°

DABTMT07M


P176



Branch Tee Connector BSPT Male
60° - BSPT Male 60°

DABTFT07F


P177



Tee Connector BSPT Fixed Female
- BSPT Fixed Female

DABTML081


P178



Run Tee Connector BSPT Male 60° -
BSPP Swivel Female 60°

DABTFL07M


P179



Run Tee Adaptor BSPT Fixed Female
- BSPT Male 60°

DABPMX05M


P180



Cross Connector BSPP Male 60° -
BSPP Male 60°

DABPFX05F


P181



Cross Connector BSPP Fixed Female

DABPIX081

P182




Cross Connector BSPP Swivel
Female 60° Cone

DABPM105M

Straight Connector BSPP Male 60° Cone – BSPP Male 60° Cone

D	A	BP	M	1	05	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPP	Male	Straight	BSPP	Male

DME&JDE Code:	DABPM105M
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	BSPP 60° Cone × BSPP 60° Cone

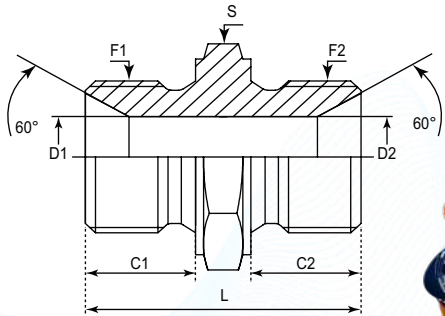

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Revision History
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm	
DABPM105M-0202	1/8"-28	1/8"-28	9.00	9.00	3.50	3.50	26.50	14.00	
DABPM105M-0402	1/4"-19	1/8"-28	11.00	9.00	4.70	3.50	28.00	19.00	
DABPM105M-0404	1/4"-19	1/4"-19	11.00	11.00	4.70	4.70	30.00	19.00	
DABPM105M-0602	3/8"-19	1/8"-28	12.00	9.00	7.90	3.50	32.00	22.00	
DABPM105M-0604	3/8"-19	1/4"-19	12.00	11.00	7.90	4.70	34.00	22.00	
DABPM105M-0606	3/8"-19	3/8"-19	12.00	12.00	7.90	7.90	35.00	22.00	
DABPM105M-0802	1/2"-14	1/8"-28	14.00	9.00	11.10	3.50	37.00	27.00	
DABPM105M-0804	1/2"-14	1/4"-19	14.00	11.00	11.10	4.70	37.00	27.00	
DABPM105M-0806	1/2"-14	3/8"-19	14.00	12.00	11.10	7.90	40.00	27.00	
DABPM105M-0808	1/2"-14	1/2"-14	14.00	14.00	11.10	11.10	40.00	27.00	
DABPM105M-1004	5/8"-14	1/4"-19	16.00	11.00	14.00	4.70	39.00	30.00	
DABPM105M-1006	5/8"-14	3/8"-19	16.00	12.00	14.00	7.90	40.00	30.00	
DABPM105M-1008	5/8"-14	1/2"-14	16.00	14.00	14.00	11.10	42.00	30.00	
DABPM105M-1010	5/8"-14	5/8"-14	16.00	16.00	14.00	14.00	43.00	30.00	
DABPM105M-1204	3/4"-14	1/4"-19	16.00	11.00	16.70	4.70	41.00	32.00	
DABPM105M-1206	3/4"-14	3/8"-19	16.00	12.00	16.70	7.90	41.00	32.00	
DABPM105M-1208	3/4"-14	1/2"-14	16.00	14.00	16.70	11.10	45.00	32.00	
DABPM105M-1210	3/4"-14	5/8"-14	16.00	16.00	16.70	14.00	43.00	32.00	
DABPM105M-1212	3/4"-14	3/4"-14	16.00	16.00	16.70	16.70	45.50	32.00	2024/6/4,Dimension L of item AT01496(DABPM105M-1212)has been changed from 45±0.5mm to 45.5±0.5mm
DABPM105M-1606	1"-11	3/8"-19	19.00	12.00	22.20	7.90	46.00	41.00	
DABPM105M-1608	1"-11	1/2"-14	19.00	14.00	22.20	11.10	48.00	41.00	
DABPM105M-1610	1"-11	5/8"-14	19.00	16.00	22.20	14.00	50.00	41.00	
DABPM105M-1612	1"-11	3/4"-14	19.00	16.00	22.20	16.70	50.00	41.00	
DABPM105M-1616	1"-11	1"-11	19.00	19.00	22.20	22.20	53.00	41.00	
DABPM105M-2008	1-1/4"-11	1/2"-14	20.00	14.00	28.60	11.10	53.00	50.00	
DABPM105M-2012	1-1/4"-11	3/4"-14	20.00	16.00	28.60	16.70	53.00	50.00	
DABPM105M-2016	1-1/4"-11	1"-11	20.00	19.00	28.60	22.20	57.00	50.00	
DABPM105M-2020	1-1/4"-11	1-1/4"-11	20.00	20.00	28.60	28.60	57.00	50.00	
DABPM105M-2412	1-1/2"-11	3/4"-14	22.00	16.00	33.30	16.70	55.00	55.00	
DABPM105M-2416	1-1/2"-11	1"-11	22.00	19.00	33.30	22.20	56.00	55.00	
DABPM105M-2420	1-1/2"-11	1-1/4"-11	22.00	20.00	33.30	28.60	60.00	55.00	
DABPM105M-2424	1-1/2"-11	1-1/2"-11	22.00	22.00	33.30	33.30	61.00	55.00	
DABPM105M-3216	2"-11	1"-11	25.00	19.00	46.00	22.20	60.00	65.00/70.00	
DABPM105M-3220	2"-11	1-1/4"-11	25.00	20.00	46.00	28.60	65.00	70.00	
DABPM105M-3224	2"-11	1-1/2"-11	25.00	22.00	46.00	33.30	67.00	70.00	
DABPM105M-3232	2"-11	2"-11	25.00	25.00	46.00	46.00	70.00	70.00	


DABPM128M

Straight Connector BSPP Male 60° - NPTF Male Large Hexagon

D	A	BP	M	1	28	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPP	Male	Straight	NPTF	Male



DME&JDE Code:	DABPM128M
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	BSPP 60° × NPTF Large Hexagon
Other Features:	Large Hexagon

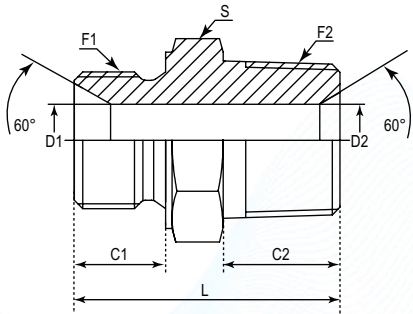

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	NPTF	mm	mm	mm	mm	mm	mm
DABPM128M-0202	1/8"-28	1/8"-27	9.00	9.65	3.50	3.50	25.00	14.00
DABPM128M-0204	1/8"-28	1/4"-18	9.00	14.22	3.50	7.14	31.50	17.00
DABPM128M-0402	1/4"-19	1/8"-27	11.00	9.65	4.70	4.70	28.00	19.00
DABPM128M-0404	1/4"-19	1/4"-18	11.00	14.22	4.70	7.14	33.00	19.00
DABPM128M-0406	1/4"-19	3/8"-18	11.00	14.22	4.70	10.31	34.60	19.00
DABPM128M-0408	1/4"-19	1/2"-14	11.00	19.05	4.70	13.49	39.00	22.22
DABPM128M-0604	3/8"-19	1/4"-18	12.00	14.22	7.14	7.14	36.70	22.00
DABPM128M-0606	3/8"-19	3/8"-18	12.00	14.22	7.90	10.31	37.50	22.00
DABPM128M-0608	3/8"-19	1/2"-14	12.00	19.05	7.90	13.49	40.00	22.22
DABPM128M-0806	1/2"-14	3/8"-18	14.00	14.22	10.31	10.31	40.00	27.00
DABPM128M-0808	1/2"-14	1/2"-14	14.00	19.05	11.10	13.49	45.50	27.00
DABPM128M-0812	1/2"-14	3/4"-14	14.00	19.05	11.10	18.26	45.70	28.57
DABPM128M-0816	1/2"-14	1"-11-1/2	14.00	23.88	11.10	22.20	51.50	36.00
DABPM128M-1008	5/8"-14	1/2"-14	16.00	19.05	13.49	13.49	47.00	30.00
DABPM128M-1012	5/8"-14	3/4"-14	16.00	19.05	14.00	18.26	47.00	30.00
DABPM128M-1206	3/4"-14	3/8"-18	16.00	14.22	16.70	10.31	43.00	32.00
DABPM128M-1208	3/4"-14	1/2"-14	16.00	19.05	16.70	13.49	48.00	32.00
DABPM128M-1212	3/4"-14	3/4"-14	16.00	19.05	16.70	16.70	49.00	32.00
DABPM128M-1216	3/4"-14	1"-11-1/2	16.00	23.88	16.70	22.20	53.50	36.00
DABPM128M-1612	1"-11	3/4"-14	19.00	19.05	22.20	18.26	52.00	41.00
DABPM128M-1616	1"-11	1"-11-1/2	19.00	23.88	22.20	22.20	57.00	41.00
DABPM128M-1620	1"-11	1-1/4"-11-1/2	19.00	24.64	22.20	31.75	58.50	46.00
DABPM128M-2016	1-1/4"-11	1"-11-1/2	20.00	23.88	28.60	23.83	60.00	50.00
DABPM128M-2020	1-1/4"-11	1-1/4"-11-1/2	20.00	24.64	28.60	31.75	59.50	50.00
DABPM128M-2024	1-1/4"-11	1-1/2"-11-1/2	20.00	25.40	28.60	38.10	62.00	50.80
DABPM128M-2420	1-1/2"-11	1-1/4"-11-1/2	22.00	24.64	31.80	31.75	63.50	55.00
DABPM128M-2424	1-1/2"-11	1-1/2"-11-1/2	22.00	25.40	33.30	38.10	64.00	55.00
DABPM128M-2432	1-1/2"-11	2"-11-1/2	22.00	26.16	33.30	49.23	66.00	63.50/65.00
DABPM128M-3224	2"-11	1 1/2"-11-1/2	25.00	25.40	46.00	38.10	68.00	70.00


DABPM152M

Straight Connector BSPP Male 60° Cone-Metric Male 60°Cone

D	A	BP	M	1	52	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPP	Male	Straight	Metric	Male



DME&JDE Code:	DABPM152M
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	BSPP 60° Cone × Metric 60° Cone

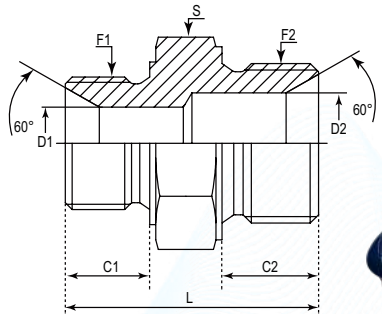

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	Metric	mm	mm	mm	mm	mm	mm
DABPM152M-0210	1/8"-28	M10X1	9.00	8.00	3.50	3.50	26.00	14.00
DABPM152M-0212	1/8"-28	M12X1.5	9.00	12.00	3.50	3.50	30.50	17.00
DABPM152M-0214	1/8"-28	M14X1.5	9.00	12.00	3.50	6.00	31.00	19.00
DABPM152M-0410	1/4"-19	M10X1	11.00	8.00	3.50	3.50	28.50	19.00
DABPM152M-0412	1/4"-19	M12X1.5	11.00	12.00	4.00	4.00	33.00	19.00
DABPM152M-0414	1/4"-19	M14X1.5	11.00	12.00	4.70	6.00	33.00	19.00
DABPM152M-0416	1/4"-19	M16X1.5	11.00	12.00	4.70	8.00	33.50	22.00
DABPM152M-0418	1/4"-19	M18X1.5	11.00	12.00	4.70	10.00	35.00	24.00
DABPM152M-0420	1/4"-19	M20X1.5	11.00	14.00	4.70	12.00	37.50	27.00
DABPM152M-0422	1/4"-19	M22X1.5	11.00	14.00	4.70	14.10	38.00	27.00
DABPM152M-0612	3/8"-19	M12X1.5	12.00	11.00	7.90	4.00	34.50	22.00
DABPM152M-0614	3/8"-19	M14X1.5	12.00	12.00	7.90	6.00	34.50	22.00
DABPM152M-0616	3/8"-19	M16X1.5	12.00	12.00	7.90	7.90	34.50	22.00
DABPM152M-0618	3/8"-19	M18X1.5	12.00	12.00	7.90	10.00	36.00	24.00
DABPM152M-0620	3/8"-19	M20X1.5	12.00	14.00	7.90	12.00	38.50	27.00
DABPM152M-0622	3/8"-19	M22X1.5	12.00	14.00	7.90	14.10	38.50	27.00
DABPM152M-0812	1/2"-14	M12X1.5	14.00	11.00	11.10	4.00	37.00	27.00
DABPM152M-0814	1/2"-14	M14X1.5	14.00	12.00	11.10	6.00	38.00	27.00
DABPM152M-0816	1/2"-14	M16X1.5	14.00	12.00	11.10	8.00	38.00	27.00
DABPM152M-0818	1/2"-14	M18X1.5	14.00	12.00	11.10	10.00	38.50	27.00
DABPM152M-0820	1/2"-14	M20X1.5	14.00	14.00	11.10	12.00	40.50	27.00
DABPM152M-0822	1/2"-14	M22X1.5	14.00	14.00	11.10	14.10	41.00	27.00
DABPM152M-0824	1/2"-14	M24X1.5	14.00	14.00	11.10	15.50	41.00	30.00
DABPM152M-0826	1/2"-14	M26X1.5	14.00	16.00	11.10	15.00	45.00	32.00
DABPM152M-1022	5/8"-14	M22X1.5	16.00	14.00	14.00	14.00	43.00	30.00
DABPM152M-1216	3/4"-14	M16X1.5	16.00	12.00	16.70	8.00	43.00	32.00
DABPM152M-1218	3/4"-14	M18X1.5	16.00	12.00	16.70	10.00	43.00	32.00
DABPM152M-1220	3/4"-14	M20X1.5	16.00	14.00	16.70	12.00	45.00	32.00
DABPM152M-1222	3/4"-14	M22X1.5	16.00	14.00	16.70	14.10	42.00	32.00
DABPM152M-1224	3/4"-14	M24X1.5	16.00	14.00	15.50	15.50	45.00	32.00
DABPM152M-1230	3/4"-14	M30X1.5	16.00	18.00	16.70	21.50	48.50	36.00
DABPM152M-1618	1"-11	M18X1.5	19.00	12.00	22.20	10.00	47.00	41.00
DABPM152M-1622	1"-11	M22X1.5	19.00	14.00	22.20	14.10	49.00	41.00
DABPM152M-1626	1"-11	M26X1.5	19.00	16.00	22.20	15.00	49.00	41.00
DABPM152M-1628	1"-11	M28X1.5	19.00	16.00	22.20	16.00	50.50	41.00
DABPM152M-1630	1"-11	M30X1.5	19.00	18.00	21.50	21.50	51.50	41.00
DABPM152M-1636	1"-11	M36X1.5	19.00	18.00	22.20	25.00	51.50	41.00
DABPM152M-1638	1"-11	M38X1.5	19.00	18.00	22.20	25.00	54.00	46.00
DABPM152M-2030	1-1/4"-11	M30X1.5	20.00	18.00	28.60	21.50	55.00	50.00
DABPM152M-2038	1-1/4"-11	M38X1.5	20.00	18.00	25.00	25.00	55.00	50.00
DABPM152M-2438	1-1/2"-11	M38X1.5	22.00	18.00	33.30	25.00	59.00	55.00
DABPM152M-2445	1-1/2"-11	M45X1.5	22.00	20.00	32.00	32.00	60.00	55.00
DABPM152M-3245	2"-11	M45X1.5	25.00	20.00	46.00	32.00	66.00	70.00
DABPM152M-3252	2"-11	M52X1.5	25.00	20.00	46.00	38.00	66.00	70.00

DABPM107M-LH

Straight Connector BSPP Male 60° Cone – BSPT Male 60° Large Hexagon

D

A

BP

M

1

07

M

LH

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Other Features

Adaptor

BSPP

Male

Straight

BSPT

Male

Large Hexagon

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM107M-LH

Product Type

hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

BSPP 60° Cone × BSPT 60° Cone Large Hexagon

Other Features:

Large Hexagon

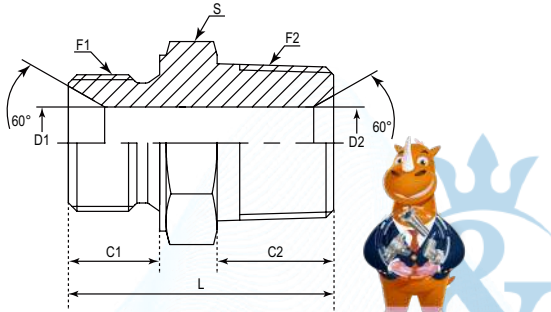

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	BSPT	mm	mm	mm	mm	mm	mm
DABPM107M-LH-0202	1/8"-28	1/8"-28	9.00	10.00	3.50	3.50	26.50	14.00
DABPM107M-LH-0204	1/8"-28	1/4"-19	9.00	14.00	3.50	6.00	30.50	14.00
DABPM107M-LH-0402	1/4"-19	1/8"-28	11.00	10.00	4.50	4.50	29.50	19.00
DABPM107M-LH-0404	1/4"-19	1/4"-19	11.00	14.00	4.70	6.00	32.50	19.00
DABPM107M-LH-0406	1/4"-19	3/8"-19	11.00	15.00	4.70	9.00	33.50	19.00
DABPM107M-LH-0408	1/4"-19	1/2"-14	11.00	19.00	4.70	12.00	39.00	22.00
DABPM107M-LH-0412	1/4"-19	3/4"-14	11.00	20.00	4.70	16.70	40.00	27.00
DABPM107M-LH-0602	3/8"-19	1/8"-28	12.00	10.00	7.90	4.50	30.00	22.00
DABPM107M-LH-0604	3/8"-19	1/4"-19	12.00	14.00	7.90	6.00	35.00	22.00
DABPM107M-LH-0606	3/8"-19	3/8"-19	12.00	15.00	7.90	7.90	36.00	22.00
DABPM107M-LH-0608	3/8"-19	1/2"-14	12.00	19.00	7.90	12.00	39.00	22.00
DABPM107M-LH-0612	3/8"-19	3/4"-14	12.00	20.00	7.90	16.70	41.00	27.00
DABPM107M-LH-0804	1/2"-14	1/4"-19	14.00	14.00	11.10	6.00	39.00	27.00
DABPM107M-LH-0806	1/2"-14	3/8"-19	14.00	15.00	11.10	9.00	40.00	27.00
DABPM107M-LH-0808	1/2"-14	1/2"-14	14.00	19.00	11.10	11.10	44.00	27.00
DABPM107M-LH-0810	1/2"-14	5/8"-14	14.00	19.00	11.10	14.00	44.00	27.00
DABPM107M-LH-0812	1/2"-14	3/4"-14	14.00	20.00	11.10	16.70	45.00	30.00
DABPM107M-LH-0816	1/2"-14	1"-11	14.00	24.00	11.10	22.20	50.50	36.00



Certificate:

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	BSPT	mm	mm	mm	mm	mm	mm
DABPM107M-LH-1006	5/8"-14	3/8"-19	16.00	15.00	14.00	9.00	42.00	30.00
DABPM107M-LH-1008	5/8"-14	1/2"-14	16.00	19.00	14.00	12.00	46.00	30.00
DABPM107M-LH-1010	5/8"-14	5/8"-14	16.00	19.00	14.00	14.00	47.00	30.00
DABPM107M-LH-1012	5/8"-14	3/4"-14	16.00	20.00	14.00	16.70	48.00	30.00
DABPM107M-LH-1208	3/4"-14	1/2"-14	16.00	19.00	16.70	12.00	47.00	32.00
DABPM107M-LH-1212	3/4"-14	3/4"-14	16.00	20.00	16.70	16.70	45.00	32.00
DABPM107M-LH-1216	3/4"-14	1"-11	16.00	24.00	16.70	22.20	53.00	36.00
DABPM107M-LH-1220	3/4"-14	1-1/4"-11	16.00	25.00	16.70	28.60	56.00	46.00
DABPM107M-LH-1608	1"-11	1/2"-14	19.00	19.00	22.20	12.00	52.00	41.00
DABPM107M-LH-1612	1"-11	3/4"-14	19.00	20.00	22.20	16.70	53.00	41.00
DABPM107M-LH-1616	1"-11	1"-11	19.00	24.00	22.20	22.20	57.00	41.00
DABPM107M-LH-1620	1"-11	1-1/4"-11	19.00	25.00	22.20	28.60	58.00	46.00
DABPM107M-LH-1624	1"-11	1-1/2"-11	19.00	25.00	22.20	33.30	61.00	50.00
DABPM107M-LH-2012	1-1/4"-11	3/4"-11	20.00	20.00	28.60	16.70	56.00	50.00
DABPM107M-LH-2016	1-1/4"-11	1"-11	20.00	24.00	28.60	22.20	60.00	50.00
DABPM107M-LH-2020	1-1/4"-11	1-1/4"-11	20.00	25.00	28.60	28.60	61.00	50.00
DABPM107M-LH-2024	1-1/4"-11	1-1/2"-11	20.00	25.00	28.60	33.30	62.00	50.00
DABPM107M-LH-2416	1-1/2"-11	1"-11	22.00	24.00	33.30	22.20	62.00	55.00
DABPM107M-LH-2420	1-1/2"-11	1-1/4"-11	22.00	25.00	33.30	28.60	63.00	55.00
DABPM107M-LH-2424	1-1/2"-11	1-1/2"-11	22.00	25.00	33.30	33.30	63.00	55.00
DABPM107M-LH-2432	1-1/2"-11	2"-11	22.00	30.00	33.30	46.00	70.00	65.00
DABPM107M-LH-3220	2"-11	1-1/4"-11	25.00	25.00	46.00	28.60	70.00	70.00
DABPM107M-LH-3224	2"-11	1-1/2"-11	25.00	25.00	46.00	33.30	68.50	70.00
DABPM107M-LH-3232	2"-11	2"-11	25.00	30.00	46.00	46.00	72.00	70.00
DABPM107M-LH-4040	2-1/2"-11	2-1/2"-11	32.00	36.00	58.00	58.00	84.00	90.00

Certificate:



DABPM152JM

Straight Connector BSPP Male 60° Cone - JIS Metric Male 60°Cone

D

A

BP

M

1

52J

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Straight

JIS Metric

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM152JM

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

BSPP 60° Cone × JIS Metric 60° Cone

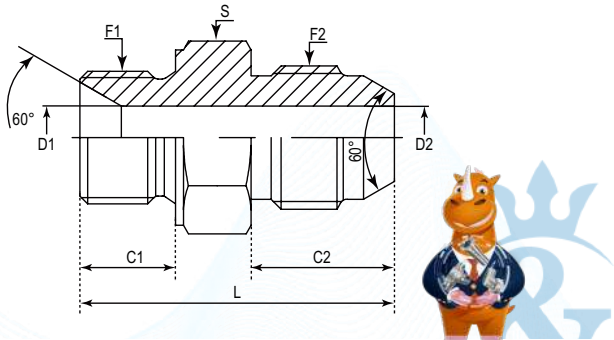

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	Metric	mm	mm	mm	mm	mm	mm
DABPM152JM-0414	1/4"-19	M14X1.5	11.00	17.00	4.70	4.70	35.00	19.00
DABPM152JM-0418	1/4"-19	M18X1.5	11.00	18.00	4.70	7.90	38.00	22.00
DABPM152JM-0618	3/8"-19	M18X1.5	12.00	18.00	7.90	7.90	39.50	22.00
DABPM152JM-0622	3/8"-19	M22X1.5	12.00	20.00	7.90	12.00	41.00	24.00
DABPM152JM-0818	1/2"-14	M18X1.5	14.00	18.00	11.10	7.90	44.00	27.00
DABPM152JM-0822	1/2"-14	M22X1.5	14.00	20.00	11.10	11.10	44.00	27.00
DABPM152JM-1024	5/8"-14	M24X1.5	16.00	21.50	14.00	14.00	48.00	30.00
DABPM152JM-1230	3/4"-14	M30X1.5	16.00	26.00	16.70	16.70	52.00	32.00
DABPM152JM-1633	1"-11	M33X1.5	19.00	30.00	22.20	19.00	60.00	41.00



Certificate:



DABPM107M

Straight Connector BSPP Male 60° - BSPT Male 60°

D

A

BP

M

1

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Straight

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM107M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

BSPP 60° Cone × BSPT 60° Cone

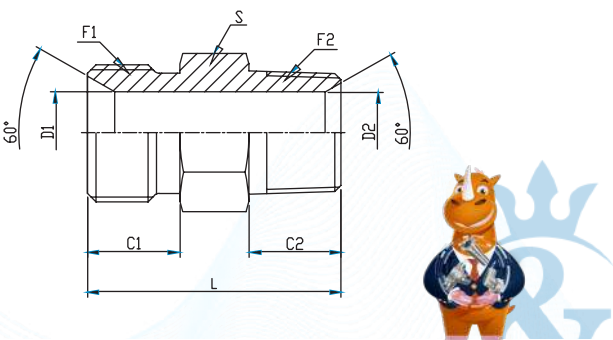

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	BSPT	mm	mm	mm	mm	mm	mm
DABPM107M-0202	1/8"-28	1/8"-28	8.00	10.00	3.50	3.50	24.00	12.00
DABPM107M-0402	1/4"-19	1/8"-28	11.00	10.00	4.50	4.50	29.00	14.00
DABPM107M-0404	1/4"-19	1/4"-19	11.00	14.00	4.70	6.00	33.00	14.00
DABPM107M-0406	1/4"-19	3/8"-19	11.00	15.00	4.70	9.00	33.00	17.00
DABPM107M-0606	3/8"-19	3/8"-19	12.00	15.00	7.90	7.90	35.00	17.00
DABPM107M-0608	3/8"-19	1/2"-14	12.00	19.00	7.90	12.00	39.00	22.00
DABPM107M-0612	3/8"-19	3/4"-14	12.00	20.00	7.90	16.70	41.00	27.00
DABPM107M-0804	1/2"-14	1/4"-19	14.00	14.00	11.10	6.00	37.00	22.00
DABPM107M-0808	1/2"-14	1/2"-14	14.00	19.00	11.10	11.10	44.00	22.00
DABPM107M-1208	3/4"-14	1/2"-14	16.00	19.00	16.70	12.00	45.00	27.00
DABPM107M-1212	3/4"-14	3/4"-14	16.00	20.00	16.70	16.70	46.00	27.00
DABPM107M-1216	3/4"-14	1"-11	16.00	24.00	16.70	22.20	51.00	36.00
DABPM107M-1616	1"-11	1"-11	19.00	24.00	22.20	22.20	56.00	36.00
DABPM107M-2020	1-1/4"-11	1-1/4"-11	20.00	25.00	28.60	28.60	57.00	46.00
DABPM107M-2424	1-1/2"-11	1-1/2"-11	22.00	25.00	33.30	33.30	62.00	50.00
DABPM107M-3232	2"-11	2"-11	25.00	30.00	46.00	46.00	70.00	65.00



Certificate:



DABPM1305

Straight Connector BSPP Male 60° - SAE Male + O Ring

D

A

BP

M

1

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Straight

SAE

Male + O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM1305

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

BSPP 60° × SAE + O Ring

Sealing Method:

O Ring

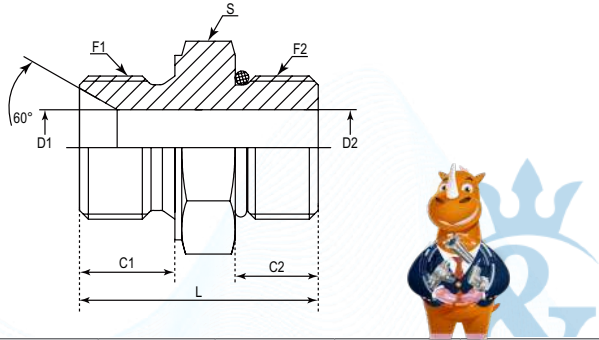

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPM1305-0404	1/4"-19	7/16"-20	11.00	9.14	4.37	4.37	29.50	19.00
DABPM1305-0406	1/4"-19	9/16"-18	11.00	9.93	4.70	7.54	30.00	19.00
DABPM1305-0408	1/4"-19	3/4"-16	11.00	11.13	4.70	9.93	32.00	22.00
DABPM1305-0604	3/8"-19	7/16"-20	12.00	9.14	7.90	4.37	32.80	22.00
DABPM1305-0606	3/8"-19	9/16"-18	12.00	9.93	7.50	7.54	33.50	22.00
DABPM1305-0608	3/8"-19	3/4"-16	12.00	11.13	7.90	9.93	33.00	22.00
DABPM1305-0610	3/8"-19	7/8"-14	12.00	12.70	7.90	12.29	36.50	27.00
DABPM1305-0612	3/8"-19	1-1/16"-12	12.00	15.09	7.90	15.47	40.00	32.00
DABPM1305-0808	1/2"-14	3/4"-16	14.00	11.13	11.10	9.93	40.00	27.00
DABPM1305-0810	1/2"-14	7/8"-14	14.00	12.70	11.10	12.29	38.70	27.00
DABPM1305-0812	1/2"-14	1-1/16"-12	14.00	15.09	11.10	15.47	42.00	32.00
DABPM1305-1010	5/8"-14	7/8"-14	16.00	12.70	12.29	12.29	42.50	30.00
DABPM1305-1012	5/8"-14	1-1/16"-12	16.00	15.09	14.00	15.47	43.50	32.00
DABPM1305-1208	3/4"-14	3/4"-16	16.00	11.13	16.70	9.93	43.80	32.00
DABPM1305-1210	3/4"-14	7/8"-14	16.00	12.70	16.70	12.29	43.50	32.00
DABPM1305-1212	3/4"-14	1-1/16"-12	16.00	15.09	15.47	15.47	44.50	32.00
DABPM1305-1216	3/4"-14	1-5/16"-12	16.00	15.09	16.70	21.44	46.00	41.00
DABPM1305-1612	1"-11	1-1/16"-12	19.00	15.09	22.20	15.47	51.00	41.00
DABPM1305-1616	1"-11	1-5/16"-12	19.00	15.09	21.44	21.44	46.10	41.00
DABPM1305-1620	1"-11	1-5/8"-12	19.00	15.09	22.20	27.38	50.00	50.00
DABPM1305-2016	1-1/4"-11	1-5/16"-12	20.00	15.09	28.60	21.44	53.50	50.00
DABPM1305-2020	1-1/4"-11	1-5/8"-12	20.00	15.09	27.38	27.38	54.50	50.00
DABPM1305-2024	1-1/4"-11	1-7/8"-12	20.00	15.09	28.60	33.30	52.00	53.97



Certificate:



DABPM106Q

Straight Connector BSPP Male 60° – BSPP Male + O Ring + Retaining Ring

D

A

BP

M

1

06

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Straight

BPSS

Male + O Ring + Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM106Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

BSPP 60° Cone × BSPP

Sealing Method:

Male + O Ring + Retaining Ring

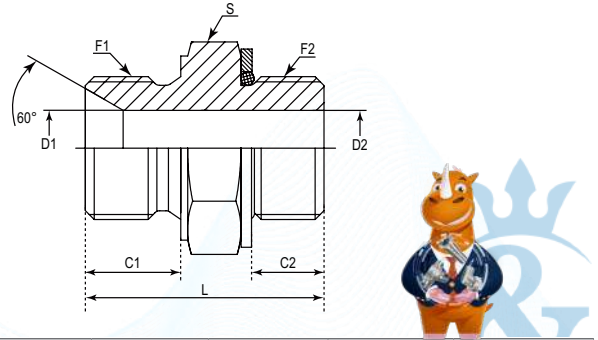

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	NPTF	mm	mm	mm	mm	mm	mm
DABPM106Q-0202	1/8"-28	1/8"-28	9.00	7.60	3.50	3.50	23.50	14.00
DABPM106Q-0404	1/4"-19	1/4"-19	11.00	11.20	4.70	4.70	31.00	19.00
DABPM106Q-0606	3/8"-19	3/8"-19	12.00	11.20	7.90	7.90	34.00	22.00
DABPM106Q-0808	1/2"-14	1/2"-14	14.00	14.50	11.10	11.10	40.00	27.00
DABPM106Q-1010	5/8"-14	5/8"-15	16.00	14.50	12.30	12.30	40.00	32.00
DABPM106Q-1212	3/4"-14	3/4"-14	16.00	14.50	15.50	15.50	44.00	32.00
DABPM106Q-1616	1"-11	1"-11	19.00	18.60	21.50	21.50	55.00	46.00
DABPM106Q-2020	1-1/4"-11	1-1/4"-11	20.00	18.60	27.50	27.50	53.00	50.00
DABPM106Q-2424	1-1/2"-11	1-1/2"-11	22.00	18.60	33.00	33.00	63.00	55.00



Certificate:



DABPM152Q

Straight Connector BSPP Male 60° – Metric Male + O Ring + Retaining Ring

D

A

BP

M

1

52

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Straight

Metric

Male + O Ring + Retaining Ring

DME&JDE Code:

DABPM152Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

BSPP 60° × Metric

Sealing Method:

O Ring + Retaining Ring

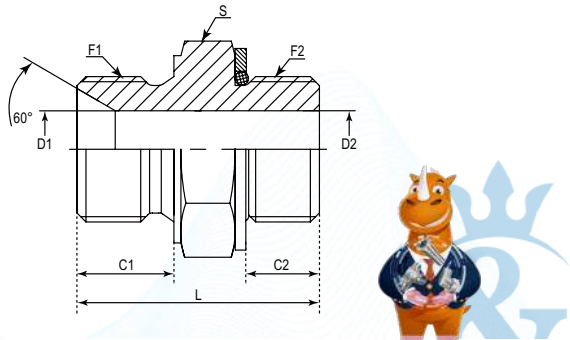

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPM152Q-0210	1/8"-28	M10X1	9.00	9.00	3.50	3.50	26.00	14.00
DABPM152Q-0212	1/8"-28	M12X1.5	9.00	11.00	3.50	6.00	28.00	17.00
DABPM152Q-0412	1/4"-19	M12X1.5	11.00	11.00	4.70	4.70	31.00	19.00
DABPM152Q-0416	1/4"-19	M16X1.5	11.00	12.00	4.70	7.00	32.50	19.00
DABPM152Q-0618	3/8"-19	M18X1.5	12.00	12.50	7.90	10.00	35.00	24.00
DABPM152Q-0820	1/2"-14	M20X1.5	14.00	12.50	11.10	11.10	38.00	27.00
DABPM152Q-1226	3/4"-14	M26X1.5	16.00	16.00	16.70	16.70	42.50	32.00
DABPM152Q-1627	1"-11	M27X2	19.00	16.00	22.20	18.00	50.00	41.00
DABPM152Q-2042	1-1/4"-11	M42X2	20.00	16.00	28.60	28.60	53.00	50.00
DABPM152Q-2448	1-1/2"-11	M48X2	22.00	17.50	33.30	33.30	56.50	55.00

German Technology Equipment

New-Standard

DABPM1525

Straight Connector BSPP Male 60° – Metric Male + O Ring

D

A

BP

M

1

52

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Straight

Metric

Male + O Ring

DME&JDE Code:

DABPM1525

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

BSPP 60° × Metric

Sealing Method:

Male + O Ring

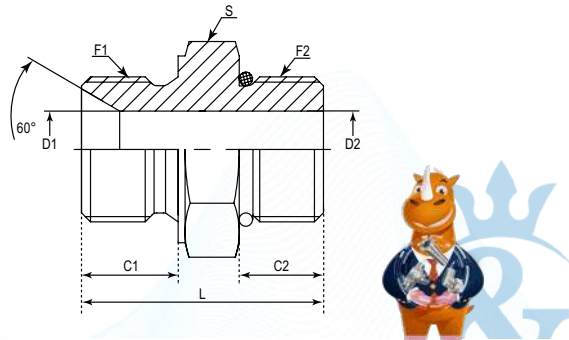

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	NPTF	mm	mm	mm	mm	mm	mm
DABPM1525-0210	1/8"-28	M10X1	9.00	9.00	3.50	3.50	26.00	14.00
DABPM1525-0212	1/8"-28	M12X1.5	9.00	11.00	3.50	6.00	28.00	17.00
DABPM1525-0412	1/4"-19	M12X1.5	11.00	11.00	4.70	4.70	31.00	19.00
DABPM1525-0416	1/4"-19	M16X1.5	11.00	12.00	4.70	7.00	32.50	19.00
DABPM1525-0618	3/8"-19	M18X1.5	12.00	12.50	7.90	10.00	35.00	24.00
DABPM1525-0820	1/2"-14	M20X1.5	14.00	12.50	11.10	11.10	38.00	27.00
DABPM1525-1226	3/4"-14	M26X1.5	16.00	16.00	16.70	16.70	42.50	32.00
DABPM1525-1627	1"-11	M27X2	19.00	16.00	22.20	18.00	50.00	41.00
DABPM1525-2042	1-1/4"-11	M42X2	20.00	16.00	28.60	28.60	53.00	50.00
DABPM1525-2448	1-1/2"-11	M48X2	22.00	17.50	33.30	33.30	56.50	55.00

German Technology Equipment

New-Standard


DABPM105M-ED

Straight Connector BSPP Male 60° with ED Ring

D	A	BP	M	1	05	M	ED
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type	Sealing Type
DME	Adaptor	BSPP	Male	Straight	BSPP	Male	ED Ring



DME&JDE Code:	DABPM105M-ED
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	BSPP 60°
Sealing Method:	ED Ring

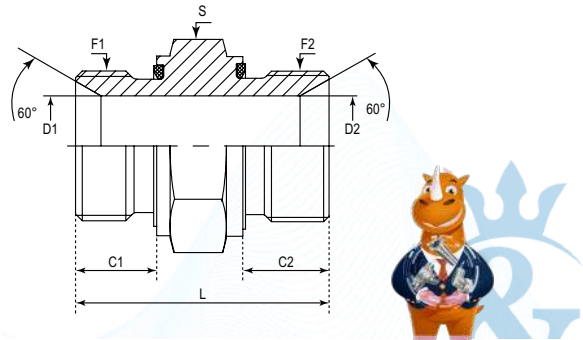

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPM105M-ED-0202	1/8"-28	1/8"-28	8.00	8.00	3.50	3.50	25.00	14.00
DABPM105M-ED-0402	1/4"-19	1/8"-28	12.00	8.00	4.70	3.50	29.50	19.00
DABPM105M-ED-0404	1/4"-19	1/4"-19	12.00	12.00	4.70	4.70	34.00	19.00
DABPM105M-ED-0602	3/8"-19	1/8"-28	12.00	8.00	7.90	3.50	30.00	22.00
DABPM105M-ED-0604	3/8"-19	1/4"-19	12.00	12.00	7.90	4.70	34.50	22.00
DABPM105M-ED-0606	3/8"-19	3/8"-19	12.00	12.00	7.90	7.90	37.00	22.00
DABPM105M-ED-0804	1/2"-14	1/4"-19	14.00	12.00	11.10	4.70	40.00	27.00
DABPM105M-ED-0806	1/2"-14	3/8"-19	14.00	12.00	11.10	7.90	40.50	27.00
DABPM105M-ED-0808	1/2"-14	1/2"-14	14.00	14.00	11.10	11.10	44.00	27.00
DABPM105M-ED-1004	5/8"-14	1/4"-19	16.00	12.00	14.00	4.70	43.00	30.00
DABPM105M-ED-1006	5/8"-14	3/8"-19	16.00	12.00	14.00	7.90	43.00	30.00
DABPM105M-ED-1008	5/8"-14	1/2"-14	16.00	14.00	14.00	11.10	45.00	30.00
DABPM105M-ED-1010	5/8"-14	5/8"-14	16.00	16.00	14.00	14.00	47.00	30.00
DABPM105M-ED-1204	3/4"-14	1/4"-19	16.00	12.00	16.70	4.70	44.00	32.00
DABPM105M-ED-1206	3/4"-14	3/8"-19	16.00	12.00	16.70	7.90	44.00	32.00
DABPM105M-ED-1208	3/4"-14	1/2"-14	16.00	14.00	16.70	11.10	46.00	32.00
DABPM105M-ED-1212	3/4"-14	3/4"-14	16.00	16.00	16.70	16.70	47.00	32.00
DABPM105M-ED-1604	1"-11	1/4"-19	18.00	12.00	22.20	4.70	47.50	41.00
DABPM105M-ED-1606	1"-11	3/8"-19	18.00	12.00	22.20	7.90	47.50	41.00
DABPM105M-ED-1608	1"-11	1/2"-14	18.00	14.00	22.20	11.10	51.00	41.00
DABPM105M-ED-1610	1"-11	5/8"-14	18.00	16.00	22.20	14.00	52.50	41.00
DABPM105M-ED-1612	1"-11	3/4"-14	18.00	16.00	22.20	16.70	52.50	41.00
DABPM105M-ED-1616	1"-11	1"-11	18.00	18.00	22.20	22.20	55.00	41.00
DABPM105M-ED-2012	1-1/4"-11	3/4"-14	20.00	16.00	28.60	16.70	57.00	50.00
DABPM105M-ED-2016	1-1/4"-11	1"-11	20.00	18.00	28.60	22.20	58.50	50.00
DABPM105M-ED-2020	1-1/4"-11	1-1/4"-11	20.00	20.00	28.60	28.60	61.00	50.00
DABPM105M-ED-2412	1-1/2"-11	3/4"-14	22.00	16.00	33.30	16.70	59.00	55.00
DABPM105M-ED-2416	1-1/2"-11	1"-11	22.00	18.00	33.30	22.20	61.00	55.00
DABPM105M-ED-2420	1-1/2"-11	1-1/4"-11	22.00	20.00	33.30	28.60	60.50	55.00
DABPM105M-ED-2424	1-1/2"-11	1-1/2"-11	22.00	22.00	33.30	33.30	65.00	55.00
DABPM105M-ED-3220	2"-11	1-1/4"-11	22.00	20.00	46.00	28.60	66.00	75.00
DABPM105M-ED-3224	2"-11	1-1/2"-11	22.00	22.00	46.00	33.30	66.00	75.00
DABPM105M-ED-3232	2"-11	2"-11	22.00	22.00	46.00	46.00	66.00	70.00


DABPM107M-ED

Straight Connector BSPP Male 60° with ED Ring - BSPT Male 60°

D	A	BP	M	1	07	M	ED
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type	Sealing Method
DME	Adaptor	BSPP	Male	Straight	BSPT	Male	ED Ring



DME&JDE Code:	DABPM107M-ED
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	BSPP 60° × BSPT 60°
Sealing Method:	ED Ring

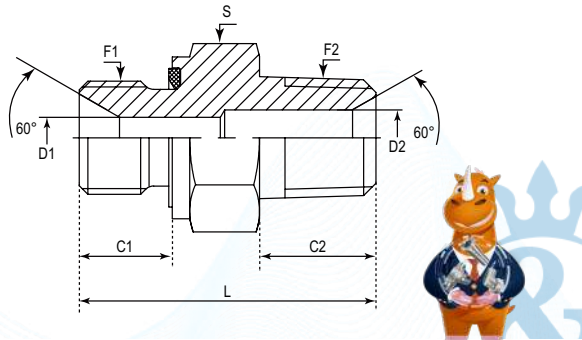

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	NPTF	mm	mm	mm	mm	mm	mm
DABPM107M-ED-0406	1/4"-19	3/8"-19	12.00	15.00	4.70	9.00	35.00	19.00
DABPM107M-ED-0408	1/4"-19	1/2"-14	12.00	19.00	4.70	12.00	42.00	22.00
DABPM107M-ED-0606	3/8"-19	3/8"-19	12.00	15.00	7.90	9.00	37.50	22.00
DABPM107M-ED-0608	3/8"-19	1/2"-14	12.00	19.00	7.90	12.00	42.50	24.00
DABPM107M-ED-0612	3/8"-19	3/4"-14	12.00	20.00	7.90	16.70	44.50	30.00
DABPM107M-ED-0804	1/2"-14	1/4"-19	14.00	14.00	11.10	6.00	41.50	27.00
DABPM107M-ED-0806	1/2"-14	3/8"-19	14.00	15.00	11.10	9.00	42.00	27.00
DABPM107M-ED-0808	1/2"-14	1/2"-14	14.00	19.00	11.10	12.00	47.00	27.00
DABPM107M-ED-1206	3/4"-14	3/8"-19	16.00	15.00	16.70	9.00	45.00	32.00
DABPM107M-ED-1208	3/4"-14	1/2"-14	16.00	19.00	16.70	12.00	50.00	32.00
DABPM107M-ED-1608	1"-11	1/2"-14	18.00	19.00	22.20	12.00	54.00	41.00
DABPM107M-ED-1616	1"-11	1"-11	18.00	24.00	22.20	22.20	59.50	41.00
DABPM107M-ED-2020	1-1/4"-11	1-1/4"-11	20.00	25.00	28.60	28.60	64.50	50.00
DABPM107M-ED-2420	1-1/2"-11	1-1/4"-11	22.00	25.00	33.30	28.60	66.50	55.00
DABPM107M-ED-2424	1-1/2"-11	1-1/2"-11	22.00	25.00	33.30	33.30	66.50	55.00
DABPM107M-ED-3232	2"-11	2"-11	22.00	30.00	46.00	46.00	70.00	70.00

DABPM1061

Straight Connector BSPP Male 60° Cone- BSPP Male with ED Seal

D

A

BP

M

1

061

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

DME

Adaptor

BSPP

Male

Straight

BSPP + ED

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM1061

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

BSPP 60° Cone × BSPP

Sealing Method:

ED Seal

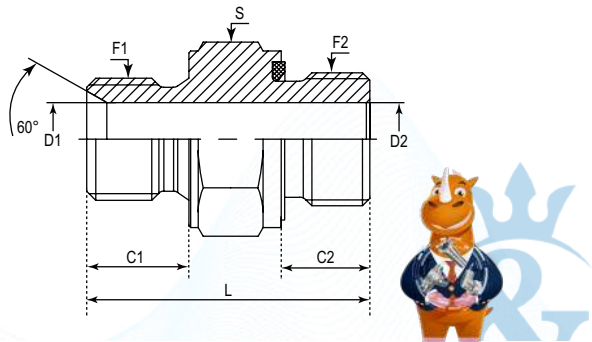

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPM1061-0202	1/8"-28	1/8"-28	8.00	8.00	3.50	3.50	25.50	14.00
DABPM1061-0204	1/8"-28	1/4"-19	8.00	12.00	3.50	5.00	30.00	19.00
DABPM1061-0402	1/4"-19	1/8"-28	11.00	8.00	4.00	4.00	37.50	19.00
DABPM1061-0404	1/4"-19	1/4"-19	11.00	12.00	4.70	4.70	32.00	19.00
DABPM1061-0406	1/4"-19	3/8"-19	11.00	12.00	4.70	8.00	34.00	22.00
DABPM1061-0408	1/4"-19	1/2"-14	11.00	14.00	4.70	11.20	39.00	27.00
DABPM1061-0412	1/4"-19	3/4"-14	11.00	16.00	4.70	16.70	40.00	32.00
DABPM1061-0602	3/8"-19	1/8"-28	12.00	8.00	7.90	4.00	30.00	22.00
DABPM1061-0604	3/8"-19	1/4"-19	12.00	12.00	7.90	6.00	34.50	22.00
DABPM1061-0606	3/8"-19	3/8"-19	12.00	12.00	7.90	7.90	35.00	22.00
DABPM1061-0608	3/8"-19	1/2"-14	12.00	14.00	7.90	12.00	37.00	27.00
DABPM1061-0612	3/8"-19	3/4"-14	12.00	16.00	7.90	16.70	43.50	32.00
DABPM1061-0616	3/8"-19	1"-11	12.00	18.00	7.90	22.20	47.50	41.00
DABPM1061-0804	1/2"-14	1/4"-19	14.00	12.00	11.10	5.00	40.00	27.00
DABPM1061-0806	1/2"-14	3/8"-19	14.00	12.00	11.10	9.00	40.00	27.00
DABPM1061-0808	1/2"-14	1/2"-14	14.00	14.00	11.10	11.10	42.00	27.00
DABPM1061-0812	1/2"-14	3/4"-14	14.00	16.00	11.10	16.70	43.00	32.00
DABPM1061-0816	1/2"-14	1"-11	14.00	18.00	11.10	20.00	49.50	41.00
DABPM1061-1008	5/8"-14	1/2"-14	16.00	14.00	14.00	14.00	44.00	30.00
DABPM1061-1012	5/8"-14	3/4"-14	16.00	16.00	14.00	16.70	45.00	32.00
DABPM1061-1208	3/4"-14	1/2"-14	16.00	14.00	16.70	11.10	44.50	32.00
DABPM1061-1212	3/4"-14	3/4"-14	16.00	16.00	16.70	16.70	47.00	32.00
DABPM1061-1216	3/4"-14	1"-11	16.00	18.00	16.70	22.20	52.50	41.00
DABPM1061-1612	1"-11	3/4"-14	19.00	16.00	22.20	18.00	52.50	41.00
DABPM1061-1616	1"-11	1"-11	19.00	18.00	22.20	22.20	54.50	41.00
DABPM1061-2012	1-1/4"-11	3/4"-14	20.00	16.00	28.60	16.70	52.50	50.00
DABPM1061-2020	1-1/4"-11	1-1/4"-11	20.00	20.00	28.60	28.60	56.50	50.00

DABPM1521

Straight Connector BSPP Male 60° Cone-Metric Male 60°Cone

D

A

BP

M

1

521

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

DME

Adaptor

BSPP

Male

Straight

Metric + ED

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM1521

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

BSPP 60° Cone × Metric 60° Cone

Sealing Method:

ED Ring

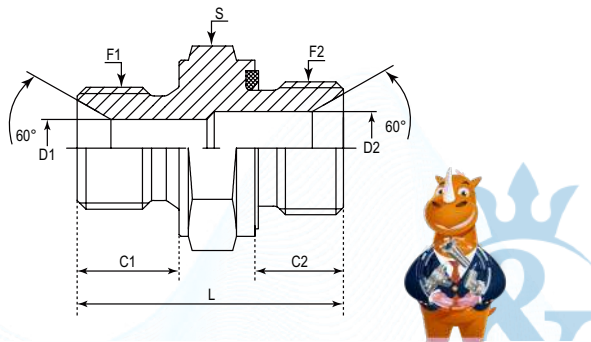

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	Metric	mm	mm	mm	mm	mm	mm
DABPM1521-0414	1/4"-19	M14X1.5	11.00	12.00	4.70	6.00	32.50	19.00
DABPM1521-0418	1/4"-19	M18X1.5	11.00	12.00	4.70	9.00	33.00	24.00
DABPM1521-0614	3/8"-19	M14X1.5	12.00	12.00	6.50	6.50	35.00	22.00
DABPM1521-0618	3/8"-19	M18X1.5	12.00	12.00	7.90	7.90	35.00	24.00
DABPM1521-0622	3/8"-19	M22X1.5	12.00	14.00	7.90	12.00	37.00	27.00
DABPM1521-0818	1/2"-14	M18X1.5	14.00	12.00	11.10	19.00	37.00	27.00
DABPM1521-0824	1/2"-14	M24X1.5	14.00	14.00	11.10	15.00	42.00	30.00
DABPM1521-1222	3/4"-14	M22X1.5	16.00	14.00	16.70	12.00	44.00	32.00

DABTM107M

Straight Connector BSPT Male 60° -BSPT Male 60°

D

A

BT

M

1

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

Straight

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTM107M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

BSPP 60° × BSPT 60°

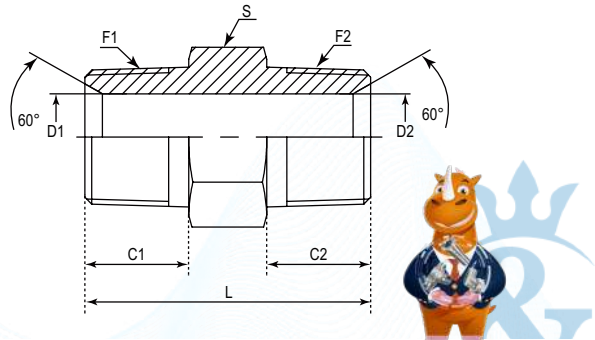

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	BSPT	mm	mm	mm	mm	mm	mm
DABTM107M-0202	1/8"-28	1/8"-28	10.00	10.00	4.50	4.50	26.00	12.00
DABTM107M-0402	1/4"-19	1/8"-28	14.00	10.00	6.00	4.50	31.00	17.00
DABTM107M-0404	1/4"-19	1/4"-19	14.00	14.00	6.00	6.00	34.00	17.00
DABTM107M-0602	3/8"-19	1/8"-28	15.00	10.00	9.00	4.50	31.00	19.00
DABTM107M-0604	3/8"-19	1/4"-19	15.00	14.00	9.00	6.00	35.00	19.00
DABTM107M-0606	3/8"-19	3/8"-19	15.00	15.00	9.00	9.00	38.00	19.00
DABTM107M-0804	1/2"-14	1/4"-19	19.00	14.00	12.00	6.00	41.00	22.00
DABTM107M-0806	1/2"-14	3/8"-19	19.00	15.00	12.00	9.00	42.00	22.00
DABTM107M-0808	1/2"-14	1/2"-14	19.00	19.00	12.00	12.00	46.00	22.00
DABTM107M-1008	5/8"-14	1/2"-14	19.00	19.00	14.00	12.00	46.00	24.00
DABTM107M-1010	5/8"-14	5/8"-14	19.00	19.00	14.00	14.00	46.00	24.00
DABTM107M-1204	3/4"-14	1/4"-19	19.00	14.00	16.70	6.00	43.50	30.00
DABTM107M-1206	3/4"-14	3/8"-19	19.00	15.00	16.70	9.00	44.00	30.00
DABTM107M-1208	3/4"-14	1/2"-14	19.00	19.00	16.70	12.00	47.00	30.00
DABTM107M-1212	3/4"-14	3/4"-14	19.00	19.00	16.70	16.70	47.00	30.00
DABTM107M-1606	1"-11	3/8"-19	24.00	15.00	22.20	9.00	49.00	36.00
DABTM107M-1608	1"-11	1/2"-14	24.00	19.00	22.20	12.00	53.00	36.00
DABTM107M-1612	1"-11	3/4"-14	24.00	19.00	22.20	16.70	53.00	36.00
DABTM107M-1616	1"-11	1"-11	24.00	24.00	22.20	22.20	58.00	36.00
DABTM107M-2012	1-1/4"-11	3/4"-14	25.00	19.00	28.60	16.70	56.00	46.00
DABTM107M-2016	1-1/4"-11	1"-11	25.00	24.00	28.60	22.20	61.00	46.00
DABTM107M-2020	1-1/4"-11	1-1/4"-11	25.00	25.00	28.60	28.60	62.00	46.00
DABTM107M-2416	1-1/2"-11	1"-11	25.00	24.00	33.30	22.20	61.00	50.00
DABTM107M-2420	1-1/2"-11	1-1/4"-11	25.00	25.00	33.30	28.60	62.00	50.00
DABTM107M-2424	1-1/2"-11	1-1/2"-11	25.00	25.00	33.30	33.30	63.50	50.00
DABTM107M-3224	2"-11	1-1/2"-11	30.00	25.00	45.00	33.30	70.00	65.00
DABTM107M-3232	2"-11	2"-11	30.00	30.00	45.00	45.00	75.00	65.00

Certificate:



DABTM128M

Straight Connector BSPT Male 60° - NPTF Male 60°

D

A

BT

M

1

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

Straight

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTM128M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

BSPT 60° × NPTF 60°

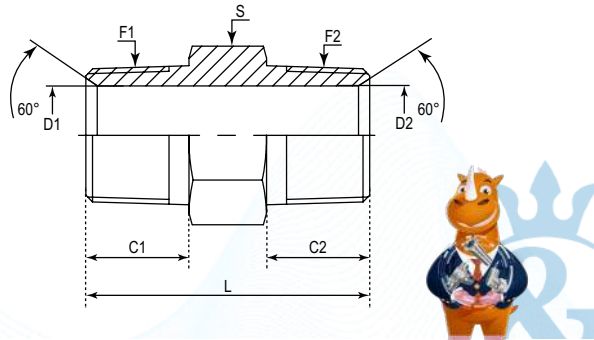

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPT	NPTF	mm	mm	mm	mm	mm	mm
DABTM128M-0202	1/8"-28	1/8"-27	10.00	9.65	4.50	4.50	27.00	12.00
DABTM128M-0204	1/8"-27	1/4"-18	10.00	14.22	4.50	7.14	33.00	17.00
DABTM128M-0402	1/4"-19	1/8"-27	14.00	9.65	6.00	4.78	32.00	17.00
DABTM128M-0404	1/4"-19	1/4"-18	14.00	14.22	6.00	6.00	37.00	17.00
DABTM128M-0406	1/4"-19	3/8"-19	14.00	14.22	6.00	10.31	36.50	19.00
DABTM128M-0604	3/8"-19	1/4"-18	15.00	14.22	9.00	7.14	36.50	19.00
DABTM128M-0606	3/8"-19	3/8"-18	15.00	14.22	9.00	9.00	38.00	19.00
DABTM128M-0808	1/2"-14	1/2"-14	19.00	19.05	12.70	12.70	49.80	22.00
DABTM128M-1212	3/4"-14	3/4"-14	20.00	19.05	16.70	18.26	50.00	30.00
DABTM128M-1616	1"-11	1"-11-1/2	24.00	24.00	24.00	21.50	57.00	36.00
DABTM128M-2016	1-1/4"-11	1"-11-1/2	25.00	23.88	28.60	23.83	62.00	46.00
DABTM128M-2020	1-1/4"-11	1-1/4"-11-1/2	25.00	24.64	28.60	28.60	63.00	46.00
DABTM128M-2424	1-1/2"-11	1-1/2"-11-1/2	25.00	25.40	33.30	33.30	66.00	50.80
DABTM128M-3232	2"-11	2"-11-1/2	30.00	26.16	46.00	46.00	75.00	66.68
DABTM128M-4040	2-1/2"-11	2"-1/2-8	36.00	38.86	58.00	58.00	95.50	82.55

Certificate:



DABTM1305

Straight Connector BSPT Male 60° – SAE Male + O Ring

D

A

BT

M

1

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

Straight

SAE

Male + O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTM1305

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

BSPT 60° × SAE Male

Sealing Method:

O Ring

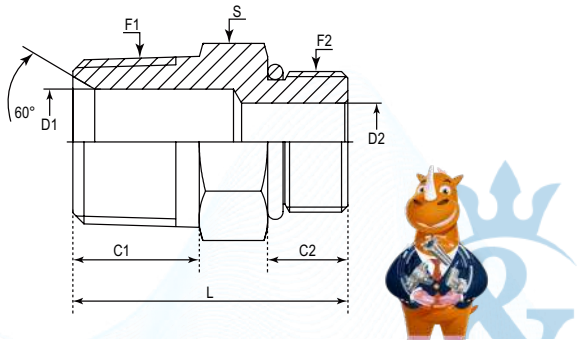

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABTM1305-0205	1/8"-28	1/2"-20	10.00	9.14	4.50	5.94	28.00	17.00
DABTM1305-0206	1/8"-28	9/16"-18	10.00	9.93	4.50	7.54	28.50	17.00
DABTM1305-0404	1/4"-19	7/16"-20	14.00	9.14	6.00	4.37	30.00	14.00
DABTM1305-0406	1/4"-19	9/16"-18	14.00	9.93	6.00	7.54	30.00	19.00
DABTM1305-0408	1/4"-19	3/4"-16	14.00	11.13	6.00	9.93	33.50	22.00
DABTM1305-0410	1/4"-19	7/8"-14	14.00	12.70	6.00	12.29	35.00	27.00
DABTM1305-0604	3/8"-19	7/16"-20	15.00	9.14	9.00	4.37	32.00	19.00
DABTM1305-0606	3/8"-19	9/16"-18	15.00	9.93	9.00	7.54	31.00	19.00
DABTM1305-0608	3/8"-19	3/4"-16	15.00	11.13	9.00	9.00	34.00	22.00
DABTM1305-0610	3/8"-19	7/8"-14	15.00	12.70	9.00	12.29	37.50	27.00
DABTM1305-0806	1/2"-14	9/16"-18	19.00	9.93	12.00	7.54	37.00	22.00
DABTM1305-0808	1/2"-14	3/4"-16	19.00	11.13	12.00	9.93	38.00	22.00
DABTM1305-0810	1/2"-14	7/8"-14	19.00	12.70	12.00	12.00	42.50	27.00
DABTM1305-0812	1/2"-14	1-1/16"-12	19.00	15.09	12.00	15.47	46.00	32.00
DABTM1305-0816	1/2"-14	1-5/16"-12	19.00	15.09	12.00	21.44	46.80	38.00
DABTM1305-1210	3/4"-14	7/8"-14	20.00	12.70	16.70	12.29	44.00	30.00
DABTM1305-1212	3/4"-14	1-1/16"-12	20.00	15.09	16.70	15.47	47.00	32.00
DABTM1305-1216	3/4"-14	1-5/16"-12	20.00	15.09	16.70	21.44	47.00	38.00
DABTM1305-1612	1"-11	1-1/16"-12	24.00	15.09	22.20	15.47	51.00	38.00
DABTM1305-1616	1"-11	1-5/16"-12	24.00	15.09	22.20	21.44	51.00	38.00
DABTM1305-1620	1"-11	1-5/8"-12	24.00	15.09	22.20	27.38	55.50	50.00
DABTM1305-2016	1-1/4"-11	5-1/16"-12	25.00	15.09	28.60	21.44	54.50	46.00
DABTM1305-2020	1-1/4"-11	1-5/8"-12	25.00	15.09	28.60	27.38	55.50	50.00
DABTM1305-2024	1-1/4"-11	1-7/8"-12	25.00	15.09	28.60	33.30	57.50	55.00
DABTM1305-2424	1-1/2"-11	1-7/8"-12	25.00	15.09	33.30	33.30	57.50	55.00

Certificate:



DABPM1000

Male Plug BSPP Male 60°

D

A

BP

M

1

000

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Other Features

DME

Adaptor

BSPP

Male

Straight

Nut/Plug

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM1000

Product Type

Hydraulic adaptor

Standard:

BSP

Connection Type:


Male × Male

Thread Types:

BSPP 60°

Other Features:

Nut/Plug

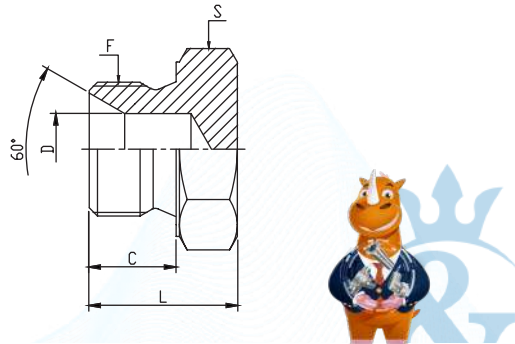

PART NUMBER	F (Thread)	C	D	L	S
#	BSPP	mm	mm	mm	mm
DABPM1000-0200	1/8"-28	8.00	3.50	16.00	14.00
DABPM1000-0400	1/4"-19	11.00	4.70	18.00	19.00
DABPM1000-0600	3/8"-19	12.00	7.90	20.00	22.00
DABPM1000-0800	1/2"-14	14.00	11.10	24.00	27.00
DABPM1000-1000	5/8"-14	16.00	14.00	26.00	30.00
DABPM1000-1200	3/4"-14	16.00	16.70	27.00	32.00
DABPM1000-1600	1"-11	19.00	22.20	32.00	41.00
DABPM1000-2000	1-1/4"-11	20.00	28.60	34.00	50.00
DABPM1000-2400	1-1/2"-11	22.00	33.30	39.00	55.00
DABPM1000-3200	2"-11	25.00	46.00	45.00	70.00

Certificate:



DABPM1000-ED

Male Plug BSPP Male 60° ED Seal

D

A

BP

M

1

000

ED

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Other Features

Sealing Type

DME

Adaptor

BSPP

Male

Straight

Nut/Plug

ED Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM1000-ED

Product Type

Hydraulic adaptor

Standard:

BSP

Sealing Type:

ED Seal

Connection Type:


Male × Male

Thread Types:

BSPP 60°

Other Features:

Nut/Plug



PART NUMBER	F (Thread)	C	D	L	S
#	BSPP	mm	mm	mm	mm
DABPM1000-0200ED	1/8"-28	8.00	3.50	15.50	14.00
DABPM1000-0400ED	1/4"-19	12.00	4.70	20.00	19.00
DABPM1000-0600ED	3/8"-19	12.00	7.90	20.00	22.00
DABPM1000-0800ED	1/2"-14	14.00	11.00	25.00	27.00
DABPM1000-1200ED	3/4"-14	16.00	16.70	29.00	32.00
DABPM1000-2400ED	1-1/2"-11	22.00	33.30	39.00	55.00
DABPM1000-3200ED	2"-11	22.00	46.00	41.00	70.00



Certificate:

DABT21000-HHP

Male Plug with Hexagon Socket Head BSPT

D

A

BT

2

1

000

HHP

Company

Product Range

Thread Types

Plug Type

Adaptor Structure

Thread Types

Plug Head Type

DME

Adaptor

BSPT

Socket

Straight

Nut/Plug

Hexagon Head

German Technology Equipment

New-Standard

DME&JDE Code:

DABT21000-HHP

Product Type

Hydraulic adaptor

Standard:

BSP

Connection Type:

Male

Thread Type:


BSPT

Other Features:

Nut/Plug

Plug Type:

Male Plug with Hexagon Socket Head



PART NUMBER	F (Thread)	L	H
#	BSPT	mm	mm
DABT21000-HHP-0200	1/8"-28	8.00	5.00
DABT21000-HHP-0600	3/8"-19	10.00	8.00
DABT21000-HHP-0800	1/2"-14	10.00	10.00
DABT21000-HHP-1200	3/4"-14	12.00	12.00
DABT21000-HHP-1600	1"-11	12.00	17.00
DABT21000-HHP-2000	1 1/4"-11	18.00	22.00
DABT21000-HHP-2400	1 1/2"-11	20.00	24.00
DABT21000-HHP-3200	2"-11	22.00	32.00



Certificate:

DABPM105F

Straight Connector BSPP Male 60° – BSPP Fixed Female

D

A

BP

M

1

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Straight

BSPP

Fixed Female

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM105F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

BSPP 60° Cone × BSPP

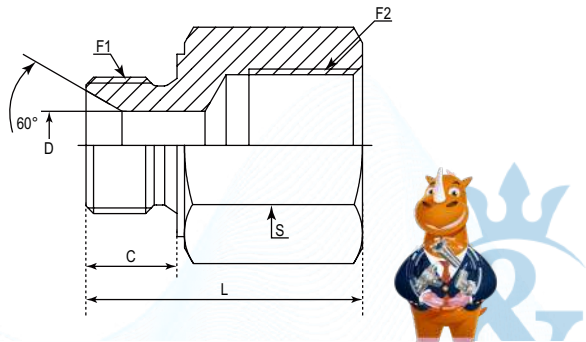

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	BSPP	BSPP	mm	mm	mm	mm
DABPM105F-0202	1/8"-28	1/8"-28	8.00	4.50	22.50	14.00
DABPM105F-0204	1/8"-28	1/4"-19	8.00	3.50	26.00	19.00
DABPM105F-0206	1/8"-28	3/8"-19	9.00	3.50	27.00	22.00
DABPM105F-0402	1/4"-19	1/8"-28	11.00	4.70	26.50	19.00
DABPM105F-0404	1/4"-19	1/4"-19	11.00	4.70	30.00	19.00
DABPM105F-0406	1/4"-19	3/8"-19	11.00	4.70	31.00	22.00
DABPM105F-0408	1/4"-19	1/2"-14	11.00	4.70	35.00	27.00
DABPM105F-0604	3/8"-19	1/4"-19	12.00	7.90	31.00	22.00
DABPM105F-0606	3/8"-19	3/8"-19	12.00	7.90	31.00	22.00
DABPM105F-0608	3/8"-19	1/2"-14	12.00	7.90	38.00	27.00
DABPM105F-0612	3/8"-19	3/4"-14	12.00	7.90	40.00	32.00
DABPM105F-0804	1/2"-14	1/4"-19	14.00	11.10	33.00	27.00
DABPM105F-0806	1/2"-14	3/8"-19	14.00	11.10	33.00	27.00
DABPM105F-0808	1/2"-14	1/2"-14	14.00	11.10	38.00	27.00
DABPM105F-0812	1/2"-14	3/4"-14	14.00	11.10	42.00	32.00
DABPM105F-0816	1/2"-14	1"-11	14.00	11.10	46.00	41.00
DABPM105F-1206	3/4"-14	3/8"-19	16.00	16.70	36.00	32.00
DABPM105F-1208	3/4"-14	1/2"-14	16.00	16.70	40.00	32.00
DABPM105F-1212	3/4"-14	3/4"-14	16.00	16.70	42.00	32.00
DABPM105F-1216	3/4"-14	1"-11	16.00	16.70	48.00	41.00
DABPM105F-1220	3/4"-14	1-1/4"-11	16.00	16.70	49.00	50.00
DABPM105F-1224	3/4"-14	1-1/2"-14	16.00	16.70	52.00	55.00
DABPM105F-1608	1"-11	1/2"-14	19.00	18.63	42.00	41.00
DABPM105F-1612	1"-11	3/4"-14	19.00	22.20	46.00	41.00
DABPM105F-1616	1"-11	1"-11	19.00	22.20	51.00	41.00
DABPM105F-1620	1"-11	1-1/4"-11	19.00	22.20	53.00	50.00
DABPM105F-2012	1-1/4"-11	3/4"-14	20.00	24.12	45.00	50.00
DABPM105F-2016	1-1/4"-11	1"-11	20.00	28.60	53.00	50.00
DABPM105F-2020	1-1/4"-11	1-1/4"-11	20.00	28.60	55.00	50.00
DABPM105F-2024	1-1/4"-11	1-1/2"-11	20.00	28.60	56.00	55.00
DABPM105F-2420	1-1/2"-11	1-1/4"-11	22.00	33.30	59.00	55.00
DABPM105F-2424	1-1/2"-11	1-1/2"-11	22.00	33.30	56.00	55.00
DABPM105F-3224	2"-11	1-1/2"-11	25.00	44.85	59.00	70.00
DABPM105F-3232	2"-11	2"-11	25.00	45.00	65.00	70.00

DABPM105FR

Straight Bushing Connector BSPP Male 60° – BSPP Fixed Female

D

A

BP

M

1

05

F

R

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Other Features

DME

Adaptor

BSPP

Male

Straight

NPTF

Fixed Female

Bushing

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM105FR

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Male × Fixed Female

Thread Types:

BSPP 60° Cone × BSPP

Other Features:

Bushing

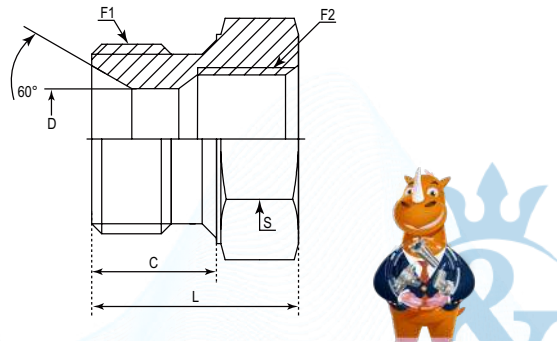

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	BSPP	BSPP	mm	mm	mm	mm
DABPM105FR-0402	1/4"-19	1/8"-28	11.00	4.70	20.00	19.00
DABPM105FR-0602	3/8"-19	1/8"-28	12.00	7.90	20.00	22.00
DABPM105FR-0604	3/8"-19	1/4"-19	14.50	7.90	21.00	22.00
DABPM105FR-0804	1/2"-14	1/4"-19	14.00	11.10	24.00	27.00
DABPM105FR-0806	1/2"-14	3/8"-19	14.00	11.10	24.00	27.00
DABPM105FR-1204	3/4"-14	1/4"-19	16.00	16.70	26.00	32.00
DABPM105FR-1206	3/4"-14	3/8"-19	16.00	16.70	26.00	32.00
DABPM105FR-1604	1"-11	1/4"-19	19.00	22.20	30.00	41.00
DABPM105FR-1606	1"-11	3/8"-19	19.00	22.20	30.00	41.00
DABPM105FR-1608	1"-11	1/2"-14	19.00	22.20	30.00	41.00
DABPM105FR-1612	1"-11	3/4"-14	19.00	22.20	30.00	41.00
DABPM105FR-2008	1-1/4"-11	1/2"-14	20.00	28.60	33.00	50.00
DABPM105FR-2012	1-1/4"-11	3/4"-14	20.00	28.60	33.00	50.00
DABPM105FR-2016	1-1/4"-11	1"-11	20.00	28.60	35.00	50.00
DABPM105FR-2408	1-1/2"-11	1/2"-14	22.00	33.30	38.00	55.00
DABPM105FR-2416	1-1/2"-11	1"-11	22.00	33.30	38.00	55.00
DABPM105FR-2420	1-1/2"-11	1-1/4"-11	22.00	33.30	38.00	55.00

DABPM128F

Straight Connector BSPP Male 60° - NPTF Female

D

A

BP

M

1

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Straight

NPTF

Female

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM128F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Female

Thread Types:

BSPP 60° × NPTF



PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D	L	S
#	BSPP	NPTF	mm	mm	mm	mm	mm
DABPM128F-0202	1/8"-28	1/8"-27	9.00	6.35	3.50	24.50	16.00
DABPM128F-0204	1/8"-28	1/4"-18	9.00	10.92	3.50	29.00	19.05
DABPM128F-0402	1/4"-19	1/8"-27	11.00	6.35	4.70	26.00	19.00
DABPM128F-0404	1/4"-19	1/4"-18	11.00	10.90	4.70	31.00	19.00
DABPM128F-0406	1/4"-19	3/8"-18	11.00	10.92	4.70	32.50	22.00
DABPM128F-0408	1/4"-19	1/2"-14	11.00	14.22	4.70	39.00	28.58
DABPM128F-0604	3/8"-19	1/4"-18	12.00	10.92	7.90	32.50	22.00
DABPM128F-0606	3/8"-19	3/8"-18	12.00	10.92	7.90	32.50	22.23
DABPM128F-0608	3/8"-19	1/2"-14	12.00	14.22	7.90	40.00	28.58
DABPM128F-0804	1/2"-14	1/4"-18	14.00	10.92	11.10	35.50	27.00
DABPM128F-0806	1/2"-14	3/8"-18	14.00	10.92	11.10	34.00	27.00
DABPM128F-0808	1/2"-14	1/2"-14	14.00	14.22	11.10	38.90	28.58
DABPM128F-1208	3/4"-14	1/2"-14	16.00	14.22	16.70	41.60	32.00
DABPM128F-1212	3/4"-14	3/4"-14	16.00	14.22	16.70	42.50	36.00
DABPM128F-1612	1"-11	3/4"-14	19.00	14.22	22.20	49.00	41.28
DABPM128F-1616	1"-11	1"-11-1/2	19.00	17.53	22.20	34.00	41.28
DABPM128F-2016	1-1/4"-11	1"-11-1/2	20.00	17.53	28.60	51.00	50.80
DABPM128F-2020	1-1/4"-11	1"1/4-11-1/2	20.00	17.53	28.60	60.00	50.80
DABPM128F-2420	1-1/2"-11	1-1/4"-11-1/2	22.00	17.53	33.30	57.50	55.00
DABPM128F-2424	1-1/2"-11	1-1/2"-11-1/2	22.00	17.53	33.30	58.00	60.33
DABPM128F-3224	2"-11	1-1/2"-11-1/2	25.00	17.53	46.00	63.50	70.00
DABPM128F-3232	2"-11	2"-11-1/2	25.00	16.00	46.00	67.00	70.00
DABPM128F-4040	2-1/2"-11	2-1/2"-8	32.00	19.50	58.00	78.50	90.00

Certificate:

DABPM107F

Straight Connector BSPP Male 60° Cone-BSPT Female Cone

D

A

BP

M

1

07

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Straight

BSPT

Female

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM107F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Female

Thread Types:

BSPP 60° Cone × BSPT Cone



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	BSPP	BSPT	mm	mm	mm	mm
DABPM107F-0402	1/4"-19	1/8"-28	11.00	4.70	32.00	19.00
DABPM107F-0404	1/4"-19	1/4"-19	11.00	4.70	32.50	19.00
DABPM107F-0604	3/8"-19	1/4"-19	12.00	7.90	34.00	22.00
DABPM107F-0606	3/8"-19	3/8"-19	12.00	7.90	31.00	22.00
DABPM107F-0808	1/2"-14	1/2"-14	14.00	11.10	42.50	27.00
DABPM107F-1212	3/4"-14	3/4"-14	16.00	16.70	46.50	32.00

Certificate:





DABPM1081

Straight Connector BSPP Male 60° - BSPP Swivel Female 60°

D

A

BP

M

1

081

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Adaptor

BSPP


Male

Straight

BSPP Swivel Female

German Technology Equipment

New-Standard

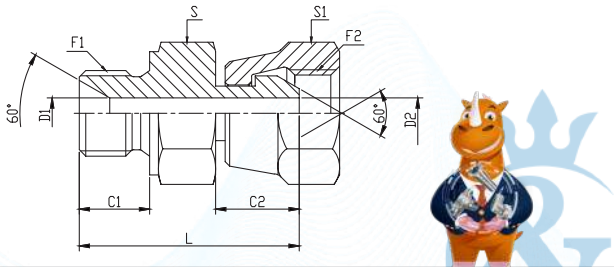

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm
DABPM1081-0202	1/8"-28	1/8"-28	8.00	9.50	3.50	3.50	23.00	14.00	14.00
DABPM1081-0204	1/8"-28	1/4"-19	9.00	11.50	3.50	4.70	28.00	14.00	19.00
DABPM1081-0402	1/4"-19	1/8"-28	11.00	9.50	4.70	3.50	28.50	19.00	14.00
DABPM1081-0404	1/4"-19	1/4"-19	11.00	11.50	4.70	4.70	29.50	19.00	19.00
DABPM1081-0406	1/4"-19	3/8"-19	11.00	12.50	4.70	7.10	33.00	19.00	22.00
DABPM1081-0408	1/4"-19	1/2"-14	11.00	15.00	4.70	11.10	34.50	22.00	27.00
DABPM1081-0412	1/4"-19	3/4"-14	11.00	17.50	4.70	16.70	40.00	27.00	32.00
DABPM1081-0604	3/8"-19	1/4"-19	12.00	11.50	7.90	4.50	33.00	22.00	19.00
DABPM1081-0606	3/8"-19	3/8"-19	12.00	12.50	7.0	7.00	32.50	22.00	22.00
DABPM1081-0608	3/8"-19	1/2"-14	12.00	15.00	7.90	11.10	36.00	22.00	27.00
DABPM1081-0612	3/8"-19	3/4"-14	12.00	17.50	7.90	16.70	38.50	27.00	32.00
DABPM1081-0804	1/2"-14	1/4"-19	14.00	11.50	11.10	4.70	36.50	27.00	19.00
DABPM1081-0806	1/2"-14	3/8"-19	14.00	12.50	11.10	7.10	37.50	27.00	22.00
DABPM1081-0808	1/2"-14	1/2"-14	14.00	15.00	11.10	11.10	39.00	27.00	27.00
DABPM1081-0810	1/2"-14	5/8"-14	14.00	15.50	11.10	14.00	40.00	27.00	30.00
DABPM1081-0812	1/2"-14	3/4"-14	14.00	17.50	11.10	16.70	43.00	27.00	32.00
DABPM1081-0816	1/2"-14	1"-11	14.00	19.50	11.10	20.40	43.50	36.00	41.00
DABPM1081-1008	5/8"-14	1/2"-14	16.00	15.00	14.00	9.70	38.50	30.00	27.00
DABPM1081-1010	5/8"-14	5/8"-14	16.00	15.50	14.00	14.00	42.00	30.00	30.00
DABPM1081-1012	5/8"-14	3/4"-14	16.00	17.50	14.00	16.00	41.00	30.00	32.00
DABPM1081-1206	3/4"-14	3/8"-19	16.00	12.50	16.70	7.90	39.00	32.00	22.00
DABPM1081-1208	3/4"-14	1/2"-14	16.00	15.00	16.70	11.10	42.50	32.00	27.00
DABPM1081-1210	3/4"-14	5/8"-14	16.00	15.50	16.70	12.00	42.00	32.00	30.00
DABPM1081-1212	3/4"-14	3/4"-14	16.00	17.50	16.70	16.70	45.00	32.00	32.00
DABPM1081-1216	3/4"-14	1"-11	16.00	19.50	16.70	22.20	47.50	36.00	41.00
DABPM1081-1220	3/4"-14	1 1/4"-11	16.00	21.00	16.70	28.60	51.50	41.00	50.00
DABPM1081-1608	1"-11	1/2"-14	19.00	15.00	22.20	11.10	47.50	41.00	27.00
DABPM1081-1612	1"-11	3/4"-14	19.00	17.50	22.20	15.50	50.00	41.00	32.00
DABPM1081-1616	1"-11	1"-11	19.00	19.50	22.20	22.20	53.50	41.00	41.00
DABPM1081-1620	1"-11	1-1/4"-11	19.00	21.00	22.20	26.00	53.50	41.00	50.00
DABPM1081-2012	1-1/4"-11	3/4"-14	20.00	17.50	28.60	16.70	51.00	50.00	32.00
DABPM1081-2016	1-1/4"-11	1"-11	20.00	19.50	28.60	22.20	53.00	50.00	41.00
DABPM1081-2020	1-1/4"-11	1-1/4"-11	20.00	21.00	28.60	28.60	54.40	50.00	50.00
DABPM1081-2024	1-1/4"-11	1-1/2"-11	20.00	22.00	28.60	33.30	55.50	50.00	55.00
DABPM1081-2416	1-1/2"-11	1"-11	22.00	19.50	33.30	22.20	55.00	55.00	41.00
DABPM1081-2420	1-1/2"-11	1-1/4"-11	22.00	21.00	33.30	26.00	57.50	55.00	50.00
DABPM1081-2424	1-1/2"-11	1-1/2"-11	22.00	22.00	33.30	33.30	58.50	55.00	55.00
DABPM1081-2432	1-1/2"-11	2"-11	22.00	23.00	33.30	44.00	61.50	60.00	70.00
DABPM1081-3232	2"-11	2"-11	25.00	23.00	46.00	46.00	69.00	70.00	70.00

Certificate:

DABPM1251

Straight Connector BSP Male 60° - JIC Swivel Female 74°

D

A

BP

M

1

251

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Adaptor

BSPP


Male

Straight

JIC Swivel FemaleF

German Technology Equipment

New-Standard

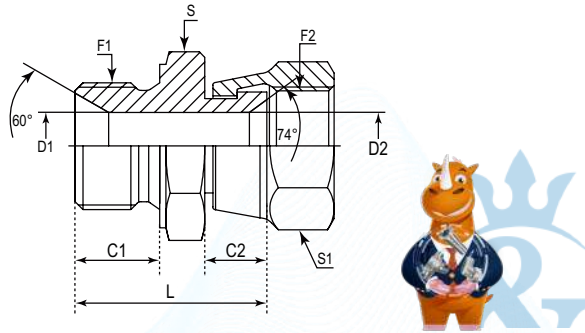

DME&JDE Code: DABPM1251

Product Type Hydraulic adaptor

Standard: BSP

Structure: Straight

Connection Type: Male x Swivel Female

Thread Types: BSPP 60° x JIC 74° Cone

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	S1
#	BSPP	UNF	mm	mm	mm	mm	mm	mm	mm
DABPM1251-0204	1/8"-28	7/16"-20	9.00	8.50	3.50	4.37	25.00	14.00	17.00
DABPM1251-0205	1/8"-28	1/2"-20	9.00	8.50	3.50	5.94	25.00	14.00	17.00
DABPM1251-0206	1/8"-28	9/16"-18	9.00	9.50	3.50	7.54	25.00	14.00	19.00
DABPM1251-0404	1/4"-19	7/16"-20	11.00	8.50	4.37	4.37	27.50	19.00	17.00
DABPM1251-0405	1/4"-19	1/2"-20	11.00	8.50	4.70	5.94	28.00	19.00	17.00
DABPM1251-0406	1/4"-19	9/16"-18	11.00	9.50	4.70	7.54	29.00	19.00	19.00
DABPM1251-0408	1/4"-19	3/4"-16	11.00	10.50	4.70	9.93	30.00	19.00	24.00
DABPM1251-0605	3/8"-19	1/2"-20	12.00	8.50	7.90	5.94	31.00	22.00	17.00
DABPM1251-0606	3/8"-19	9/16"-18	12.00	9.50	7.54	7.54	32.00	22.00	19.00
DABPM1251-0608	3/8"-19	3/4"-16	12.00	10.50	7.90	9.90	31.50	22.00	24.00
DABPM1251-0610	3/8"-19	7/8"-14	12.00	11.50	7.90	12.29	34.50	22.00	27.00
DABPM1251-0804	1/2"-14	7/16"-20	14.00	8.50	11.10	4.37	33.00	27.00	17.00
DABPM1251-0806	1/2"-14	9/16"-18	14.00	9.50	11.10	7.54	33.00	27.00	19.00
DABPM1251-0808	1/2"-14	3/4"-16	14.00	10.50	11.10	9.93	36.50	27.00	24.00
DABPM1251-0810	1/2"-14	7/8"-14	14.00	11.50	11.10	11.10	36.50	27.00	27.00
DABPM1251-0812	1/2"-14	1-1/16"-12	14.00	13.50	11.10	15.50	36.50	27.00	32.00
DABPM1251-0816	1/2"-14	1-5/16"-12	14.00	13.50	11.10	21.44	39.00	32.00	41.00
DABPM1251-1006	5/8"-14	9/16"-18	16.00	9.91	14.00	7.54	36.00	30.00	19.00
DABPM1251-1008	5/8"-14	3/4"-16	16.00	10.50	14.00	9.93	36.50	30.00	24.00
DABPM1251-1010	5/8"-14	7/8"-14	16.00	11.50	14.00	12.30	37.50	30.00	27.00
DABPM1251-1012	5/8"-14	1-1/16"-12	16.00	13.50	14.00	14.00	41.50	30.00	32.00
DABPM1251-1016	5/8"-14	1-5/16"-12	16.00	14.37	14.00	21.44	41.50	34.93	41.00
DABPM1251-1208	3/4"-14	3/4"-16	16.00	10.50	16.70	9.93	37.00	32.00	24.00
DABPM1251-1210	3/4"-14	7/8"-14	16.00	11.50	16.70	12.30	39.00	32.00	27.00
DABPM1251-1212	3/4"-14	1-1/16"-12	16.00	13.50	15.47	15.47	42.50	32.00	32.00
DABPM1251-1214	3/4"-14	1-3/16"-12	16.00	13.61	16.00	16.00	40.00	32.00	36.00
DABPM1251-1216	3/4"-14	1-5/16"-12	16.00	13.50	16.70	21.44	41.00	32.00	41.00
DABPM1251-1220	3/4"-14	1-5/8"-12	16.00	15.50	16.70	27.38	42.50	41.00	50.00
DABPM1251-1612	1"-11	1-1/16"-12	19.00	13.50	22.20	15.47	43.50	41.00	32.00
DABPM1251-1614	1"-11	1-3/16"-12	19.00	13.61	22.20	18.26	43.50	41.00	36.00
DABPM1251-1616	1"-11	1-5/16"-12	19.00	13.50	21.40	21.40	43.50	41.00	41.00
DABPM1251-1620	1"-11	1-5/8"-12	19.00	15.50	22.20	27.38	45.50	41.00	50.00
DABPM1251-2020	1-1/4"-11	1-5/8"-12	20.00	15.75	27.42	27.42	50.00	50.00	50.00
DABPM1251-2024	1-1/4"-11	1-7/8"-12	20.00	17.53	28.60	33.32	52.50	50.00	55.00
DABPM1251-2420	1-1/2"-11	1-5/8"-12	22.00	15.75	33.30	27.42	53.00	55.00	50.00
DABPM1251-2424	1-1/2"-11	1-7/8"-12	22.00	16.00	33.30	33.30	53.00	55.00	55.00
DABPM1251-2432	1-1/2"-11	2-1/2"-12	22.00	19.80	33.30	45.24	59.00	65.00	75.00
DABPM1251-3224	2"-11	1-7/8"-12	25.00	16.00	46.00	33.32	59.50	70.00	55.00
DABPM1251-3232	2"-11	2-1/2"-12	25.00	16.50	45.00	45.00	60.00	70.00	75.00

Certificate:



DABTM107F

Straight Connector BSPT Male 60°- BSPT Fixed Female

D

A

BT

M

1

07

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

Straight

BSPP

Female

German Technology Equipment

New-Standard

DME&JDE Code:

DABTM107F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Female

Thread Types:

BSPT 60° × BSPT Fixed Female

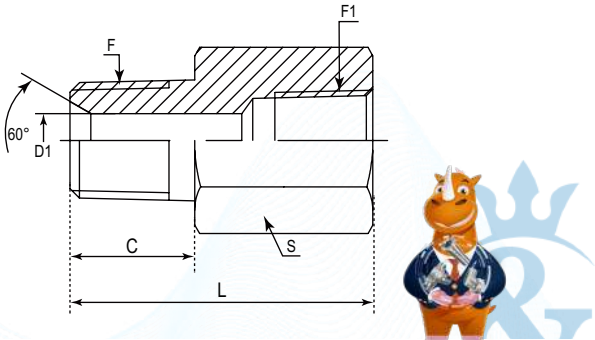

PART NUMBER	F (Thread)	F1 (Thread)	C	D	L	S
#	BSPT	BSPT	mm	mm	mm	mm
DABTM107F-0204	1/8"-28	1/4"-19	10.00	4.50	30.73	19.00
DABTM107F-0404	1/4"-19	1/4"-19	14.00	6.00	34.00	19.00
DABTM107F-0406	1/4"-19	3/8"-19	14.00	6.00	35.50	22.00
DABTM107F-0408	1/4"-19	1/2"-14	14.00	6.00	41.00	27.00
DABTM107F-0606	3/8"-19	3/8"-19	15.00	9.00	36.00	22.00
DABTM107F-0608	3/8"-19	1/2"-14	15.00	9.00	42.00	27.00
DABTM107F-0806	1/2"-14	3/8"-19	19.00	12.00	40.00	22.00
DABTM107F-0812	1/2"-14	3/4"-14	19.00	12.00	48.00	33.00
DABTM107F-1216	3/4"-14	1"-11	20.00	16.70	54.00	41.00
DABTM107F-1620	1"-11	1-1/4"-11	24.00	22.20	63.00	50.00



Certificate:

DABTM107FR

Straight Bushing Connector BSPT Male 60° - BSPT Fixed Female

D

A

BT

M

1

07

FR

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

Straight

BSPT

Fixed Female

German Technology Equipment

New-Standard

DME&JDE Code:

DABTM107FR

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

BSPT 60° × BSPT

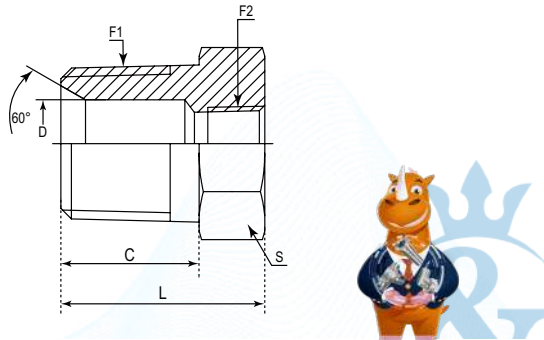

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	BSPT	BSPT	mm	mm	mm	mm
DABTM107FR-0402	1/4"-19	1/8"-28	14.00	6.00	20.50	14.00
DABTM107FR-0602	3/8"-19	1/8"-28	14.20	9.00	21.60	19.00
DABTM107FR-0604	3/8"-19	1/4"-19	14.20	9.00	21.60	19.00
DABTM107FR-0802	1/2"-14	1/8"-28	19.00	12.00	28.00	24.00
DABTM107FR-0806	1/2"-14	3/8"-19	19.00	11.00	28.00	24.00
DABTM107FR-1204	3/4"-14	1/4"-19	20.00	16.70	29.00	30.00
DABTM107FR-1206	3/4"-14	3/8"-19	20.00	16.70	29.00	30.00
DABTM107FR-1208	3/4"-14	1/2"-14	20.00	16.70	30.00	30.00
DABTM107FR-1216	3/4"-14	1"-11	20.00	16.70	55.50	41.00
DABTM107FR-1604	1"-11	1/4"-19	24.00	22.20	34.00	36.00
DABTM107FR-1606	1"-11	3/8"-19	24.00	22.20	34.00	36.00
DABTM107FR-1608	1"-11	1/2"-14	24.00	22.20	34.00	36.00
DABTM107FR-1612	1"-11	3/4"-14	24.00	22.20	34.00	35.00
DABTM107FR-2012	1-1/4"-11	3/4"-14	25.00	28.60	37.50	45.00
DABTM107FR-2016	1-1/4"-11	1"-11	25.00	28.00	37.50	45.00
DABTM107FR-2420	1-1/2"-11	1-1/4"-11	25.00	33.30	40.00	50.00
DABTM107FR-3216	2"-11	1"-11	30.00	46.00	45.00	65.00
DABTM107FR-3224	2"-11	1-1/2"-11	30.00	45.20	45.00	65.00



Certificate:

DABTM105F

Straight Connector BSPT Male 60° - BSPP Fixed Female

D

A

BT

M

1

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

Straight

BSPP

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTM105F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

BSPT 60° × BSPP Fixed Female

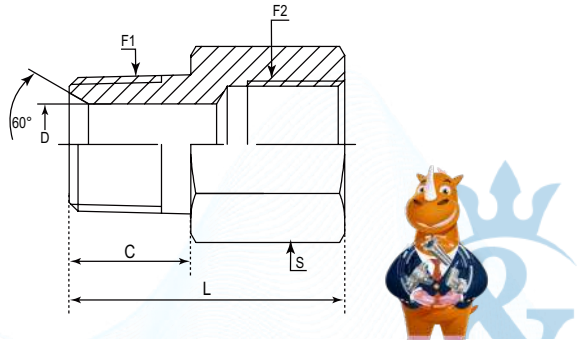

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	BSPT	BSPP	mm	mm	mm	mm
DABTM105F-0202	1/8"-28	1/8"-28	10.00	4.50	27.50	14.00
DABTM105F-0204	1/8"-28	1/4"-19	10.00	4.50	30.50	19.00
DABTM105F-0402	1/4"-19	1/8"-28	14.00	6.00	31.00	17.00
DABTM105F-0404	1/4"-19	1/4"-19	14.00	6.00	33.50	17.00
DABTM105F-0406	1/4"-19	3/8"-19	14.00	6.00	33.00	22.00
DABTM105F-0604	3/8"-19	1/4"-19	15.00	9.00	34.50	19.00
DABTM105F-0606	3/8"-19	3/8"-19	15.00	9.00	37.00	22.00
DABTM105F-0612	3/8"-19	3/4"-14	15.00	9.00	43.50	32.00
DABTM105F-0808	1/2"-14	1/2"-14	19.00	12.00	43.00	27.00
DABTM105F-0816	1/2"-14	1"-11	19.00	12.00	54.00	41.00
DABTM105F-1206	3/4"-14	3/8"-19	20.00	16.70	43.00	30.00
DABTM105F-1212	3/4"-14	3/4"-14	20.00	16.70	46.00	32.00
DABTM105F-1220	3/4"-14	1"1/4"-11	20.00	16.70	60.00	50.00
DABTM105F-1616	1"-11	1"-11	24.00	22.20	57.00	41.00
DABTM105F-1620	1"-11	1-1/4"-11	24.00	22.20	59.50	50.00
DABTM105F-2020	1-1/4"-11	1-1/4"-11	25.00	28.60	63.50	50.00
DABTM105F-2024	1-1/4"-11	1-1/2"-11	25.00	28.60	60.00	55.00
DABTM105F-2432	1-1/2"-11	2"-11	25.00	33.30	65.50	70.00

DABTM105FR

Straight Bushing Connector BSPT Male 60° - BSPP Fixed Female

D

A

BT

M

1

05

FR

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

Straight

BSPP

Fixed Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTM105FR

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

BSPP 60° × BSPP Fixed Female

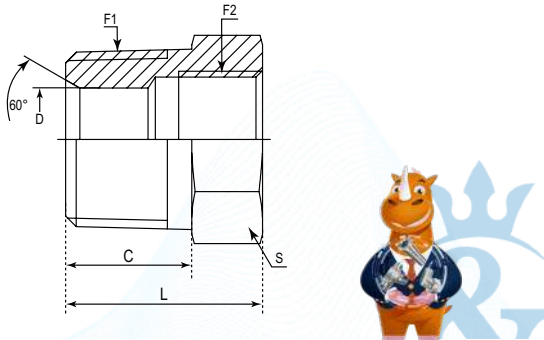

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	BSPT	BSPP	mm	mm	mm	mm
DABTM105FR-0202	1/8"-28	1/8"-28	5.00	4.50	10.00	12.00
DABTM105FR-0402	1/4"-19	1/8"-28	14.00	7.00	21.00	14.00
DABTM105FR-0408	1/4"-19	1/2"-14	14.00	7.00	40.50	27.00
DABTM105FR-0602	3/8"-19	1/8"-28	15.00	8.57	22.00	17.00
DABTM105FR-0604	3/8"-19	1/4"-19	15.00	11.45	23.00	19.00
DABTM105FR-0802	1/2"-14	1/8"-28	19.00	13.00	27.00	22.00
DABTM105FR-0804	1/2"-14	1/4"-19	19.00	11.45	27.00	22.00
DABTM105FR-0806	1/2"-14	3/8"-19	19.00	14.95	27.00	22.00
DABTM105FR-0816	1/2"-14	1"-11	19.00	13.00	55.50	41.00
DABTM105FR-1204	3/4"-14	1/4"-19	20.00	11.45	29.00	27.00
DABTM105FR-1206	3/4"-14	3/8"-19	20.00	14.95	29.00	27.00
DABTM105FR-1208	3/4"-14	1/2"-14	20.00	18.63	29.00	27.00
DABTM105FR-1608	1"-11	1/2"-14	24.00	24.00	34.00	36.00
DABTM105FR-1612	1"-11	3/4"-14	24.00	24.12	34.00	36.00
DABTM105FR-1616	1"-11	1"-11	24.00	22.20	59.00	41.00
DABTM105FR-2008	1-1/4"-11	1/2"-14	25.00	31.00	37.00	46.00
DABTM105FR-2016	1-1/4"-11	1"-11	25.00	30.29	37.00	46.00
DABTM105FR-2412	1-1/2"-11	3/4"-14	25.00	38.00	37.00	50.00
DABTM105FR-2416	1-1/2"-11	1"-11	25.00	38.00	37.00	50.00
DABTM105FR-2420	1-1/2"-11	1-1/4"-11	25.00	38.95	37.00	50.00
DABTM105FR-3216	2"-11	1"-11	30.00	49.00	45.00	65.00
DABTM105FR-3220	2"-11	1-1/4"-11	30.00	49.00	45.00	65.00
DABTM105FR-3224	2"-11	1-1/2"-11	30.00	44.85	45.00	65.00
DABTM105FR-4020	2-1/2"-11	1-1/4"-11	36.00	38.95	60.00	76.20
DABTM105FR-4032	2-1/2"-11	2"-11	36.00	56.80	60.00	76.20
DABTM105FR-4832	3"-11	2"-11	40.00	56.80	60.00	90.00



Certificate:





Certificate:



DABTM152F

Straight Adaptor BSPT Male 60° - Metric Fixed Female

D

A

BT

M

1

52

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

Straight

Metric

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTM152F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

BSPP 60° × Metric Fixed Female

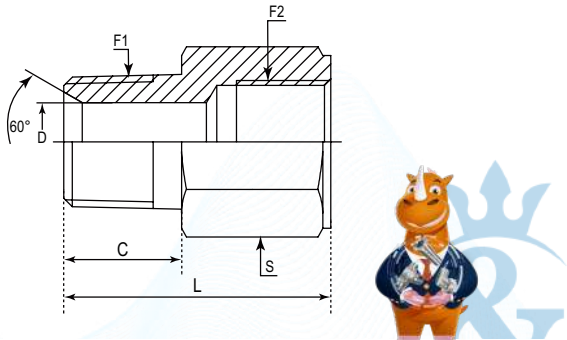

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	BSPT	Metric	mm	mm	mm	mm
DABTM152F-0410	1/4"-19	M10X1	14.00	7.00	29.00	14.00
DABTM152F-0414	1/4"-19	M14X1.5	14.00	7.00	33.00	19.00
DABTM152F-0416	1/4"-19	M16X1.5	14.00	7.00	34.50	22.00
DABTM152F-0418	1/4"-19	M18X1.5	14.00	7.00	35.00	24.00
DABTM152F-0614	3/8"-19	M14X1.5	15.00	10.00	33.00	19.00
DABTM152F-0616	3/8"-19	M16X1.5	15.00	10.00	34.00	22.00
DABTM152F-0622	3/8"-19	M22X1.5	15.00	10.00	37.50	27.00
DABTM152F-0818	1/2"-14	M18X1.5	19.00	12.00	37.50	24.00
DABTM152F-0822	1/2"-14	M22X1.5	19.00	13.00	41.00	27.00



Certificate:



DABTM152FR

Straight Bushing Connector BSPT Male 60° - Metric Fixed Female

D

A

BT

M

1

52

FR

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

Straight

Metric

Fixed Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTM152FR

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

BSPT 60° × Metric Fixed Female

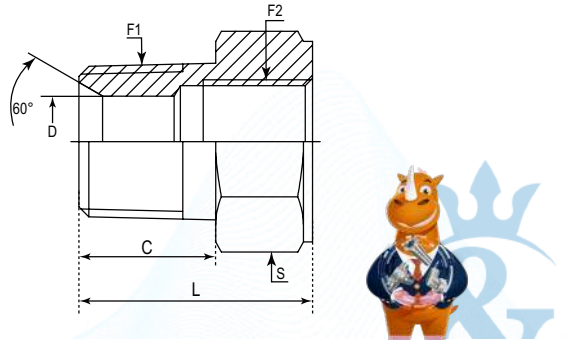

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	BSPT	Metric	mm	mm	mm	mm
DABTM152FR-0206	1/8"-28	M6X1	10.00	4.50	15.00	14.00
DABTM152FR-0408	1/4"-19	M8X1	14.00	6.00	19.00	17.00
DABTM152FR-0612	3/8"-19	M12X1.5	15.00	9.00	21.00	22.00
DABTM152FR-0816	1/2"-14	M16X1.5	19.00	13.00	27.00	22.00
DABTM152FR-1214	3/4"-14	M14X1.5	20.00	16.70	27.00	30.00
DABTM152FR-1216	3/4"-14	M16X1.5	20.00	16.70	27.00	30.00
DABTM152FR-1616	1"-11	M16X1.5	24.00	22.20	32.00	36.00
DABTM152FR-1620	1"-11	M20X1.5	24.00	22.20	32.00	36.00
DABTM152FR-2022	1-1/4"-11	M22X1.5	25.00	28.60	34.00	46.00
DABTM152FR-2026	1-1/4"-11	M26X1.5	25.00	28.60	34.00	46.00
DABTM152FR-2426	1-1/4"-11	M26X1.5	25.00	33.30	35.00	50.00



Certificate:



DABTM128F

Straight Connector BSPT Male 60° - NPTF Female

D

A

BT

M

1

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

Straight

NPTF

Female

German Technology Equipment

New-Standard

DME&JDE Code:

DABTM128F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Female

Thread Types:

BSPP 60° × NPTF

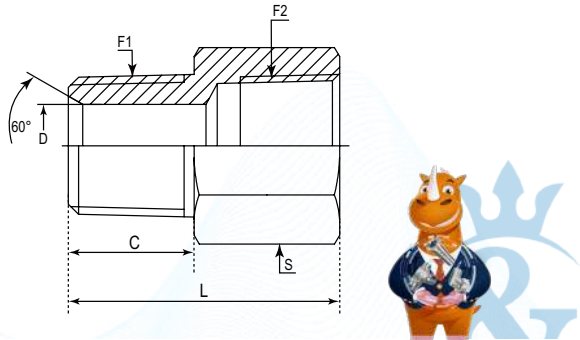

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	BSPT	NPTF	mm	mm	mm	mm
DABTM128F-0202	1/8"-28	1/8"-27	10.00	4.50	26.50	17.00
DABTM128F-0204	1/8"-28	1/4"-18	10.00	4.50	32.00	19.00
DABTM128F-0402	1/4"-19	1/8"-27	14.00	6.00	28.50	17.00
DABTM128F-0404	1/4"-19	1/4"-18	14.00	6.00	35.00	19.00
DABTM128F-0602	3/8"-19	1/8"-27	15.00	9.00	23.50	19.00
DABTM128F-0604	3/8"-19	1/4"-18	15.00	9.00	36.00	19.00
DABTM128F-0606	3/8"-19	3/8"-18	15.00	9.00	37.00	22.00
DABTM128F-0808	1/2"-14	1/2"-14	19.00	12.50	46.00	27.00
DABTM128F-1206	3/4"-16	3/8"-18	20.00	16.70	32.00	27.00
DABTM128F-1208	3/4"-16	1/2"-14	20.00	16.70	32.50	27.00
DABTM128F-1212	3/4"-14	3/4"-14	20.00	16.70	52.00	34.93
DABTM128F-1612	1"-11	3/4"-14	24.00	22.20	41.00	36.00
DABTM128F-1616	1"-11	1"-11-1/2	24.00	22.20	60.00	41.00
DABTM128F-2012	1"1/4-11	3/4"-14	25.00	28.60	39.00	46.00
DABTM128F-2016	1-1/4"-11	1"-11-1/2	25.00	28.60	39.00	46.00
DABTM128F-2020	1-1/4"-11	1-1/4"-11-1/2	25.00	28.60	63.00	50.80
DABTM128F-2420	1-1/2"-11	1-1/4"-11-1/2	25.00	33.30	41.00	50.00
DABTM128F-2424	1-1/2"-11	1-1/2"-11-1/2	25.00	33.30	63.00	60.00
DABTM128F-3232	2"-11	2"-11-1/2	30.00	46.00	71.50	73.02



Certificate:

DABPF152M

Straight Connector BSPP Fixed Female - Metric Male 60°

D

A

BP

F

1

52

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Straight

Metric

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DABPF152M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Fixed Female × Male

Thread Types:

BSPP × Metric 60°

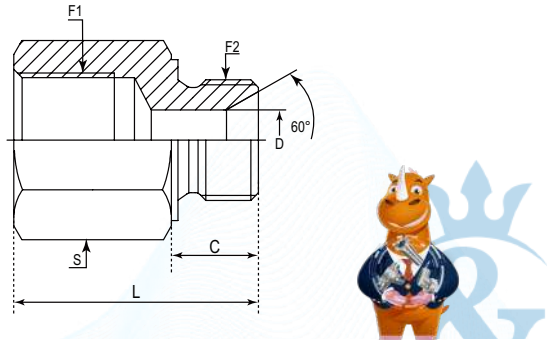

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	BSPP	Metric	mm	mm	mm	mm
DABPF152M-0412	1/4"-19	M12X1.5	10.00	4.00	30.00	19.00
DABPF152M-0414	1/4"-19	M14X1.5	12.00	6.00	31.00	19.00
DABPF152M-0616	3/8"-19	M16X1.5	12.00	8.00	32.50	22.00
DABPF152M-0618	3/8"-19	M18X1.5	12.00	10.00	32.00	24.00
DABPF152M-0816	1/2"-14	M16X1.5	12.00	8.00	38.00	27.00
DABPF152M-0818	1/2"-14	M18X1.5	12.00	10.00	36.50	27.00
DABPF152M-0822	1/2"-14	M22X1.5	14.00	14.00	38.00	27.00
DABPF152M-1226	3/4"-14	M26X1.5	16.00	15.00	43.50	32.00
DABPF152M-1230	3/4"-14	M30X1.5	16.00	19.00	41.00	36.00
DABPF152M-1638	1"-11	M38X1.5	18.00	25.00	50.00	46.00



Certificate:

DABPF1305

Straight Adaptor BSPP Fixed Female – SAE Male O Ring

D

A

BP

F

1

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

Straight

SAE

Male O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DABPF1305

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Fixed Female × Male

Thread Types:

BSPP × SAE UNF

Sealing Method:

O Ring

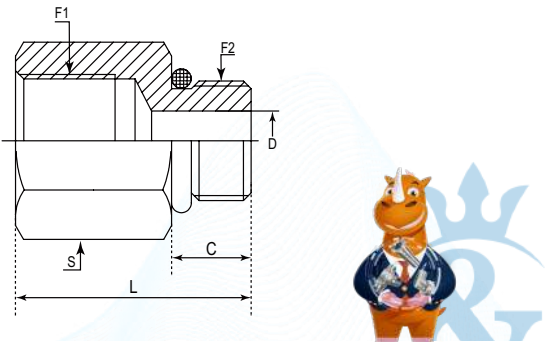

PART NUMBER	F1 (Thread)	F2 (Thread)	D2	L	S	S1
#	BSPP	UNF	mm	mm	mm	mm
DABPF1305-0404	1/4"-19	7/16"-20	9.14	4.37	29.5	19
DABPF1305-0408	1/4"-19	3/4"-16	11.13	9.90	30.50	22.00
DABPF1305-0606	3/8"-19	9/16"-18	9.93	7.50	31.50	22.00
DABPF1305-0608	3/8"-19	3/4"-16	11.13	9.90	31.00	22.00
DABPF1305-0810	1/2"-14	7/8"-14	12.70	12.30	37.00	27.00
DABPF1305-0812	1/2"-14	1-1/16"-12	15.09	15.50	38.00	32.00
DABPF1305-1212	3/4"-14	1-1/16"-12	15.09	15.50	41.00	32.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DABP11065

Straight Connector BSPP Swivel Female 60° - BSPP Male + O Ring

D

A

BP

1

1

06

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

Straight

BSPP

Male+ O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DABP11065

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Swivel Female × Male

Thread Types:

BSPP 60° × BSPP + O Ring

Sealing Method:

O Ring

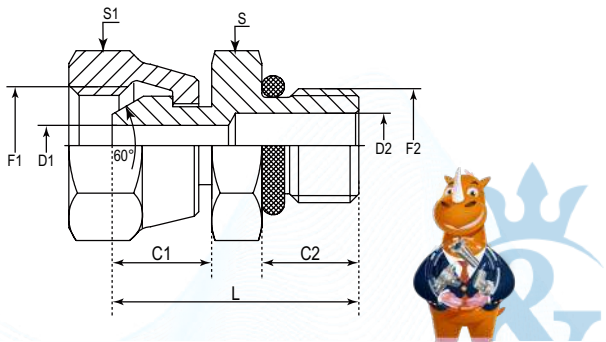

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm
DABP11065-0202	1/8"-28	1/8"-28	9.50	7.60	3.50	4.40	24.50	14.00	14.00
DABP11065-0204	1/8"-29	1/4"-19	9.50	11.20	3.50	7.50	25.00	19.00	14.00
DABP11065-0404	1/4"-19	1/4"-19	11.50	11.20	4.50	7.50	28.50	19.00	19.00
DABP11065-0406	1/4"-19	3/8"-19	11.50	11.20	4.50	9.90	30.50	22.00	19.00
DABP11065-0604	3/8"-19	1/4"-19	12.50	11.20	7.10	7.10	28.50	19.00	22.00
DABP11065-0606	3/8"-19	3/8"-19	12.50	11.20	7.10	9.90	32.00	22.00	22.00
DABP11065-0608	3/8"-19	1/2"-14	12.50	14.50	7.10	12.30	36.50	27.00	22.00
DABP11065-0806	1/2"-14	3/8"-19	15.00	11.20	9.70	9.70	34.00	22.00	27.00
DABP11065-0808	1/2"-14	1/2"-14	15.00	14.50	9.70	12.30	38.00	27.00	27.00
DABP11065-0812	1/2"-14	3/4"-14	15.00	14.50	9.70	15.50	39.50	32.00	27.00
DABP11065-1008	5/8"-14	1/2"-14	15.50	14.50	12.00	12.00	38.50	27.00	30.00
DABP11065-1208	3/4"-14	1/2"-14	17.50	14.50	15.50	12.30	39.00	27.00	32.00
DABP11065-1212	3/4"-14	3/4"-14	17.50	14.50	15.50	15.50	41.50	32.00	32.00
DABP11065-1216	3/4"-14	1"-11	17.50	18.60	15.50	21.50	46.00	41.00	32.00
DABP11065-1612	1"-11	3/4"-14	19.50	14.50	20.40	15.50	42.00	32.00	41.00
DABP11065-1616	1"-11	1"-11	19.50	18.60	20.40	21.50	48.00	41.00	41.00
DABP11065-1620	1"-11	1-1/4"-11	19.50	18.60	20.40	27.50	51.50	50.00	41.00
DABP11065-2020	1-1/4"-11	1-1/4"-11	21.00	18.60	26.00	27.50	53.50	50.00	50.00
DABP11065-2424	1-1/2"-11	1-1/2"-11	22.00	18.60	30.80	33.00	55.50	55.00	55.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DABP1106Q

Straight Connector BSPP Swivel Female 60° – BSPP Male + O Ring + Retaining Ring

D

A

BP

1

1

06

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

Straight

BSPP

Male + O Ring + Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABP1106Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Swivel Female × Male

Thread Types:

BSPP 60° × BSPP

Sealing Method:

O Ring + Retaining Ring

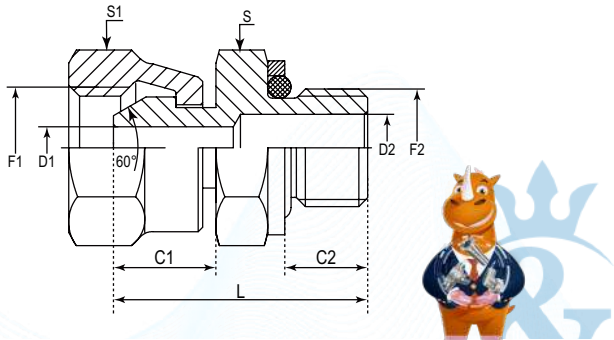

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm
DABP1106Q-0202	1/8"-28	1/8"-28	9.50	7.60	3.50	4.40	24.50	14.00	14.00
DABP1106Q-0204	1/8"-29	1/4"-19	9.50	11.20	3.50	7.50	25.00	19.00	14.00
DABP1106Q-0404	1/4"-19	1/4"-19	11.50	11.20	4.50	7.50	28.50	19.00	19.00
DABP1106Q-0406	1/4"-19	3/8"-19	11.50	11.20	4.50	9.90	30.50	22.00	19.00
DABP1106Q-0604	3/8"-19	1/4"-19	12.50	11.20	7.10	7.10	28.50	19.00	22.00
DABP1106Q-0606	3/8"-19	3/8"-19	12.50	11.20	7.10	9.90	32.00	22.00	22.00
DABP1106Q-0608	3/8"-19	1/2"-14	12.50	14.50	7.10	12.30	36.50	27.00	22.00
DABP1106Q-0806	1/2"-14	3/8"-19	15.00	11.20	9.70	9.70	34.00	22.00	27.00
DABP1106Q-0808	1/2"-14	1/2"-14	15.00	14.50	9.70	12.30	38.00	27.00	27.00
DABP1106Q-0812	1/2"-14	3/4"-14	15.00	14.50	9.70	15.50	39.50	32.00	27.00
DABP1106Q-1008	5/8"-14	1/2"-14	15.50	14.50	12.00	12.00	38.50	27.00	30.00
DABP1106Q-1208	3/4"-14	1/2"-14	17.50	14.50	15.50	12.30	39.00	27.00	32.00
DABP1106Q-1212	3/4"-14	3/4"-14	17.50	14.50	15.50	15.50	41.50	32.00	32.00
DABP1106Q-1216	3/4"-14	1"-11	17.50	18.60	15.50	21.50	46.00	41.00	32.00
DABP1106Q-1612	1"-11	3/4"-14	19.50	14.50	20.40	15.50	42.00	32.00	41.00
DABP1106Q-1616	1"-11	1"-11	19.50	18.60	20.40	21.50	48.00	41.00	41.00
DABP1106Q-1620	1"-11	1-1/4"-11	19.50	18.60	20.40	27.50	51.50	50.00	41.00
DABP1106Q-2020	1-1/4"-11	1-1/4"-11	21.00	18.60	26.00	27.50	53.50	50.00	50.00
DABP1106Q-2424	1-1/2"-11	1-1/2"-11	22.00	18.60	30.80	33.00	55.50	55.00	55.00

Certificate:



DABP11305

Straight Connector BSP Swivel Female 60° - SAE Male O Ring Boss

D

A

BP

1

1

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

Straight

SAE

Male O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABP11305

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Swivel Female × Male

Thread Types:

BSPP 60° × SAE UNF O Ring

Sealing Method:

O Ring

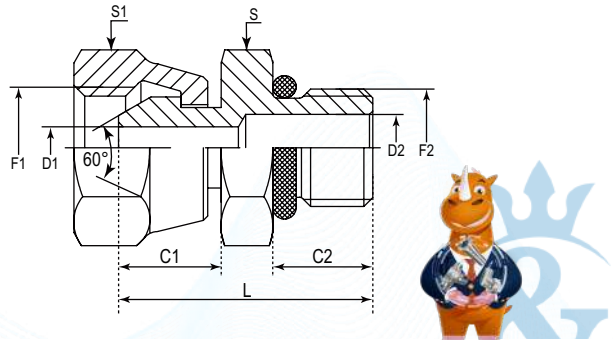

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	S1
#	BSPP	NPTF	mm	mm	mm	mm	mm	mm	mm
DABP11305-0404	1/4"-19	7/16"-20	11.50	9.14	4.37	4.37	26.00	14.00	19.00
DABP11305-0406	1/4"-19	9/16"-18	11.50	9.93	4.50	7.54	27.00	17.00	19.00
DABP11305-0604	3/8"-19	7/16"-20	12.50	9.14	7.10	4.37	27.00	17.00	22.00
DABP11305-0605	3/8"-19	1/2"-20	12.50	9.14	7.10	5.94	27.00	17.00	22.00
DABP11305-0606	3/8"-19	9/16"-18	12.50	9.93	7.10	7.10	28.00	17.00	22.00
DABP11305-0608	3/8"-19	3/4"-16	12.50	11.13	7.10	9.93	31.00	22.00	22.00
DABP11305-0610	3/8"-19	7/8"-14	12.50	12.70	7.10	12.29	35.00	27.00	22.00
DABP11305-0806	1/2"-14	9/16"-18	15.00	9.93	9.70	7.54	30.00	19.00	27.00
DABP11305-0808	1/2"-14	3/4"-16	15.00	11.13	9.70	9.70	33.00	22.00	27.00
DABP11305-0810	1/2"-14	7/8"-14	15.00	12.70	9.70	12.29	36.50	27.00	27.00
DABP11305-0812	1/2"-14	1-1/16"-12	15.00	15.09	9.70	15.47	40.00	32.00	27.00
DABP11305-1208	3/4"-14	3/4"-16	17.50	11.13	15.50	9.93	36.00	27.00	32.00
DABP11305-1210	3/4"-14	7/8"-14	17.50	12.70	15.50	12.29	37.50	27.00	32.00
DABP11305-1212	3/4"-14	1-1/16"-12	17.50	15.09	15.50	15.50	41.00	32.00	32.00
DABP11305-1216	3/4"-14	1-5/16"-12	17.50	15.09	15.50	21.44	41.00	38.00	32.00
DABP11305-1612	1"-11	1-1/16"-12	19.50	15.09	20.40	15.47	42.00	32.00	41.00
DABP11305-1616	1"-11	1-5/16"-12	19.50	15.09	20.40	21.44	42.00	38.00	41.00
DABP11305-2016	1-1/4"-11	1-5/16"-12	21.00	15.09	26.00	21.44	48.00	41.00	50.00
DABP11305-2020	1-1/4"-11	1-5/8"-12	21.00	15.09	26.00	27.38	49.50	50.00	50.00
DABP11305-2420	1-1/2"-11	1-5/8"-12	22.00	15.09	30.80	27.38	50.00	50.00	55.00
DABP11305-2424	1-1/2"-11	1-7/8"-12	22.00	15.09	30.80	33.32	50.00	55.00	55.00

Certificate:



DABP1152Q

Straight Connector BSPP Swivel Female 60° – Metric Male + O Ring +Retaining Ring

D

A

BP

1

1

52

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

Straight

Metric

Male + O Ring
+Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABP1152Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Swivel Female × Male

Thread Types:

BSPP 60° Cone × BSPP

Sealing Method:

O Ring +Retaining Ring

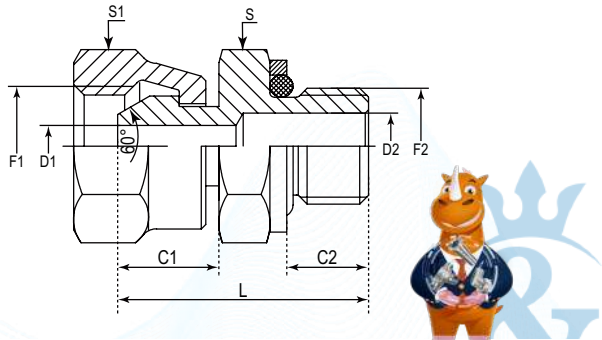

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	S1
#	BSPP	Metric	mm	mm	mm	mm	mm	mm	mm
DABP1152Q-0210	1/8"-29	M10X1	9.50	8.50	3.50	4.50	23.50	14.00	14.00
DABP1152Q-0412	1/4"-19	M12X1.5	11.50	11.00	4.50	6.00	28.00	17.00	19.00
DABP1152Q-0414	1/4"-19	M14X1.5	11.50	11.00	4.50	7.50	28.00	19.00	19.00
DABP1152Q-0616	3/8"-19	M16X1.5	12.50	11.50	7.10	9.00	31.50	22.00	22.00
DABP1152Q-0618	3/8"-19	M18X1.5	12.50	12.50	7.10	11.00	32.50	24.00	22.00
DABP1152Q-0818	1/2"-14	M18X1.5	15.00	12.50	9.70	11.00	34.50	24.00	27.00
DABP1152Q-0822	1/2"-14	M22X1.5	15.00	13.00	9.70	14.00	37.00	27.00	27.00
DABP1152Q-1022	5/8"-14	M22X1.5	15.50	13.00	12.00	14.00	37.50	27.00	30.00
DABP1152Q-1222	3/4"-14	M22X1.5	17.50	13.00	15.50	14.00	38.00	27.00	32.00
DABP1152Q-1227	3/4"-14	M27X2	17.50	16.00	15.50	18.00	42.00	32.00	32.00
DABP1152Q-1627	1"-11	M27X2	19.50	16.00	20.40	18.00	43.50	32.00	41.00
DABP1152Q-1633	1"-11	M33X2	19.50	16.00	20.40	23.00	45.50	41.00	41.00
DABP1152Q-2042	1-1/4"-11	M42X2	21.00	16.00	26.00	30.00	49.50	50.00	50.00
DABP1152Q-2448	1-1/2"-11	M48X2	22.00	17.50	30.80	36.00	51.50	55.00	55.00

Certificate:



DABP11525

Straight Connector BSPP Swivel Female 60° - Metric Male + O Ring

D

A

BP

1

1

52

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

Straight

Metric

Male + O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABP11525

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Swivel Female × Male

Thread Types:

BSPP 60° × Metric

Sealing Method:

O Ring

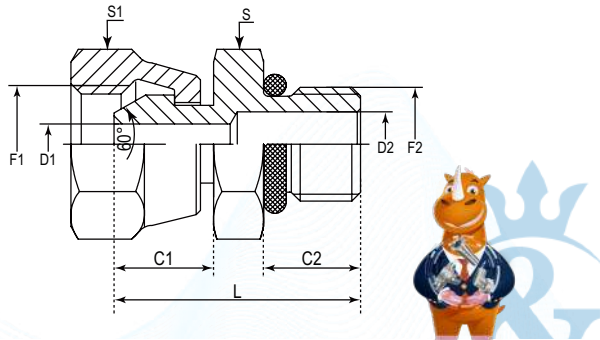

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	S1
#	BSPP	Metric	mm	mm	mm	mm	mm	mm	mm
DABP11525-0210	1/8"-29	M10X1	9.50	8.50	3.50	4.50	23.50	14.00	14.00
DABP11525-0412	1/4"-19	M12X1.5	11.50	11.00	4.50	6.00	28.00	17.00	19.00
DABP11525-0414	1/4"-19	M14X1.5	11.50	11.00	4.50	7.50	28.00	19.00	19.00
DABP11525-0616	3/8"-19	M16X1.5	12.50	11.50	7.10	9.00	31.50	22.00	22.00
DABP11525-0618	3/8"-19	M18X1.5	12.50	12.50	7.10	11.00	32.50	24.00	22.00
DABP11525-0818	1/2"-14	M18X1.5	15.00	12.50	9.70	11.00	34.50	24.00	27.00
DABP11525-0822	1/2"-14	M22X1.5	15.00	13.00	9.70	14.00	37.00	27.00	27.00
DABP11525-1022	5/8"-14	M22X1.5	15.50	13.00	12.00	14.00	37.50	27.00	30.00
DABP11525-1222	3/4"-14	M22X1.5	17.50	13.00	15.50	14.00	38.00	27.00	32.00
DABP11525-1227	3/4"-14	M27X2	17.50	16.00	15.50	18.00	42.00	32.00	32.00
DABP11525-1627	1"-11	M27X2	19.50	16.00	20.40	18.00	43.50	32.00	41.00
DABP11525-1633	1"-11	M33X2	19.50	16.00	20.40	23.00	45.50	41.00	41.00
DABP11525-2042	1-1/4"-11	M42X2	21.00	16.00	26.00	30.00	49.50	50.00	50.00
DABP11525-2448	1-1/2"-11	M48X2	22.00	17.50	30.80	36.00	51.50	55.00	55.00

Certificate:



DABP1107M

Straight Connector BSPP Swivel Female 60° - BSPT Male 60°

D

A

BP

1

1

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

Straight

BSPT

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABP1107M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Swivel Female × Male

Thread Types:

BSPP 60° × BSPT 60°

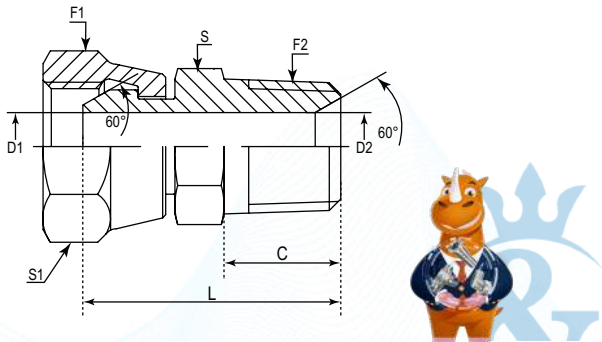

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	BSPP	BSPT	mm	mm	mm	mm	mm	mm
DABP1107M-0202	1/8"-28	1/8"-28	10.00	3.50	4.50	25.00	12.00	14.00
DABP1107M-0204	1/8"-28	1/4"-19	14.00	3.50	6.00	29.50	17.00	14.00
DABP1107M-0402	1/4"-19	1/8"-28	10.00	4.50	4.50	27.00	12.00	19.00
DABP1107M-0404	1/4"-19	1/4"-19	14.00	4.70	6.00	32.00	17.00	19.00
DABP1107M-0406	1/4"-19	3/8"-19	15.00	4.70	9.00	33.00	19.00	19.00
DABP1107M-0408	1/4"-19	1/2"-14	19.00	4.70	12.00	39.00	22.00	19.00
DABP1107M-0604	3/8"-19	1/4"-19	14.00	7.90	6.00	32.50	17.00	22.00
DABP1107M-0606	3/8"-19	3/8"-19	15.00	7.90	9.00	34.00	19.00	22.00
DABP1107M-0608	3/8"-19	1/2"-14	19.00	7.90	12.00	40.00	22.00	22.00
DABP1107M-0804	1/2"-14	1/4"-19	14.00	11.10	6.00	36.00	19.00	27.00
DABP1107M-0806	1/2"-14	3/8"-19	15.00	11.10	9.00	37.00	19.00	27.00
DABP1107M-0808	1/2"-14	1/2"-14	19.00	11.10	11.10	42.00	22.00	27.00
DABP1107M-0812	1/2"-14	3/4"-14	20.00	11.10	16.70	44.00	30.00	27.00
DABP1107M-1206	3/4"-14	3/8"-19	15.00	15.00	9.00	41.00	27.00	32.00
DABP1107M-1208	3/4"-14	1/2"-14	19.00	16.70	12.00	45.00	27.00	32.00
DABP1107M-1212	3/4"-14	3/4"-14	20.00	16.70	16.70	46.50	30.00	32.00
DABP1107M-1216	3/4"-14	1"-11	24.00	16.70	22.20	53.00	36.00	32.00
DABP1107M-1612	1"-11	3/4"-14	20.00	20.40	16.70	48.00	32.00	41.00
DABP1107M-1616	1"-11	1"-11	24.00	22.20	22.20	55.00	36.00	41.00
DABP1107M-2016	1-1/4"-11	1"-11	24.00	28.60	22.20	58.00	41.00	50.00
DABP1107M-2020	1-1/4"-11	1-1/4"-11	25.00	28.60	28.60	58.00	46.00	50.00
DABP1107M-2424	1-1/2"-11	1-1/2"-11	25.00	33.30	33.30	61.50	50.00	55.00
DABP1107M-3232	2"-11	2"-11	30.00	46.00	46.00	69.00	65.00	70.00

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA

DABPD0000

NUT BSPP

D

A

BP

D

0

000

Company

Product Range

Thread Types

Sealing Type

Compatible Type

Other Features

DME

Adaptor

BSPP

Welding

Tube

Nut/Plug

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABPD0000

Product Type

Hydraulic adaptor

Adaptor Standard:

BSP

Thread Types:


BSPP

Other Features:

Nut/Plug

Sealing Type:

Welding

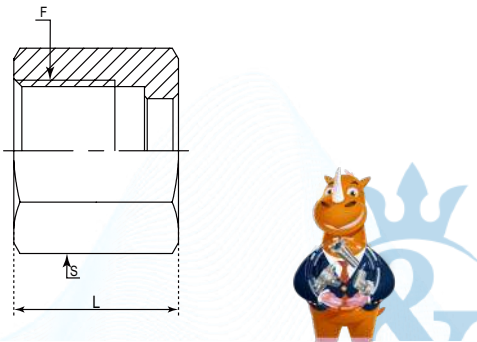

PART NUMBER	F (Thread)	L	S
#	BSPP	mm	mm
DABPD0000-0400	1/4"-19	15.00	19.00
DABPD0000-0600	3/8"-19	17.00	22.00
DABPD0000-0800	1/2"-14	20.10	27.00
DABPD0000-1000	5/8"-14	21.80	30.00
DABPD0000-1200	3/4"-14	22.60	32.00
DABPD0000-1600	1"-11	27.60	41.00

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA

DABP31000

Female Cap BSPP

D

A

BP

3

1

000

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Other Features

DME

Adaptor

BSPP

Slip-on Female

Straight

Nut/Plug

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABP31000

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Slip-on Female

Thread Types:

BSPP

Other Features:

Nut/Plug



PART NUMBER	F (Thread)	L	S
#	BSPP	mm	mm
DABP31000-0200	1/8"-28	14.00	14.00
DABP31000-0400	1/4"-19	16.00	19.00
DABP31000-0600	3/8"-19	17.50	22.00
DABP31000-0800	1/2"-14	20.50	27.00
DABP31000-1000	5/8"-14	22.00	30.00
DABP31000-1200	3/4"-14	25.00	32.00
DABP31000-1600	1"-11	29.00	41.00
DABP31000-2000	1-1/4"-11	29.20	50.00
DABP31000-2400	1-1/2"-11	32.00	55.00
DABP31000-3200	2"-11	34.00	70.00

DABP31000-C

Female Cap BSPP

D

A

BP

3

1

000

C

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Other Features

Plug Type

DME

Adaptor

BSPP

Female

Straight

Nut/Plug

Cap

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABP31000-C

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

straight

Connection Type:


Female

Thread Types:

BSPP

Other Features:

Nut/Plug



PART NUMBER	F (Thread)	L	R	C1	C2	S
#	BSPP	mm	mm	mm	mm	mm
DABP31000-400-C	1/4"-19	19.00	9.00	11.00	10.00	19
DABP31000-600-C	3/8"-19	22.00	11.00	13.00	11.00	22
DABP31000-800-C	1/2"-14	26.00	13.00	15.00	12.00	27
DABP31000-1200-C	3/4"-14	31.00	16.00	17.00	13.00	32
DABP31000-1600-C	1"-11	36.00	20.00	19.00	16.00	41



DABPF105F

Straight Connector BSPP Female Fixed

D

A

BP

F

1

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

Straight

BSPP

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPF105F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Fixed Female

Thread Types:

BSPP



PART NUMBER	F1 (Thread)	F2 (Thread)	L	S
#	BSPP	BSPP	mm	mm
DABPF105F-0202	1/8"-28	1/8"-28	22.00	14.00
DABPF105F-0402	1/4"-19	1/8"-28	24.00	19.00
DABPF105F-0404	1/4"-19	1/4"-19	25.00	19.00
DABPF105F-0602	3/8"-19	1/8"-28	27.00	22.00
DABPF105F-0604	3/8"-19	1/4"-19	27.00	22.00
DABPF105F-0606	3/8"-19	3/8"-19	27.00	22.00
DABPF105F-0804	1/2"-14	1/4"-19	29.50	27.00
DABPF105F-0806	1/2"-14	3/8"-19	30.50	27.00
DABPF105F-0808	1/2"-14	1/2"-14	35.00	27.00
DABPF105F-1008	5/8"-14	1/2"-14	40.00	30/32
DABPF105F-1010	5/8"-14	5/8"-14	36.00	30.00
DABPF105F-1206	3/4"-14	3/8"-19	40.00	32.00
DABPF105F-1208	3/4"-14	1/2"-14	34.00	32.00
DABPF105F-1212	3/4"-14	3/4"-14	40.00	32.00
DABPF105F-1612	1"-11	3/4"-14	41.00	41.00
DABPF105F-1616	1"-11	1"-11	45.00	41.00
DABPF105F-2012	1-1/4"-11	3/4"-14	45.00	50.00
DABPF105F-2016	1-1/4"-11	1"-11	50.00	50.00
DABPF105F-2020	1-1/4"-11	1-1/4"-11	48.00	50.00
DABPF105F-2420	1-1/2"-11	1-1/4"-11	50.00	60.00
DABPF105F-2424	1-1/2"-11	1-1/2"-11	54.00	55.00
DABPF105F-3220	2"-11	1-1/4"-11	55.00	70.00
DABPF105F-3224	2"-11	1-1/2"-11	55.00	70.00
DABPF105F-3232	2"-11	2"-11	60.00	70.00
DABPF105F-4032	2-1/2"-11	2"-11	70.00	90.00

Certificate:



DABPF128F

Straight Coupling BSPP Fixed Female - NPTF Fixed Female

D

A

BP

F

1

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

Straight

NPTF

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPF128F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Female × Female

Thread Types:

BSPP Fixed Female × NPTF Fixed Female



PART NUMBER	F1 (Thread)	F2 (Thread)	L	S
#	BSPP	NPTF	mm	mm
DABPF128F-0202	1/8"-28	1/8"-27	23.00	15.88
DABPF128F-0404	1/4"-19	1/4"-18	30.00	19.00
DABPF128F-0604	3/8"-19	1/4"-18	30.50	22.00
DABPF128F-0606	3/8"-19	3/8"-18	30.50	22.00
DABPF128F-0808	1/2"-14	1/2"-14	41.50	28.58
DABPF128F-1212	3/4"-14	3/4"-14	46.80	34.93
DABPF128F-1616	1"-11	1"-11-1/2	53.50	41.28
DABPF128F-2016	1-1/4"-11	1"-11-1/2	55.50	50.00
DABPF128F-2020	1-1/4"-11	1-1/4"-11-1/2	56.00	50.80
DABPF128F-2424	1-1/2"-11	1-1/2"-11-1/2	58.50	60.00
DABPF128F-3232	2"-11	2"-11-1/2	58.50	70.00

Certificate:



DABPF1081

Straight Connector BSPP Fixed Female – BSPP Swivel Female 60°

D

A

BP

F

1

081

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

DME

Adaptor

BSPP

Male

Straight

BSPP Swivel Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPF1081

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Fixed Female × Swivel Female

Thread Types:

BSPP × BSPP 60°

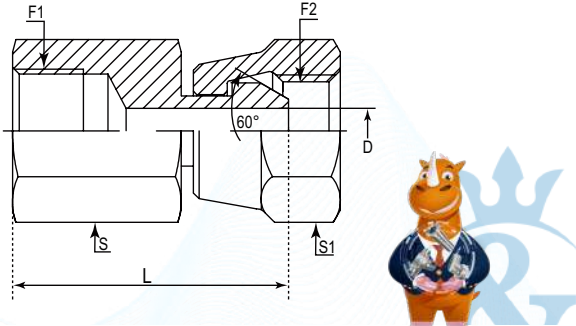

PART NUMBER	F1 (Thread)	F2 (Thread)	D	L	S	S1
#	BSPP	BSPP	mm	mm	mm	mm
DABPF1081-0404	1/4"-19	1/4"-19	4.70	30.50	19.00	19.00
DABPF1081-0606	3/8"-19	3/8"-19	7.90	33.00	22.00	22.00
DABPF1081-0808	1/2"-14	1/2"-14	11.10	39.00	27.00	27.00
DABPF1081-0812	1/2"-14	3/4"-14	16.70	42.00	27.00	32.00
DABPF1081-1212	3/4"-14	3/4"-14	16.70	45.00	32.00	32.00
DABPF1081-1616	1"-11	1"-11	22.20	52.00	41.00	41.00
DABPF1081-2020	1-1/4"-11	1-1/4"-11	28.60	56.00	50.00	50.00
DABPF1081-2424	1-1/2"-11	1-1/2"-11	33.3	61	55	55
DABPF1081-3232	2"-11	2"-11	46	63	70	70



Certificate:



DABP11081

Straight Connector BSPP Swivel Female 60° - BSPP Swivel Female 60°

D

A

BP

1

1

081

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

BSPP

Swivel Female

Straight

BSPP Swivel Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABP11081

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Swivel Female × Swivel Female

Thread Types:

BSPP Swivel Female × BSPP Swivel Female

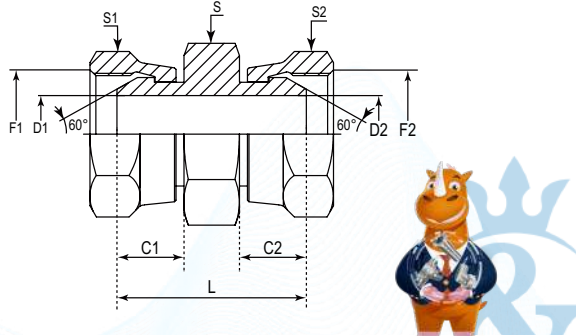

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	S1	S2
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DABP11081-0404	1/4"-19	1/4"-19	11.50	11.50	4.70	4.70	29.00	14.00	19.00	19.00
DABP11081-0604	3/8"-19	1/4"-19	12.50	11.50	7.90	4.70	31.50	17.00	22.00	19.00
DABP11081-0606	3/8"-19	3/8"-19	12.50	12.50	7.10	7.10	32.50	17.00	22.00	22.00
DABP11081-0804	1/2"-14	1/4"-19	15.00	11.50	11.10	4.70	33.50	22.00	27.00	19.00
DABP11081-0806	1/2"-14	3/8"-19	15.00	12.50	11.10	7.90	34.50	22.00	27.00	22.00
DABP11081-0808	1/2"-14	1/2"-14	15.00	15.00	10.00	10.00	38.00	22.00	27.00	27.00
DABP11081-1008	5/8"-14	1/2"-14	15.50	15.00	12.30	11.10	39.00	24.00	30.00	27.00
DABP11081-1010	5/8"-14	5/8"-14	15.50	15.50	12.30	12.30	39.00	24.00	30.00	30.00
DABP11081-1208	3/4"-14	1/2"-14	17.50	15.00	16.70	11.10	41.00	27.00	32.00	27.00
DABP11081-1210	3/4"-14	5/8"-14	17.50	15.50	15.50	14.00	41.50	27.00	32.00	30.00
DABP11081-1212	3/4"-14	3/4"-14	17.50	17.50	15.50	15.50	43.50	27.00	32.00	32.00
DABP11081-1608	1"-11	1/2"-14	19.50	15.00	22.20	11.10	45.50	36.00	41.00	27.00
DABP11081-1612	1"-11	3/4"-14	19.50	17.50	22.20	16.70	49.00	36.00	41.00	32.00
DABP11081-1616	1"-11	1"-11	19.50	19.50	22.20	22.20	50.00	36.00	41.00	41.00
DABP11081-2012	1-1/4"-11	3/4"-14	21.00	17.50	26.00	16.70	51.50	41.00	50.00	32.00
DABP11081-2020	1-1/4"-11	1-1/4"-11	21.00	21.00	26.00	26.00	55.00	41.00	50.00	50.00
DABP11081-2420	1-1/2"-11	1-1/4"-11	22.00	21.00	33.30	28.60	57.00	50.00	55.00	50.00
DABP11081-2424	1-1/2"-11	1-1/2"-11	22.00	22.00	33.30	33.30	58.00	50.00	55.00	55.00
DABP11081-3232	2"-11	2"-11	23.00	23.00	46.00	46.00	61.50	60.00	70.00	70.00

Certificate:






DABP11251

Straight Connector BSPP Swivel Female 60° - JIC Swivel Female 74°

D	A	BP	1	1	251
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	BSPP	Swivel Female	Straight	JIC Swivel Female



DME&JDE Code:	DABP11251
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	Straight
Connection Type:	Swivel Female × Swivel Female
Thread Types:	BSPP 60° × JIC UNF 74°

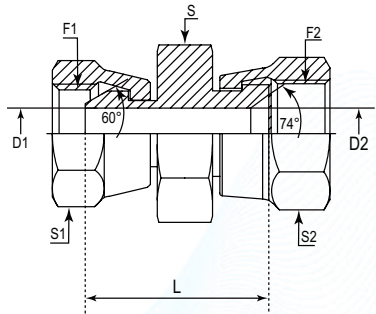

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L	S	S1	S2
#	BSPP	UNF	mm	mm	mm	mm	mm	mm
DABP11251-0404	1/4"-19	7/16"-20	4.37	4.37	26.00	14.00	19.00	17.00
DABP11251-0405	1/4"-19	1/2"-20	4.70	4.70	26.50	14.00	19.00	15.88
DABP11251-0406	1/4"-19	9/16"-18	4.70	7.54	27.00	14.00	19.00	19.00
DABP11251-0604	3/8"-19	7/16"-20	7.10	4.37	28.50	17.00	22.00	17.00
DABP11251-0605	3/8"-19	1/2"-20	7.10	5.94	29.00	17.00	22.00	15.88
DABP11251-0606	3/8"-19	9/16"-18	7.54	7.54	28.50	19.00	22.00	19.00
DABP11251-0608	3/8"-19	3/4"-16	7.10	9.93	33.50	20.64	22.00	22.23
DABP11251-0806	1/2"-14	9/16"-18	11.10	7.54	32.00	22.00	27.00	19.00
DABP11251-0808	1/2"-14	3/4"-16	9.93	9.93	34.00	22.00	27.00	22.00
DABP11251-0812	1/2"-14	1-1/16"-12	11.10	15.47	38.00	27.00	27.00	32.00
DABP11251-1010	5/8"-14	7/8"-14	12.29	12.29	35.50	24.00	30.00	27.00
DABP11251-1012	5/8"-14	1-1/16"-12	14.30	15.47	37.50	27.00	30.00	32.00
DABP11251-1208	3/4"-14	3/4"-16	16.70	9.93	37.50	27.00	32.00	22.23
DABP11251-1210	3/4"-14	7/8"-14	16.70	12.29	38.00	27.00	32.00	27.00
DABP11251-1212	3/4"-14	1-1/16"-12	15.47	15.47	40.00	27.00	32.00	32.00
DABP11251-1216	3/4"-14	1-5/16"-12	16.70	21.44	41.00	32.00	32.00	41.00
DABP11251-1612	1"-11	1-1/16"-12	22.20	15.47	45.00	36.00	41.00	32.00
DABP11251-1616	1"-11	1-5/16"-12	21.44	21.44	43.00	32.00	41.00	41.00
DABP11251-2020	1-1/4"-11	1-5/8"-12	26.00	26.00	49.50	41.00	50.00	50.00


DABTF107F

Straight Connector BSPT Female Fixed

D	A	BT	F	1	07	F
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPT	Female	Straight	BSPT	Fixed Female



DME&JDE Code:	DABTF107F
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	Straight
Connection Type:	Female × Fixed Female
Thread Types:	BSPT × BSPT



PART NUMBER	F1 (Thread)	F2 (Thread)	L	S
#	BSPP	BSPP	mm	mm
DABTF107F-0404	1/4"-19	1/4"-19	30.00	19.00
DABTF107F-0602	3/8"-19	1/8"-28	26.00	22.00
DABTF107F-0804	1/2"-14	1/4"-19	35.00	27.00
DABTF107F-0806	1/2"-14	3/8"-19	40.00	27.00
DABTF107F-0808	1/2"-14	1/2"-14	40.00	27.00
DABTF107F-1612	1"-11	3/4"-14	50.00	41.00
DABTF107F-1616	1"-11	1"-11	50.00	41.00
DABTF107F-2016	1-1/4"-11	1"-11	53.00	50.00
DABTF107F-2020	1-1/4"-11	1-1/4"-11	55.00	50.00
DABTF107F-2424	1-1/2"-11	1-1/2"-11	55.00	55.00
DABTF107F-3232	2"-11	2"-11	65.00	70.00

DABPM100S

Straight Adaptor BSPP Male 60° – Butt Welding

D

A

BP

M

1

00

S

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Sealing Type

Welding Type

DME

Adaptor

BSPP

Male

Straight

Welding

Butt

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM100S

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Male

Thread Types:

BSPP

Sealing Method:

Butt Welding



PART NUMBER	F (Thread)	C	D	L	S
#	BSPP	mm	mm	mm	mm
DABPM100S-0414	1/4"-19	11.00	6.00	22.00	17.00
DABPM100S-0616	3/8"-19	12.00	9.50	26.00	17.00
DABPM100S-0820	1/2"-14	14.00	12.50	31.00	22.00
DABPM100S-1225	3/4"-14	16.00	16.70	37.00	27.00
DABPM100S-1632	1"-11	19.00	21.50	42.00	34.00
DABPM100S-2041	1-1/4"-11	20.00	27.50	46.00	42.00
DABPM100S-2446	1-1/2"-11	22.00	33.30	53.00	50.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABPM100B

Bonding (socket welding) Connector BSPP Male 60° – Metric / Imperial Tube

D

A

BP

M

1

00

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Sealing Type

Welding Type

DME

Adaptor

BSPP

Male

Straight

Welding

Socket Welding

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM100B

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Male

Thread Types:

BSPP

Sealing Type:

Socket Welding



PART NUMBER	F (Thread)	C	D1	D	L	S
#	BSPP	mm	mm	mm	mm	mm
DABPM100B-0410	1/4"-19	11.00	4.70	9.60	22.00	19.00
DABPM100B-0612	3/8"-19	12.00	7.90	12.70	23.50	22.00
DABPM100B-0812	1/2"-14	14.00	11.10	12.70	30.00	27.00
DABPM100B-0820	1/2"-14	14.00	11.10	19.00	32.00	27.00
DABPM100B-1220	3/4"-14	16.00	16.70	19.00	34.50	32.00
DABPM100B-1625	1"-11	19.00	22.20	25.40	39.50	41.00
DABPM100B-2032	1-1/4"-11	20.00	28.60	31.80	39.50	50.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABTM100B

Bonding (socket welding) Connector BSPT Male 60° - Metric / Imperial Tube

D

A

BT

M

1

00

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

Straight

Metric

Socket Welding

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTM100B

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Male

Thread Types:

BSPT

Sealing Method:

Socket Welding



PART NUMBER	F (Thread)	C	D	L	S
#	BSPT	mm	mm	mm	mm
DABTM100B-0406	1/4"-19	14.00	6.00	23.50	14.00
DABTM100B-0410	1/4"-19	14.00	6.00	24.50	14.00
DABTM100B-0610	3/8"-19	15.00	6.00	25.00	19.00
DABTM100B-0612	3/8"-19	15.00	9.00	25.00	19.00
DABTM100B-0812	1/2"-14	19.00	12.00	32.00	22.00
DABTM100B-0816	1/2"-14	19.00	12.00	33.00	22.00
DABTM100B-0820	1/2"-14	19.00	12.00	36.00	24.00
DABTM100B-1220	3/4"-14	20.00	16.70	36.00	30.00
DABTM100B-1225	3/4"-14	20.00	16.70	37.00	32.00
DABTM100B-1625	1"-11	24.00	22.20	42.50	36.00
DABTM100B-3250	2"-11	30.00	46.00	47.00	66.68



DABTM1000

Male Plug BSPT Male 60°

D

A

BT

M

1

000

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

BSPT

Male

Straight

Male Plug

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTM1000

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

Male Plug BSPT Male 60°



PART NUMBER	F (Thread)	C	D	L	S
#	BSPP	mm	mm	mm	mm
DABTM1000-0200	1/8"-28	10.00	4.50	16.00	12.00
DABTM1000-0400	1/4"-19	14.00	6.00	21.00	14.00
DABTM1000-0600	3/8"-19	14.50	9.00	21.00	19.00
DABTM1000-0800	1/2"-14	19.00	11.00	27.00	32.00
DABTM1000-1000	5/8"-14	19.00	14.00	29.00	24.00
DABTM1000-1200	3/4"-14	19.00	16.70	28.00	29.00
DABTM1000-1600	1"-11	24.00	22.20	36.00	36.00
DABTM1000-2000	1-1/4"-11	25.00	28.50	37.50	46.00
DABTM1000-2400	1-1/2"-11	25.00	33.50	40.00	50.00
DABTM1000-3200	2"-11	30.00	45.00	45.00	65.00



DABP1100B

Straight Welding Connector BSPP Swivel Female – Metric/Imperial Tube

D

A

BP

1

1

00

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Sealing Type

Welding Type

DME

Adaptor

BSPP

Swivel Female

Straight

Welding

Socket Welding

 German Technology Equipment



New-Standard

DME&JDE Code:

DABP1100B

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Swivel Female

Thread Types:

BSPP

Sealing Method:

Socket Welding



PART NUMBER	F (Thread)	D	L	S	S1
#	BSPP	mm	mm	mm	mm
DABP1100B-0406	1/4"-19	4.7	20	14	19
DABP1100B-0610	3/8"-19	7.90	22.00	17.00	22.00
DABP1100B-0812	1/2"-14	11.10	24.00	19.00	27.00
DABP1100B-1220	3/4"-14	16.70	31.00	27.00	32.00
DABP1100B-1625	1"-11	22.20	33.00	32.00	41.00
DABP1100B-2032	1-1/4"-11	28.60	37.50	41.00	50.00
DABP1100B-2438	1-1/2"-11	33.30	40.00	50.00	55.00



DABPM105T

Straight Bulkhead Connector BSPP Male 60°- BSPP Male 60°

D

A

BP

M

1

05

T

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Other Features

DME

Adaptor

BSPP

Male

Straight

BSPP

Bulkhead

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM105T

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

BSPP 60° × BSPP 60°

Other Features:

Bulkhead

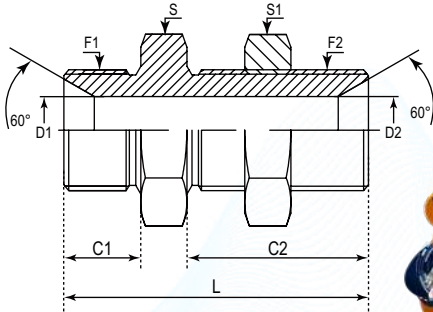

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm
DABPM105T-0202	1/8"-28	1/8"-28	9.00	25.00	3.50	3.50	41.50	14.00	14.00
DABPM105T-0404	1/4"-19	1/4"-19	11.00	28.00	4.70	4.70	46.00	19.00	19.00
DABPM105T-0606	3/8"-19	3/8"-19	12.00	31.00	7.90	7.90	52.00	22.00	22.00
DABPM105T-0808	1/2"-14	1/2"-14	14.00	35.00	11.10	11.10	59.00	27.00	27.00
DABPM105T-1010	5/8"-14	5/8"-14	16.00	35.00	14.00	14.00	63.00	30.00	30.00
DABPM105T-1212	3/4"-14	3/4"-14	16.00	38.00	16.70	16.70	66.00	32.00	32.00
DABPM105T-1616	1"-11	1"-11	19.00	41.00	22.20	22.20	75.00	41.00	41.00
DABPM105T-2020	1-1/4"-11	1-1/4"-11	20.00	44.00	28.60	28.60	83.00	50.00	50.00
DABPM105T-2424	1-1/2"-11	1-1/2"-11	22.00	48.00	33.30	33.30	93.00	55.00	55.00
DABPM105T-3232	2"-11	2"-11	25.00	59.00	46.00	46.00	100.00	70.00	70.00



DABPM105T-ED

Straight Bulkhead Connector BSPP Male 60° ED Seal - BSPP 60° Male

D

A

BP

M

1

05

T

ED

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Sealing Method

DME

Adaptor

BSPP

Male

Straight

BSPP

Bulkhead Connector

ED Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM105T-ED

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Straight

Connection Type:

Male × Male

Thread Types:


BSPP 60° ED Ring × BSPP 60° Cone

Sealing Method:

ED Seal

Other Features:

Bulkhead

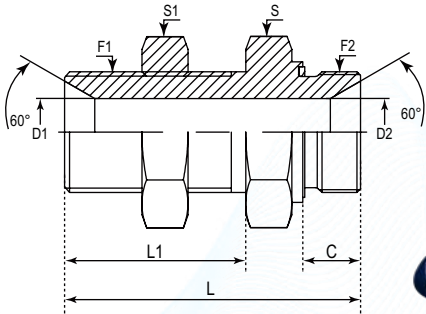

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L1	L	S	S1
#	BSPP	NPTF	mm	mm	mm	mm	mm	mm	mm
DABPM105T-0404ED	1/4"-19	1/4"-19	12.00	4.70	4.70	35.00	55.00	19.00	19.00
DABPM105T-0606ED	3/8"-19	3/8"-19	12.00	7.90	7.90	35.00	57.50	22.00	22.00
DABPM105T-0808ED	1/2"-14	1/2"-14	14.00	11.10	11.10	39.00	66.00	27.00	27.00
DABPM105T-1212ED	3/4"-14	3/4"-14	16.00	16.70	16.70	42.00	72.00	32.00	32.00
DABPM105T-1616ED	1"-11	1"-11	18.00	22.20	22.20	50.00	84.00	41.00	41.00
DABPM105T-2020ED	1-1/4"-11	1-1/4"-11	20.00	28.60	28.60	52.00	90.00	50.00	50.00
DABPM105T-2424ED	1-1/2"-11	1-1/2"-11	22.00	33.30	33.30	56.00	96.00	55.00	55.00
DABPM105T-3232ED	2"-11	2"-11	22.00	46.00	46.00	59.00	100.00	70.00	70.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABPLN

BSPP Bulkhead Nut

D

A

BP

LN

Company

Product Range

Thread Types

Other Features

DME

Adaptor

BSPP

Bulkhead

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPLN

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Straight

Thread Types:

BSPP Bulkhead Nut

Other Features:

Bulkhead



PART NUMBER	F (Thread)	D	L	S
#	BSPP	mm	mm	mm
DABPLN-0200	1/8"-28	8.60	5.50	14.00
DABPLN-0400	1/4"-19	11.50	6.50	19.00
DABPLN-0600	3/8"-19	15.00	7.00	22.00
DABPLN-0800	1/2"-14	18.70	8.00	27.00
DABPLN-1000	5/8"-14	20.70	9.00	30.00
DABPLN-1200	3/4"-14	24.12	10.50	32.00
DABPLN-1600	1"-11	30.40	10.50	41.00
DABPLN-2000	1-1/4"-11	39.00	13.00	50.00
DABPLN-2400	1-1/2"-11	45.00	15.00	55.00
DABPLN-3200	2"-11	56.80	15.00	70.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABPM405M

45° Elbow Connector BSPP Male 60° - BSPP 60° Male

D

A

BP

M

4

05

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

45° Elbow

BSPP

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABPM405M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


45° Elbow

Connection Type:

Male × Male

Thread Types:

BSPP 60° × BSPP 60°

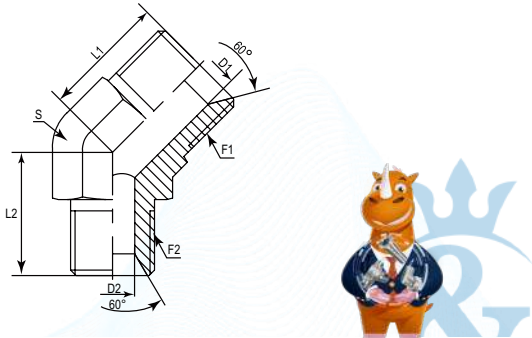

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S
#	BSPP	BSPP	mm	mm	mm	mm	mm
DABPM405M-0402	1/4"-19	1/8"-28	4.70	3.50	21.00	20.00	14.00
DABPM405M-0404	1/4"-19	1/4"-19	4.70	4.70	21.00	21.00	14.00
DABPM405M-0604	3/8"-19	1/4"-19	7.90	4.70	22.00	21.00	19.00
DABPM405M-0806	1/2"-14	3/8"-19	11.10	7.90	28.00	26.00	22.00
DABPM405M-0808	1/2"-14	1/2"-14	11.10	11.10	28.00	28.00	22.00
DABPM405M-1010	5/8"-14	5/8"-14	14.00	14.00	29.00	29.00	22.00
DABPM405M-1208	3/4"-14	1/2"-14	16.70	11.10	32.00	30.00	27.00
DABPM405M-1212	3/4"-14	3/4"-14	16.70	16.70	32.00	32.00	27.00
DABPM405M-1612	1"-11	3/4"-14	22.20	16.70	37.60	33.00	33.00
DABPM405M-1616	1"-11	1"-11	22.20	22.20	37.50	37.50	33.00
DABPM405M-2016	1-1/4"-11	1"-11	28.60	22.20	40.00	40.00	41.00
DABPM405M-2020	1-1/4"-11	1-1/4"-11	28.60	28.60	40.00	40.00	41.00
DABPM405M-2424	1-1/2"-11	1-1/2"-11	33.30	33.30	45.00	45.00	48.00
DABPM405M-3232	2"-11	2"-11	46.00	46.00	52.50	52.50	63.50

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA

CE

UK CA

DABPM407M

45° Elbow Connector BSPP Male 60° - BSPT Male 60°

D

A

BP

M

4

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

45° Elbow

BSPT

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABPM407M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


45° Elbow

Connection Type:

Male × Male

Thread Types:

BSPP 60° × BSPT 60°

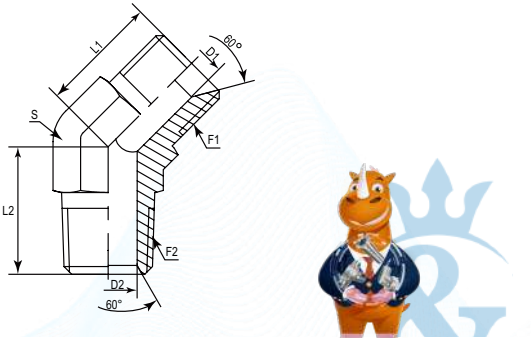

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S
#	BSPP	BSPP	mm	mm	mm	mm	mm
DABPM407M-0404	1/4"-19	1/4"-19	21.00	21.00	4.70	6.00	14.00
DABPM407M-0606	3/8"-19	3/8"-19	23.00	23.00	7.90	9.00	19.00
DABPM407M-0808	1/2"-14	1/2"-14	27.50	27.50	11.10	12.00	22.00
DABPM407M-1212	3/4"-14	3/4"-14	30.50	30.50	16.00	16.00	27.00
DABPM407M-1616	1"-11	1"-11	37.50	37.50	22.20	22.20	33.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA

CE

UK CA


DABPM428M

45° Elbow Connector BSPP Male 60° - NPTF Male 60°

D	A	BP	M	4	28	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPP	Male	45° Elbow	NPTF	Male



DME&JDE Code:	DABPM428M
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	45° Elbow
Connection Type:	Male × Male
Thread Types:	BSPP 60° × NPTF 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S
#	BSPP	NPTF	mm	mm	mm	mm	mm
DABPM428M-0202	1/8"-28	1/8"-27	18.00	16.50	3.50	4.78	11.00
DABPM428M-0404	1/4"-19	1/4"-18	21.00	22.00	4.70	7.14	14.00
DABPM428M-0606	3/8"-19	3/8"-18	23.00	24.00	7.90	10.31	19.00
DABPM428M-0808	1/2"-14	1/2"-14	26.00	29.50	11.10	13.49	22.00
DABPM428M-1212	3/4"-14	3/4"-14	32.00	30.50	16.70	18.26	27.00
DABPM428M-1616	1"-11	1"-11-1/2	37.00	38.00	22.20	23.83	33.00
DABPM428M-2020	1-1/4"-11	1-1/4"-11-1/2	39.00	42.00	28.60	31.75	41.00
DABPM428M-2424	1-1/2"-11	1-1/2"-11-1/2	45.00	45.00	33.30	38.10	48.00
DABPM428M-3232	2"-11	2"-11-1/2	56.50	53.60	46.00	49.23	65.00


DABTM407M

45° Elbow Connector BSPT Male 60° - BSPT Male 60°

D	A	BT	M	4	07	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPT	Male	45° Elbow	BSPT	Male



DME&JDE Code:	DABTM407M
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	45° Elbow
Connection Type:	Male × Male
Thread Types:	BSPT 60° × BSPT 60°

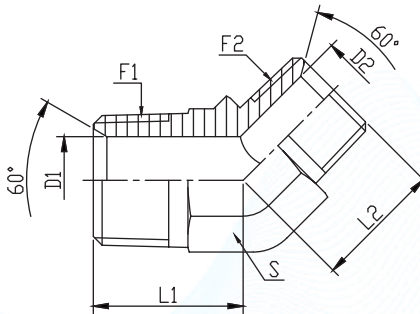

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S
#	BSPT	BSPT	mm	mm	mm	mm	mm
DABTM407M-0202	1/8"-28	1/8"-28	4.50	4.50	17.00	17.00	11.00
DABTM407M-0404	1/4"-19	1/4"-19	6.00	6.00	21.00	21.00	14.00
DABTM407M-0606	3/8"-19	3/8"-19	9.00	9.00	23.00	23.00	19.00
DABTM407M-0808	1/2"-14	1/2"-14	12.00	12.00	29.50	29.50	22.00
DABTM407M-1208	3/4"-14	1/2"-14	16.70	12.00	30.50	30.00	27.00
DABTM407M-1212	3/4"-14	3/4"-14	16.70	16.70	30.50	30.50	27.00
DABTM407M-1612	1"-11	3/4"-14	22.20	16.70	38.00	32.50	33.00
DABTM407M-1616	1"-11	1"-11	22.20	22.20	38.00	38.00	33.00
DABTM407M-2020	1-1/4"-11	1-1/4"-11	28.60	28.60	43.00	43.00	41.00
DABTM407M-2424	1-1/2"-11	1-1/2"-11	33.30	33.30	45.00	45.00	48.00


DABPM406Q

45° Adjustable Elbow BSPP Male 60° - BSPP Male + O Ring + Retaining Ring

D	A	BP	M	4	06	0
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPP	Male	45° Adjustable Elbow	BSPP	Male + O Ring + Retaining Ring



DME&JDE Code:	DABPM406Q
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	45° Elbow
Connection Type:	Adjustable Male × Male
Thread Types:	BSPP 60° × BSPP
Sealing Method:	O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPM406Q-0202	1/8"-28	1/8"-28	18.00	26.00	3.50	4.40	11.10	14.00
DABPM406Q-0404	1/4"-19	1/4"-19	21.00	28.00	4.70	7.50	14.00	19.00
DABPM406Q-0406	1/4"-19	3/8"-19	20.00	33.00	4.70	9.90	19.00	22.00
DABPM406Q-0604	3/8"-19	1/4"-19	21.00	32.00	7.90	7.50	19.00	19.00
DABPM406Q-0606	3/8"-19	3/8"-19	21.06	33.00	7.90	9.90	19.00	22.00
DABPM406Q-0608	3/8"-19	1/2"-14	22.50	38.60	7.90	12.30	22.00	27.00
DABPM406Q-0806	1/2"-14	3/8"-19	24.30	34.50	11.10	9.90	22.00	22.00
DABPM406Q-0808	1/2"-14	1/2"-14	24.30	38.60	11.10	12.30	22.00	27.00
DABPM406Q-1212	3/4"-14	3/4"-14	27.50	43.90	16.70	15.50	27.00	36.00
DABPM406Q-1616	1"-11	1"-11	37.00	47.20	22.20	21.50	33.00	41.00
DABPM406Q-2020	1-1/4"-11	1-1/4"-11	40.00	49.00	28.60	27.50	41.00	50.00
DABPM406Q-2424	1-1/2"-11	1-1/2"-11	45.00	50.00	33.30	30.00	48.00	55.00
DABPM406Q-3232	2"-11	2"-11	52.50	50.50	46.00	45.00	63.50	70.00


DABPM4065

45° Adjustable Elbow BSPP Male 60° - BSPP Male + O Ring

D	A	BP	M	4	06	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPP	Male	45° Elbow	BSPP	Male + O Ring



DME&JDE Code:	DABPM4065
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	45° Elbow
Adaptor Connection Type:	Adjustable Male × Male
Thread Types:	BSPP 60° × BSPP 60° O Ring
Sealing Method:	O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPM4065-0202	1/8"-28	1/8"-28	18.00	26.00	3.50	4.40	11.10	14.00
DABPM4065-0404	1/4"-19	1/4"-19	21.00	28.00	4.70	7.50	14.00	19.00
DABPM4065-0406	1/4"-19	3/8"-19	20.00	33.00	4.70	9.90	19.00	22.00
DABPM4065-0604	3/8"-19	1/4"-19	21.00	32.00	7.90	7.50	19.00	19.00
DABPM4065-0606	3/8"-19	3/8"-19	21.06	33.00	7.90	9.90	19.00	22.00
DABPM4065-0608	3/8"-19	1/2"-14	22.50	38.60	7.90	12.30	22.00	27.00
DABPM4065-0806	1/2"-14	3/8"-19	24.30	34.50	11.10	9.90	22.00	22.00
DABPM4065-0808	1/2"-14	1/2"-14	24.30	38.60	11.10	12.30	22.00	27.00
DABPM4065-1212	3/4"-14	3/4"-14	27.50	43.90	16.70	15.50	27.00	36.00
DABPM4065-1616	1"-11	1"-11	37.00	47.20	22.20	21.50	33.00	41.00
DABPM4065-2020	1-1/4"-11	1-1/4"-11	40.00	49.00	28.60	27.50	41.00	50.00
DABPM4065-2424	1-1/2"-11	1-1/2"-11	45.00	50.00	33.30	30.00	48.00	55.00
DABPM4065-3232	2"-11	2"-11	52.50	50.50	46.00	45.00	63.50	70.00

DABPM4305

45° Adjustable Elbow BSPP Male 60° – SAE Male + O Ring

D

A

BP

M

4

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Sealing Type

DME

Adaptor

BSPP

Male

45° Elbow

SAE

O Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABPM4305

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

45° Elbow

Connection Type:


Male × Male

Thread Types:

BSPP 60° × SAE UNF Male

Sealing Method:

O Ring

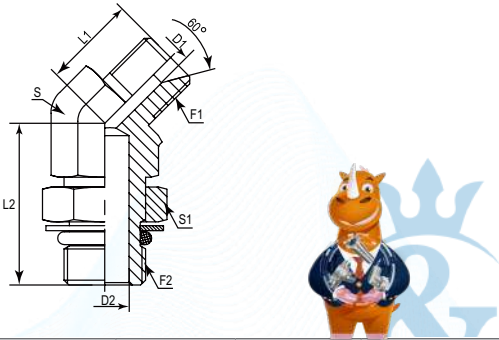

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	UNF	mm	mm	mm	mm	mm	mm
DABPM4305-0204	1/8"-28	7/16"-20	18.00	26.70	3.50	4.37	11.00	14.00
DABPM4305-0205	1/8"-28	1/2"-20	20.00	26.70	3.50	5.94	11.00	17.00
DABPM4305-0405	1/4"-19	1/2"-20	21.00	29.00	4.70	5.94	14.00	17.00
DABPM4305-0406	1/4"-19	9/16"-18	21.00	29.00	4.70	7.54	14.00	19.00
DABPM4305-0606	3/8"-19	9/16"-18	25.00	30.00	7.90	7.54	19.00	19.00
DABPM4305-0608	3/8"-19	3/4"-16	25.00	33.00	7.90	9.93	19.00	22.00
DABPM4305-0808	1/2"-14	3/4"-16	28.00	35.00	11.10	9.93	22.00	22.00
DABPM4305-0810	1/2"-14	7/8"-14	28.00	38.50	11.10	12.29	22.00	27.00
DABPM4305-0812	1/2"-14	1-1/16"-12	30.00	44.00	11.10	15.47	27.00	32.00
DABPM4305-1010	5/8"-14	7/8"-14	28.00	38.50	14.30	12.29	22.00	27.00
DABPM4305-1210	3/4"-14	7/8"-14	32.00	40.50	16.70	12.29	27.00	27.00
DABPM4305-1212	3/4"-14	1-1/16"-12	32.00	44.00	16.70	15.47	27.00	32.00
DABPM4305-1216	3/4"-14	1-5/16"-12	35.00	47.20	16.70	21.44	33.00	38.00
DABPM4305-1616	1"-11	1-5/16"-12	37.00	47.20	22.20	21.44	33.00	38.00
DABPM4305-1620	1"-11	1-5/8"-12	39.00	48.50	22.20	27.38	41.00	48.00
DABPM4305-2020	1-1/4"-11	1-5/8"-12	40.00	48.50	28.60	27.38	41.00	48.00
DABPM4305-2024	1-1/4"-11	1-7/8"-12	45.00	48.50	28.60	33.32	48.00	55.00
DABPM4305-2424	1-1/2"-11	1-7/8"-12	45.00	48.50	33.30	33.32	48.00	55.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA

CE

UK CA

DABPM452Q

45° Adjustable Elbow BSPP Male 60° - Metric Male + O Ring + Retaining Ring

D

A

BP

M

4

52

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

45° Elbow

Metric

Male + O Ring + Retaining Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABPM452Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

45° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

BSPP 60° × Metric

Sealing Method:

O Ring + Retaining Ring

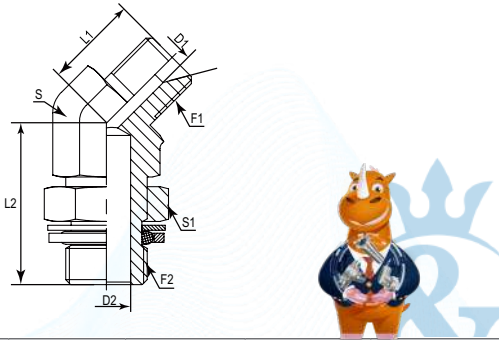

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	Metric	mm	mm	mm	mm	mm	mm
DABPM452Q-0210	1/8"-28	M10X1	18.00	26.00	3.50	4.50	11.00	14.00
DABPM452Q-0212	1/8"-28	M12X1.5	21.00	28.00	3.50	6.00	14.00	17.00
DABPM452Q-0412	1/4"-19	M12X1.5	21.00	28.00	4.70	6.00	14.00	17.00
DABPM452Q-0414	1/4"-19	M14X1.5	21.00	28.00	4.70	7.50	14.00	19.00
DABPM452Q-0416	1/4"-19	M16X1.5	25.00	33.00	4.70	9.00	19.00	22.00
DABPM452Q-0614	3/8"-19	M14X1.5	25.00	30.00	7.90	7.50	14.00	19.00
DABPM452Q-0616	3/8"-19	M16X1.5	25.00	33.00	7.90	9.00	19.00	22.00
DABPM452Q-0618	3/8"-19	M18X1.5	25.00	33.00	7.90	11.00	19.00	24.00
DABPM452Q-0818	1/2"-14	M18X1.5	28.00	35.00	11.10	11.00	22.00	24.00
DABPM452Q-0820	1/2"-14	M20X1.5	28.00	38.00	11.10	12.50	22.00	27.00
DABPM452Q-0822	1/2"-14	M22X1.5	28.00	38.00	11.10	14.00	22.00	27.00
DABPM452Q-1022	5/8"-14	M22X1.5	28.00	38.00	14.30	14.00	22.00	27.00
DABPM452Q-1222	3/4"-14	M22X1.5	32.00	40.00	16.70	14.00	27.00	27.00
DABPM452Q-1226	3/4"-14	M26X1.5	32.00	44.00	16.70	17.00	27.00	32.00
DABPM452Q-1227	3/4"-14	M27X2	32.00	44.00	16.70	18.00	27.00	32.00
DABPM452Q-1627	1"-11	M27X2	37.00	47.00	22.20	18.00	33.00	32.00
DABPM452Q-1633	1"-11	M33X2	37.00	47.00	22.20	23.00	33.00	41.00
DABPM452Q-2042	1-1/4"-11	M42X2	40.00	49.00	28.60	30.00	41.00	50.00
DABPM452Q-2448	1-1/2"-11	M48X2	45.00	49.00	33.30	36.00	48.00	55.00

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA

CE

UK CA

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com




DABPM4525

45° Adjustable Elbow BSPP Male 60°- Metric Male + O Ring

D	A	BP	M	4	52	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPP	Male	45° Elbow	Metric	O Ring



DME&JDE Code:	DABPM4525
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	45° Elbow
Connection Type:	Adjustable Male × Male
Thread Types:	BSPP 60° × Metric O Ring
Sealing Method:	O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	Metric	mm	mm	mm	mm	mm	mm
DABPM4525-0210	1/8"-28	M10X1	18.00	26.00	3.50	4.50	11.00	14.00
DABPM4525-0212	1/8"-28	M12X1.5	21.00	28.00	3.50	6.00	14.00	17.00
DABPM4525-0412	1/4"-19	M12X1.5	21.00	28.00	4.70	6.00	14.00	17.00
DABPM4525-0414	1/4"-19	M14X1.5	21.00	28.00	4.70	7.50	14.00	19.00
DABPM4525-0416	1/4"-19	M16X1.5	25.00	33.00	4.70	9.00	19.00	22.00
DABPM4525-0614	3/8"-19	M14X1.5	25.00	30.00	7.90	7.50	14.00	19.00
DABPM4525-0616	3/8"-19	M16X1.5	25.00	33.00	7.90	9.00	19.00	22.00
DABPM4525-0618	3/8"-19	M18X1.5	25.00	33.00	7.90	11.00	19.00	24.00
DABPM4525-0818	1/2"-14	M18X1.5	28.00	35.00	11.10	11.00	22.00	24.00
DABPM4525-0820	1/2"-14	M20X1.5	28.00	38.00	11.10	12.50	22.00	27.00
DABPM4525-0822	1/2"-14	M22X1.5	28.00	38.00	11.10	14.00	22.00	27.00
DABPM4525-1022	5/8"-14	M22X1.5	28.00	38.00	14.30	14.00	22.00	27.00
DABPM4525-1222	3/4"-14	M22X1.5	32.00	40.00	16.70	14.00	27.00	27.00
DABPM4525-1226	3/4"-14	M26X1.5	32.00	44.00	16.70	17.00	27.00	32.00
DABPM4525-1227	3/4"-14	M27X2	32.00	44.00	16.70	18.00	27.00	32.00
DABPM4525-1627	1"-11	M27X2	37.00	47.00	22.20	18.00	33.00	32.00
DABPM4525-1633	1"-11	M33X2	37.00	47.00	22.20	23.00	33.00	41.00
DABPM4525-2042	1-1/4"-11	M42X2	40.00	49.00	28.60	30.00	41.00	50.00
DABPM4525-2448	1-1/2"-11	M48X2	45.00	49.00	33.30	36.00	48.00	55.00


DABPM4081

45° Elbow Connector BSPP Male 60° - BSPP Swivel Female 60°

D	A	BP	M	4	081
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	BSPP	Male	45° Elbow	BSPP Swivel Female



DME&JDE Code:	DABPM4081
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	45° Elbow
Connection Type:	Male × Swivel Female
Thread Types:	BSPP 60° × BSPP 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPM4081-0202	1/8"-28	1/8"-28	16.00	16.00	3.50	3.50	11.00	14.00
DABPM4081-0404	1/4"-19	1/4"-19	21.00	23.00	4.70	4.70	14.00	19.00
DABPM4081-0606	3/8"-19	3/8"-19	25.00	26.00	7.90	7.90	19.00	22.00
DABPM4081-0808	1/2"-14	1/2"-14	28.00	26.50	11.10	11.10	22.00	27.00
DABPM4081-1010	5/8"-14	5/8"-14	28.00	30.00	14.00	14.00	22.00	30.00
DABPM4081-1212	3/4"-14	3/4"-14	32.00	35.00	16.70	16.70	27.00	32.00
DABPM4081-1616	1"-11	1"-11	37.00	37.00	22.20	22.20	33.00	41.00
DABPM4081-2020	1-1/4"-11	1-1/4"-11	40.00	40.00	28.60	28.60	41.00	50.00
DABPM4081-2424	1-1/2"-11	1-1/2"-11	45.00	45.00	33.30	33.30	48.00	55.00




DABPM4251

45° Elbow Connector BSPP Male 60° Cone – JIC Swivel Female 74°

D	A	BP	M	4	251
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	BSPP	Male	45° Elbow	JIC Swivel Female



DME&JDE Code:	DABPM4251
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	45° Elbow
Adaptor Connection Type:	Male × Swivel Female
Thread Types:	BSPP 60° Cone × JIC UNF 74°

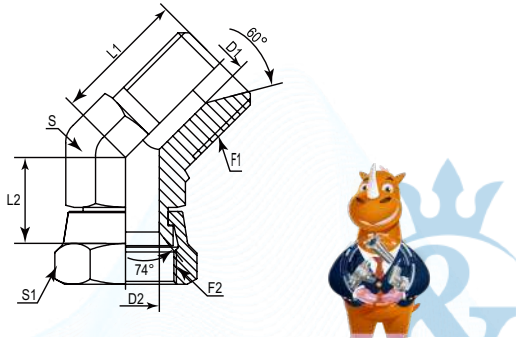

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	BSPP	UNF	mm	mm	mm	mm	mm	mm
DABPM4251-0404	1/4"-19	7/16"-20	4.70	4.40	21.00	15.20	14.00	14.00
DABPM4251-0606	3/8"-19	9/16"-18	7.90	7.50	24.00	19.00	19.00	19.00
DABPM4251-0808	1/2"-14	3/4"-16	11.10	9.90	27.00	21.80	22.00	22.00
DABPM4251-1212	3/4"-14	1-1/16"-12	16.70	15.50	32.00	23.80	27.00	32.00
DABPM4251-1616	1"-11	1-5/16"-12	22.20	21.50	35.00	29.30	33.00	41.00


DABTM4081

45° Elbow Connector BSPT Male 60° - BSPP Swivel Female 60°

D	A	BT	M	4	081
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	BSPP	Male	45° Elbow	BSPP Swivel Female



DME&JDE Code:	DABTM4081
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	45° Elbow
Connection Type:	Male × Swivel Female
Thread Types:	BSPT 60° × BSPP 60°

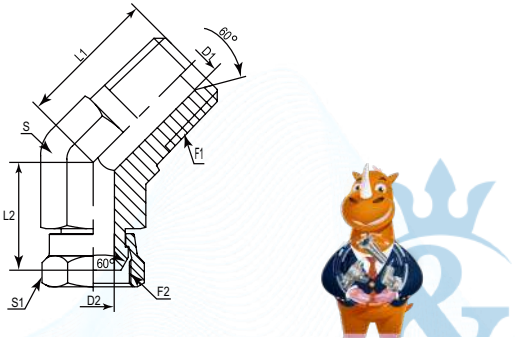

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	BSPT	BSPP	mm	mm	mm	mm	mm	mm
DABTM4081-0202	1/8"-28	1/8"-28	4.50	3.50	17.00	12.80	11.00	14.00
DABTM4081-0404	1/4"-19	1/4"-19	6.00	4.70	21.00	16.30	14.00	19.00
DABTM4081-0606	3/8"-19	3/8"-19	9.00	7.90	24.00	18.50	19.00	22.00
DABTM4081-0808	1/2"-14	1/2"-14	12.00	11.10	29.50	22.00	22.00	27.00
DABTM4081-1212	3/4"-14	3/4"-14	16.70	16.70	30.50	23.00	27.00	32.00
DABTM4081-1616	1"-11	1"-11	22.20	22.20	38.00	28.50	33.00	41.00
DABTM4081-2020	1-1/4"-11	1-1/4"-11	28.60	28.60	42.40	40.00	41.00	50.00
DABTM4081-2424	1-1/2"-11	1-1/2"-11	33.30	33.30	45.00	36.80	48.00	55.00

DABPF428M

45° Elbow Connector BSPP Fixed Female - NPTF Male 60°

D

A

BP

F

4

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

45° Elbow

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPF428M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


45° Elbow

Connection Type:

Fixed Female × Male

Thread Types:

BSPP × NPTF 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D	S
#	BSPP	NPTF	mm	mm	mm	mm
DABPF428M-0202	1/8"-28	1/8"-27	13.00	18.00	4.78	14.00
DABPF428M-0404	1/4"-19	1/4"-18	18.00	26.50	7.14	19.00
DABPF428M-0606	3/8"-19	3/8"-18	19.50	27.00	10.31	22.00
DABPF428M-0808	1/2"-14	1/2"-14	24.50	34.00	13.49	27.00
DABPF428M-1212	3/4"-14	3/4"-14	26.00	35.00	18.26	33.00
DABPF428M-1616	1"-11	1"-11-1/2	31.00	44.00	23.83	41.00
DABPF428M-2020	1-1/4"-11	1-1/4"-11-1/2	37.00	45.50	31.75	48.00
DABPF428M-2424	1-1/2"-11	1-1/2"-11-1/2	43.00	53.00	38.10	65.00
DABPF428M-3232	2"-11	2"-11-1/2	55.00	57.00	49.23	70.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABPF407M

45° Elbow Connector BSPP Fixed Female - BSPT Male

D

A

BP

F

4

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

45° Elbow

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPF407M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


45° Elbow

Connection Type:

Fixed Female × Male

Thread Types:

BSPP × BSPT



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D	S
#	BSPP	NPTF	mm	mm	mm	mm
DABPF407M-0202	1/8"-28	1/8"-28	15.50	18.00	4.50	14.00
DABPF407M-0404	1/4"-19	1/4"-19	21.00	26.50	6.00	19.00
DABPF407M-0606	3/8"-19	3/8"-19	22.00	27.00	9.00	22.00
DABPF407M-0808	1/2"-14	1/2"-14	26.00	34.00	12.00	27.00
DABPF407M-1212	3/4"-14	3/4"-14	29.50	35.00	16.70	33.00
DABPF407M-1616	1"-11	1"-11	33.00	44.00	22.20	41.00
DABPF407M-2020	1-1/4"-11	1-1/4"-11	39.00	45.50	28.60	48.00
DABPF407M-2424	1-1/2"-11	1-1/2"-11	43.00	53.00	33.30	65.00
DABPF407M-3232	2"-11	2"-11	55.00	57.00	45.00	70.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABP14305

45° Adjustable Elbow BSPP Swivel Female 60° - SAE Male O Ring

D

A

BP

1

4

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

45° Elbow

SAE UNF

O Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABP14305

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

45° Elbow

Connection Type:


Adjustable Swivel Female × Male

Thread Types:

BSPP 60° × SAE UNF

Sealing Method:

O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S2
#	BSPP	UNF	mm	mm	mm	mm	mm	mm	mm
DABP14305-0204	1/8"-28	7/16"-20	25.00	26.70	3.50	4.37	11.00	14.00	14.00
DABP14305-0205	1/8"-28	1/2"-20	25.00	26.70	3.50	5.94	14.00	14.00	17.00
DABP14305-0405	1/4"-19	1/2"-20	25.00	29.00	4.50	5.94	14.00	19.00	17.00
DABP14305-0406	1/4"-19	9/16"-18	25.00	29.00	4.50	7.54	14.00	19.00	19.00
DABP14305-0606	3/8"-19	9/16"-18	30.00	30.00	7.10	7.54	19.00	22.00	19.00
DABP14305-0608	3/8"-19	3/4"-16	30.00	33.00	7.10	9.93	19.00	22.00	20.00
DABP14305-0808	1/2"-14	3/4"-16	33.00	35.00	11.10	9.93	22.00	27.00	22.00
DABP14305-0810	1/2"-14	7/8"-14	33.00	38.60	11.10	12.29	22.00	27.00	27.00
DABP14305-0812	1/2"-14	1-1/16"-12	39.00	43.90	11.10	15.47	27.00	27.00	32.00
DABP14305-1010	5/8"-14	7/8"-14	38.00	38.60	12.00	12.29	22.00	30.00	27.00
DABP14305-1210	3/4"-14	7/8"-14	41.00	40.50	15.50	12.29	27.00	32.00	27.00
DABP14305-1212	3/4"-14	1-1/16"-12	41.00	43.90	15.50	15.47	27.00	32.00	32.00
DABP14305-1216	3/4"-14	1-5/16"-12	44.00	47.20	15.50	21.44	33.00	32.00	38.00
DABP14305-1616	1"-11	1-5/16"-12	46.00	47.20	22.20	21.44	33.00	41.00	38.00
DABP14305-1620	1"-11	1-5/8"-12	46.00	48.50	22.20	27.38	41.00	41.00	48.00
DABP14305-2020	1-1/4"-11	1-5/8"-12	48.00	48.50	28.60	27.38	41.00	50.00	48.00
DABP14305-2024	1-1/4"-11	1-7/8"-12	52.00	48.50	28.60	33.32	48.00	50.00	55.00
DABP14305-2424	1-1/2"-11	1-7/8"-12	55.00	48.50	33.30	33.32	48.00	55.00	55.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA

CE

UK CA

DABP1406Q

45° Adjustable Elbow BSPP Swivel Female 60° - BSPP Male + O Ring + Retaining Ring

D

A

BP

1

4

06

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

45° Elbow

BSPP

Male + O Ring + Retaining Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABP1406Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

45° Elbow

Connection Type:


Adjustable Swivel Female × Male

Thread Types:

BSPP 60° × BSPP

Sealing Method:

O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm
DABP1406Q-0404	1/4"-19	1/4"-19	21.00	28.00	4.70	7.50	14.00	19.00	19.00
DABP1406Q-0606	3/8"-19	3/8"-19	21.50	33.00	7.90	9.90	19.00	22.00	22.00
DABP1406Q-0808	1/2"-14	1/2"-14	23.50	38.00	11.10	12.30	22.00	27.00	27.00
DABP1406Q-1212	3/4"-14	3/4"-14	28.00	44.00	16.70	15.50	27.00	32.00	36.00
DABP1406Q-1616	1"-11	1"-11	35.00	47.20	22.20	21.50	33.00	41.00	41.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA

CE

UK CA

DABP14525

45° Adjustable Elbow BSPP Swivel Female - Metric Male + O Ring

D

A

BP

1

4

52

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

45° Elbow

Metric

Male + O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABP14525

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

45° Elbow

Connection Type:


Adjustable Swivel Female × Male

Thread Types:

BSPP × Metric

Sealing Method:

O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S2
#	BSPP	Metric	mm	mm	mm	mm	mm	mm	mm
DABP14525-0210	1/8"-28	M10X1	25.00	26.00	3.50	4.50	11.00	14.00	14.00
DABP14525-0212	1/8"-28	M12X1.5	25.00	28.00	3.50	6.00	14.00	14.00	17.00
DABP14525-0412	1/4"-19	M12X1.5	27.00	28.00	4.50	6.00	14.00	19.00	17.00
DABP14525-0414	1/4"-19	M14X1.5	27.00	28.00	4.50	7.50	14.00	19.00	19.00
DABP14525-0416	1/4"-19	M16X1.5	28.00	33.00	4.50	9.00	19.00	19.00	22.00
DABP14525-0614	3/8"-19	M14X1.5	30.00	30.00	7.90	7.50	14.00	22.00	19.00
DABP14525-0616	3/8"-19	M16X1.5	30.00	33.00	7.90	9.00	19.00	22.00	22.00
DABP14525-0618	3/8"-19	M18X1.5	30.00	33.00	7.90	11.00	19.00	22.00	24.00
DABP14525-0818	1/2"-14	M18X1.5	33.00	35.00	11.10	11.00	19.00	27.00	24.00
DABP14525-0820	1/2"-14	M20X1.5	33.00	38.00	11.10	12.50	22.00	27.00	27.00
DABP14525-0822	1/2"-14	M22X1.5	33.00	38.00	11.10	14.00	22.00	27.00	27.00
DABP14525-1022	5/8"-14	M22X1.5	33.00	38.00	12.00	14.00	22.00	30.00	27.00
DABP14525-1222	3/4"-14	M22X1.5	41.00	40.00	16.70	14.00	27.00	32.00	27.00
DABP14525-1226	3/4"-14	M26X1.5	41.00	44.00	16.70	17.00	27.00	32.00	32.00
DABP14525-1227	3/4"-14	M27X2	41.00	44.00	16.70	18.00	27.00	32.00	32.00
DABP14525-1627	1"-11	M27X2	46.00	47.00	22.20	18.00	33.00	41.00	32.00
DABP14525-1633	1"-11	M33X2	46.00	47.00	22.20	23.00	33.00	41.00	41.00
DABP14525-2042	1-1/4"-11	M42X2	48.00	49.00	28.60	30.00	41.00	50.00	50.00
DABP14525-2448	1-1/2"-11	M48X2	55.00	49.00	33.30	36.00	48.00	55.00	55.00

DABP1452Q

45° Adjustable Elbow BSPP Swivel Female 60° - Metric Male + O Ring + Retaining Ring

D

A

BP

1

4

52

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

45° Elbow

Metric

Male + O Ring + Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABP1452Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

45° Elbow

Connection Type:


Adjustable Swivel Female × Male

Thread Types:

BSPP 60° × Metric

Sealing Method:

O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S2
#	BSPP	Metric	mm	mm	mm	mm	mm	mm	mm
DABP1452Q-0210	1/8"-28	M10X1	25.00	26.00	3.50	4.50	11.00	14.00	14.00
DABP1452Q-0212	1/8"-28	M12X1.5	25.00	28.00	3.50	6.00	14.00	14.00	17.00
DABP1452Q-0412	1/4"-19	M12X1.5	27.00	28.00	4.50	6.00	14.00	19.00	17.00
DABP1452Q-0414	1/4"-19	M14X1.5	27.00	28.00	4.50	7.50	14.00	19.00	19.00
DABP1452Q-0416	1/4"-19	M16X1.5	28.00	33.00	4.50	9.00	19.00	19.00	22.00
DABP1452Q-0614	3/8"-19	M14X1.5	30.00	30.00	7.90	7.50	14.00	22.00	19.00
DABP1452Q-0616	3/8"-19	M16X1.5	30.00	33.00	7.90	9.00	19.00	22.00	22.00
DABP1452Q-0618	3/8"-19	M18X1.5	30.00	33.00	7.90	11.00	19.00	22.00	24.00
DABP1452Q-0818	1/2"-14	M18X1.5	33.00	35.00	11.10	11.00	19.00	27.00	24.00
DABP1452Q-0820	1/2"-14	M20X1.5	33.00	38.00	11.10	12.50	22.00	27.00	27.00
DABP1452Q-0822	1/2"-14	M22X1.5	33.00	38.00	11.10	14.00	22.00	27.00	27.00
DABP1452Q-1022	5/8"-14	M22X1.5	33.00	38.00	12.00	14.00	22.00	30.00	27.00
DABP1452Q-1222	3/4"-14	M22X1.5	41.00	40.00	16.70	14.00	27.00	32.00	27.00
DABP1452Q-1226	3/4"-14	M26X1.5	41.00	44.00	16.70	17.00	27.00	32.00	32.00
DABP1452Q-1227	3/4"-14	M27X2	41.00	44.00	16.70	18.00	27.00	32.00	32.00
DABP1452Q-1627	1"-11	M27X2	46.00	47.00	22.20	18.00	33.00	41.00	32.00
DABP1452Q-1633	1"-11	M33X2	46.00	47.00	22.20	23.00	33.00	41.00	41.00
DABP1452Q-2042	1-1/4"-11	M42X2	48.00	49.00	28.60	30.00	41.00	50.00	50.00
DABP1452Q-2448	1-1/2"-11	M48X2	55.00	49.00	33.30	36.00	48.00	55.00	55.00


DABP14065

45° Adjustable Elbow BSPP Swivel Female 60° - BSPP Male + O Ring

D	A	BP	1	4	06	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPP	Swivel Female	45° Elbow	BSPP	Male + O Ring



DME&JDE Code:	DABP14065
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	45° Elbow
Connection Type:	Adjustable Swivel Female × Male
Thread Types:	BSPP 60° × BSPP + O Ring
Sealing Method:	O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S2
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm
DABP14065-0404	1/4"-19	1/4"-19	21.00	28.00	4.70	7.50	14.00	19.00	19.00
DABP14065-0606	3/8"-19	3/8"-19	21.50	33.00	7.90	9.90	19.00	22.00	22.00
DABP14065-0808	1/2"-14	1/2"-14	23.50	38.00	11.10	12.30	22.00	27.00	27.00
DABP14065-1212	3/4"-14	3/4"-14	28.00	44.00	16.70	15.50	27.00	32.00	36.00
DABP14065-1616	1"-11	1"-11	35.00	47.20	22.20	21.50	33.00	41.00	41.00


DABPF405F

45° Elbow Connector BSPP Fixed Female - BSPP Fixed Female

D	A	BP	F	4	05	F
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPP	Female	45° Elbow	BSPP	Female



DME&JDE Code:	DABPF405F
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	45° Elbow
Connection Type:	Fixed Female × Fixed Female
Thread Types:	BSPP × BSPP



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	S
#	BSPP	BSPP	mm	mm	mm
DABPF405F-0202	1/8"-28	1/8"-28	13.00	13.00	14.00
DABPF405F-0404	1/4"-19	1/4"-19	18.00	18.00	19.00
DABPF405F-0606	3/8"-19	3/8"-19	19.00	19.00	22.00
DABPF405F-0808	1/2"-14	1/2"-14	23.90	23.90	27.00
DABPF405F-1212	3/4"-14	3/4"-14	25.50	25.50	33.00
DABPF405F-1616	1"-11	1"-11	31.00	31.00	41.00

DABP14081

45° Elbow Connector BSPP Swivel Female 60° - BSPP 60° Swivel Female 45°

D

A

BP

1

4

081

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

DME

Adaptor

BSPP

Swivel Female

45° Elbow

BSPP Swivel Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABP14081

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


45° Elbow

Connection Type:

Swivel Female × Swivel Female

Thread Types:

BSPP 60° × BSPP 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	S1
#			mm	mm	mm	mm	mm	mm	mm
DABP14081-0202	1/8"-28	1/8"-28	3.50	3.50	16.00	16.00	11.00	14.00	14.00
DABP14081-0404	1/4"-19	1/4"-19	4.70	4.70	23.00	23.00	14.00	19.00	19.00
DABP14081-0606	3/8"-19	3/8"-19	7.90	7.90	26.00	26.00	19.00	22.00	22.00
DABP14081-0808	1/2"-14	1/2"-14	11.10	11.10	26.50	26.50	22.00	27.00	27.00
DABP14081-1212	3/4"-14	3/4"-14	16.70	16.70	32.00	32.00	27.00	32.00	32.00
DABP14081-1616	1"-11	1"-11	22.20	22.20	37.00	37.00	33.00	41.00	41.00
DABP14081-2020	1-1/4"-11	1-1/4"-11	28.60	28.60	40.00	40.00	41.00	50.00	50.00
DABP14081-2424	1-1/2"-11	1-1/2"-11	33.00	33.00	45.00	45.00	48.00	55.00	55.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABTF407F

45° Elbow Connector BSPT Fixed Female - BSPT Fixed Female

D

A

BT

F

4

07

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Female

45° Elbow

BSPT

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTF407F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


45° Elbow

Connection Type:

Fixed Female × Fixed Female

Thread Types:

BSPT × BSPT



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	S
#	BSPT	BSPT	mm	mm	mm
DABTF407F-0202	1/8"-28	1/8"-28	12.70	12.70	14.28
DABTF407F-0404	1/4"-19	1/4"-19	17.50	17.50	19.05
DABTF407F-0606	3/8"-19	3/8"-19	19.10	19.10	22.22
DABTF407F-0808	1/2"-14	1/2"-14	23.10	23.10	27.00
DABTF407F-1212	3/4"-14	3/4"-14	25.40	25.40	33.32
DABTF407F-1616	1"-11	1"-11	30.20	30.20	41.27

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABPM905M

90° Elbow Connector BSPP Male 60° - BSPP 60° Male

D

A

BP

M

9

05

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

BSPP

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM905M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Male x Male

Thread Types:

BSPP 60° x BSPP 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S
#	BSPP	BSPP	mm	mm	mm	mm	mm
DABPM905M-0202	1/8"-28	1/8"-28	20.00	20.00	3.50	3.50	11.00
DABPM905M-0404	1/4"-19	1/4"-19	27.00	27.00	4.70	4.70	14.00
DABPM905M-0604	3/8"-19	1/4"-19	29.00	29.00	7.90	4.70	19.00
DABPM905M-0606	3/8"-19	3/8"-19	29.00	29.00	9.00	9.00	19.00
DABPM905M-0806	1/2"-14	3/8"-14	35.00	35.00	11.10	7.90	22.00
DABPM905M-0808	1/2"-14	1/2"-14	34.00	34.00	11.10	11.10	22.00
DABPM905M-1010	5/8"-14	5/8"-14	37.00	37.00	14.00	14.00	27.00
DABPM905M-1212	3/4"-14	3/4"-14	43.00	43.00	16.70	16.70	27.00
DABPM905M-1616	1"-11	1"-11	48.00	48.00	22.00	22.00	33.00
DABPM905M-2020	1-1/4"-11	1-1/4"-11	52.30	52.30	28.60	28.60	41.00
DABPM905M-2424	1-1/2"-11	1-1/2"-11	60.50	60.50	33.30	33.30	48.00
DABPM905M-3232	2"11	2"11	75.00	75.00	46.00	46.00	65.00



Certificate:



DABPM905M-SQ

90° Elbow Connector Square BSPP Male 60° - BSPP 60° Male

D

A

BP

M

9

05

M

SQ

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Body Type

DME

Adaptor

BSPP

Male

90° Elbow

BSPP

Male

Square

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM905-SQ

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Male x Male

Thread Types:

BSPP 60° x BSPP 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2
#	BSPP	BSPP	mm	mm	mm	mm
DABPM905M-0404-SQ	1/4"-19	1/4"-19	22.50	22.50	4.70	4.70
DABPM905M-0606-SQ	3/8"-19	3/8"-19	26.00	26.00	7.90	7.90
DABPM905M-0808-SQ	1/2"-14	1/2"-14	30.00	30.00	11.10	11.10
DABPM905M-1212-SQ	3/4"-14	3/4"-14	34.00	34.00	16.70	16.70
DABPM905M-1616-SQ	1"-11	1"-11	44.00	44.00	22.00	22.00



Certificate:



DABPM907M

90° Elbow Connector BSPP Male 60° - BSPT Male 60°

D

A

BP

M

9

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

BSPT

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM907M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Male × Male

Thread Types:

BSPP 60° × BSPT 60°

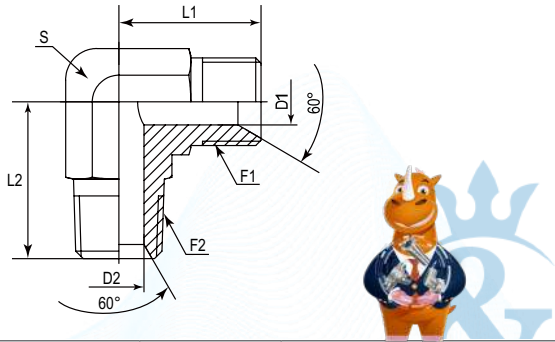

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S
#	BSPT	BSPT	mm	mm	mm	mm	mm
DABPM907M-0202	1/8"-28	1/8"-28	20.00	20.00	3.50	4.50	11.00
DABPM907M-0402	1/4"-28	1/8"-28	27.00	23.50	4.70	4.50	14.00
DABPM907M-0404	1/4"-19	1/4"-19	27.00	27.00	5.00	6.00	14.00
DABPM907M-0606	3/8"-19	3/8"-19	29.00	31.00	7.90	9.00	19.00
DABPM907M-0806	1/2"-14	3/8"-19	34.00	33.00	11.10	9.00	22.00
DABPM907M-0808	1/2"-14	1/2"-14	34.00	37.50	11.10	12.00	22.00
DABPM907M-1212	3/4"-14	3/4"-14	40.00	40.00	16.70	16.70	27.00
DABPM907M-1616	1"-11	1"-11	45.00	45.00	22.20	22.20	33.00
DABPM907M-2020	1-1/4"-11	1-1/4"-11	52.00	60.00	28.60	28.60	41.00
DABPM907M-2424	1-1/2"-11	1-1/2"-11	60.50	67.10	33.30	33.30	48.00
DABPM907M-3232	2"-11	2"-11	75.00	75.00	46.00	46.00	65.00

DABPM928M

90° Elbow Connector BSPP Male 60° - NPTF Male 60°

D

A

BP

M

9

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

NPTF

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM928M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Male × Male

Thread Types:

BSPP 60° × NPTF 60°

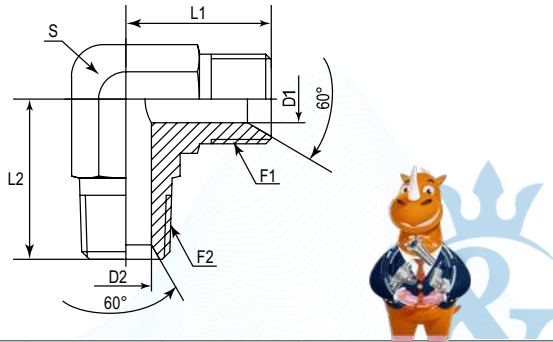

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S
#	BSPP	NPTF	mm	mm	mm	mm	mm
DABPM928M-0202	1/8"-28	1/8"-27	20.00	20.00	3.50	4.78	11.00
DABPM928M-0402	1/4"-19	1/8"-27	27.00	22.40	4.70	4.78	14.00
DABPM928M-0404	1/4"-19	1/4"-18	27.00	27.70	5.00	7.14	14.28
DABPM928M-0606	3/8"-19	3/8"-18	29.00	31.00	7.90	10.31	19.00
DABPM928M-0806	1/2"-14	3/8"-18	34.00	32.50	11.10	10.31	22.00
DABPM928M-0808	1/2"-14	1/2"-14	34.00	37.50	11.10	13.49	22.00
DABPM928M-1212	3/4"-14	3/4"-14	42.00	40.40	16.70	18.26	27.00
DABPM928M-1616	1"-11	1"-11-1/2	47.00	50.00	22.20	23.83	33.30
DABPM928M-2020	1-1/4"-11	1-1/4"-11-1/2	52.50	60.50	28.60	31.75	41.00
DABPM928M-2424	1-1/2"-11	1-1/2"-11-1/2	60.50	67.00	33.30	38.10	48.00
DABPM928M-3232	2"-11	2"-11-1/2	75.00	75.00	46.00	49.23	65.00/63.00

DABPM9065

90° Adjustable Elbow BSPP Male 60° - BSPP Male + O Ring

D

A

BP

M

9

06

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

BSPP

Male + O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM9065

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

BSPP 60° × BSPP + O Ring

Sealing Method:

O Ring

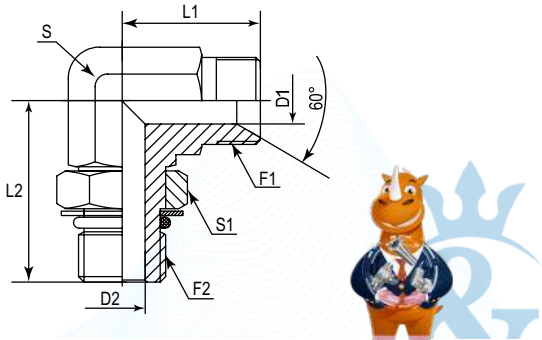

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPM9065-0202	1/8"-28	1/8"-28	22.50	26.00	3.50	4.40	11.00	14.00
DABPM9065-0402	1/4"-19	1/8"-28	27.00	28.00	4.70	4.40	14.00	14.00
DABPM9065-0404	1/4"-19	1/4"-19	27.00	31.50	4.70	7.50	14.00	19.00
DABPM9065-0406	1/4"-19	3/8"-19	28.00	37.00	4.70	9.90	19.00	22.00
DABPM9065-0604	3/8"-19	1/4"-19	29.00	34.00	7.90	7.50	19.00	19.00
DABPM9065-0606	3/8"-19	3/8"-19	29.00	37.00	7.90	9.90	19.00	22.00
DABPM9065-0608	3/8"-19	1/2"-14	32.00	43.00	7.90	12.30	22.00	27.00
DABPM9065-0806	1/2"-14	3/8"-19	34.00	40.00	11.10	9.90	22.00	22.00
DABPM9065-0808	1/2"-14	1/2"-14	34.00	43.00	11.10	12.30	22.00	27.00
DABPM9065-0812	1/2"-14	3/4"-14	37.00	50.00	11.10	15.50	27.00	36.00
DABPM9065-1208	3/4"-14	1/2"-14	41.00	45.50	16.70	12.30	27.00	27.00
DABPM9065-1212	3/4"-14	3/4"-14	41.00	50.00	16.70	15.50	27.00	36.00
DABPM9065-1216	3/4"-14	1"-11	43.00	53.00	16.70	21.50	33.00	41.00
DABPM9065-1612	1"-11	3/4"-14	46.00	52.00	22.20	15.50	33.00	36.00
DABPM9065-1616	1"-11	1"-11	46.00	53.00	22.20	21.50	33.00	41.00
DABPM9065-2020	1-1/4"-11	1-1/4"-11	51.00	58.00	28.60	27.50	41.00	50.00
DABPM9065-2424	1-1/2"-11	1-1/2"-11	60.00	61.00	33.30	33.00	48.00	55.00

DABPM906Q

90° Adjustable Elbow BSPP Male 60° - BSPP Male + O Ring + Retaining Ring

D

A

BP

M

9

06

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

BSPP

Male + O Ring + Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM906Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

BSPP 60° × BSPP

Sealing Method:

O Ring + Retaining Ring

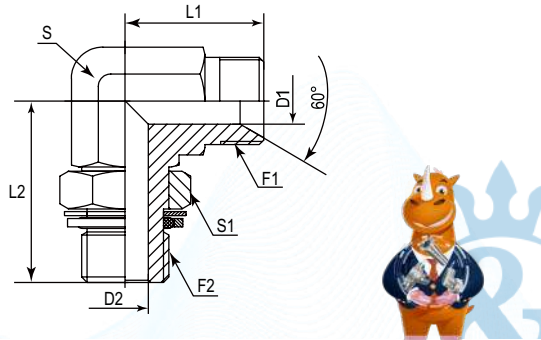

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPM906Q-0202	1/8"-28	1/8"-28	22.50	26.00	3.50	4.40	11	14
DABPM906Q-0402	1/4"-19	1/8"-28	27.00	28.00	4.70	4.40	14	14
DABPM906Q-0404	1/4"-19	1/4"-19	27.00	31.50	4.70	7.50	14	19
DABPM906Q-0406	1/4"-19	3/8"-19	28.00	37.00	4.70	9.90	19	22
DABPM906Q-0604	3/8"-19	1/4"-19	29.00	34.00	7.90	7.50	19	19
DABPM906Q-0606	3/8"-19	3/8"-19	29.00	37.00	7.90	9.90	19	22
DABPM906Q-0608	3/8"-19	1/2"-14	32.00	43.00	7.90	12.30	22	27
DABPM906Q-0806	1/2"-14	3/8"-19	34.00	40.00	11.10	9.90	22	22
DABPM906Q-0808	1/2"-14	1/2"-14	34.00	43.00	11.10	12.30	22	27
DABPM906Q-0812	1/2"-14	3/4"-14	37.00	50.00	11.10	15.50	27	36
DABPM906Q-1208	3/4"-14	1/2"-14	41.00	45.50	16.70	12.30	27	27
DABPM906Q-1212	3/4"-14	3/4"-14	41.00	50.00	16.70	15.50	27	36
DABPM906Q-1216	3/4"-14	1"-11	43.00	53.00	16.70	21.50	33	41
DABPM906Q-1612	1"-11	3/4"-14	46.00	52.00	22.20	15.50	33	36
DABPM906Q-1616	1"-11	1"-11	46.00	53.00	22.20	21.50	33	41
DABPM906Q-1620	1"-11	1-1/4"-11	50.00	58.00	22.20	27.50	41	50
DABPM906Q-2016	1-1/4"-11	1"-11	51.00	57.00	28.60	21.50	41	41
DABPM906Q-2020	1-1/4"-11	1-1/4"-11	51.00	58.00	28.60	27.50	41	50
DABPM906Q-2424	1-1/2"-11	1-1/2"-11	59.00	67.00	33.30	33.00	48	55
DABPM906Q-3232	2"-11	2"-11	75.00	75.00	46.00	45.00	63.50	70

DABPM9305

90° Adjustable Elbow BSPP Male 60° – SAE Male O Ring

D

A

BP

M

9

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

SAE UNF

Male O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM9305

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

BSPP 60° × SAE UNF O Ring

Sealing Method:

O Ring

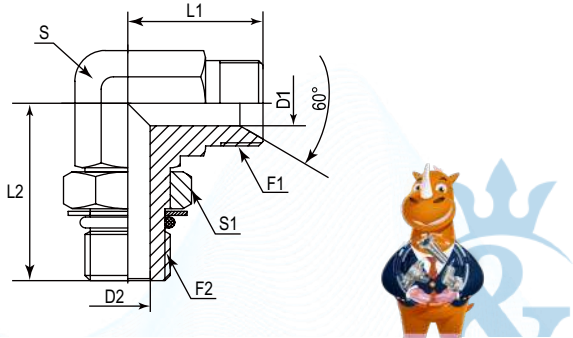

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	UNF	mm	mm	mm	mm	mm	mm
DABPM9305-0204	1/8"-28	7/16"-20	22.50	26.16	3.50	4.37	11.10	14.29
DABPM9305-0205	1/8"-28	1/2"-20	24.00	28.70	3.50	5.94	14.27	15.88
DABPM9305-0404	1/4"-19	7/16"-20	27.00	30.20	4.70	4.37	14.00	14.00
DABPM9305-0405	1/4"-19	1/2"-20	27.00	28.70	4.70	5.94	14.27	15.88
DABPM9305-0406	1/4"-19	9/16"-18	27.00	31.80	4.70	7.54	14.00	17.46
DABPM9305-0606	3/8"-19	9/16"-18	29.00	33.80	7.90	7.54	19.00	17.46
DABPM9305-0608	3/8"-19	3/4"-16	31.00	37.00	7.90	9.93	19.00	22.00
DABPM9305-0808	1/2"-14	3/4"-16	34.00	40.50	11.10	9.93	22.00	22.00
DABPM9305-0810	1/2"-14	7/8"-14	34.00	43.20	11.10	12.29	22.22	25.40
DABPM9305-1212	3/4"-14	1-1/16"-12	42.00	49.30	16.70	15.47	27.00	31.75
DABPM9305-1616	1"-11	1-5/16"-12	46.00	52.10	22.20	21.44	33.00	38.10
DABPM9305-2020	1-1/4"-11	1-5/8"-12	52.00	57.30	28.60	27.38	41.38	50.00
DABPM9305-2424	1-1/2"-11	1-7/8"-12	60.00	61.00	33.30	33.32	48.00	53.98



Certificate:



DABPM952Q

90° Adjustable Elbow BSPP Male 60° - Metric Male + O Ring + Retaining Ring

D

A

BP

M

9

52

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

Metric

Male + O Ring + Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM952Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

BSPP 60° × Metric

Sealing Method:

O Ring + Retaining Ring

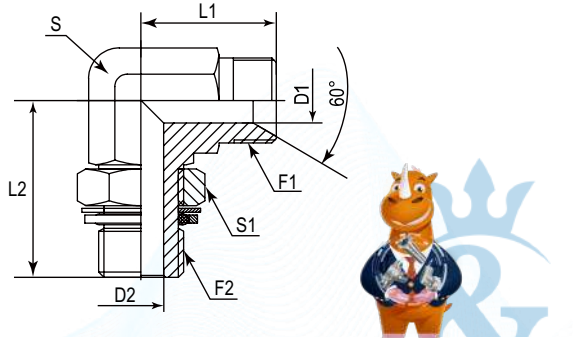

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	Metric	mm	mm	mm	mm	mm	mm
DABPM952Q-0210	1/8"-28	M10X1	22.00	27.00	3.50	4.50	11.00	14.00
DABPM952Q-0212	1/8"-28	M12X1.5	24.00	31.50	3.50	6.00	14.00	17.00
DABPM952Q-0412	1/4"-19	M12X1.5	27.00	31.50	4.70	6.00	14.00	17.00
DABPM952Q-0414	1/4"-19	M14X1.5	27.00	31.50	4.70	7.50	14.00	19.00
DABPM952Q-0416	1/4"-19	M16X1.5	28.00	37.00	4.70	9.00	19.00	22.00
DABPM952Q-0614	3/8"-19	M14X1.5	29.00	34.00	7.90	7.50	14.00	19.00
DABPM952Q-0616	3/8"-19	M16X1.5	29.00	37.00	7.90	9.00	19.00	22.00
DABPM952Q-0618	3/8"-19	M18X1.5	29.00	38.00	7.90	11.00	19.00	24.00
DABPM952Q-0816	1/2"-14	M16X1.5	34.00	40.00	11.10	7.00	22.00	22.00
DABPM952Q-0818	1/2"-14	M18X1.5	34.00	41.00	11.10	11.00	22.00	24.00
DABPM952Q-0820	1/2"-14	M20X1.5	34.00	43.00	11.10	12.50	22.00	27.00
DABPM952Q-0822	1/2"-14	M22X1.5	34.00	43.00	11.10	14.00	22.00	27.00
DABPM952Q-1022	5/8"-14	M22X1.5	37.00	46.00	14.30	14.00	22.00	27.00
DABPM952Q-1222	3/4"-14	M22X1.5	41.00	46.00	16.70	14.00	27.00	27.00
DABPM952Q-1226	3/4"-14	M26X1.5	41.00	50.00	16.70	17.00	27.00	32.00
DABPM952Q-1227	3/4"-14	M27X2	41.00	50.00	16.70	18.00	27.00	32.00
DABPM952Q-1627	1"-11	M27X2	46.00	52.00	22.20	18.00	33.00	32.00
DABPM952Q-1633	1"-11	M33X2	46.00	53.00	22.20	23.00	33.00	41.00
DABPM952Q-2042	1-1/4"-11	M42X2	51.00	58.00	28.60	30.00	41.00	50.00
DABPM952Q-2448	1-1/2"-11	M48X2	59.00	67.00	33.30	36.00	48.00	55.00



Certificate:



DABPM9525

90° Adjustable Elbow BSPP Male 60° - Metric Male + O Ring

D

A

BP

M

9

52

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

Metric

Male + O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM9525

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

BSPP 60° × Metric + O Ring

Sealing Method:

O Ring

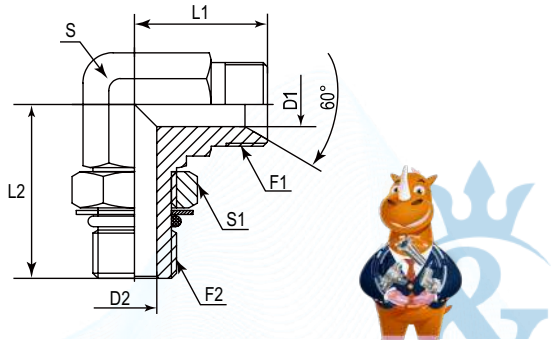

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	Metric	mm	mm	mm	mm	mm	mm
DABPM9525-0210	1/8"-28	M10X1	22.00	27.00	3.50	4.50	11.00	14.00
DABPM9525-0212	1/8"-28	M12X1.5	24.00	31.50	3.50	6.00	14.00	17.00
DABPM9525-0412	1/4"-19	M12X1.5	27.00	31.50	4.70	6.00	14.00	17.00
DABPM9525-0414	1/4"-19	M14X1.5	27.00	31.50	4.70	7.50	14.00	19.00
DABPM9525-0416	1/4"-19	M16X1.5	28.00	37.00	4.70	9.00	19.00	22.00
DABPM9525-0614	3/8"-19	M14X1.5	29.00	34.00	7.90	7.50	14.00	19.00
DABPM9525-0616	3/8"-19	M16X1.5	29.00	37.00	7.90	9.00	19.00	22.00
DABPM9525-0618	3/8"-19	M18X1.5	29.00	38.00	7.90	11.00	19.00	24.00
DABPM9525-0816	1/2"-14	M16X1.5	34.00	40.00	11.10	7.00	22.00	22.00
DABPM9525-0818	1/2"-14	M18X1.5	34.00	41.00	11.10	11.00	22.00	24.00
DABPM9525-0820	1/2"-14	M20X1.5	34.00	43.00	11.10	12.50	22.00	27.00
DABPM9525-0822	1/2"-14	M22X1.5	34.00	43.00	11.10	14.00	22.00	27.00
DABPM9525-1022	5/8"-14	M22X1.5	37.00	46.00	14.30	14.00	22.00	27.00
DABPM9525-1222	3/4"-14	M22X1.5	41.00	46.00	16.70	14.00	27.00	27.00
DABPM9525-1226	3/4"-14	M26X1.5	41.00	50.00	16.70	17.00	27.00	32.00
DABPM9525-1227	3/4"-14	M27X2	41.00	50.00	16.70	18.00	27.00	32.00
DABPM9525-1627	1"-11	M27X2	46.00	52.00	22.20	18.00	33.00	32.00
DABPM9525-1633	1"-11	M33X2	46.00	53.00	22.20	23.00	33.00	41.00
DABPM9525-2042	1-1/4"-11	M42X2	51.00	58.00	28.60	30.00	41.00	50.00
DABPM9525-2448	1-1/2"-11	M48X2	59.00	67.00	33.30	36.00	48.00	55.00

DABPM930J

90° Adjustable Long Elbow BSPP Male 60° – SAE Male + O Ring

D

A

BP

M

9

30

J

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Sealing Type

DME

Adaptor

BSPP

Male

90° Elbow

SAE

Long O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM930J

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Male × Male

Thread Types:

BSPP 60° Cone × SAE UNF

Thread Types:

Long O Ring

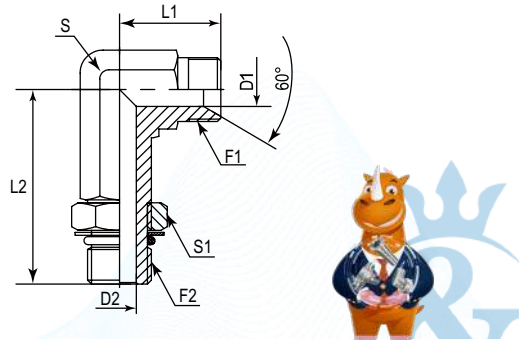

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	UNF	mm	mm	mm	mm	mm	mm
DABPM930J-0204	1/8"-28	7/16"-20	22.00	45.00	3.50	4.37	11.00	17.00
DABPM930J-0205	1/8"-28	1/2"-20	24.00	46.00	3.50	5.94	14.00	17.00
DABPM930J-0405	1/4"-28	1/2"-20	27.00	56.00	4.70	5.94	14.00	17.00
DABPM930J-0406	1/4"-28	9/16"-18	27.00	56.00	4.70	7.54	14.00	19.00
DABPM930J-0608	3/8"-19	3/4"-16	29.00	67.00	7.90	9.93	19.00	22.00
DABPM930J-0808	1/2"-14	3/4"-16	34.00	75.00	11.10	9.93	22.00	22.00
DABPM930J-0810	1/2"-14	7/8"-14	34.00	78.00	11.10	12.29	22.00	27.00
DABPM930J-1010	5/8"-14	7/8"-14	37.00	78.00	14.30	12.29	22.00	27.00
DABPM930J-1212	3/4"-14	1-1/16"-12	41.00	92.00	16.70	15.47	27.00	32.00
DABPM930J-1216	3/4"-14	1-5/16"-12	43.00	105.00	16.70	21.44	33.00	38.00
DABPM930J-1616	1"-11	1-5/16"-12	46.00	105.00	22.20	21.44	33.00	38.00
DABPM930J-1620	1"-11	1-5/8"-12	50.00	124.00	22.20	27.38	41.00	50.00
DABPM930J-2020	1-1/4"-11	1-5/8"-12	51.00	124.00	28.60	27.38	41.00	50.00
DABPM930J-2424	1-1/2"-11	1-7/8"-12	59.00	135.00	33.30	33.32	48.00	55.00

DABPM906Y

90° Adjustable Long Elbow BSPP Male 60° - BSPP Male + O Ring + Retaining Ring

D

A

BP

M

9

06

Y

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

BSPP

Male + Long O Ring + Retaining Ring

DME&JDE Code:

DABPM906Y

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

BSPP 60° × BSPP + Long O Ring + Retaining Ring

Sealing Method:

Long O Ring + Retaining Ring

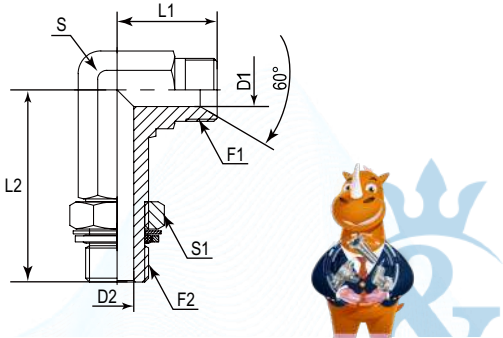

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPM906Y-0202	1/8"-28	1/8"-28	22.00	46.00	3.50	4.40	11.00	14.00
DABPM906Y-0204	1/8"-28	1/4"-19	24.00	56.50	3.50	7.50	14.00	19.00
DABPM906Y-0404	1/4"-19	1/4"-19	27.00	56.50	4.70	7.50	14.00	19.00
DABPM906Y-0406	1/4"-19	3/8"-19	28.00	67.00	4.70	9.90	19.00	22.00
DABPM906Y-0606	3/8"-19	3/8"-19	29.00	67.00	7.90	9.90	19.00	22.00
DABPM906Y-0608	3/8"-19	1/2"-14	32.00	78.00	7.90	12.30	22.00	27.00
DABPM906Y-0806	1/2"-14	3/8"-19	34.00	78.00	11.10	9.90	22.00	22.00
DABPM906Y-0808	1/2"-14	1/2"-14	34.00	78.00	11.10	12.30	22.00	27.00
DABPM906Y-1008	5/8"-14	1/2"-14	37.00	92.00	14.30	12.30	22.00	27.00
DABPM906Y-1212	3/4"-14	3/4"-14	41.00	92.00	16.70	15.50	27.00	32.00
DABPM906Y-1216	3/4"-14	1"-11	43.00	105.00	16.70	21.50	33.00	33.00
DABPM906Y-1616	1"-11	1"-11	46.00	105.00	22.20	21.50	33.00	41.00
DABPM906Y-1620	1"-11	1-1/4"-11	50.00	124.00	22.20	27.50	41.00	50.00
DABPM906Y-2020	1-1/4"-11	1-1/4"-11	51.00	124.00	28.60	27.50	41.00	50.00
DABPM906Y-2424	1-1/2"-11	1-1/2"-11	59.00	135.00	33.30	33.00	48.00	55.00

German Technology Equipment

SHIELD FLEX

New-Standard

DABPM906J

90° Adjustable Long Elbow BSPP Male 60° - BSPP Male + O Ring

D

A

BP

M

9

06

J

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

BSPP

Male Long O Ring

DME&JDE Code:

DABPM906J

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

BSPP 60° × BSPP + Long O Ring

Sealing Method:

Long O Ring

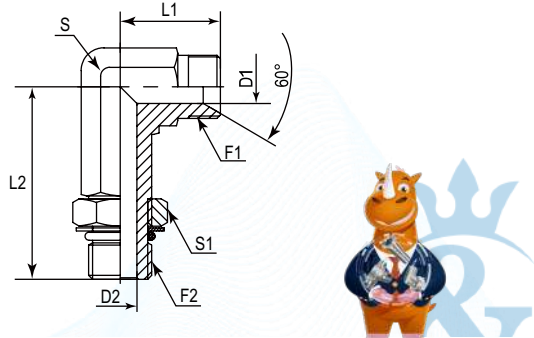

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPM906J-0202	1/8"-28	1/8"-28	22.00	46.00	3.50	4.40	11.00	14.00
DABPM906J-0204	1/8"-28	1/4"-19	24.00	56.50	3.50	7.50	14.00	19.00
DABPM906J-0404	1/4"-19	1/4"-19	27.00	56.50	4.70	7.50	14.00	19.00
DABPM906J-0406	1/4"-19	3/8"-19	28.00	67.00	4.70	9.90	19.00	22.00
DABPM906J-0606	3/8"-19	3/8"-19	29.00	67.00	7.90	9.90	19.00	22.00
DABPM906J-0608	3/8"-19	1/2"-14	32.00	78.00	7.90	12.30	22.00	27.00
DABPM906J-0806	1/2"-14	3/8"-19	34.00	78.00	11.10	9.90	22.00	22.00
DABPM906J-0808	1/2"-14	1/2"-14	34.00	78.00	11.10	12.30	22.00	27.00
DABPM906J-1008	5/8"-14	1/2"-14	37.00	92.00	14.30	12.30	22.00	27.00
DABPM906J-1212	3/4"-14	3/4"-14	41.00	92.00	16.70	15.50	27.00	32.00
DABPM906J-1216	3/4"-14	1"-11	43.00	105.00	16.70	21.50	33.00	33.00
DABPM906J-1616	1"-11	1"-11	46.00	105.00	22.20	21.50	33.00	41.00
DABPM906J-1620	1"-11	1-1/4"-11	50.00	124.00	22.20	27.50	41.00	50.00
DABPM906J-2020	1-1/4"-11	1-1/4"-11	51.00	124.00	28.60	27.50	41.00	50.00
DABPM906J-2424	1-1/2"-11	1-1/2"-11	59.00	135.00	33.30	33.00	48.00	55.00

German Technology Equipment

SHIELD FLEX

New-Standard

DABPM952Y

90° Adjustable Long Elbow BSPP Male 60° - Metric Male + O Ring + Retaining Ring

D

A

BP

M

9

52

Y

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

Metric

Male + Long O Ring + Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM952Y

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

BSPP 60° × Metric + O Ring + Retaining Ring

Sealing Method:

Long O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	Metric	mm	mm	mm	mm	mm	mm
DABPM952Y-0210	1/8"-28	M10X1	22.00	46.00	3.50	4.50	11.00	14.00
DABPM952Y-0212	1/8"-28	M12X1.5	25.00	56.50	3.50	6.00	14.00	17.00
DABPM952Y-0412	1/4"-19	M12X1.5	27.00	56.50	4.70	6.00	14.00	17.00
DABPM952Y-0414	1/4"-19	M14X1.5	27.00	56.50	4.70	7.50	14.00	19.00
DABPM952Y-0616	3/8"-19	M16X1.5	29.00	65.00	7.90	9.00	19.00	22.00
DABPM952Y-0618	3/8"-19	M18X1.5	29.00	67.00	7.90	11.00	19.00	24.00
DABPM952Y-0818	1/2"-14	M18X1.5	34.00	76.00	11.10	11.00	22.00	24.00
DABPM952Y-0822	1/2"-14	M22X1.5	34.00	78.00	11.10	14.00	22.00	27.00
DABPM952Y-1022	5/8"-14	M22X1.5	37.00	78.00	14.30	14.00	22.00	27.00
DABPM952Y-1222	3/4"-14	M22X1.5	41.00	93.00	16.70	14.00	27.00	27.00
DABPM952Y-1226	3/4"-14	M26X1.5	41.00	95.00	16.70	17.00	27.00	32.00
DABPM952Y-1227	3/4"-14	M27X2	41.00	95.00	16.70	18.00	27.00	32.00
DABPM952Y-1627	1"-11	M27X2	46.00	105.00	22.20	18.00	33.00	32.00
DABPM952Y-1633	1"-11	M33X2	46.00	105.00	22.20	23.00	33.00	41.00
DABPM952Y-2042	1-1/4"-11	M42X2	51.00	124.00	28.60	30.00	41.00	50.00
DABPM952Y-2448	1-1/2"-11	M48X2	59.00	141.00	33.30	36.00	48.00	55.00

DABPM952J

90° Adjustable Long Elbow BSPP Male 60° - Metric Male + O Ring

D

A

BP

M

9

52

J

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

Metric

Male+ Long O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM952J

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

BSPP 60° × Metric

Sealing Method:

Long O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	Metric	mm	mm	mm	mm	mm	mm
DABPM952J-0210	1/8"-28	M10X1	22.00	46.00	3.50	4.50	11.00	14.00
DABPM952J-0212	1/8"-28	M12X1.5	25.00	56.50	3.50	6.00	14.00	17.00
DABPM952J-0412	1/4"-19	M12X1.5	27.00	56.50	4.70	6.00	14.00	17.00
DABPM952J-0414	1/4"-19	M14X1.5	27.00	56.50	4.70	7.50	14.00	19.00
DABPM952J-0616	3/8"-19	M16X1.5	29.00	65.00	7.90	9.00	19.00	22.00
DABPM952J-0618	3/8"-19	M18X1.5	29.00	67.00	7.90	11.00	19.00	24.00
DABPM952J-0818	1/2"-14	M18X1.5	34.00	76.00	11.10	11.00	22.00	24.00
DABPM952J-0822	1/2"-14	M22X1.5	34.00	78.00	11.10	14.00	22.00	27.00
DABPM952J-1022	5/8"-14	M22X1.5	37.00	78.00	14.30	14.00	22.00	27.00
DABPM952J-1222	3/4"-14	M22X1.5	41.00	93.00	16.70	14.00	27.00	27.00
DABPM952J-1226	3/4"-14	M26X1.5	41.00	95.00	16.70	17.00	27.00	32.00
DABPM952J-1227	3/4"-14	M27X2	41.00	95.00	16.70	18.00	27.00	32.00
DABPM952J-1627	1"-11	M27X2	46.00	105.00	22.20	18.00	33.00	32.00
DABPM952J-1633	1"-11	M33X2	46.00	105.00	22.20	23.00	33.00	41.00
DABPM952J-2042	1-1/4"-11	M42X2	51.00	124.00	28.60	30.00	41.00	50.00
DABPM952J-2448	1-1/2"-11	M48X2	59.00	141.00	33.30	36.00	48.00	55.00



DABPM905T

90° Bulkhead Elbow BSPP Male 60° - BSPP 60° Male

D

A

BP

M

9

05

T

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

BSPP

Male Bulkhead

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM905T

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Male × Male

Thread Types:

BSPP 60° × BSPP 60°

Other Features:

Bulkhead



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPM905T-0202	1/8"-28	1/8"-28	21.00	38.00	3.50	3.50	11.00	14.00
DABPM905T-0404	1/4"-19	1/4"-19	25.00	45.00	4.70	4.70	14.00	19.00
DABPM905T-0606	3/8"-19	3/8"-19	30.00	52.00	7.90	7.90	19.00	22.00
DABPM905T-0808	1/2"-14	1/2"-14	34.00	58.00	11.10	11.10	22.00	27.00
DABPM905T-1010	5/8"-14	5/8"-14	38.00	59.00	14.00	14.00	27.00	30.00
DABPM905T-1212	3/4"-14	3/4"-14	40.00	65.00	16.70	16.70	27.00	32.00
DABPM905T-1616	1"-11	1"-11	45.00	71.00	22.20	22.20	33.00	41.00
DABPM905T-2020	1-1/4"-11	1-1/4"-11	52.00	77.00	28.60	28.60	41.00	50.00
DABPM905T-2424	1-1/2"-11	1-1/2"-11	60.00	87.00	33.30	33.30	48.00	55.00
DABPM905T-3232	2"-11	2"-11	65.00	97.00	46.00	46.00	65.00	70.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABTM907M

90° Elbow BSPT Male 60° - BSPT Male 60°

D

A

BT

M

9

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

90° Elbow

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTM907M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Male × Male

Thread Types:

BSPT 60° × BSPT 60°

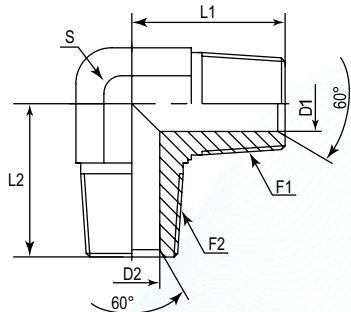

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S
#	BSPT	BSPT	mm	mm	mm	mm	mm
DABTM907M-0202	1/8"-28	1/8"-28	21.00	21.00	4.50	4.50	11.00
DABTM907M-0402	1/4"-19	1/8"-28	25.50	23.50	6.00	4.50	14.00
DABTM907M-0404	1/4"-19	1/4"-19	25.50	25.50	6.00	6.00	14.00
DABTM907M-0604	3/8"-19	1/4"-19	28.50	26.50	9.00	6.00	19.00
DABTM907M-0606	3/8"-19	3/8"-19	28.50	28.50	9.00	9.00	19.00
DABTM907M-0804	1/2"-14	1/4"-19	36.00	30.50	12.00	6.00	22.00
DABTM907M-0806	1/2"-14	3/8"-19	36.00	32.50	12.00	9.00	22.00
DABTM907M-0808	1/2"-14	1/2"-14	36.00	36.00	12.00	12.00	22.00
DABTM907M-1208	3/4"-14	1/2"-14	43.50	39.50	16.70	12.00	27.00
DABTM907M-1212	3/4"-14	3/4"-14	43.50	43.50	16.70	16.70	27.00
DABTM907M-1612	1"-11	3/4"-14	50.00	48.00	22.20	16.70	33.00
DABTM907M-1616	1"-11	1"-11	50.00	50.00	22.20	22.20	33.00
DABTM907M-2016	1-1/4"-11	1"-11	57.50	56.50	28.60	22.20	41.00
DABTM907M-2020	1-1/4"-11	1-1/4"-11	56.50	56.50	28.60	28.60	41.00
DABTM907M-2424	1-1/2"-11	1-1/2"-11	62.50	62.50	33.30	33.30	48.00
DABTM907M-3232	2"-11	2"-11	75.00	75.00	46.00	46.00	63.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABTM928M

90° Elbow BSPT Male 60° - NPTF Male 60°

D

A

BP

M

9

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

90° Elbow

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTM928M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Male × Male

Thread Types:

BSPP 60° × NPTF 60°

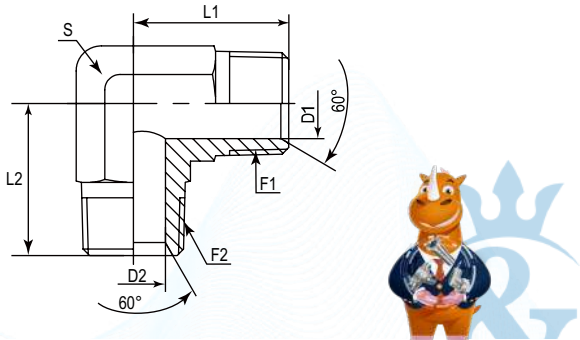

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S
#	BSPT	NPTF	mm	mm	mm	mm	mm
DABTM928M-0404	1/4"-19	1/4"-18	6.00	7.14	25.50	25.50	14.00
DABTM928M-0606	3/8"-19	3/8"-18	9.00	10.31	28.50	28.50	19.00
DABTM928M-0808	1/2"-14	1/2"-14	12.00	13.49	36.00	36.00	22.00
DABTM928M-1212	3/4"-14	3/4"-14	16.70	18.26	43.50	40.40	27.00
DABTM928M-1616	1"-11	1"-11-1/2	22.20	22.20	50.00	50.00	33.00
DABTM928M-2020	1-1/4"-11	1-1/4"-11-1/2	28.60	31.75	56.50	60.50	41.27
DABTM928M-2424	1-1/2"-11	1-1/2"-11-1/2	33.30	38.10	62.50	67.10	47.60
DABTM928M-3232	2"-11	2"-11-1/2	46.00	49.23	75.00	76.50	63.50

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABTM9305

90° Adjustable Elbow BSPT Male 60° - SAE Male + O Ring

D

A

BT

M

9

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

90° Elbow

SAE

Male + O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTM9305

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

BSPP 60° Cone × SAE UNF + O Ring

Sealing Method:

O Ring

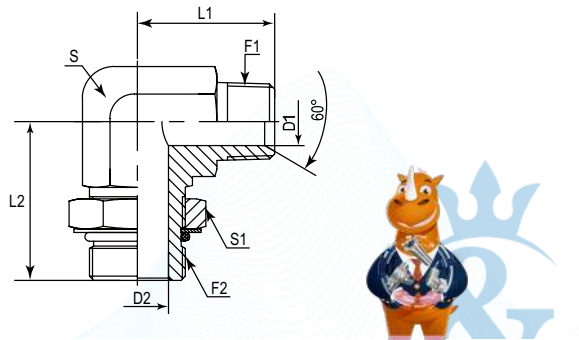

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABTM9305-0204	1/8"-28	7/16"-20	19.8	26.2	4.5	4.37	11	14
DABTM9305-0404	1/4"-19	7/16"-20	27.50	30.20	6.00	4.37	14.00	14.29
DABTM9305-0406	1/4"-19	9/16"-18	26.00	31.80	6.00	7.54	14.00	17.00
DABTM9305-0408	1/4"-19	3/4"-16	30.00	37.00	6.00	9.93	19.00	22.22
DABTM9305-0606	3/8"-19	9/16"-18	28.50	33.30	9.00	7.54	19.00	17.00
DABTM9305-0608	3/8"-19	3/4"-16	31.00	37.00	9.00	9.93	19.00	22.00
DABTM9305-0610	3/8"-19	7/8"-14	34.00	44.00	9.00	12.29	22.00	27.00
DABTM9305-0808	1/2"-14	3/4"-16	37.00	40.50	12.00	9.93	22.00	22.00
DABTM9305-0810	1/2"-14	7/8"-14	38.00	44.00	12.00	12.29	22.00	27.00
DABTM9305-0812	1/2"-14	1-1/16"-12	41.00	51.00	12.00	15.47	27.00	32.00
DABTM9305-1210	3/4"-14	7/8"-14	43.00	47.00	16.70	12.29	27.00	27.00
DABTM9305-1212	3/4"-14	1-1/16"-12	43.50	51.00	16.70	15.47	27.00	32.00
DABTM9305-1216	3/4"-14	1-5/16"-12	46.00	55.00	16.70	21.44	33.00	41.00
DABTM9305-1612	1"-11	1-1/16"-12	50.00	52.10	22.20	15.47	33.00	32.00
DABTM9305-1616	1"-11	1-5/16"-12	50.00	55.00	22.20	21.44	33.00	41.00
DABTM9305-1620	1"-11	1-5/8"-12	59.70	57.50	22.20	27.38	41.00	50.00
DABTM9305-2020	1-1/4"-11	1-5/8"-12	60.50	57.50	28.60	27.38	41.00	50.00
DABTM9305-2424	1-1/2"-11	1-7/8"-12	67.10	60.70	33.30	33.32	48.00	55.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABTM906Q

Adjustable 90° Elbow BSPT Male 60° - BSPP Male + O Ring + Retaining Ring

D

A

BT

M

9

05

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Male

90° Elbow

BSPP

Male + O Ring + Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTM906Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

BSPT 60° × BSPP

Sealing Method:

O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	BSPT	UNF	mm	mm	mm	mm	mm	mm
DABTM906Q-0404	1/4"-19	1/4"-19	25.5	31.3	6	7.5	14	19
DABTM906Q-0406	1/4"-19	3/8"-19	26.50	36.80	6.00	9.90	19.00	22.00
DABTM906Q-0606	3/8"-19	3/8"-19	27.50	36.80	9.00	9.90	19.00	22.00
DABTM906Q-0608	3/8"-19	1/2"-14	32.50	43.20	9.00	12.30	22.00	27.00
DABTM906Q-0806	1/2"-14	3/8"-19	37.00	36.80	12.00	9.90	22.00	22.00
DABTM906Q-0808	1/2"-14	1/2"-14	37.00	43.20	12.00	12.30	22.00	27.00
DABTM906Q-0812	1/2"-14	3/4"-14	39.50	49.30	12.00	15.50	27.00	32.00
DABTM906Q-1212	3/4"-14	3/4"-14	43.00	49.30	16.70	15.50	27.00	32.00
DABTM906Q-1216	3/4"-14	1"-11	48.00	53.00	16.70	21.50	33.00	41.00
DABTM906Q-1612	1"-11	3/4"-14	50.00	53.00	22.20	15.50	33.30	32.00
DABTM906Q-1616	1"-11	1"-11	50.00	53.00	22.20	21.50	33.00	41.00
DABTM906Q-1620	1"-11	1-1/4"-11	55.50	58.00	22.20	27.50	41.00	50.00
DABTM906Q-2020	1-1/4"-11	1-1/4"-11	57.00	58.00	28.60	27.50	41.00	50.00
DABTM906Q-2424	1-1/2"-11	1-1/2"-11	62.50	63.00	33.30	33.00	48.00	55.00



Certificate:



DABPM905F

90° Elbow Connector BSPP Male 60° - BSPP Fixed Female

D

A

BP

M

9

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

BSPP

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM905F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Male × Fixed Female

Thread Types:

BSPP 60° × BSPP



PART NUMBER	F1 (Thread)	F2 (Thread)	D	L1	L2	S
#	BSPP	BSPP	mm	mm	mm	mm
DABPM905F-0202	1/8"-28	1/8"-28	3.50	20.00	20.00	14.00
DABPM905F-0404	1/4"-19	1/4"-19	4.70	27.00	22.00	19.00
DABPM905F-0606	3/8"-19	3/8"-19	7.90	31.00	26.00	22.00
DABPM905F-0808	1/2"-14	1/2"-14	11.10	37.50	32.00	27.00
DABPM905F-1212	3/4"-14	3/4"-14	16.70	40.40	34.50	33.00
DABPM905F-1616	1"-11	1"-11	22.20	50.00	41.50	41.00



Certificate:



DABPM9251

90° Elbow Connector BSPP Male 60°Cone - JIC Swivel Female 74°

D

A

BP

M

9

251

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

DME

Adaptor

BSPP

Male

90° Elbow

JIC Swivel Female 74°

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM9251

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Male × Swivel Female

Thread Types:

BSPP 60° Cone × JIC 74°



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	BSPP	UNF	mm	mm	mm	mm	mm	mm
DABPM9251-0404	1/4"-19	7/16"-20	4.70	4.40	26.00	22.00	14.00	14.00
DABPM9251-0406	1/4"-19	9/16"-18	4.70	7.54	26.00	22.23	14.00	19.00
DABPM9251-0606	3/8"-19	9/16"-18	7.90	7.54	28.00	22.23	19.00	19.00
DABPM9251-0608	3/8"-19	3/4"-16	7.90	9.93	29.00	24.33	19.00	22.23
DABPM9251-0806	1/2"-14	9/16"-18	11.10	7.54	34.00	25.15	22.00	19.00
DABPM9251-0808	1/2"-14	3/4"-16	11.10	9.93	34.00	26.16	22.00	22.23
DABPM9251-0810	1/2"-14	7/8"-14	11.10	12.29	34.00	28.45	22.00	27.00
DABPM9251-1212	3/4"-14	1-1/16"-12	16.70	15.47	40.00	30.20	27.00	31.75

DABPM9081

90° Elbow Connector BSPP Male 60° - BSPP Swivel Female 60°

D

A

BP

M

9

081

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

DME

Adaptor

BSPP

Male

Straight

BSPP Swivel FemaleP

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM9081

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Male × Swivel Female

Thread Types:

BSPP 60° × BSPP 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	Revision History
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm	
DABPM9081-0202	1/8"-28	1/8"-28	22.50	22.50	3.50	3.50	11.00	14.00	
DABPM9081-0404	1/4"-19	1/4"-19	27.00	23.80	4.70	4.70	14.00	19.00	
DABPM9081-0406	1/4"-19	3/8"-19	28.00	28.00	4.70	7.90	19.00	22.00	
DABPM9081-0604	3/8"-19	1/4"-19	29.00	27.50	7.90	4.70	19.00	19.00	
DABPM9081-0606	3/8"-19	3/8"-19	29.00	28.20	7.90	7.50	19.00	22.00	2024/6/4,Dimension D2 of item AT04054(DABPM9081-0606)has been changed from 7.5±0.2mm to Max7.10 mm
DABPM9081-0808	1/2"-14	1/2"-14	35.00	33.60	11.10	11.10	22.00	27.00	
DABPM9081-0812	1/2"-14	3/4"-14	40.50	37.90	11.10	16.70	27.00	32.00	
DABPM9081-1010	5/8"-14	5/8"-14	37.00	35.00	14.30	14.30	22.00	30.00	
DABPM9081-1212	3/4"-14	3/4"-14	43.00	37.90	16.70	16.70	27.00	32.00	
DABPM9081-1612	1"-11	3/4"-14	50.00	45.50	22.20	16.70	33.00	32.00	
DABPM9081-1616	1"-11	1"-11	47.00	44.00	22.20	22.20	33.00	41.00	
DABPM9081-2016	1-1/4"-11	1"-11	50.00	50.00	28.60	22.20	41.00	41.00	
DABPM9081-2020	1-1/4"-11	1-1/4"-11	52.30	50.00	28.60	26.00	41.00	50.00	
DABPM9081-2424	1-1/2"-11	1-1/2"-11	60.50	53.30	33.30	33.30	48.00	55.00	
DABPM9081-3232	2"-11	2"-11	75.00	60.00	46.00	46.00	65.00	70.00	



Certificate:



Certificate:

DABPM9081-B

90° Swept Elbow BSPP Male 60° Cone - BSPP Swivel Female 60°

D

A

BP

M

9

081

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Elbow Type

DME

Adaptor

BSPP

Male

90° Elbow

BSPP Swivel Female

Swept Elbow

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM9081-B

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Male × Swivel Female

Thread Types:

BSPP 60° Cone × BSPP 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPM9081-0404B	1/4"-19	1/4"-19	4.00	4.00	30.00	32.50	19.00	19.00
DABPM9081-0606B	3/8"-19	3/8"-19	7.00	7.00	37.00	39.00	22.00	22.00
DABPM9081-0808B	1/2"-14	1/2"-14	10.00	10.00	45.00	47.00	27.00	27.00
DABPM9081-1010B	5/8"-14	5/8"-14	13.00	13.00	52.00	52.00	30.00	30.00
DABPM9081-1212B	3/4"-14	3/4"-14	15.00	15.00	54.00	57.00	32.00	32.00
DABPM9081-1616B	1"-11	1"-11	19.00	19.00	68.00	69.00	41.00	41.00
DABPM9081-2020B	1-1/4"-11	1-1/4"-11	26.00	26.00	100.00	86.00	50.00	50.00

DABPM9081-SQ

90° Elbow Connector BSPP Male 60° Cone - BSPP Swivel Female 60°

D

A

BP

M

9

081

SQ

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Body Type

DME

Adaptor

BSPP

Male

90° Elbow

BSPP Swivel Female

Square

German Technology Equipment

New-Standard

DME&JDE Code:

DABPM9081-SQ

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Male × Swivel Female

Thread Types:

BSPP 60° Cone × BSPP 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2
#	BSPP	BSPP	mm	mm	mm	mm
DABPM9081-0202SQ	1/8"-28	1/8"-28	18.00	17.50	3.50	3.50
DABPM9081-0404SQ	1/4"-19	1/4"-19	23.50	22.50	4.70	4.70
DABPM9081-0606SQ	3/8"-19	3/8"-19	26.50	26.00	7.90	7.50
DABPM9081-0808SQ	1/2"-14	1/2"-14	29.00	30.50	11.10	11.10
DABPM9081-1212SQ	3/4"-14	3/4"-14	34.00	35.00	16.70	16.70
DABPM9081-1616SQ	1"-11	1"-11	42.00	42.00	22.20	22.20
DABPM9081-2020SQ	1-1/4"-11	1-1/4"-11	50.00	48.00	28.60	26.00
DABPM9081-2424SQ	1-1/2"-11	1-1/2"-11	50.50	54.50	33.30	33.30

DABTM9081

90° Elbow Connector BSPT Male 60° - BSPP Swivel Female 60°

D

A

BT

M

9

081

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

BSPT

Male

90° Elbow

BSPP Swivel Female

German Technology Equipment

New-Standard

DME&JDE Code:

DABTM9081

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Male × Swivel Female

Thread Types:

BSPT 60° × BSPP 60°

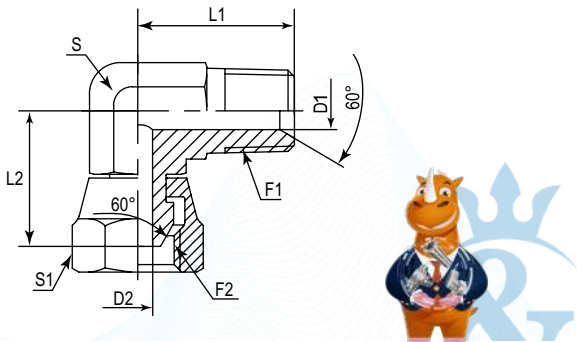

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	BSPT	BSPP	mm	mm	mm	mm	mm	mm
DABTM9081-0202	1/8"-28	1/8"-28	4.50	3.50	20.00	18.80	11.00	14.00
DABTM9081-0404	1/4"-19	1/4"-19	6.00	4.70	25.00	21.60	14.00	19.00
DABTM9081-0406	1/4"-19	3/8"-19	6.00	7.90	28.00	25.60	19.00	22.00
DABTM9081-0604	3/8"-19	1/4"-19	9.00	4.70	28.50	23.80	19.00	19.00
DABTM9081-0606	3/8"-19	3/8"-19	9.00	7.90	28.50	25.60	19.00	22.00
DABTM9081-0608	3/8"-19	1/2"-14	9.00	11.10	30.50	30.00	19.00	27.00
DABTM9081-0806	1/2"-14	3/8"-19	12.00	7.90	36.00	28.20	22.00	22.00
DABTM9081-0808	1/2"-14	1/2"-14	12.00	11.10	36.00	30.00	22.00	27.00
DABTM9081-0812	1/2"-14	3/4"-14	12.00	16.70	40.00	35.30	27.00	32.00
DABTM9081-1208	3/4"-14	1/2"-14	16.70	11.10	40.40	33.50	27.00	27.00
DABTM9081-1212	3/4"-14	3/4"-14	16.70	16.70	40.40	35.30	27.00	32.00
DABTM9081-1216	3/4"-14	1"-11	16.70	22.20	49.00	45.50	33.00	41.00
DABTM9081-1612	1"-11	3/4"-14	22.20	16.70	50.00	44.50	33.00	32.00
DABTM9081-1616	1"-11	1"-11	22.20	22.20	50.00	45.50	33.00	41.00
DABTM9081-2020	1-1/4"-11	1-1/4"-11	28.60	28.60	58.00	52.50	41.00	50.00
DABTM9081-2424	1-1/2"-11	1-1/2"-11	33.30	33.30	62.50	53.30	48.00	55.00
DABTM9081-3232	2"-11	2"-11	46.00	44.00	75.00	60.00	65.00	70.00

DABPF907M

90° Elbow Connector BSPP Fixed Female - BSPT Male

D

A

BP

F

9

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

90° Elbow

BSPT

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DABPF907M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Fixed Female × Male

Thread Types:

BSPP × BSPT

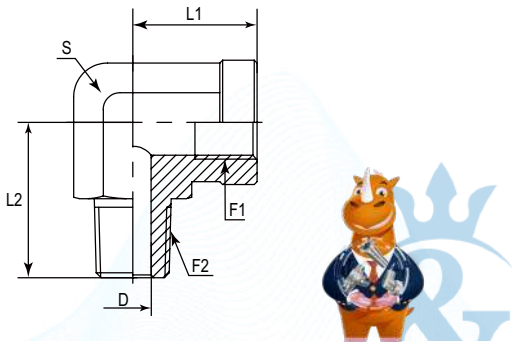

PART NUMBER	F1 (Thread)	F2 (Thread)	D	L1	L2	S
#	BSPP	BSPT	mm	mm	mm	mm
DABPF907M-0202	1/8"-28	1/8"-28	4.5	17	20	14
DABPF907M-0404	1/4"-19	1/4"-19	6.5	22	27.5	19
DABPF907M-0606	3/8"-19	3/8"-19	10	26	31	22
DABPF907M-0808	1/2"-14	1/2"-14	13	32	37.5	27
DABPF907M-1212	3/4"-14	3/4"-14	18	36	43	33
DABPF907M-1616	1"-11	1"-11	22.2	42	50	41
DABPF907M-2020	1-1/4"-11	1-1/4"-11	28.6	43	60	48
DABPF907M-2424	1-1/2"-11	1-1/2"-11	33.3	53	67	65
DABPF907M-3232	2"-11	2"-11	46	60	76	72

DABPF906Q

90° Adjustable Elbow BSPP Fixed Female - BSPP Male + O Ring + Retaining Ring

D

A

BP

F

9

06

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

90° Elbow

BSPP

Male + O Ring + Retaining Ring

DME&JDE Code:

DABPF906Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:

Adjustable Male × Fixed Female

Thread Types:


BSPP × BSPP + O Ring + Retaining Ring

Sealing Method:

O Ring + Retaining Ring

German Technology Equipment

New-Standard



PART NUMBER	F1 (Thread)	F2 (Thread)	D	L1	L2	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm
DABPF906Q-0404	1/4"-19	1/4"-19	7.5	22	33.5	19	19
DABPF906Q-0606	3/8"-19	3/8"-19	9.9	26	39.5	22	22
DABPF906Q-0808	1/2"-14	1/2"-14	12.3	32	45.5	27	27
DABPF906Q-1212	3/4"-14	3/4"-14	15.5	36	52	33	36
DABPF906Q-1616	1"-11	1"-11	21.5	42	57	41	41
DABPF906Q-2020	1-1/4"-11	1-1/4"-11	27.5	43	61	48	50

DABP19065

90° Adjustable Elbow BSPP Swivel Female 60° - BSPP Male + O Ring

D

A

BP

1

9

06

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

90° Elbow

BSPP

Male + O Ring

DME&JDE Code:

DABP19065

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Swivel Female

Thread Types:

BSPP 60° × BSPP + O Ring

Sealing Method:

O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm
DABP19065-0202	1/8"-28	1/8"-28	22.00	26.00	3.50	4.40	11.00	14.00	14.00
DABP19065-0204	1/8"-28	1/4"-19	22.00	31.50	3.50	7.50	14.00	14.00	19.00
DABP19065-0404	1/4"-19	1/4"-19	24.00	31.50	4.70	7.50	14.00	19.00	19.00
DABP19065-0406	1/4"-19	3/8"-19	26.00	36.50	4.70	9.90	19.00	19.00	22.00
DABP19065-0604	3/8"-19	1/4"-19	28.00	34.50	7.90	7.50	19.00	22.00	19.00
DABP19065-0606	3/8"-19	3/8"-19	28.00	37.00	7.90	9.90	19.00	22.00	22.00
DABP19065-0608	3/8"-19	1/2"-14	28.50	43.00	7.90	12.30	22.00	22.00	27.00
DABP19065-0806	1/2"-14	3/8"-19	28.50	39.50	11.10	9.90	22.00	27.00	22.00
DABP19065-0808	1/2"-14	1/2"-14	28.50	43.00	11.10	12.30	22.00	27.00	27.00
DABP19065-1212	3/4"-14	3/4"-14	37.90	50.00	16.70	15.50	27.00	32.00	36.00
DABP19065-1616	1"-11	1"-11	42.00	53.00	22.20	21.50	33.00	41.00	41.00
DABP19065-2020	1-1/4"-11	1-1/4"-11	52.00	58.00	27.50	27.50	41.00	50.00	50.00



DABP1906Q

90° Adjustable Elbow BSPP Swivel Female 60° - BSPP Male + O Ring + Retaining Ring

D

A

BP

1

9

06

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

90° Elbow

BSPP

Male + O Ring + Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABP1906Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Swivel Female

Thread Types:

BSPP 60° × BSPP

Sealing Method:

O Ring + Retaining Ring

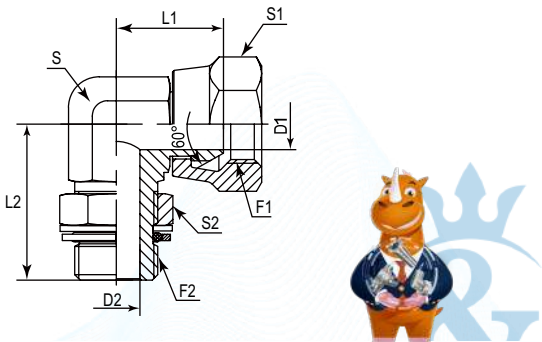

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S2
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm
DABP1906Q-0202	1/8"-28	1/8"-28	22.00	26.00	3.50	4.40	11.00	14.00	14.00
DABP1906Q-0204	1/8"-28	1/4"-19	22.00	31.50	3.50	7.50	14.00	14.00	19.00
DABP1906Q-0404	1/4"-19	1/4"-19	24.00	31.50	4.70	7.50	14.00	19.00	19.00
DABP1906Q-0406	1/4"-19	3/8"-19	26.00	36.50	4.70	9.90	19.00	19.00	22.00
DABP1906Q-0604	3/8"-19	1/4"-19	28.00	34.50	7.90	7.50	19.00	22.00	19.00
DABP1906Q-0606	3/8"-19	3/8"-19	28.00	37.00	7.90	9.90	19.00	22.00	22.00
DABP1906Q-0608	3/8"-19	1/2"-14	28.50	43.00	7.90	12.30	22.00	22.00	27.00
DABP1906Q-0806	1/2"-14	3/8"-19	28.50	39.50	11.10	9.90	22.00	27.00	22.00
DABP1906Q-0808	1/2"-14	1/2"-14	28.50	43.00	11.10	12.30	22.00	27.00	27.00
DABP1906Q-1212	3/4"-14	3/4"-14	37.90	50.00	16.70	15.50	27.00	32.00	36.00
DABP1906Q-1616	1"-11	1"-11	42.00	53.00	22.20	21.50	33.00	41.00	41.00
DABP1906Q-2020	1-1/4"-11	1-1/4"-11	52.00	58.00	27.50	27.50	41.00	50.00	50.00

DABP1952Q

90° Adjustable Elbow BSPP Swivel Female 60° - Metric Male + O Ring + Retaining Ring

D

A

BP

1

9

52

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

90° Elbow

Metric

Male+ O Ring + Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABP1952Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Swivel Female

Thread Types:

BSPP 60° × Metric

Sealing Method:

O Ring + Retaining Ring

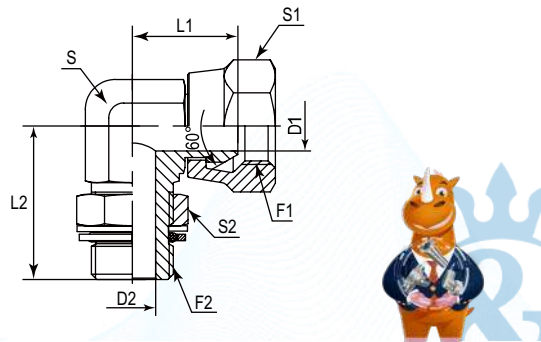

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S2
#	BSPP	Metric	mm	mm	mm	mm	mm	mm	mm
DABP1952Q-0210	1/8"-28	M10X1	20.50	27.00	3.50	4.50	11.00	14.00	14.00
DABP1952Q-0212	1/8"-28	M12X1.5	22.50	31.50	3.50	6.00	14.00	14.00	17.00
DABP1952Q-0412	1/4"-19	M12X1.5	24.00	31.50	4.50	6.00	14.00	19.00	17.00
DABP1952Q-0414	1/4"-19	M14X1.5	24.00	31.50	4.50	7.50	14.00	19.00	19.00
DABP1952Q-0416	1/4"-19	M16X1.5	26.00	37.00	4.50	9.00	19.00	19.00	22.00
DABP1952Q-0614	3/8"-19	M14X1.5	26.00	34.00	7.90	7.50	19.00	22.00	19.00
DABP1952Q-0616	3/8"-19	M16X1.5	26.00	37.00	7.90	9.00	19.00	22.00	22.00
DABP1952Q-0618	3/8"-19	M18X1.5	26.00	38.00	7.90	11.00	19.00	22.00	24.00
DABP1952Q-0818	1/2"-14	M18X1.5	28.50	41.00	11.10	11.00	19.00	27.00	24.00
DABP1952Q-0820	1/2"-14	M20X1.5	28.50	43.00	11.10	12.50	22.00	27.00	27.00
DABP1952Q-0822	1/2"-14	M22X1.5	28.50	43.00	11.10	14.00	22.00	27.00	27.00
DABP1952Q-1022	5/8"-14	M22X1.5	28.50	45.00	12.00	14.00	22.00	30.00	27.00
DABP1952Q-1222	3/4"-14	M22X1.5	37.00	46.00	16.70	14.00	27.00	32.00	27.00
DABP1952Q-1226	3/4"-14	M26X1.5	37.00	50.00	16.70	17.00	27.00	32.00	32.00
DABP1952Q-1227	3/4"-14	M27X2	37.00	50.00	16.70	18.00	27.00	32.00	32.00
DABP1952Q-1627	1"-11	M27X2	42.00	52.00	22.20	18.00	33.00	41.00	32.00
DABP1952Q-1633	1"-11	M33X2	42.00	53.00	22.20	23.00	33.00	41.00	41.00
DABP1952Q-2042	1-1/4"-11	M42X2	50.00	58.00	28.60	30.00	41.00	50.00	50.00
DABP1952Q-2448	1-1/2"-11	M48X2	53.50	67.00	33.30	36.00	48.00	55.00	55.00



DABP19525

90° Adjustable Elbow BSPP Swivel Female 60° - Metric Male + O Ring

D

A

BP

1

9

52

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

90° Elbow

Metric

Male + O Ring

DME&JDE Code:

DABP19525

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Swivel Female

Thread Types:

BSPP 60° × Metric + O Ring

Sealing Method:

O Ring

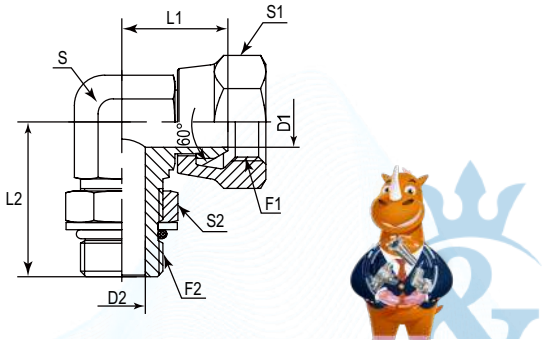

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S2
#	BSPP	Metric	mm	mm	mm	mm	mm	mm	mm
DABP19525-0210	1/8"-28	M10X1	20.50	27.00	3.50	4.50	11.00	14.00	14.00
DABP19525-0212	1/8"-28	M12X1.5	22.50	31.50	3.50	6.00	14.00	14.00	17.00
DABP19525-0412	1/4"-19	M12X1.5	24.00	31.50	4.50	6.00	14.00	19.00	17.00
DABP19525-0414	1/4"-19	M14X1.5	24.00	31.50	4.50	7.50	14.00	19.00	19.00
DABP19525-0416	1/4"-19	M16X1.5	26.00	37.00	4.50	9.00	19.00	19.00	22.00
DABP19525-0614	3/8"-19	M14X1.5	26.00	34.00	7.90	7.50	19.00	22.00	19.00
DABP19525-0616	3/8"-19	M16X1.5	26.00	37.00	7.90	9.00	19.00	22.00	22.00
DABP19525-0618	3/8"-19	M18X1.5	26.00	38.00	7.90	11.00	19.00	22.00	24.00
DABP19525-0818	1/2"-14	M18X1.5	28.50	41.00	11.10	11.00	19.00	27.00	24.00
DABP19525-0820	1/2"-14	M20X1.5	28.50	43.00	11.10	12.50	22.00	27.00	27.00
DABP19525-0822	1/2"-14	M22X1.5	28.50	43.00	11.10	14.00	22.00	27.00	27.00
DABP19525-1022	5/8"-14	M22X1.5	28.50	45.00	12.00	14.00	22.00	30.00	27.00
DABP19525-1222	3/4"-14	M22X1.5	37.00	46.00	16.70	14.00	27.00	32.00	27.00
DABP19525-1226	3/4"-14	M26X1.5	37.00	50.00	16.70	17.00	27.00	32.00	32.00
DABP19525-1227	3/4"-14	M27X2	37.00	50.00	16.70	18.00	27.00	32.00	32.00
DABP19525-1627	1"-11	M27X2	42.00	52.00	22.20	18.00	33.00	41.00	32.00
DABP19525-1633	1"-11	M33X2	42.00	53.00	22.20	23.00	33.00	41.00	41.00
DABP19525-2042	1-1/4"-11	M42X2	50.00	58.00	28.60	30.00	41.00	50.00	50.00
DABP19525-2448	1-1/2"-11	M48X2	53.50	67.00	33.30	36.00	48.00	55.00	55.00

German Technology Equipment

New-Standard

DABP19305

90° Adjustable Elbow BSPP Swivel Female 60° - SAE Male + O Ring

D

A

BP

1

9

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Swivel Female

90° Elbow

SAE UNF

Male + O Ring

DME&JDE Code:

DABP19305

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

90° Elbow

Connection Type:


Adjustable Male × Swivel Female

Thread Types:

BSPP 60° × SAE UNF + O Ring

Sealing Method:

O Ring

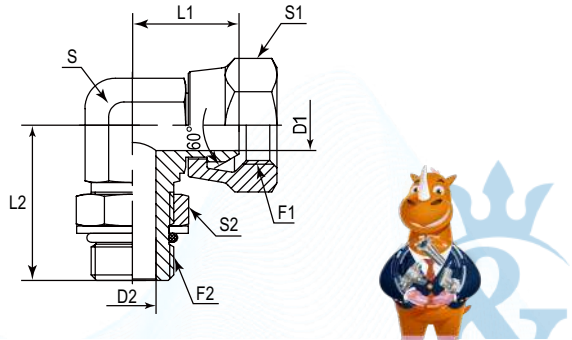

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S2
#	BSPP	UNF	mm	mm	mm	mm	mm	mm	mm
DABP19305-0404	1/4"-19	7/16"-20	21.60	27.20	4.70	4.37	11.00	19.00	17.00
DABP19305-0406	1/4"-19	9/16"-18	21.60	31.80	4.70	7.54	14.00	19.00	19.00
DABP19305-0606	3/8"-19	9/16"-18	25.60	33.30	7.90	7.54	19.00	22.00	19.00
DABP19305-0608	3/8"-19	3/4"-16	25.60	36.80	7.90	9.93	19.00	22.00	22.00
DABP19305-0806	1/2"-14	9/16"-18	29.80	33.50	11.10	7.54	22.00	27.00	19.00
DABP19305-0808	1/2"-14	3/4"-16	29.80	36.80	11.10	9.93	22.00	27.00	22.00
DABP19305-0810	1/2"-14	7/8"-14	31.20	44.00	11.10	12.29	22.00	27.00	27.00
DABP19305-0812	1/2"-14	1 1/16"-12	29.80	51.00	11.10	15.47	27.00	27.00	32.00
DABP19305-1008	5/8"-14	3/4"-16	31.20	39.50	12.00	9.93	22.00	30.00	22.00
DABP19305-1208	3/4"-14	3/4"-16	35.30	40.50	16.70	9.93	27.00	32.00	22.00
DABP19305-1212	3/4"-14	1 1/16"-12	35.30	51.00	16.70	15.47	27.00	32.00	27.00
DABP19305-1612	1"-11	1 1/16"-12	35.30	54.50	22.20	15.47	33.00	41.00	32.00
DABP19305-1616	1"-11	1 5/16"-12	45.50	54.50	22.20	21.44	33.00	41.00	41.00
DABP19305-2020	1 1/4"-11	1 5/8"-12	50.00	59.50	28.60	27.38	41.00	50.00	50.00
DABP19305-2424	1 1/2"-11	1 7/8"-12	53.50	63.00	33.30	33.32	48.00	55.00	55.00

German Technology Equipment

New-Standard

DABPF905F

90° Elbow Connector BSPP Fixed Female - BSPP Fixed Female

D

Company

DME

A

Product Range

Adaptor

BP

Thread Types

BSPP

F

Connection Type

Female

9

Adaptor Structure

90° Elbow

05

Thread Types

BSPP

F

Connection Type

Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABPF905F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Fixed Female × Fixed Female

Thread Types:

BSPP × BSPP

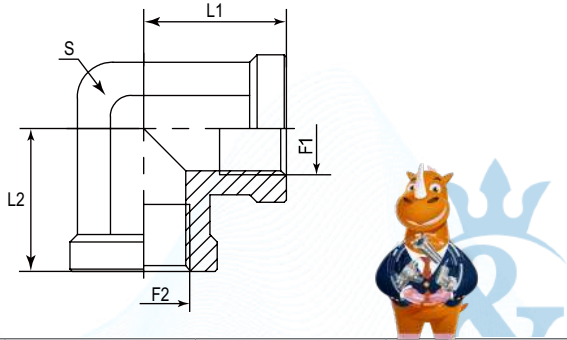

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	S
#	BSPP	BSPP	mm	mm	mm
DABPF905F-0202	1/8"-28	1/8"-28	20.00	20.00	14.00
DABPF905F-0404	1/4"-19	1/4"-19	22.00	22.00	19.00
DABPF905F-0606	3/8"-19	3/8"-19	26.00	26.00	22.00
DABPF905F-0808	1/2"-14	1/2"-14	32.00	32.00	27.00
DABPF905F-1212	3/4"-14	3/4"-14	36.00	36.00	33.00
DABPF905F-1616	1"-11	1"-11	42.00	42.00	41.00
DABPF905F-2020	1-1/4"	1-1/4"	43.00	43.00	48.00
DABPF905F-2424	1-1/2"	1-1/2"	53.00	53.00	65.00
DABPF905F-3232	2"-11	2"-11	60.00	60.00	72.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DABP19081

90° Elbow BSPP Swivel Female 60° - BSPP Swivel Female 60°

D

Company

DME

A

Product Range

Adaptor

BP

Thread Types

BSPP

1

Connection Type

Swivel Female

9

Adaptor Structure

90° Elbow

081

Connection Type

BSPP Swivel Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABP19081

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Swivel Female × Swivel Female

Thread Types:

BSPP 60° × BSPP 60°

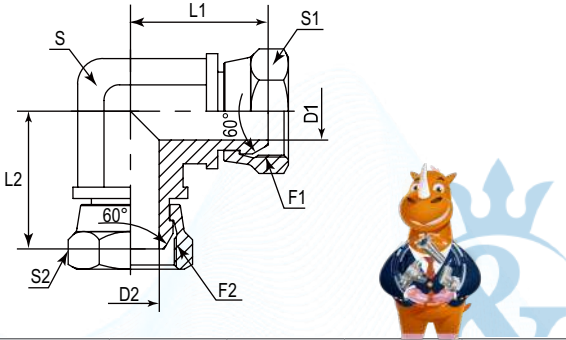

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S2
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm
DABP19081-0202	1/8"-28	1/8"-28	22.50	22.50	3.50	3.50	11.00	14.00	14.00
DABP19081-0404	1/4"-19	1/4"-19	24.50	24.50	4.70	4.70	14.00	19.00	19.00
DABP19081-0606	3/8"-19	3/8"-19	27.20	27.20	7.90	7.90	19.00	22.00	22.00
DABP19081-0808	1/2"-14	1/2"-14	31.50	31.50	11.10	11.10	22.00	27.00	27.00
DABP19081-1212	3/4"-14	3/4"-14	37.90	37.90	16.70	16.70	27.00	32.00	32.00
DABP19081-1616	1"-11	1"-11	46.00	46.00	22.20	22.20	33.00	41.00	41.00
DABP19081-2020	1-1/4"-11	1-1/4"-11	50.00	50.00	26.00	26.00	41.00	50.00	50.00
DABP19081-2424	1-1/2"-11	1-1/2"-11	55.00	55.00	33.30	33.30	48.00	55.00	55.00
DABP19081-3232	2"-11	2"-11	65.00	65.00	45.00	45.00	65.00	70.00	70.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DABP19081-B

90° Swept Elbow BSPP Swivel Female 60° - BSPP Swivel Female 60°

D

A

BP

1

9

081

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Elbow Type

DME

Adaptor

BSPP

Swivel Female

90° Elbow

BSPP Swivel Female

Swept Elbow

 German Technology Equipment



New-Standard

DME&JDE Code:

DABP19081-B

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Swivel Female × Swivel Female

Thread Types:

BSPP 60° × BSPP 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S1	S2
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABP19081-0404B	1/4"-19	1/4"-19	30.00	30.00	4.00	4.00	19.00	19.00
DABP19081-0606B	3/8"-19	3/8"-19	36.50	36.50	7.00	7.00	22.00	22.00
DABP19081-0808B	1/2"-14	1/2"-14	45.00	45.00	10.00	10.00	27.00	27.00
DABP19081-1010B	5/8"-14	5/8"-14	53.00	53.00	12.00	12.00	30.00	30.00
DABP19081-1212B	3/4"-14	3/4"-14	58.00	58.00	15.00	15.00	32.00	32.00
DABP19081-1616B	1"-11	1"-11	73.00	73.00	19.00	19.00	41.00	41.00
DABP19081-2020B	1-1/4"-11	1-1/4"-11	92.00	92.00	26.00	26.00	50.00	50.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABTF907F

90° Elbow BSPT Fixed Female - BSPT Fixed Female

D

A

BT

F

9

07

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

90° Elbow

BSPT

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTF907F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Fixed Female × Fixed Female

Thread Types:

BSPT × BSPT



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	S
#	BSPT	BSPT	mm	mm	mm
DABTF907F-0202	1/8"-28	1/8"-28	16.80	16.80	14.28
DABTF907F-0404	1/4"-19	1/4"-19	22.50	22.50	19.00
DABTF907F-0606	3/8"-19	3/8"-19	26.00	26.00	22.00
DABTF907F-0808	1/2"-14	1/2"-14	31.00	31.00	27.00
DABTF907F-1212	3/4"-14	3/4"-14	34.50	34.50	33.00
DABTF907F-1616	1"-11	1"-11	41.20	41.20	41.00
DABTF907F-2020	1-1/4"-11	1-1/4"-11	43.20	43.20	48.00
DABTF907F-2424	1-1/2"-11	1-1/2"-11	53.00	53.00	65.00
DABTF907F-3232	2"-11	2"-11	62.00	62.00	71.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABTM907F

90° Elbow BSPT Male 60° - BSPT Fixed Female

D

A

BT

M

9

07

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

90° Elbow

BSPT

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DABTM907F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


90° Elbow

Connection Type:

Male × Fixed Female

Thread Types:

BSPT 60° × BSPT

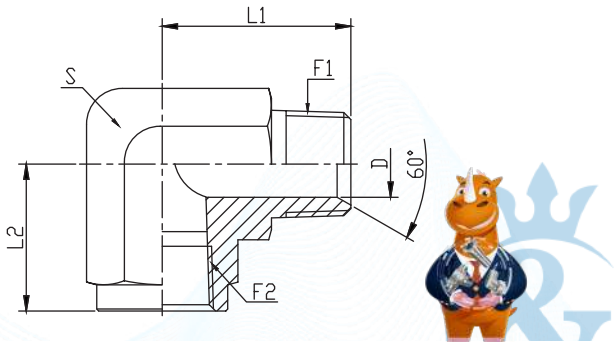

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	BSPT	BSPT	mm	mm	mm	mm
DABTM907F-0202	1/8"-28	1/8"-28	19.80	16.80	4.50	14.00
DABTM907F-0404	1/4"-19	1/4"-19	27.70	22.40	6.00	19.00
DABTM907F-0606	3/8"-19	3/8"-19	31.00	25.90	9.00	22.00
DABTM907F-0808	1/2"-14	1/2"-14	37.30	31.20	12.00	27.00
DABTM907F-1212	3/4"-14	3/4"-14	40.40	34.50	16.70	33.00
DABTM907F-1616	1"-11	1"-11	50.00	41.20	22.20	41.00
DABTM907F-2020	1 1/4"-11	1 1/4"-11	61.00	43.20	28.60	48.00
DABTM907F-2424	1 1/2"-11	1 1/2"-11	67.10	52.80	33.30	65.00
DABTM907F-3232	2"-11	2"-11	75.00	62.00	46.00	71.00



Certificate:

DABPMT05M

Branch Tee Connector BSPP Male 60° - BSPP Male 60°

D

A

BP

M

T

05

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Branch Tee

BSPP

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DABPMT05M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Branch Tee

Connection Type:

Male × Male × Male

Thread Types:

BSPP 60° × BSPP 60° × BSPP 60°

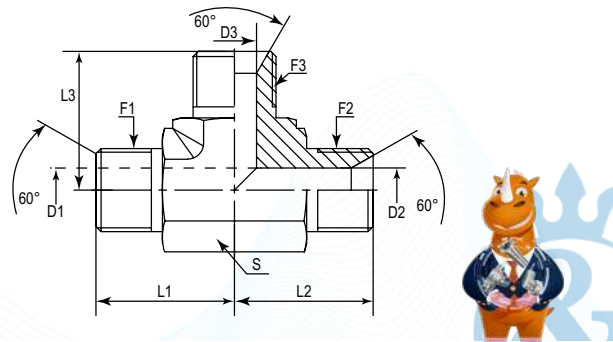

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm
DABPMT05M-0202	1/8"-28	1/8"-28	1/8"-28	20.50	20.50	20.50	3.50	3.50	3.50	11
DABPMT05M-0404	1/4"-19	1/4"-19	1/4"-19	27.00	27.00	27.00	4.70	4.70	4.70	14
DABPMT05M-0606	3/8"-19	3/8"-19	3/8"-19	29.00	29.00	29.00	7.90	7.90	7.90	19
DABPMT05M-0808	1/2"-14	1/2"-14	1/2"-14	35.00	35.00	35.00	11.10	11.10	11.10	22
DABPMT05M-1010	5/8"-14	5/8"-14	5/8"-14	37.00	37.00	37.00	14.30	14.30	14.30	27
DABPMT05M-1212	3/4"-14	3/4"-14	3/4"-14	43.00	43.00	43.00	16.70	16.70	16.70	27
DABPMT05M-121208	3/4"-14	3/4"-14	1/2"-14	43.00	43.00	40.00	16.70	16.70	11.10	27
DABPMT05M-1616	1"-11	1"-11	1"-11	48.00	48.00	48.00	22.20	22.20	22.20	33
DABPMT05M-161208	1"-11	3/4"-14	1/2"-14	46.00	44.50	44.50	22.20	16.70	11.10	33
DABPMT05M-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	51.00	51.00	51.00	28.60	28.60	28.60	41
DABPMT05M-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	60.50	60.50	60.50	33.30	33.30	33.30	48
DABPMT05M-3232	2"-11	2"-11	2"-11	75.00	75.00	75.00	46.00	46.00	46.00	65



Certificate:

DABPMT081-SQ

Branch Tee Connector Square BSPP Male 60° - BSPP Swivel Female 60°

D

A

BP

M

T

081

SQ

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Body Type

DME

Adaptor

BSPP

Male

Branch Tee

Swivel Female

Square

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABPMT081-SQ

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Branch Tee

Connection Type:

Male × Male × Swivel Female

Thread Types:

BSPP 60° × BSPP 60° × BSPP 60°

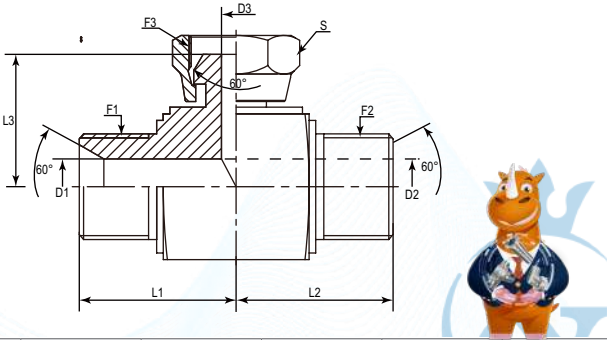

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPMT081-0404SQ	1/4"-19	1/4"-19	1/4"-19	22.50	22.50	22.00	4.70	4.70	4.70
DABPMT081-0606SQ	3/8"-19	3/8"-19	3/8"-19	26.00	26.00	25.00	7.90	7.90	7.90
DABPMT081-0808SQ	1/2"-14	1/2"-14	1/2"-14	31.80	31.80	28.50	11.10	11.10	11.10
DABPMT081-1212SQ	3/4"-14	3/4"-14	3/4"-14	35.00	35.00	34.00	16.70	16.70	16.70
DABPMT081-1616SQ	1"-11	1"-11	1"-11	44.00	44.00	41.20	22.20	22.20	22.20
DABPMT081-2020SQ	1-1/4"-11	1-1/4"-11	1-1/4"-11	50.00	50.00	48.00	28.60	28.60	28.60

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA

CE

UK CA

DABPMT07M

Branch Tee Connector BSPP Male 60° - BSPT Male 60°

D

A

BP

M

T

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Branch Tee

BSPT

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABPMT07M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Branch Tee

Connection Type:

Male × Male × Male

Thread Types:

BSPP 60° × BSPP 60° × BSPT 60°

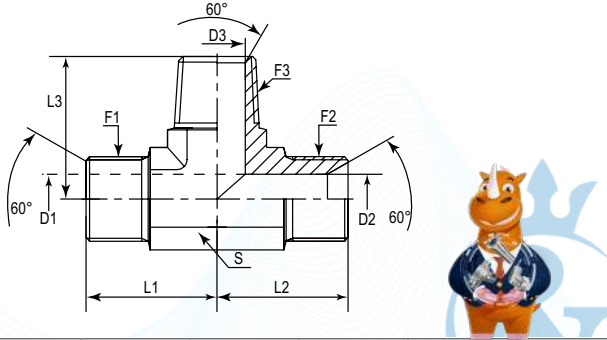

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S
#	BSPP	BSPP	BSPT	mm	mm	mm	mm	mm	mm	mm
DABPMT07M-0202	1/8"-28	1/8"-28	1/8"-28	18.50	18.50	18.50	3.50	3.50	4.50	11
DABPMT07M-0402	1/4"-28	1/4"-28	1/8"-28	27.00	27.00	23.00	4.70	4.70	4.50	14
DABPMT07M-0404	1/4"-19	1/4"-19	1/4"-19	27.00	27.00	27.00	4.70	4.70	6.00	14
DABPMT07M-0606	3/8"-19	3/8"-19	3/8"-19	29.00	29.00	31.00	7.90	7.90	9.00	19
DABPMT07M-0806	1/2"-14	1/2"-14	3/8"-19	34.00	34.00	33.00	11.10	11.10	9.00	22
DABPMT07M-0808	1/2"-14	1/2"-14	1/2"-14	34.00	34.00	37.50	11.10	11.10	12.00	22
DABPMT07M-1008	5/8"-14	5/8"-14	1/2"-14	38.00	38.00	40.00	14.30	14.30	12.00	27
DABPMT07M-1212	3/4"-14	3/4"-14	3/4"-14	40.00	40.00	40.00	16.70	16.70	16.70	27
DABPMT07M-1616	1"-11	1"-11	1"-11	45.00	45.00	50.00	22.20	22.20	22.20	33
DABPMT07M-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	52.00	52.00	56.00	28.60	28.60	28.60	41
DABPMT07M-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	59.00	59.00	67.00	33.30	33.30	33.30	48
DABPMT07M-3232	2"-11	2"-11	2"-11	75.00	75.00	75.00	46.00	46.00	45.00	65

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA

CE

UK CA

DABPMT28M

Branch Tee Connector BSPP Male 60° - NPTF Male 60°

D

A

BP

M

T

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Branch Tee

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPMT28M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Branch Tee

Connection Type:

Male × Male × Male

Thread Types:

BSPP 60° × BSPP 60° × NPTF 60°

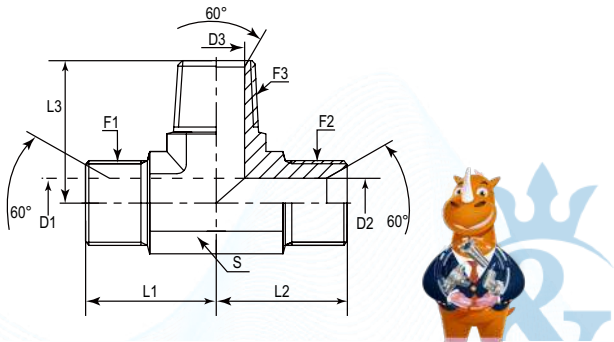

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S
#	BSPP	BSPP	NPTF	mm	mm	mm	mm	mm	mm	mm
DABPMT28M-0202	1/8"-28	1/8"-28	1/8"-27	18.50	18.50	18.50	3.50	3.50	4.78	11
DABPMT28M-0402	1/4"-28	1/4"-28	1/8"-27	27.00	27.00	23.00	4.70	4.70	4.78	14
DABPMT28M-0404	1/4"-19	1/4"-19	1/4"-18	27.00	27.00	27.70	4.70	4.70	7.14	14
DABPMT28M-0606	3/8"-19	3/8"-19	3/8"-18	29.00	29.00	31.00	7.90	7.90	10.31	19
DABPMT28M-0806	1/2"-14	1/2"-14	3/8"-18	34.00	34.00	33.00	11.10	11.10	10.31	22
DABPMT28M-0808	1/2"-14	1/2"-14	1/2"-14	34.00	34.00	37.50	11.10	11.10	13.49	22
DABPMT28M-1008	5/8"-14	5/8"-14	1/2"-14	38.00	38.00	40.00	14.30	14.30	13.49	27
DABPMT28M-1212	3/4"-14	3/4"-14	3/4"-14	40.00	40.00	40.40	16.70	16.70	18.26	27
DABPMT28M-1616	1"-11	1"-11	1"-11-1/2	45.00	45.00	50.00	22.20	22.20	23.83	33
DABPMT28M-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11-1/2	52.00	52.00	60.50	28.60	28.60	31.75	41
DABPMT28M-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11-1/2	59.00	59.00	67.10	33.30	33.30	38.10	48
DABPMT28M-3232	2"-11	2"-11	2"-11-1/2	75.00	75.00	76.20	46.00	46.00	49.23	65

DABPML07M

Run Tee Connector BSPP Male 60° - BSPT Male 60°

D

A

BP

M

L

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Run Tee

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPML07M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Run Tee

Connection Type:

Male × Male × Male

Thread Types:

BSPP 60° × BSPT 60° × BSPP 60°

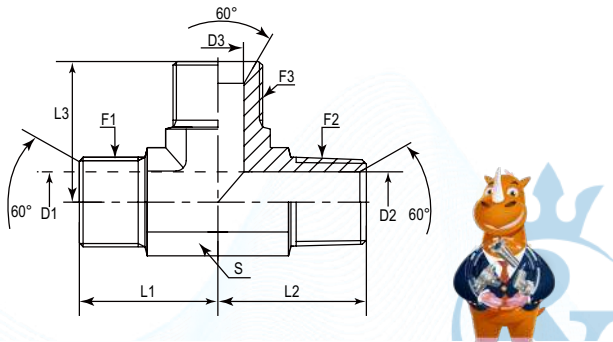

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S
#	BSPP	BSPT	BSPP	mm	mm	mm	mm	mm	mm	mm
DABPML07M-0202	1/8"-28	1/8"-28	1/8"-28	18.50	18.50	18.50	3.50	4.50	3.50	11
DABPML07M-0402	1/4"-28	1/8"-28	1/4"-28	27.00	23.00	27.00	4.70	4.50	4.70	14
DABPML07M-0404	1/4"-19	1/4"-19	1/4"-19	27.00	27.00	27.00	4.70	6.00	4.70	14
DABPML07M-0606	3/8"-19	3/8"-19	3/8"-19	29.00	31.00	29.00	7.90	9.00	7.90	19
DABPML07M-0806	1/2"-14	3/8"-19	1/2"-14	34.00	33.00	34.00	11.10	9.00	11.10	22
DABPML07M-0808	1/2"-14	1/2"-14	1/2"-14	34.00	37.50	34.00	11.10	12.00	11.10	22
DABPML07M-1008	5/8"-14	1/2"-14	5/8"-14	38.00	40.00	38.00	14.30	12.00	14.30	27
DABPML07M-1212	3/4"-14	3/4"-14	3/4"-14	40.00	40.00	40.00	16.70	16.70	16.70	27
DABPML07M-1216	3/4"-14	1"-11	3/4"-14	41.00	40.50	41.00	16.50	16.50	16.50	33
DABPML07M-1612	1"-11	3/4"-14	1"-11	43.00	43.00	43.00	22.20	16.70	22.20	33
DABPML07M-1616	1"-11	1"-11	1"-11	45.00	50.00	45.00	22.20	22.20	22.20	33
DABPML07M-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	52.00	56.00	52.00	28.60	28.60	28.60	41
DABPML07M-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	59.00	67.00	59.00	33.30	33.30	33.30	48
DABPML07M-3232	2"-11	2"-11	2"-11	75.00	75.00	75.00	46.00	45.00	46.00	65

DABPML28M

Run Tee Connector BSPP Male 60° - NPTF Male 60°

D

A

BP

M

L

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Run Tee

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPML28M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Run Tee

Connection Type:

Male × Male × Male

Thread Types:

BSPP 60° × BSPP 60° × NPTF 60°

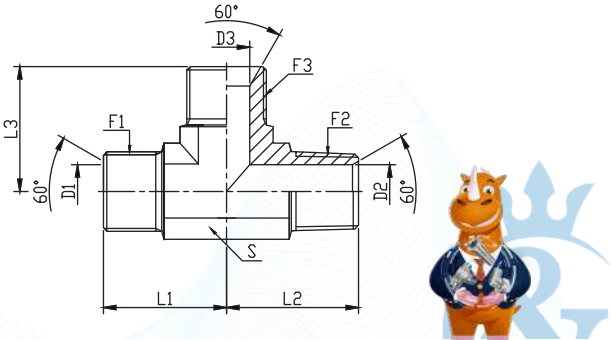

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S
#	BSPP	NPTF	BSPP	mm	mm	mm	mm	mm	mm	mm
DABPML28M-0202	1/8"-28	1/8"-27	1/8"-28	18.50	18.50	18.50	3.50	4.78	3.50	11
DABPML28M-0402	1/4"-28	1/8"-27	1/4"-28	27.00	23.00	27.00	4.70	4.78	4.70	14
DABPML28M-0404	1/4"-19	1/4"-18	1/4"-19	27.00	27.70	27.00	4.70	7.14	4.70	14
DABPML28M-0606	3/8"-19	3/8"-18	3/8"-19	29.00	31.00	29.00	7.90	10.31	7.90	19
DABPML28M-0806	1/2"-14	3/8"-18	1/2"-14	34.00	33.00	34.00	11.10	10.31	11.10	22
DABPML28M-0808	1/2"-14	1/2"-14	1/2"-14	34.00	37.50	34.00	11.10	13.49	11.10	22
DABPML28M-1008	5/8"-14	1/2"-14	5/8"-14	38.00	40.00	38.00	14.30	13.49	14.30	27
DABPML28M-1212	3/4"-14	3/4"-14	3/4"-14	40.00	40.40	40.00	16.70	18.26	16.70	27
DABPML28M-1616	1"-11	1"-11-1/2	1"-11	45.00	50.00	45.00	22.20	23.83	22.20	33
DABPML28M-2020	1-1/4"-11	1-1/4"-11-1/2	1-1/4"-11	52.00	60.50	52.00	28.60	31.75	28.60	41
DABPML28M-2424	1-1/2"-11	1-1/2"-11-1/2	1-1/2"-11	59.00	67.10	59.00	33.30	38.10	33.30	48
DABPML28M-3232	2"-11	2"-11-1/2	2"-11	75.00	76.20	75.00	46.00	49.23	46.00	65

DABPFT07M

Branch Tee Connector BSPP Fixed Female - BSPT Male 60°

D

A

BP

F

T

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

Branch Tee

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPFT07M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Branch Tee

Connection Type:

Fixed Female × Fixed Female × Male

Thread Types:

BSPP 60° × BSPT 60° × BSPP 60°

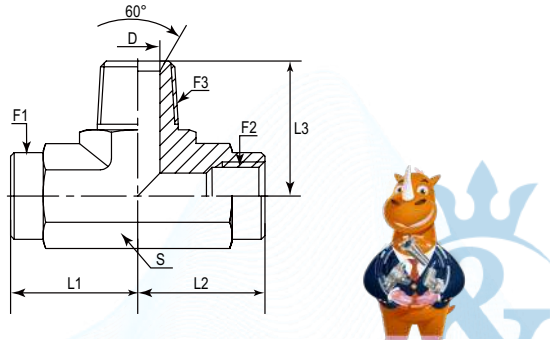

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D	S
#	BSPP	BSPP	BSPT	mm	mm	mm	mm	mm
DABPFT07M-0202	1/8"-28	1/8"-28	1/8"-28	17.00	17.00	20.00	4.50	14
DABPFT07M-0404	1/4"-19	1/4"-19	1/4"-19	22.50	22.50	28.00	6.00	19
DABPFT07M-0606	3/8"-19	3/8"-19	3/8"-19	26.00	26.00	31.00	9.00	22
DABPFT07M-0808	1/2"-14	1/2"-14	1/2"-14	31.00	31.00	37.50	12.00	27
DABPFT07M-1212	3/4"-14	3/4"-14	3/4"-14	34.50	34.50	40.00	16.70	33
DABPFT07M-1616	1"-11	1"-11	1"-11	41.00	41.00	50.00	22.20	41
DABPFT07M-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	43.00	43.00	60.00	28.60	48
DABPFT07M-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	53.00	53.00	67.00	33.30	65
DABPFT07M-3232	2"-11	2"-11	2"-11	60.50	60.50	76.00	45.00	70

DABPFT28M

Branch Tee Connector BSPP Fixed Female - NPTF Male 60°

D

A

BP

F

T

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

Branch Tee

NPTF

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DABPFT28M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Branch Tee

Connection Type:

Fixed Female × Fixed Female × Male

Thread Types:

BSPP 60° × BSPP 60° × NPTF 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D	S
#	BSPP	BSPP	NPTF	mm	mm	mm	mm	mm
DABPFT28M-0202	1/8"-28	1/8"-28	1/8"-27	17.00	17.00	20.00	4.78	14
DABPFT28M-0404	1/4"-19	1/4"-19	1/4"-18	22.50	22.50	28.00	7.14	19
DABPFT28M-0606	3/8"-19	3/8"-19	3/8"-18	26.00	26.00	31.00	10.31	22
DABPFT28M-0808	1/2"-14	1/2"-14	1/2"-14	31.00	31.00	37.50	13.49	27
DABPFT28M-1212	3/4"-14	3/4"-14	3/4"-14	34.50	34.50	40.00	18.26	33
DABPFT28M-1616	1"-11	1"-11	1"-11-1/2	41.00	41.00	50.00	23.83	41
DABPFT28M-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11-1/2	43.00	43.00	60.00	31.75	48
DABPFT28M-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11-1/2	53.00	53.00	67.00	38.10	65
DABPFT28M-3232	2"-11	2"-11	2"-11-1/2	60.50	60.50	76.00	49.23	70



Certificate:

DABPFL07M

Run Tee Connector BSPP Fixed Female - BSPT Male 60°

D

A

BP

F

L

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

Run Tee

BSPT

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DABPFL07M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Run Tee

Connection Type:

Fixed Female × Fixed Female × Male

Thread Types:

BSPP 60° × BSPT 60° × BSPP 60°

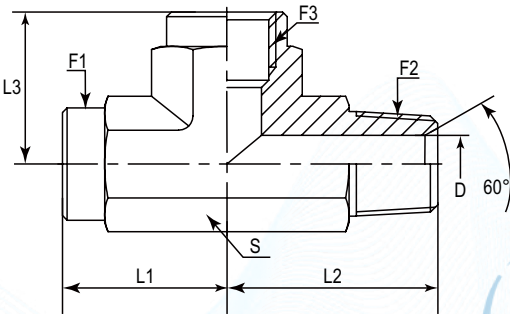

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D	S
#	BSPP	BSPT	BSPP	mm	mm	mm	mm	mm
DABPFL07M-0202	1/8"-28	1/8"-28	1/8"-28	17.00	20.00	17.00	4.50	14
DABPFL07M-0404	1/4"-19	1/4"-19	1/4"-19	22.50	28.00	22.50	6.00	19
DABPFL07M-0606	3/8"-19	3/8"-19	3/8"-19	26.00	31.00	26.00	9.00	22
DABPFL07M-0808	1/2"-14	1/2"-14	1/2"-14	31.00	37.50	31.00	12.00	27
DABPFL07M-1212	3/4"-14	3/4"-14	3/4"-14	34.50	40.00	34.50	16.70	33
DABPFL07M-1616	1"-11	1"-11	1"-11	41.00	50.00	41.00	22.20	41
DABPFL07M-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	43.00	60.00	43.00	28.60	48
DABPFL07M-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	53.00	67.00	53.00	33.30	65
DABPFL07M-3232	2"-11	2"-11	2"-11	60.50	76.00	60.50	45.00	70



Certificate:

DABPFL28M

Run Tee Connector BSPP Fixed Female - NPTF Male 60°

D

A

BP

F

L

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

Run Tee

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPFL28M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Run Tee

Connection Type:

Fixed Female × Fixed Female × Male

Thread Types:

BSPP 60° × NPTF 60° × BSPP 60°

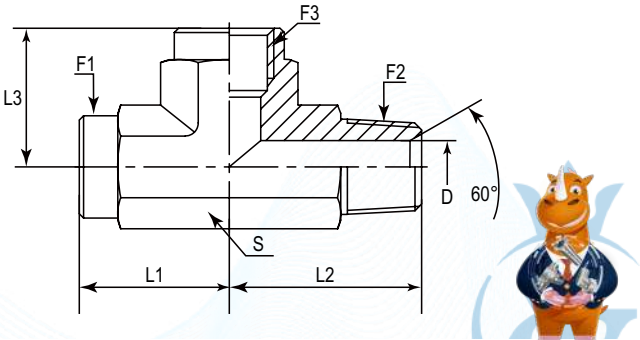

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D	S
#	BSPP	NPTF	BSPP	mm	mm	mm	mm	mm
DABPFL28M-0202	1/8"-28	1/8"-27	1/8"-28	17.00	20.00	17.00	4.78	14
DABPFL28M-0404	1/4"-19	1/4"-18	1/4"-19	22.50	28.00	22.50	7.14	19
DABPFL28M-0606	3/8"-19	3/8"-18	3/8"-19	26.00	31.00	26.00	10.31	22
DABPFL28M-0808	1/2"-14	1/2"-14	1/2"-14	31.00	37.50	31.00	13.49	27
DABPFL28M-1212	3/4"-14	3/4"-14	3/4"-14	34.50	40.00	34.50	18.26	33
DABPFL28M-1616	1"-11	1"-11 1/2	1"-11	41.00	50.00	41.00	23.83	41
DABPFL28M-2020	1-1/4"-11	1-1/4"-11-1/2	1-1/4"-11	43.00	60.00	43.00	31.75	48
DABPFL28M-2424	1-1/2"-11	1-1/2"-11-1/2	1-1/2"-11	53.00	67.00	53.00	38.10	65
DABPFL28M-3232	2"-11	2"-11-1/2	2"-11	60.50	76.00	60.50	49.23	70



Certificate:



DABPFT05F

Equal Tee Connector BSPP Fixed Female – BSPP Fixed Female

D

A

BP

F

T

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

Branch Tee

BSPP

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPFT05F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Equal Tee

Connection Type:

Fixed Female × Fixed Female × Fixed Female

Thread Types:

BSPP × BSPP × BSPP

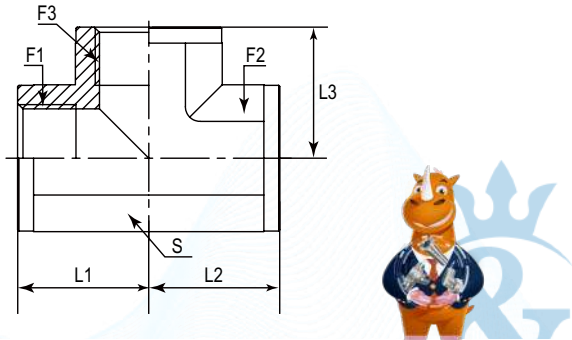

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	S
#	BSPP	BSPP	BSPP	mm	mm	mm	mm
DABPFT05F-0202	1/8"-28	1/8"-28	1/8"-28	20.00	20.00	20.00	14
DABPFT05F-0404	1/4"-19	1/4"-19	1/4"-19	22.00	22.00	22.00	19
DABPFT05F-0606	3/8"-19	3/8"-19	3/8"-19	26.00	26.00	26.00	22
DABPFT05F-0808	1/2"-14	1/2"-14	1/2"-14	32.00	32.00	32.00	27
DABPFT05F-1010	5/8"-14	5/8"-14	5/8"-14	35.00	35.00	35.00	33
DABPFT05F-1212	3/4"-14	3/4"-14	3/4"-14	36.00	36.00	36.00	33
DABPFT05F-1616	1"-11	1"-11	1"-11	42.00	42.00	42.00	41
DABPFT05F-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	48.00	48.00	48.00	48
DABPFT05F-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	53.00	53.00	53.00	65
DABPFT05F-3232	2"-11	2"-11	2"-11	60.00	60.00	60.00	70



Certificate:




DABP1T081

Branch Tee BSPP Swivel Female 60° - BSPP Swivel Female 60°

D	A	BP	1	T	081
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types
DME	Adaptor	BSPP	Male	90° Elbow	BSPT



DME&JDE Code:	DABP1T081
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	Branch Tee
Connection Type:	Swivel Female × Swivel Female × Swivel Female
Thread Types:	BSPP 60° × BSPP 60° × BSPP 60°

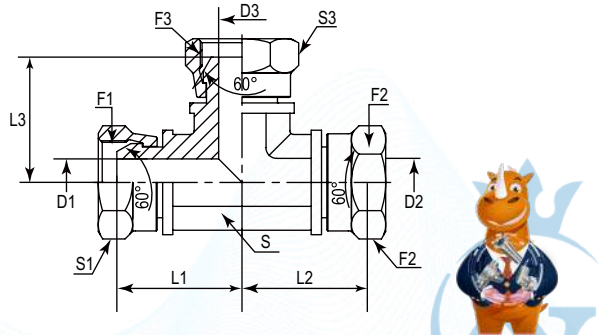

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1	S2	S3
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
DABP1T081-0202	1/8"-28	1/8"-28	1/8"-28	22.50	22.50	22.50	3.50	3.50	3.50	11	14	14	14
DABP1T081-0404	1/4"-19	1/4"-19	1/4"-19	24.50	24.50	24.50	4.70	4.70	4.70	14	19	19	19
DABP1T081-0606	3/8"-19	3/8"-19	3/8"-19	27.50	27.50	27.50	7.90	7.90	7.90	19	22	22	22
DABP1T081-0808	1/2"-14	1/2"-14	1/2"-14	31.50	31.50	31.50	11.10	11.10	11.10	22	27	27	27
DABP1T081-1010	5/8"-14	5/8"-14	5/8"-14	35.00	35.00	35.00	14.30	14.30	14.30	22	30	30	30
DABP1T081-1212	3/4"-14	3/4"-14	3/4"-14	41.50	41.50	41.50	16.70	16.70	16.70	27	32	32	32
DABP1T081-1616	1"-11	1"-11	1"-11	46.00	46.00	46.00	22.20	22.20	22.20	33	41	41	41
DABP1T081-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	51.20	51.20	51.20	28.60	28.60	28.60	41	50	50	50
DABP1T081-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	63.50	63.50	63.50	33.30	33.30	33.30	48	55	55	55
DABP1T081-3232	2"-11	2"-11	2"-11	65.00	65.00	65.00	45.00	45.00	45.00	63	70	70	70


DABPMT305

(1)Branch Adjustable Tee BSPP Male 60° - SAE Male + O Ring

D	A	BP	M	T	30	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPP	Male	Branch Tee	SAE UNF	Male + O Ring



DME&JDE Code:	DABPMT305
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	Branch Tee
Connection Type:	Adjustable Male × Male × Male
Thread Types:	BSPP 60° × BSPP 60° × SAE UNF + O Ring
Thread Types:	O Ring

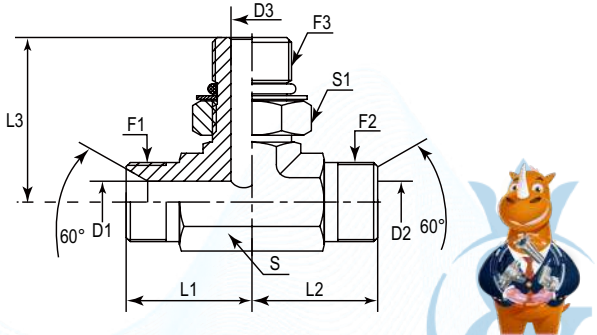

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	BSPP	BSPP	UNF	mm	mm	mm	mm	mm	mm	mm	mm
DABPMT305-0204	1/8"-28	1/8"-28	7/16"-20	22.50	22.50	26.16	3.50	3.50	4.37	11	14.29
DABPMT305-0406	1/4"-28	1/4"-28	9/16"-18	27.00	27.00	31.80	4.70	4.70	7.54	14	17.46
DABPMT305-0608	3/8"-19	3/8"-19	3/4"-16	29.00	29.00	37.00	7.90	7.90	9.93	19	22.22
DABPMT305-0808	1/2"-14	1/2"-14	3/4"-16	34.00	34.00	39.10	11.10	11.10	9.93	22	22.22
DABPMT305-0810	1/2"-14	1/2"-14	7/8"-14	34.00	34.00	43.20	11.10	11.10	12.29	22	25.40
DABPMT305-1212	3/4"-14	3/4"-14	1-1/16"-12	42.00	42.00	49.30	16.70	16.70	15.47	27	31.75
DABPMT305-1616	1"-11	1"-11	1-5/16"-12	46.00	46.00	52.10	22.20	22.20	21.44	33	38.10

DABPMT06Q

Branch Adjustable Tee BSPP Male 60° - BSPP Male + O Ring

D

A

BP

M

T

06

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Branch Tee

BSPP

Male + O Ring


German Technology Equipment



New-Standard

DME&JDE Code:
DABPMT06Q

Product Type
Hydraulic adaptor


Standard:
BSP

Structure:
Branch Tee

Connection Type:
Adjustable Male × Male × Male

Thread Types:
BSPP 60° × BSPP 60° × BSPP

Sealing Method:
O Ring

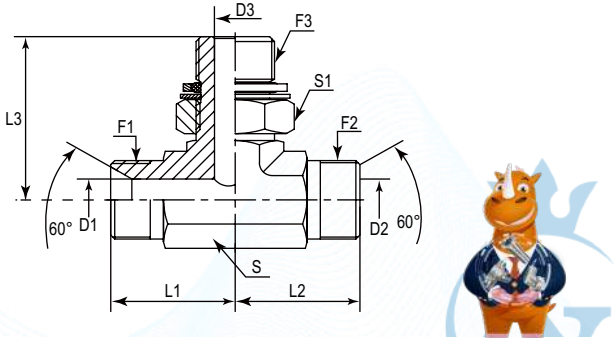

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DABPMT06Q-0202	1/8"-28	1/8"-28	1/8"-28	22.50	22.50	26.00	3.50	3.50	4.40	11	14
DABPMT06Q-0404	1/4"-19	1/4"-19	1/4"-19	27.00	27.00	31.50	4.70	4.70	7.50	14	19
DABPMT06Q-0604	3/8"-19	3/8"-19	1/4"-19	29.00	29.00	35.00	7.90	7.90	7.50	19	19
DABPMT06Q-0606	3/8"-19	3/8"-19	3/8"-19	29.00	29.00	37.00	7.90	7.90	9.00	19	22
DABPMT06Q-0806	1/2"-14	1/2"-14	3/8"-19	34.00	34.00	40.00	11.10	11.10	9.90	22	22
DABPMT06Q-0808	1/2"-14	1/2"-14	1/2"-14	34.00	34.00	43.00	11.10	11.10	12.30	22	27
DABPMT06Q-1208	3/4"-14	3/4"-14	1/2"-14	41.00	41.00	45.00	16.70	16.70	12.30	27	27
DABPMT06Q-1212	3/4"-14	3/4"-14	3/4"-14	41.00	41.00	50.00	16.70	16.70	15.50	27	36
DABPMT06Q-1612	1"-11	1"-11	3/4"-14	46.00	46.00	52.00	22.20	22.20	15.50	33	36
DABPMT06Q-1616	1"-11	1"-11	1"-11	47.00	47.00	54.00	22.20	22.20	21.50	33	41
DABPMT06Q-2016	1-1/4"-11	1-1/4"-11	1"-11	51.00	51.00	57.00	28.60	28.60	21.50	41	41
DABPMT06Q-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	51.00	51.00	58.00	28.60	28.60	27.50	41	50
DABPMT06Q-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	60.00	60.00	61.00	33.30	33.30	33.00	48	55
DABPMT06Q-3232	2"-11	2"-11	2"-11	75.00	75.00	75.00	46.00	46.00	45.00	63.50	70

DABPMT06S

Branch Adjustable Tee BSPP Male 60° - BSPP Male + O Ring

D

A

BP

M

T

06

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Branch Tee

BSPP

Male + O Ring


German Technology Equipment



New-Standard

DME&JDE Code:
DABPMT06S

Product Type
Hydraulic adaptor


Standard:
BSP

Structure:
Branch Tee

Connection Type:
Adjustable Male × Male × Male

Thread Types:
BSPP 60° × BSPP 60° × BSPP

Sealing Method:
O Ring

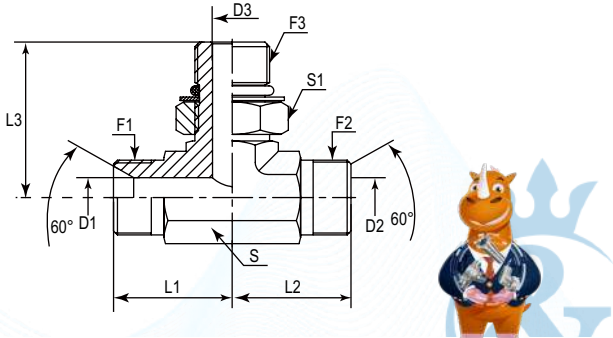

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DABPMT06S-0202	1/8"-28	1/8"-28	1/8"-28	22.50	22.50	26.00	3.50	3.50	4.40	11	14
DABPMT06S-0404	1/4"-19	1/4"-19	1/4"-19	27.00	27.00	31.50	4.70	4.70	7.50	14	19
DABPMT06S-0604	3/8"-19	3/8"-19	1/4"-19	29.00	29.00	35.00	7.90	7.90	7.50	19	19
DABPMT06S-0606	3/8"-19	3/8"-19	3/8"-19	29.00	29.00	37.00	7.90	7.90	9.00	19	22
DABPMT06S-0806	1/2"-14	1/2"-14	3/8"-19	34.00	34.00	40.00	11.10	11.10	9.90	22	22
DABPMT06S-0808	1/2"-14	1/2"-14	1/2"-14	34.00	34.00	43.00	11.10	11.10	12.30	22	27
DABPMT06S-1208	3/4"-14	3/4"-14	1/2"-14	41.00	41.00	45.00	16.70	16.70	12.30	27	27
DABPMT06S-1212	3/4"-14	3/4"-14	3/4"-14	41.00	41.00	50.00	16.70	16.70	15.50	27	36
DABPMT06S-1612	1"-11	1"-11	3/4"-14	46.00	46.00	52.00	22.20	22.20	15.50	33	36
DABPMT06S-1616	1"-11	1"-11	1"-11	47.00	47.00	54.00	22.20	22.20	21.50	33	41
DABPMT06S-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	51.00	51.00	58.00	28.60	28.60	27.50	41	50

DABPMT52Q

Branch Adjustable Tee BSPP Male 60° - Metric Male + O Ring

D

A

BP

M

T

52

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Branch Tee

Metric

Male + O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPMT52Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Branch Tee

Connection Type:


Adjustable Male × Male × Male

Thread Types:

BSPP 60° × BSPP 60° × Metric

Sealing Method:

O Ring

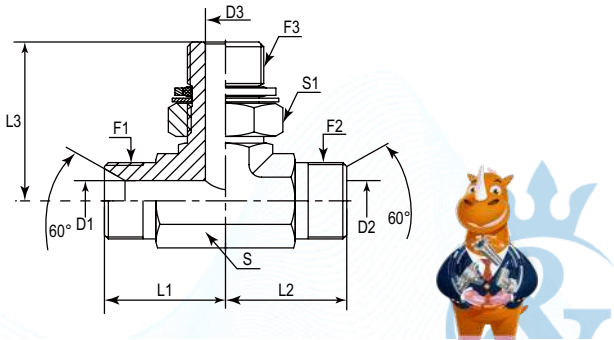

PART NUMBER	F1 (Thread)	F2 (Thread)	F2 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	BSPP	BSPP	METRIC	mm	mm	mm	mm	mm	mm	mm	mm
DABPMT52Q-0210	1/8"-28	1/8"-28	M10X1	22.00	22.00	27.00	3.50	3.50	4.50	11	14
DABPMT52Q-0212	1/8"-28	1/8"-28	M12X1.5	24.00	24.00	31.50	3.50	3.50	6.00	14	17
DABPMT52Q-0412	1/4"-19	1/4"-19	M12X1.5	27.00	27.00	31.50	4.70	4.70	6.00	14	17
DABPMT52Q-0414	1/4"-19	1/4"-19	M14X1.5	27.00	27.00	31.50	4.70	4.70	7.50	14	19
DABPMT52Q-0416	1/4"-19	1/4"-19	M16X1.5	28.00	28.00	37.00	4.70	4.70	9.00	19	22
DABPMT52Q-0614	3/8"-19	3/8"-19	M14X1.5	29.00	29.00	34.00	7.90	7.90	7.50	14	19
DABPMT52Q-0616	3/8"-19	3/8"-19	M16X1.5	29.00	29.00	37.00	7.90	7.90	9.00	19	22
DABPMT52Q-0618	3/8"-19	3/8"-19	M18X1.5	29.00	29.00	38.00	7.90	7.90	11.00	19	24
DABPMT52Q-0816	1/2"-14	1/2"-14	M16X1.5	34.00	34.00	40.00	11.10	11.10	7.00	22	22
DABPMT52Q-0818	1/2"-14	1/2"-14	M18X1.5	34.00	34.00	41.00	11.10	11.10	11.00	22	24
DABPMT52Q-0820	1/2"-14	1/2"-14	M20X1.5	34.00	34.00	43.00	11.10	11.10	12.50	22	27
DABPMT52Q-0822	1/2"-14	1/2"-14	M22X1.5	34.00	34.00	43.00	11.10	11.10	14.00	22	27
DABPMT52Q-1022	5/8"-14	5/8"-14	M22X1.5	37.00	37.00	46.00	14.30	14.30	14.00	22	27
DABPMT52Q-1222	3/4"-14	3/4"-14	M22X1.5	41.00	41.00	46.00	16.70	16.70	14.00	27	27
DABPMT52Q-1226	3/4"-14	3/4"-14	M26X1.5	41.00	41.00	50.00	16.70	16.70	17.00	27	32
DABPMT52Q-1227	3/4"-14	3/4"-14	M27X2	41.00	41.00	50.00	16.70	16.70	18.00	27	32
DABPMT52Q-1627	1"-11	1"-11	M27X2	46.00	46.00	52.00	22.20	22.20	18.00	33	32
DABPMT52Q-1633	1"-11	1"-11	M33X2	46.00	46.00	53.00	22.20	22.20	23.00	33	41
DABPMT52Q-2042	1-1/4"-11	1-1/4"-11	M42X2	51.00	51.00	58.00	28.60	28.60	30.00	41	50
DABPMT52Q-2448	1-1/2"-11	1-1/2"-11	M48X2	59.00	59.00	67.00	33.30	33.30	36.00	48	55

Certificate:



DABPMT525

Branch Adjustable Tee BSPP Male 60° - Metric Male + O Ring

D

A

BP

M

T

52

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Branch Tee

Metric

Male + O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPMT525

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Branch Tee

Connection Type:


Adjustable Male × Male × Male

Thread Types:

BSPP 60° Cone × BSPP 60° Cone × Metric

Sealing Method:

O Ring

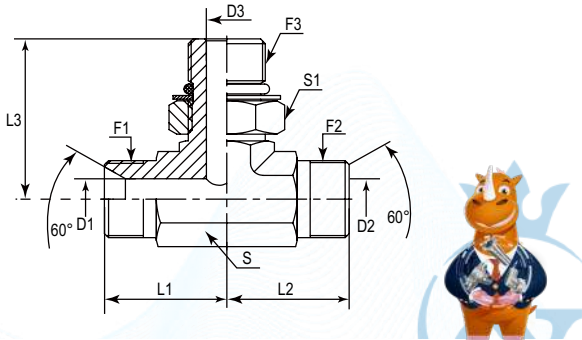

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	BSPP	BSPP	METRIC	mm	mm	mm	mm	mm	mm	mm	mm
DABPMT525-0210	1/8"-28	1/8"-28	M10X1	22.00	22.00	27.00	3.50	3.50	4.50	11	14
DABPMT525-0212	1/8"-28	1/8"-28	M12X1.5	24.00	24.00	31.50	3.50	3.50	6.00	14	17
DABPMT525-0412	1/4"-19	1/4"-19	M12X1.5	27.00	27.00	31.50	4.70	4.70	6.00	14	17
DABPMT525-0414	1/4"-19	1/4"-19	M14X1.5	27.00	27.00	31.50	4.70	4.70	7.50	14	19
DABPMT525-0416	1/4"-19	1/4"-19	M16X1.5	28.00	28.00	37.00	4.70	4.70	9.00	19	22
DABPMT525-0614	3/8"-19	3/8"-19	M14X1.5	29.00	29.00	34.00	7.90	7.90	7.50	14	19
DABPMT525-0616	3/8"-19	3/8"-19	M16X1.5	29.00	29.00	37.00	7.90	7.90	9.00	19	22
DABPMT525-0618	3/8"-19	3/8"-19	M18X1.5	29.00	29.00	38.00	7.90	7.90	11.00	19	24
DABPMT525-0816	1/2"-14	1/2"-14	M16X1.5	34.00	34.00	40.00	11.10	11.10	7.00	22	22
DABPMT525-0818	1/2"-14	1/2"-14	M18X1.5	34.00	34.00	41.00	11.10	11.10	11.00	22	24
DABPMT525-0820	1/2"-14	1/2"-14	M20X1.5	34.00	34.00	43.00	11.10	11.10	12.50	22	27
DABPMT525-0822	1/2"-14	1/2"-14	M22X1.5	34.00	34.00	43.00	11.10	11.10	14.00	22	27
DABPMT525-1022	5/8"-14	5/8"-14	M22X1.5	37.00	37.00	46.00	14.30	14.30	14.00	22	27
DABPMT525-1222	3/4"-14	3/4"-14	M22X1.5	41.00	41.00	46.00	16.70	16.70	14.00	27	27
DABPMT525-1226	3/4"-14	3/4"-14	M26X1.5	41.00	41.00	50.00	16.70	16.70	17.00	27	32
DABPMT525-1227	3/4"-14	3/4"-14	M27X2	41.00	41.00	50.00	16.70	16.70	18.00	27	32
DABPMT525-1627	1"-11	1"-11	M27X2	46.00	46.00	52.00	22.20	22.20	18.00	33	32
DABPMT525-1633	1"-11	1"-11	M33X2	46.00	46.00	53.00	22.20	22.20	23.00	33	41
DABPMT525-2042	1-1/4"-11	1-1/4"-11	M42X2	51.00	51.00	58.00	28.60	28.60	30.00	41	50
DABPMT525-2448	1-1/2"-11	1-1/2"-11	M48X2	59.00	59.00	67.00	33.30	33.30	36.00	48	55

Certificate:



DABPMT05T

Branch Bulkhead Tee Connector BSPP Male 60° - BSPP Male 60°

D

A

BP

M

T

05

T

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Branch Tee

BSPP

Bulkhead

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPMT05T

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Branch Tee

Connection Type:


Adjustable Male × Male × Male

Thread Types:

BSPP 60° × BSPP 60° × BSPP 60°

Other Features:

Bulkhead

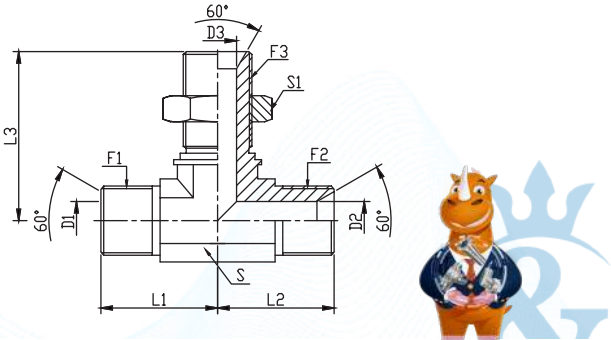

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DABPMT05T-0202	1/8"-28	1/8"-28	1/8"-28	20.00	20.00	37.00	3.50	3.50	3.50	11	14
DABPMT05T-0404	1/4"-19	1/4"-19	1/4"-19	26.00	26.00	44.00	4.70	4.70	4.70	14	19
DABPMT05T-0606	3/8"-19	3/8"-19	3/8"-19	30.00	30.00	49.00	7.90	7.90	7.90	19	22
DABPMT05T-0808	1/2"-14	1/2"-14	1/2"-14	34.00	34.00	55.00	11.10	11.10	11.10	22	27
DABPMT05T-1010	5/8"-14	5/8"-14	5/8"-14	38.00	38.00	59.00	14.30	14.30	14.30	22	32
DABPMT05T-1212	1/2"-14	1/2"-14	1/2"-14	42.00	42.00	63.00	16.70	16.70	16.70	27	32
DABPMT05T-1616	1"-11	1"-11	1"-11	47.00	47.00	69.00	22.20	22.20	22.20	33	41
DABPMT05T-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	52.00	52.00	77.00	28.60	28.60	28.60	41	50
DABPMT05T-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	60.00	60.00	87.00	33.30	33.30	33.30	48	55
DABPMT05T-3232	2"-11	2"-11	2"-11	64.00	64.00	97.00	46.00	46.00	46.00	65	70



Certificate:



DABPML181

Run Tee Connector BSPP Male 60° – BSPP Swivel Female 60°

D

A

BP

M

L

1

81

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Connection Type

DME

Adaptor

BSPP

Male

Run Tee

Swivel Female

BSPP Swivel Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPML181

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Branch Tee

Connection Type:

Male × Swivel Female × Swivel Female

Thread Types:

BSPP 60° × BSPP 60° × BSPP 60°

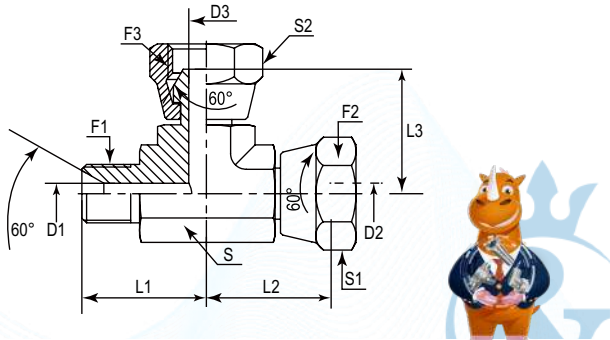

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1	S2
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm	mm	mm
DABPML181-0202	1/8"-28	1/8"-28	1/8"-28	3.50	3.50	3.50	22.50	22.50	22.50	11	14	14
DABPML181-0404	1/4"-19	1/4"-19	1/4"-19	4.70	4.70	4.70	27.00	23.80	23.80	14	19	19
DABPML181-0606	3/8"-19	3/8"-19	3/8"-19	7.90	7.90	7.90	29.00	28.20	28.20	19	22	22
DABPML181-0808	1/2"-14	1/2"-14	1/2"-14	11.10	11.10	11.10	35.00	33.60	33.60	22	27	27
DABPML181-1010	5/8"-14	5/8"-14	5/8"-14	14.30	12.50	12.50	37.00	35.00	35.00	27	30	30
DABPML181-1212	3/4"-14	3/4"-14	3/4"-14	16.70	16.70	16.70	43.00	37.90	37.90	27	32	32
DABPML181-1616	1"-11	1"-11	1"-11	22.20	22.20	22.20	47.00	45.42	45.42	33	41	41
DABPML181-2020	1 1/4"-11	1-1/4"-11	1-1/4"-11	28.60	28.60	28.60	52.30	50.00	50.00	41	50	50



Certificate:



DABPML081

Run Tee Connector BSPP Male 60° - BSPP Swivel Female 60°

D

A

BP

M

L

081

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

DME

Adaptor

BSPP

Male

Run Tee

BSPP Swivel Female

German Technology Equipment

New-Standard

DME&JDE Code:

DABPML081

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Run Tee

Connection Type:

Male × Male × Swivel Female

Thread Types:

BSPP 60° × BSPP 60° × BSPP 60°

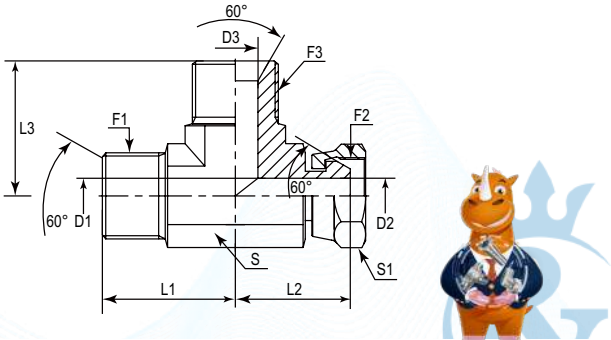

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DABPML081-0202	1/8"-28	1/8"-28	1/8"-28	22.50	22.50	22.50	3.50	3.50	3.50	11	14
DABPML081-0404	1/4"-19	1/4"-19	1/4"-19	27.00	23.80	27.00	4.70	4.70	4.70	14	19
DABPML081-0606	3/8"-19	3/8"-19	3/8"-19	29.00	28.20	29.00	7.90	7.90	7.90	19	22
DABPML081-0808	1/2"-14	1/2"-14	1/2"-14	35.00	33.60	35.00	11.10	11.10	11.10	22	27
DABPML081-1010	5/8"-14	5/8"-14	5/8"-14	37.00	35.00	37.00	14.30	12.50	14.30	27	30
DABPML081-1212	3/4"-14	3/4"-14	3/4"-14	43.00	37.90	43.00	16.70	16.70	16.70	27	32
DABPML081-1616	1"-11	1"-11	1"-11	47.00	45.42	47.00	22.20	22.20	22.20	33	41
DABPML081-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	50.00	50.00	50.00	28.60	28.60	28.60	41	50
DABPML081-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	59.00	54.00	59.00	33.30	30.80	33.30	48	55
DABPML081-3232	2"-11	2"-11	2"-11	70.00	60.00	70.00	46.00	43.50	46.00	63	70



Certificate:

DABPML081-SQ

Run Tee Connector Square BSPP Male 60° - BSPP Swivel Female 60°

D

A

BP

M

L

081

SQ

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Body Type

DME

Adaptor

BSPP

Male

Run Tee

BSPP Swivel Female

Square

German Technology Equipment

New-Standard

DME&JDE Code:

DABPML081-SQ

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Run Tee

Connection Type:

Male × Male × Swivel Female

Thread Types:

BSPP 60° × BSPP 60° × BSPP 60°

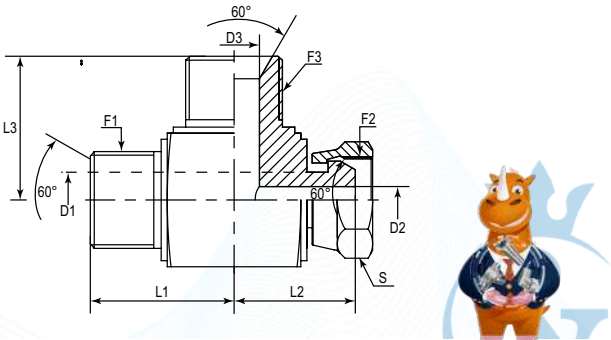

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPML081-0404SQ	1/4"-19	1/4"-19	1/4"-19	22.50	22.00	22.50	4.70	4.70	4.70
DABPML081-0606SQ	3/8"-19	3/8"-19	3/8"-19	25.00	24.50	25.00	7.90	7.90	7.90
DABPML081-0808SQ	1/2"-14	1/2"-14	1/2"-14	31.80	28.50	31.80	11.10	11.10	11.10
DABPML081-1212SQ	3/4"-14	3/4"-14	3/4"-14	35.00	34.00	35.00	16.70	16.70	16.70
DABPML081-1616SQ	1"-11	1"-11	1"-11	44.00	42.00	44.00	22.20	22.20	22.20
DABPML081-2020SQ	1-1/4"-11	1-1/4"-11	1-1/4"-11	50.00	48.00	50.00	28.60	28.60	28.60



Certificate:

DABPFT06Q

Branch Adjustable Tee Connector BSPP Fixed Female - BSPP Male + O Ring

D

A

BP

F

T

06

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

Branch Tee

BSPP

Male + O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DABPFT06Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Branch Tee

Connection Type:


Adjustable Male × Male × Fixed Female

Thread Types:

BSPP 60° Cone × BSPP 60° Cone × BSPP

Sealing Method:

O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D	L1	L2	L3	S	S1
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DABPFT06Q-0202	1/8"-28	1/8"-28	1/8"-28	4.40	16.80	16.80	28.00	14	14
DABPFT06Q-0404	1/4"-19	1/4"-19	1/4"-19	7.50	26.50	26.50	37.00	22	19
DABPFT06Q-0606	3/8"-19	3/8"-19	3/8"-19	9.90	26.00	26.00	39.50	22	22
DABPFT06Q-0808	1/2"-14	1/2"-14	1/2"-14	12.30	32.00	32.00	45.50	27	27
DABPFT06Q-1212	3/4"-14	3/4"-14	3/4"-14	15.50	36.00	36.00	52.00	33	36
DABPFT06Q-1616	1"-11	1"-11	1"-11	21.50	42.00	42.00	57.00	41	41
DABPFT06Q-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	27.50	43.00	43.00	61.00	48	50
DABPFT06Q-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	33.00	53.00	53.00	75.00	65	55
DABPFT06Q-3232	2"-11	2"-11	2"-11	56.80	60.00	60.00	75.00	72	70



Certificate:

DABPML305

Run Adjustable Tee BSPP Male 60° - SAE Male + O Ring + Retaining Ring

D

A

BP

M

L

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Run Tee

SAE UNF

Male + O Ring + Retaining Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DABPML305

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Run Tee

Connection Type:


Adjustable Male × Male

Thread Types:

BSPP 60° × SAE UNF × BSPP 60°

Sealing Method:

O Ring + Retaining Ring

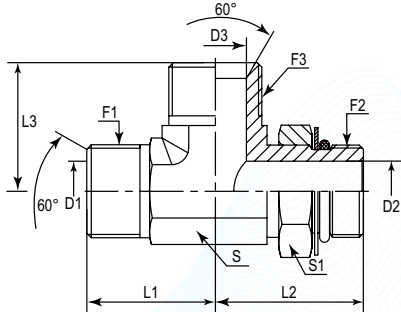

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	BSPP	UNF	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DABPML305-0204	1/8"-28	7/16"-20	1/8"-28	22.50	26.16	22.50	3.50	4.37	3.50	11	14.29
DABPML305-0406	1/4"-28	9/16"-18	1/4"-28	27.00	31.80	27.00	4.70	7.54	4.70	14	17.46
DABPML305-0608	3/8"-19	3/4"-16	3/8"-19	29.00	37.00	29.00	7.90	9.93	7.90	19	22.22
DABPML305-0810	1/2"-14	7/8"-14	1/2"-14	34.00	43.20	34.00	11.10	12.29	11.10	22	25.40
DABPML305-1210	3/4"-14	7/8"-14	3/4"-14	42.00	45.20	42.00	16.70	12.29	16.70	27	25.40
DABPML305-1212	3/4"-14	1-1/16"-12	3/4"-14	42.00	49.30	42.00	16.70	15.47	16.70	27	31.75
DABPML305-1616	1"-11	1-5/16"-12	1"-11	46.00	52.10	46.00	22.20	21.44	22.20	33	38.10



Certificate:


DABPML06Q

Run Adjustable Tee BSPP Male 60° - BSPP Male + O Ring + Retaining Ring

D	A	BP	M	L	06	0
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPP	Male	Run Tee	BSPP	Male + O Ring + Retaining Ring



DME&JDE Code:	DABPML06Q
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	Run Tee
Connection Type:	Adjustable Male x Male x Male
Thread Types:	BSPP 60° x BSPP x BSPP 60°
Sealing Method:	O Ring + Retaining Ring

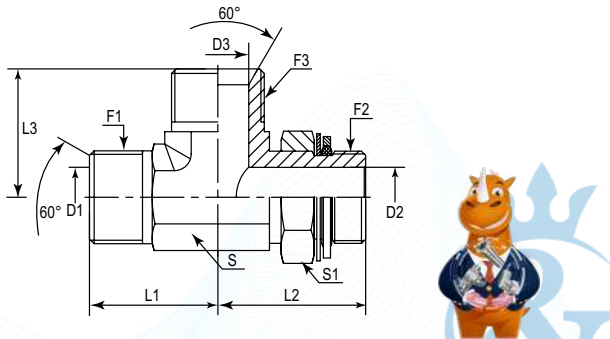

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DABPML06Q-0404	1/4"-19	1/4"-19	1/4"-19	27.00	31.50	27.00	4.70	7.50	4.70	14	19
DABPML06Q-0604	3/8"-19	1/4"-19	3/8"-19	29.00	34.00	29.00	7.90	7.50	7.90	19	19
DABPML06Q-0606	3/8"-19	3/8"-19	3/8"-19	29.00	37.00	29.00	7.90	9.90	7.90	19	22
DABPML06Q-0806	1/2"-14	3/8"-19	1/2"-14	34.00	40.00	34.00	11.10	9.90	11.10	22	22
DABPML06Q-0808	1/2"-14	1/2"-14	1/2"-14	34.00	43.00	34.00	11.10	12.30	11.10	22	27
DABPML06Q-1208	3/4"-14	1/2"-14	3/4"-14	41.00	45.50	41.00	16.70	12.30	16.70	27	27
DABPML06Q-1212	3/4"-14	3/4"-14	3/4"-14	41.00	50.00	41.00	16.70	15.50	16.70	27	36
DABPML06Q-1612	1"-11	3/4"-14	1"-11	46.00	52.00	46.00	22.20	15.50	22.20	33	36
DABPML06Q-1616	1"-11	1"-11	1"-11	46.00	53.00	46.00	22.20	21.50	22.20	33	41
DABPML06Q-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	51.00	58.00	51.00	28.60	27.50	28.60	41	50
DABPML06Q-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	60.00	61.00	60.00	33.30	33.00	33.30	48	55
DABPML06Q-3232	2"-11	2"-11	2"-11	75.00	75.00	75.00	46.00	45.00	46.00	63.50	70


DABTML06Q

Run Adjustable Tee BSPT Male 60° - BSPP Male + O Ring + Retaining Ring

D	A	BP	M	L	06	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPT	Male	Run Tee	BSPP	Male + O Ring + Retaining Ring



DME&JDE Code:	DABTML06Q
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	Run Tee
Connection Type:	Adjustable Male x Male x Male
Thread Types:	BSPP 60° x BSPP x BSPT 60°
Sealing Method:	O Ring + Retaining Ring

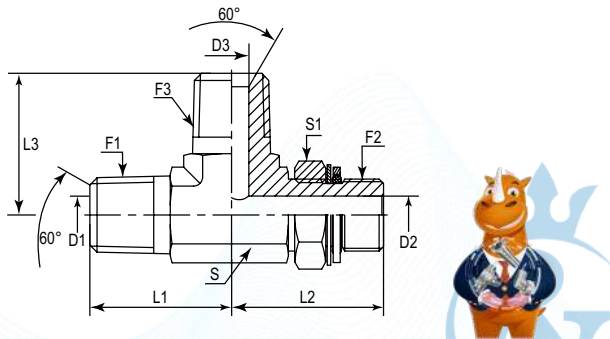

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	BSPT	BSPP	BSPT	mm	mm	mm	mm	mm	mm	mm	mm
DABTML06Q-0404	1/4"-19	1/4"-19	1/4"-19	6.00	7.50	6.00	27.70	31.50	27.70	14	19
DABTML06Q-0606	3/8"-19	3/8"-19	3/8"-19	9.00	9.90	9.00	31.00	36.50	31.00	19	22
DABTML06Q-0808	1/2"-14	1/2"-14	1/2"-14	12.00	12.30	12.00	37.50	43.00	37.50	22	27
DABTML06Q-1010	5/8"-14	5/8"-14	5/8"-14	14.00	14.00	14.00	46.00	39.00	46.00	27	30
DABTML06Q-1212	3/4"-14	3/4"-14	3/4"-14	16.70	15.50	16.70	40.40	49.00	40.40	27	36
DABTML06Q-1616	1"-11	1"-11	1"-11	22.20	21.50	22.20	50.00	52.00	50.00	33	41
DABTML06Q-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	28.60	27.50	28.60	60.50	58.00	60.50	41	50
DABTML06Q-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	33.30	33.00	33.30	67.10	62.00	67.10	48	55

DABPML065

Run Adjustable Tee BSPP Male 60°- BSPP Male + O Ring

D

A

BP

M

L

06

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Run Tee

BSPP

Male + O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPML065

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Run Tee

Connection Type:


Adjustable Male × Male × Male

Thread Types:

BSPP 60° × BSPP × BSPP 60°

Sealing Method:

O Ring

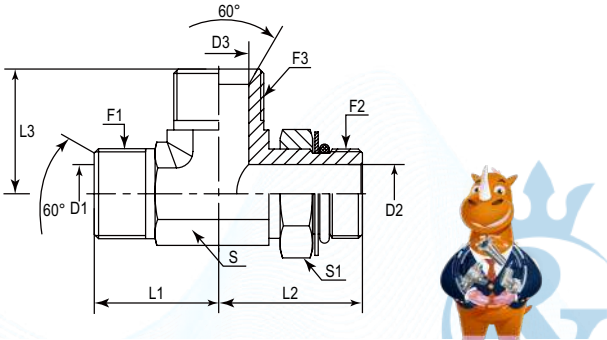

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DABPML065-0202	1/8"-28	1/8"-28	1/8"-28	22.00	26.00	22.00	3.50	4.40	3.50	11	14
DABPML065-0204	1/8"-28	1/4"-19	1/8"-28	24.00	31.50	24.00	3.50	7.50	3.50	14	19
DABPML065-0402	1/4"-19	1/8"-28	1/4"-19	27.00	28.00	27.00	4.70	4.40	4.70	14	14
DABPML065-0404	1/4"-19	1/4"-19	1/4"-19	27.00	31.50	27.00	4.70	7.50	4.70	14	19
DABPML065-0406	1/4"-19	3/8"-19	1/4"-19	27.00	37.00	27.00	4.70	9.90	4.70	19	22
DABPML065-0604	3/8"-19	1/4"-19	3/8"-19	29.00	35.00	29.00	7.90	7.50	7.90	19	19
DABPML065-0606	3/8"-19	3/8"-19	3/8"-19	29.00	37.00	29.00	7.90	9.90	7.90	19	22
DABPML065-0608	3/8"-19	1/2"-14	3/8"-19	32.00	43.00	32.00	7.90	12.30	7.90	22	27
DABPML065-0806	1/2"-14	3/8"-19	1/2"-14	34.00	40.00	34.00	11.10	9.90	11.10	22	22
DABTML06Q-0808	1/2"-14	1/2"-14	1/2"-14	37.50	43.00	37.50	12.00	12.30	12.00	22	27
DABTML06Q-1212	3/4"-14	3/4"-14	3/4"-14	40.40	49.00	40.40	16.70	15.50	16.70	27	36
DABTML06Q-1616	1"-11	1"-11	1"-11	50.00	52.00	50.00	22.20	21.50	22.20	33	41

Certificate:



DABPML52Q

Run Adjustable Tee BSPP Male 60° - Metric Male + O Ring + Retaining Ring

D

A

BP

M

L

52

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Run Tee

Metric

Male + O Ring + Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPML52Q

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:

Run Tee

Connection Type:


Adjustable Male × Male × Male

Thread Types:

BSPP 60° × Metric × BSPP 60°

Sealing Method:

O Ring + Retaining Ring

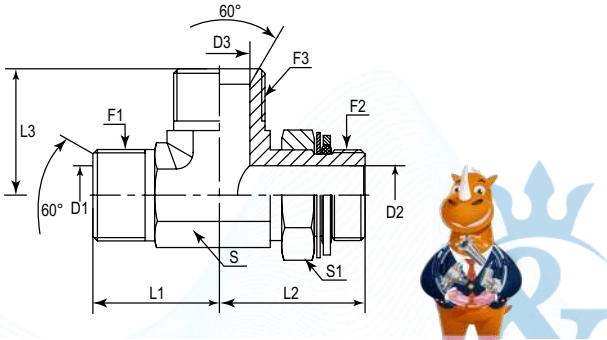

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	BSPP	METRIC	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DABPML52Q-0210	1/8"-28	M10X1	1/8"-28	22.00	27.00	22.00	3.50	4.50	3.50	11	14
DABPML52Q-0212	1/8"-28	M12X1.5	1/8"-28	24.00	31.50	24.00	3.50	6.00	3.50	14	17
DABPML52Q-0412	1/4"-19	M12X1.5	1/4"-19	27.00	31.50	27.00	4.70	6.00	4.70	14	17
DABPML52Q-0414	1/4"-19	M14X1.5	1/4"-19	27.00	31.50	27.00	4.70	7.50	4.70	14	19
DABPML52Q-0416	1/4"-19	M16X1.5	1/4"-19	28.00	37.00	28.00	4.70	9.00	4.70	19	22
DABPML52Q-0614	3/8"-19	M14X1.5	3/8"-19	29.00	34.00	29.00	7.90	7.50	7.90	14	19
DABPML52Q-0616	3/8"-19	M16X1.5	3/8"-19	29.00	37.00	29.00	7.90	9.00	7.90	19	22
DABPML52Q-0618	3/8"-19	M18X1.5	3/8"-19	29.00	38.00	29.00	7.90	11.00	7.90	19	24
DABPML52Q-0816	1/2"-14	M16X1.5	1/2"-14	34.00	40.00	34.00	11.10	7.00	11.10	22	22
DABPML52Q-0818	1/2"-14	M18X1.5	1/2"-14	34.00	41.00	34.00	11.10	11.00	11.10	22	24
DABPML52Q-0820	1/2"-14	M20X1.5	1/2"-14	34.00	43.00	34.00	11.10	12.50	11.10	22	27
DABPML52Q-0822	1/2"-14	M22X1.5	1/2"-14	34.00	43.00	34.00	11.10	14.00	11.10	22	27
DABPML52Q-1022	5/8"-14	M22X1.5	5/8"-14	37.00	46.00	37.00	14.30	14.00	14.30	22	27
DABPML52Q-1222	3/4"-14	M22X1.5	3/4"-14	41.00	46.00	41.00	16.70	14.00	16.70	27	27
DABPML52Q-1226	3/4"-14	M26X1.5	3/4"-14	41.00	50.00	41.00	16.70	17.00	16.70	27	32
DABPML52Q-1227	3/4"-14	M27X2	3/4"-14	41.00	50.00	41.00	16.70	18.00	16.70	27	32
DABPML52Q-1627	1"-11	M27X2	1"-11	46.00	52.00	46.00	22.20	18.00	22.20	33	32
DABPML52Q-1633	1"-11	M33X2	1"-11	46.00	53.00	46.00	22.20	23.00	22.20	33	41
DABPML52Q-2042	1-1/4"-11	M42X2	1-1/4"-11	51.00	58.00	51.00	28.60	30.00	28.60	41	50
DABPML52Q-2448	1-1/2"-11	M48X2	1-1/2"-11	59.00	67.00	59.00	33.30	36.00	33.30	48	55

Certificate:




DABPML525

Run Adjustable Tee BSPP Male 60° - Metric Male + O Ring

D	A	BP	M	L	52	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	BSPP	Male	Run Tee	Metric	Male + O Ring



DME&JDE Code:	DABPML525
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	Run Tee
Connection Type:	Adjustable Male × Male × Male
Thread Types:	BSPP 60° × Metric × BSPP 60°
Sealing Method:	O Ring

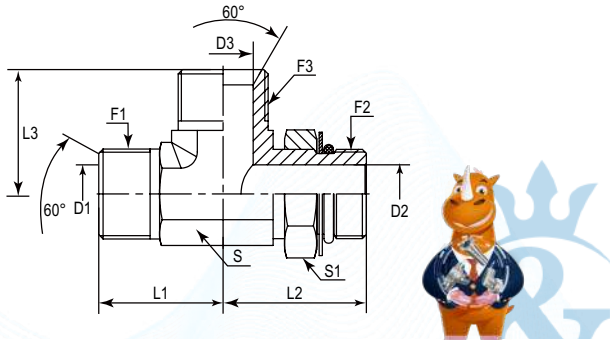

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	BSPP	METRIC	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DABPML525-0210	1/8"-28	M10X1	1/8"-28	22.00	27.00	22.00	3.50	4.50	3.50	11	14
DABPML525-0212	1/8"-28	M12X1.5	1/8"-28	24.00	31.50	24.00	3.50	6.00	3.50	14	17
DABPML525-0412	1/4"-19	M12X1.5	1/4"-19	27.00	31.50	27.00	4.70	6.00	4.70	14	17
DABPML525-0414	1/4"-19	M14X1.5	1/4"-19	27.00	31.50	27.00	4.70	7.50	4.70	14	19
DABPML525-0416	1/4"-19	M16X1.5	1/4"-19	28.00	37.00	28.00	4.70	9.00	4.70	19	22
DABPML525-0614	3/8"-19	M14X1.5	3/8"-19	29.00	34.00	29.00	7.90	7.50	7.90	14	19
DABPML525-0616	3/8"-19	M16X1.5	3/8"-19	29.00	37.00	29.00	7.90	9.00	7.90	19	22
DABPML525-0618	3/8"-19	M18X1.5	3/8"-19	29.00	38.00	29.00	7.90	11.00	7.90	19	24
DABPML525-0816	1/2"-14	M16X1.5	1/2"-14	34.00	40.00	34.00	11.10	7.00	11.10	22	22
DABPML525-0818	1/2"-14	M18X1.5	1/2"-14	34.00	41.00	34.00	11.10	11.00	11.10	22	24
DABPML525-0820	1/2"-14	M20X1.5	1/2"-14	34.00	43.00	34.00	11.10	12.50	11.10	22	27
DABPML525-0822	1/2"-14	M22X1.5	1/2"-14	34.00	43.00	34.00	11.10	14.00	11.10	22	27
DABPML525-1022	5/8"-14	M22X1.5	5/8"-14	37.00	46.00	37.00	14.30	14.00	14.30	22	27
DABPML525-1222	3/4"-14	M22X1.5	3/4"-14	41.00	46.00	41.00	16.70	14.00	16.70	27	27
DABPML525-1226	3/4"-14	M26X1.5	3/4"-14	41.00	50.00	41.00	16.70	17.00	16.70	27	32
DABPML525-1227	3/4"-14	M27X2	3/4"-14	41.00	50.00	41.00	16.70	18.00	16.70	27	32
DABPML525-1627	1"-11	M27X2	1"-11	46.00	52.00	46.00	22.20	18.00	22.20	33	32
DABPML525-1633	1"-11	M33X2	1"-11	46.00	53.00	46.00	22.20	23.00	22.20	33	41
DABPML525-2042	1-1/4"-11	M42X2	1-1/4"-11	51.00	58.00	51.00	28.60	30.00	28.60	41	50
DABPML525-2448	1-1/2"-11	M48X2	1-1/2"-11	59.00	67.00	59.00	33.30	36.00	33.30	48	55


DABPMT181

Branch Tee Connector BSPP Swivel Female 60° - BSPP Swivel Female 60° - BSPP Male 60°

D	A	BP	M	T	1	81
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type	Connection Type
DME	Adaptor	BSPP	Male	Branch Tee	Swivel Female	BSPP Swivel Female



DME&JDE Code:	DABPMT181
Product Type	Hydraulic adaptor
Standard:	BSP
Structure:	Branch Tee
Connection Type:	Swivel Female × Swivel Female × Male
Thread Types:	BSPP 60° × BSPP 60° × BSPP 60°

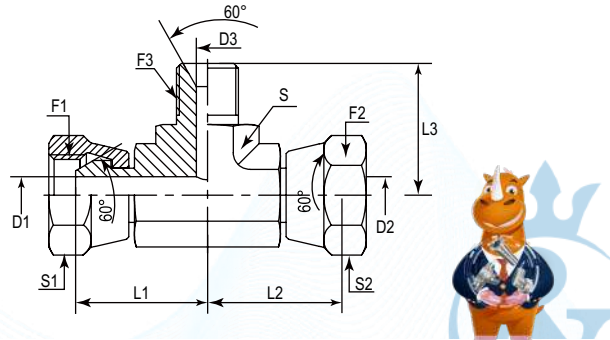

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1	S2
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm	mm	mm
DABPMT181-0202	1/8"-28	1/8"-28	1/8"-28	3.50	3.50	3.50	22.50	22.50	22.50	11	14	14
DABPMT181-0404	1/4"-19	1/4"-19	1/4"-19	4.70	4.70	4.70	24.00	24.00	27.00	14	19	19
DABPMT181-0606	3/8"-19	3/8"-19	3/8"-19	7.90	7.90	7.90	28.20	28.20	29.00	19	22	22
DABPMT181-0808	1/2"-14	1/2"-14	1/2"-14	11.10	11.10	11.10	33.60	33.60	35.00	22	27	27
DABPMT181-1010	5/8"-14	5/8"-14	5/8"-14	14.30	14.30	14.30	35.00	35.00	37.00	27	30	30
DABPMT181-1212	3/4"-14	3/4"-14	3/4"-14	16.70	16.70	16.70	37.90	37.90	43.00	27	32	32
DABPMT181-1616	1"-11	1"-11	1"-11	22.20	22.20	22.20	45.40	45.40	47.00	33	41	41
DABPMT181-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	26.00	26.00	28.60	50.00	50.00	52.30	41	50	50



DABTFT07F

Tee Connector BSPT Fixed Female - BSPT Fixed Female

D

A

BT

F

T

07

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Female

Tee

BSPT

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTFT07F

Product Type

Hydraulic adaptor

Adaptor Standard:

BSP

Adaptor structure:


Tee

Adaptor Connection Type:

Fixed Female × Fixed Female

Thread Types:

BSPT × BSPT



PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	S
#	BSPT	BSPT	BSPT	mm	mm	mm	mm
DABTFT07F-0202	1/8"-28	1/8"-28	1/8"-28	20.00	20.00	20.00	14
DABTFT07F-0404	1/4"-19	1/4"-19	1/4"-19	22.50	22.50	22.50	19
DABTFT07F-0606	3/8"-19	3/8"-19	3/8"-19	26.00	26.00	26.00	22
DABTFT07F-0808	1/2"-14	1/2"-14	1/2"-14	31.20	31.20	31.20	27
DABTFT07F-1212	3/4"-14	3/4"-14	3/4"-14	34.50	34.50	34.50	33
DABTFT07F-1616	1"-11	1"-11	1"-11	41.20	41.20	41.20	41
DABTFT07F-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	43.20	43.20	43.20	48
DABTFT07F-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	53.00	53.00	53.00	65
DABTFT07F-3232	2"-11	2"-11	2"-11	62.00	62.00	62.00	71

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABTML081

Run Tee Connector BSPT Male 60° - BSPP Swivel Female 60°

D

A

BT

M

L

081

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

BSPT

Male

Run Tee

Swivel Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTML081

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Run Tee

Connection Type:

Male × Swivel Female × Male

Thread Types:

BSPT 60° × BSPP 60° × BSPT 60°

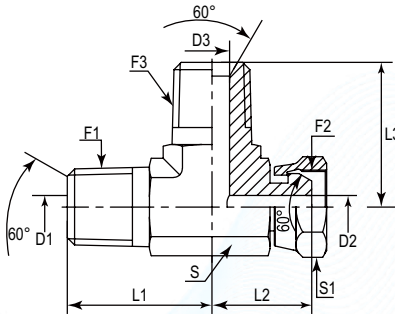

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	BSPT	BSPP	BSPT	mm	mm	mm	mm	mm	mm	mm	mm
DABTML081-0202	1/8"-28	1/8"-28	1/8"-28	4.50	3.50	4.50	20.00	18.00	20.00	11	14
DABTML081-0404	1/4"-19	1/4"-19	1/4"-19	6.00	4.70	6.00	25.00	21.60	25.00	14	19
DABTML081-0606	3/8"-19	3/8"-19	3/8"-19	9.00	7.90	9.00	28.50	25.60	28.50	19	22
DABTML081-0808	1/2"-14	1/2"-14	1/2"-14	12.00	11.10	12.00	36.00	30.00	36.00	22	27
DABTML081-1212	3/4"-14	3/4"-14	3/4"-14	16.70	16.70	16.70	40.40	35.30	40.40	27	32
DABTML081-1616	1"-11	1"-11	1"-11	22.20	22.20	22.20	50.00	45.50	50.00	33	41
DABTML081-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	28.60	28.00	28.60	58.00	52.50	58.00	41	50
DABTML081-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	33.30	33.30	33.30	59.00	54.00	59.00	48	55
DABTML081-3232	2"-11	2"-11	2"-11	46.00	46.00	46.00	76.00	60.00	76.00	65	70

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABTFL07M

Run Tee Adaptor BSPT Fixed Female – BSPT Male 60°

D

A

BT

F

L

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPT

Female

Run Tee

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABTFL07M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Run Tee

Connection Type:

Fixed Female × Male × Fixed Female

Thread Types:

BSPT 60° × BSPT × BSPT

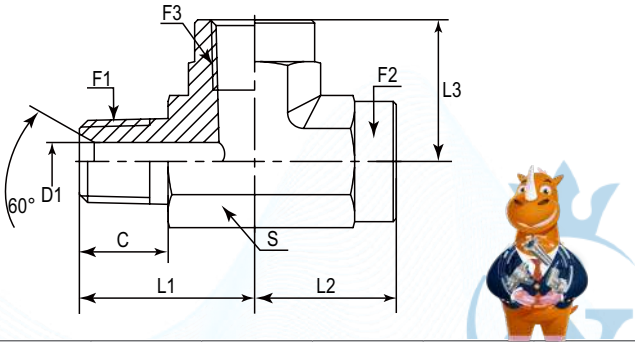

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	C	D	L1	L2	L3	S
#	BSPT	BSPT	BSPT	mm	mm	mm	mm	mm	mm
DABTFL07M-0202	1/8"-28	1/8"-28	1/8"-28	10.00	4.50	16.80	16.80	19.80	14
DABTFL07M-0404	1/4"-19	1/4"-19	1/4"-19	14.00	6.00	27.70	22.40	27.70	19
DABTFL07M-0606	3/8"-19	3/8"-19	3/8"-19	15.00	9.00	26.00	26.00	31.00	22
DABTFL07M-0808	1/2"-14	1/2"-14	1/2"-14	19.00	12.00	31.20	31.20	37.40	27
DABTFL07M-1212	3/4"-14	3/4"-14	3/4"-14	20.00	16.70	34.50	34.50	40.40	33
DABTFL07M-1616	1"-11	1"-11	1"-11	24.00	22.20	41.20	41.20	50.00	41
DABTFL07M-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	25.00	28.60	43.20	43.20	60.50	48

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABPMX05M

Cross Connector BSPP Male 60° - BSPP Male 60°

D

A

BP

M

X

05

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male

Cross

BSPP

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPMX05M

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Cross

Connection Type:

Male × Male × Male × Male

Thread Types:

BSPP 60° × BSPP 60° × BSPP 60° × BSPP 60°

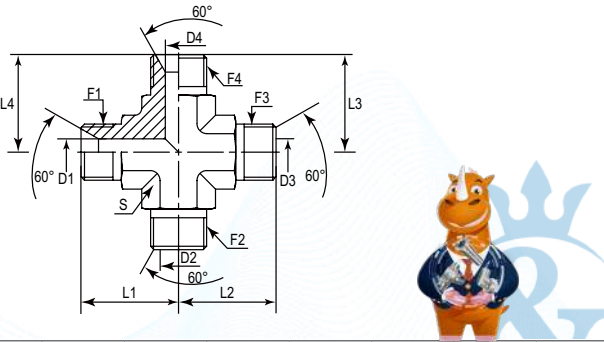

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	F4 (Thread)	L1	L2	L3	L4	D1	D2	D3	D4	S
#	BSPP	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm	mm	mm
DABPMX05M-0404	1/4"-19	1/4"-19	1/4"-19	1/4"-19	26.00	26.00	26.00	26.00	4.70	4.70	4.70	4.70	14
DABPMX05M-0606	3/8"-19	3/8"-19	3/8"-19	3/8"-19	30.00	30.00	30.00	30.00	7.90	7.90	7.90	7.90	19
DABPMX05M-0808	1/2"-14	1/2"-14	1/2"-14	1/2"-14	35.00	35.00	35.00	35.00	11.10	11.10	11.10	11.10	22
DABPMX05M-1212	3/4"-14	3/4"-14	3/4"-14	3/4"-14	42.00	42.00	42.00	42.00	16.70	16.70	16.70	16.70	27
DABPMX05M-1616	1"-11	1"-11	1"-11	1"-11	50.00	50.00	50.00	50.00	22.00	22.00	22.00	22.00	33

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DABPFX05F

Cross Connector BSPP Fixed Female

D

A

BP

F

X

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Female

Cross

BSPP

Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABPFX05F

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Cross

Connection Type:

Fixed Female × Fixed Female × Fixed Female × Fixed Female

Thread Types:

BSPP × BSPP × BSPP × BSPP

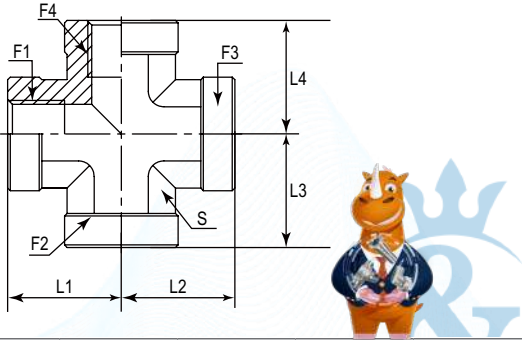

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	F4 (Thread)	L1	L2	L3	L4	S
#	BSPP	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm
DABPFX05F-0202	1/8"-28	1/8"-28	1/8"-28	1/8"-28	20.00	20.00	20.00	20.00	14
DABPFX05F-0404	1/4"-19	1/4"-19	1/4"-19	1/4"-19	22.00	22.00	22.00	22.00	19
DABPFX05F-0606	3/8"-19	3/8"-19	3/8"-19	3/8"-19	26.00	26.00	26.00	26.00	22
DABPFX05F-0808	1/2"-14	1/2"-14	1/2"-14	1/2"-14	32.00	32.00	32.00	32.00	27
DABPFX05F-1212	3/4"-14	3/4"-14	3/4"-14	3/4"-14	36.00	36.00	36.00	36.00	33
DABPFX05F-1616	1"-11	1"-11	1"-11	1"-11	41.50	41.50	41.50	41.50	41

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA

CE

UK CA

DABP1X081

Cross Connector BSPP Swivel Female 60° Cone

D

A

BP

1

X

081

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

BSPP

Swivel Female

Cross

BSPP Swivel Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABP1X081

Product Type

Hydraulic adaptor

Standard:

BSP

Structure:


Cross

Connection Type:

Swivel Female × Swivel Female × Swivel Female × Swivel Female

Thread Types:

BSPP 60° Cone × BSPP 60° Cone × BSPP 60° Cone × BSPP 60° Cone

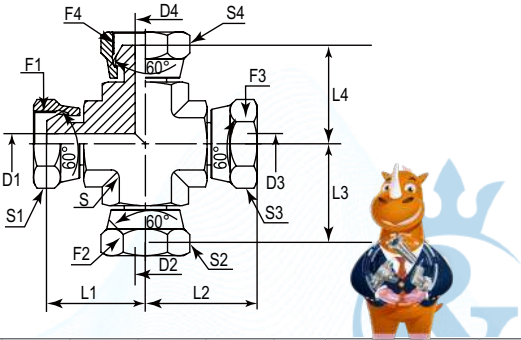

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	F4 (Thread)	D1	D2	D3	D4	L1	L2	L3	L4	S	S1	S2	S3	S4
#	BSPP	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
DABP1X081-0202	1/8"-28	1/8"-28	1/8"-28	1/8"-28	3.50	3.50	3.50	3.50	20.00	20.00	20.00	20.00	11	14	14	14	14
DABP1X081-0404	1/4"-19	1/4"-19	1/4"-19	1/4"-19	7.20	7.20	7.20	7.20	26.00	26.00	26.00	26.00	14	19	19	19	19
DABP1X081-0606	3/8"-19	3/8"-19	3/8"-19	3/8"-19	7.90	7.90	7.90	7.90	27.20	27.20	27.20	27.20	19	22	22	22	22
DABP1X081-0808	1/2"-14	1/2"-14	1/2"-14	1/2"-14	11.10	11.10	11.10	11.10	35.00	35.00	35.00	35.00	22	27	27	27	27
DABP1X081-1010	5/8"-14	5/8"-14	5/8"-14	5/8"-14	14.30	14.30	14.30	14.30	38.00	38.00	38.00	38.00	24	30	30	30	30
DABP1X081-1212	3/4"-14	3/4"-14	3/4"-14	3/4"-14	16.70	16.70	16.70	16.70	42.00	42.00	42.00	42.00	27	32	32	32	32
DABP1X081-1616	1"-11	1"-11	1"-11	1"-11	22.20	22.20	22.20	22.20	44.00	44.00	44.00	44.00	33	41	41	41	41
DABP1X081-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	1-1/4"-11	28.60	28.60	28.60	28.60	49.00	49.00	49.00	49.00	41	50	50	50	50
DABP1X081-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	1-1/2"-11	33.30	33.30	33.30	33.30	61.00	61.00	61.00	61.00	48	55	55	55	55
DABP1X081-3232	2"-11	2"-11	2"-11	2"-11	46.00	46.00	46.00	46.00	68.00	68.00	68.00	68.00	65	70	70	70	70

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA

CE

UK CA



Hydraulic Adaptors

JIC and SAE ORB »




DAJCD0000 P194 JIC Tube Nut	DAJCR0000 P195 JIC Sleeve For Inch/Metric Tube	DAJCM125M P196 JIC Sleeve For Inch/Metric Tube	DAJCM125M-LH P198 Straight Connector JIC Male - JIC Male Large Hexagon
DAJCM1305 P199 Straight Connector JIC Male - SAE Male + O Ring	DAJCM106Q P202 Straight JIC Male - BSPP Male + Retaining Ring + O Ring Seal	DAJCM1065 P204 Straight Connector JIC Male - BSPP Male + O Ring Seal	DAJCM152Q P206 Straight JIC Male - Metric Male + Retaining Ring + O Ring Seal
DAJCM1525 P208 Straight Connector JIC Male - Metric Male + O Ring Seal	DAJCM106I P210 Straight Connector JIC Male - BSPP 60° Male with ED Ring	DAJCM152I P212 Straight Connector JIC Male - Metric Male with ED Ring	DAJCM122M P214 Straight Connector JIC Male - SAE Male Inverted Flare
DAJCM152M P215 Straight Connector JIC Male Cone - Metric Male 60° Cone	DAJCM105M P216 Straight Connector JIC Male - BSPP 60° Male	DAJCM107M P218 Straight Connector JIC Male - BSPT Male 60°	DAJCM128M P220 Straight Connector JIC Male - NPTF Male 60°



DAJCM152JM


P223



Straight Connector JIC Male -
JIS Metric Male 60°

DAJCM105JM


P224



Straight Connector JIC Male -
JIS BSPP Male 60°

DAJCM105F


P225



Straight Connector JIC Male -
BSPP Female 60°

DAJCM107F


P226



Straight Connector JIC Male -
BSPT Female

DAJCM152F


P227



Straight Connector JIC Male -
Metric Fixed Female

DAJCM105JF


P228



Straight Connector JIC Male -
JIS BSPP Fixed Female

DAJCM152JF


P229



Straight Connector JIC Male -
JIS Metric Female

DAJCM128F


P230



Straight Connector JIC Male -
NPTF Female

DAJCT128F


P232



Straight Connector Bulkhead JIC
Male - NPTF Female

DAJCM1251


P233



Straight Connector JIC Male -
JIC Swivel Female

DAJCM1081


P235



Straight Connector JIC Male -
BSPP Swivel Female 60° Cone

DAJCM106Q


P236



Straight JIC Swivel Female - BSPP
Male + Retaining Ring + O Ring

DAJCM1065


P237



Straight Connector JIC Swivel
Female - BSPP Male + O Ring

DAJCM1061


P238



Straight Connector JIC Swivel Female
- BSPP Male 60° with ED Seal

DAJCM152Q


P239



Straight JIC Swivel Female - Metric
Male + Retaining Ring + O Ring

DAJCM1305


P240



Straight Connector JIC Swivel
Female - SAE Male + O Ring

DAJCM11525


P242



Straight Connector JIC Swivel
Female - Metric Male + O Ring

DAJCM1128M


P243



Straight Connector JIC Swivel
Female - NPTF Male 60°

DAJCM1107M


P245



Straight Connector JIC Swivel
Female - BSPT Male 60°

DAJCF125M


P246



Straight Connector JIC Fixed
Female - JIC Male

DAJCM3125M


P249



Straight Connector JIC Swivel
Female - JIC Male

DAJCF1251


P251



Straight Connector JIC Fixed
Female - JIC Swivel Female

DAJCM11251


P252



Straight Connector JIC Swivel
Female - JIC Swivel Female

DAJCM1128F


P253



Straight Connector JIC Swivel
Female - NPTF Female

DAJCM1105F


P254



Straight Connector JIC Swivel
Female - BSPP Fixed Female

DAJCF105F


P255



Straight Coupling JIC Fixed
Female - BSPP Fixed Female

DAJCM1100B


P256



Straight Connector JIC Female
Swivel - Imperial/Metric Tube

DAJCM1000


P257



Male Plug JIC

DAJCM100B


P258



Straight Bonding(Socket Welding)
Connector JIC Male - Imperial/
Metric Tube

DAJCM31000


P260



JIC Female Cap

DAJCM31000-C


P261



JIC Female Cap

DAJCM130J


P262



Straight Long Connector JIC Male -
SAE Male + O Ring

DAJCM152Y


P264



Long Connector JIC Male - Metric Male + Retaining Ring + O Ring

DAJCM152J


P265



Straight Long Connector JIC Male - Metric Male + O Ring

DAJCM128P


P266



Straight Long Connector JIC Male - NPTF Male 60°

DAJCM128M-LL


P267



Straight X-Long Connector JIC Male - NPTF Male 60°

DAJCM106Y


P268



Long Connector JIC Male - BSPP Male + Retaining Ring + O Ring

DAJCM106J


P269



Straight Long Connector JIC Male - BSPP Male + O Ring

DAJCM125T


P270



Straight Connector Bulkhead JIC Male - JIC Male

DAJCT130S


P271



Bulkhead Connector JIC Male Cone - SAE Male + O Ring

DAJCT128M


P272



Straight Connector Bulkhead JIC Male - NPTF Male 60°

DAJCT105M


P273



Straight Connector Bulkhead JIC Male Cone - BSPP Male 60°

DAJCLN


P274



JIC Bulkhead Nut

MJ-BJM


P275



Straight Connector JIC Male - Banjo UNF

DAJCM425M


P276



45° Elbow JIC - JIC Male

DAJCM430S


P277



45° Adjustable Elbow JIC Male - SAE Male + O Ring

DAJCM406Q


P279



45° Adjustable Elbow JIC Male - BSPP Male + O Ring + Retaining Ring

DAJCM406S


P280



45° Adjustable Elbow JIC Male - BSPP Male + O Ring

DAUNF152M


P281



Straight Connector SAE Female O Ring - Metric Male 60°

DAJCM930P


P282



90° Adjustable Long Elbow JIC Male - SAE Male + O Ring + Retaining Ring

DAJCM452Q


P283



45° Adjustable Elbow JIC Male - Metric Male + O Ring + Retaining Ring

DAJCM452S


P284



45° Adjustable Elbow JIC Male - Metric Male + O Ring

DAJCM428M


P285



45° Elbow Connector JIC Male - NPTF Male 60°

DAJCM407M


P287



45° Elbow Connector JIC Male - BSPT Male 60°

DAJCM428F


P288



45° Elbow Connector JIC Male - NPTF Female

DAJCM425T


P289



45° Elbow Connector Bulkhead JIC Male - JIC Male

DAJCM425I


P290



45° Elbow Connector JIC Male - JIC Swivel Female

DAJCM408I


P291



45° Elbow Connector JIC Male - BSPP Swivel Female 60°

DAJCM1430S


P292



45° Adjustable Elbow JIC Swivel Female - SAE Male O Ring

DAJCM1425I


P293



45° Elbow Connector JIC Swivel Female - JIC Swivel Female

DAJCM925M


P294



90° Elbow Connector JIC Male - JIC Male

DAJCM930S


P295



90° Adjustable Elbow JIC Male - SAE Male + O Ring

DAJCM906Q


P298



90° Adjustable Elbow JIC Male - BSPP Male + O Ring + Retaining Ring

DAJCM906S


P299



90° Adjustable Elbow JIC Male - BSPP Male + O Ring

DAJCM952Q


P300



90° Adjustable Elbow JIC Male –
Metric Male + O Ring + Retaining Ring

DAJCM952S


P301



90° Adjustable Elbow JIC Male –
Metric Male + O Ring

DAJCM928M


P302



90° Elbow Connector JIC Male –
NPTF Male

DAJCM928F


P305



90° Elbow Connector JIC Male –
NPTF Female

DAJCM905F


P307



90° Elbow Connector JIC Male –
BSPP Fixed Female

DAJCM905M


P308



90° Elbow Connector JIC Male –
BSPP Male 60°

DAJCM907M


P309



90° Elbow Connector JIC Male –
BSPT Male 60°

DAJCM907F


P311



90° Elbow Connector JIC Male –
BSPT Female

DAJCM900B


P312



90° Elbow Connector JIC Male –
Buttweld Tube

DAJCM900S


P313



90° Elbow Connector JIC Male –
Braze Female

DAJCM9081


P314



90° Elbow Connector JIC Male –
BSPP Swivel Female 60°

DAJCM9251


P315



90° Elbow Connector JIC Male – JIC
Swivel Female

DAJCM9305


P317



90° Adjustable Elbow JIC Swivel
Female – SAE Male O Ring

DAJCM928M


P318



90° Elbow Connector JIC Swivel
Female – NPTF Male 60°

DAJCM928F


P319



90° Elbow Connector JIC Swivel
Female – NPTF Female

DAJCM907M


P320



90° Elbow JIC Swivel Female – BSPT
Male 60°

DAJCM9251


P321



90° Elbow Connector JIC Swivel
Female – JIC Swivel Female

DAJCM906Y


P322



90° Adjustable Long Elbow JIC Male –
BSPP Male + O Ring + Retaining Ring

DAJCM906J


P323



90° Adjustable Long Elbow JIC Male –
BSPP Male + O Ring

DAJCM952Y


P324



90° Adjustable Long Elbow JIC Male –
Metric Male + O Ring + Retaining Ring

DAJCM952J


P325



90° Adjustable Long Elbow JIC
Male – Metric Male + O Ring

DAJCM928P


P326



90° Long Elbow Connector JIC
Male – NPTF Male

DAJCM9289


P327



90° Extra Long Elbow Connector
JIC Male – NPTF Male

DAJCM906P


P328



90° Adjustable Long Elbow JIC Male –
SAE Male + O Ring + Retaining Ring

DAJCM930J


P329



90° Adjustable X-Long Elbow JIC
Male – SAE Male + O Ring

DAJCM925T


P330



90° Bulkhead Elbow Connector
JIC Male – JIC Male

DAJCM9251-B


P331



90° Swept Elbow JIC Male – JIC
Swivel Female

DAJCM9251-L-B


P332



90° Swept Elbow JIC Male – Long JIC
Swivel Female

DAJCMT25M


P333



Branch Tee Connector JIC Male –
JIC Male

DAJCMT251


P335



Branch Tee Connector JIC Male – JIC
Swivel Female

DAJCMT305


P336



Branch Adjustable Tee JIC Male – SAE
Male O Ring

DAJCMT06Q


P338



Branch Adjustable Tee JIC Male –
BSPP Male + O Ring + Retaining Ring

DAJCMT065


P339



Branch Adjustable Tee JIC Male -
BSPP Male + O Ring

DAJCMT52Q


P340



Branch Adjustable Tee JIC Male -
Metric Male + O Ring + Retaining Ring

DAJCMT525


P341



Branch Adjustable Tee JIC Male -
Metric Male + O Ring

DAJCMT28M


P342



Branch Tee Connector JIC Male -
NPTF Male

DAJCML525


P359



Run Adjustable Tee JIC Male -
Metric Male + O Ring

DAJCML28M


P360



Run Tee Connector JIC Male -
NPTF Male

DAJCML07M


P362



Run Tee Connector JIC Male - BSPT
Male

DAJCML28F


P363



Run Tee Connector JIC Male -
NPTF Female

DAJCMT07M


P344



Branch Tee Connector JIC Male -
BSPT Male

DAJCMT28F


P345



Branch Tee Connector JIC Male -
NPTF Female

DAJCMT05F


P347



Branch Tee Connector JIC Male -
BSPP Fixed Female

DAJCMT25T


P348



Branch Bulkhead Tee Connector
JIC Male - JIC Male

DAJCML05F


P365



Run Tee Connector JIC Male -
BSPP Fixed Female

DAJCML25T


P366



Run Bulkhead Tee Connector JIC
Male - JIC Male

DAJCMX25M


P367



Cross Connector JIC Male - JIC
Male

DAUNM1305


P368



Straight Connector SAE Male + O
Ring - SAE Male + O Ring

DAJC1T25M


P349



Branch Tee Connector JIC Swivel
Female - JIC Male

DAJC1T28M


P350



Branch Tee Connector JIC Swivel
Female - NPTF Male

DAJC1T25I


P351



Branch Tee Connector JIC Swivel
Female - JIC Swivel Female

DAJCML25I


P352



Run Tee Connector JIC Male - JIC
Swivel Female

DAUNM1000


P369



Plug SAE Male O Ring

DVSTI-UN


P370



Hexagon Socket SAE Male O Ring
Plug

DAUNM1305B


P371



Straight Adjustable Connector
SAE Male - SAE Male + O Ring

DAUNF1305


P373



Straight Connector SAE Female O Ring
- SAE Male O Ring

DAJCML305


P354



Run Adjustable Tee JIC Male -
SAE Male O Ring

DAJCML06Q


P356



Run Adjustable Tee JIC Male - BSPP
Male + O Ring + Retaining Ring

DAJCML065


P357



Run Adjustable Tee JIC Male - BSPP
Male + O Ring

DAJCML52Q


P358



Run Adjustable Tee JIC Male - Metric
Male + O Ring + Retaining Ring

DAUNF105M


P376



Straight SAE Female O Ring -
BSPP male 60° Cone

DAUNF106Q


P377



Straight Connector SAE Female O Ring
- BSPP Male + O Ring + Retaining Ring

DAUNF152Q


P378



Straight Connector SAE Female O Ring -
Metric Male + O Ring + Retaining Ring

DAUNF128M


P379



Straight Connector SAE Female O
Ring - NPTF 60° Male

DAUNF130F


P381



Straight Connector SAE Female
O Ring – SAE Female O Ring

DAUNF128F


P382



Straight Connector SAE Female
O Ring – NPTF Female

DAUNF1251


P383



Straight Connector SAE Female
O Ring – JIC Swivel Female 74°

DAUNF1241


P384



Straight Connector SAE Female
O Ring – ORFS Swivel Female

DAUNM4305


P385



45° Adjustable Elbow SAE Male
O Ring – SAE Male O Ring

DAUNM9305


P386



90° Adjustable Elbow SAE Male
O Ring – SAE Male O Ring

DAUNF9305


P387



90° Adjustable Elbow SAE Solid Female
– SAE Male + O Ring + Retaining Ring

DAUNFT305


P388



Branch Adjustable Tee SAE
Female O Ring – SAE Male

DAUNFL305


P389



Run Adjustable Tee SAE Female
O Ring – SAE Male + O Ring

DAUNFT30F

P390




Branch Tee Connector SAE Female
O Ring – SAE Female O Ring

DAJCD0000

JIC Tube Nut

D	A	JC	D	0	000
Company	Product Range	Thread Types	Sealing Type	Compatible Type	Other Features
DME	Adaptor	JIC UNF	Welding	Tube	Nut/Plug

DME&JDE Code:	DAJCD0000
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Thread Types:	UNF
Other Features:	Nut/Plug



German Technology Equipment

SHIELD FLEX

New-Standard

PART NUMBER	F (Thread)	L	S	Hex
#	UNF	mm	-	-
DAJCD0000-0200	5/16"-24	14.00	10 mm	Metric
DAJCD0000-0200IN	5/16"-24	14.00	3/8"	Imperial
DAJCD0000-0300	3/8"-24	15.49	11 mm	Metric
DAJCD0000-0300IN	3/8"-24	15.49	7/16"	Imperial
DAJCD0000-0400	7/16"-20	15.80	14 mm	Metric
DAJCD0000-0400IN	7/16"-20	15.80	9/16"	Imperial
DAJCD0000-0500	1/2"-20	17.30	17 mm	Metric
DAJCD0000-0500IN	1/2"-20	17.30	5/8"	Imperial
DAJCD0000-0600	9/16"-18	18.50	19 mm	Metric
DAJCD0000-0600IN	9/16"-18	18.50	11/16"	Imperial
DAJCD0000-0800	3/4"-16	21.60	22 mm	Metric
DAJCD0000-0800IN	3/4"-16	21.60	7/8"	Imperial
DAJCD0000-1000	7/8"-14	24.90	27 mm	Metric
DAJCD0000-1000IN	7/8"-14	24.90	1"	Imperial
DAJCD0000-1200	1-1/16"-12	26.20	32 mm	Metric
DAJCD0000-1200IN	1-1/16"-12	26.20	1-1/4"	Imperial
DAJCD0000-1400	1-3/16"-12	27.69	36 mm	Metric
DAJCD0000-1400IN	1-3/16"-12	27.69	1-3/8"	Imperial
DAJCD0000-1600	1-5/16"-12	28.70	41 mm	Metric
DAJCD0000-1600IN	1-5/16"-12	28.70	1-1/2"	Imperial
DAJCD0000-2000	1-5/8"-12	31.20	50 mm	Metric
DAJCD0000-2000IN	1-5/8"-12	31.20	2"	Imperial
DAJCD0000-2400	1-7/8"-12	36.10	60 mm	Metric
DAJCD0000-2400IN	1-7/8"-12	36.10	2-1/4"	Imperial
DAJCD0000-3200	2-1/2"-12	44.50	75 mm	Metric
DAJCD0000-3200IN	2-1/2"-12	44.50	2-7/8"	Imperial

Certificate:



DAJCM125M-1004	7/8"-14	7/16"-20	19.25	13.97	12.29	4.37	42.42	24 mm	Metric
DAJCM125M-1005	7/8"-14	1/2"-20	19.25	13.97	12.29	5.94	42.40	24 mm	Metric
DAJCM125M-1006	7/8"-14	9/16"-18	19.25	14.12	12.29	7.54	42.70	24 mm	Metric
DAJCM125M-1008	7/8"-14	3/4"-16	19.25	16.69	12.29	9.93	45.21	24 mm	Metric
DAJCM125M-1010	7/8"-14	7/8"-14	19.25	19.25	12.29	12.29	47.80	24 mm	Metric
DAJCM125M-1004IN	7/8"-14	7/16"-20	19.25	13.97	12.29	4.37	42.42	15/16"	Imperial
DAJCM125M-1005IN	7/8"-14	1/2"-20	19.25	13.97	12.29	5.94	42.42	15/16"	Imperial
DAJCM125M-1006IN	7/8"-14	9/16"-18	19.25	14.12	12.29	7.54	42.70	15/16"	Imperial
DAJCM125M-1008IN	7/8"-14	3/4"-16	19.25	16.69	12.29	9.93	45.21	15/16"	Imperial
DAJCM125M-1010IN	7/8"-14	7/8"-14	19.25	19.25	12.29	12.29	47.80	15/16"	Imperial
DAJCM125M-1204	1-1/16"-12	7/16"-20	21.95	13.97	15.47	4.37	47.00	30 mm	Metric
DAJCM125M-1206	1-1/16"-12	9/16"-18	21.95	14.12	15.47	7.54	46.99	30 mm	Metric
DAJCM125M-1208	1-1/16"-12	3/4"-16	21.95	16.69	15.47	9.93	49.50	30 mm	Metric
DAJCM125M-1210	1-1/16"-12	7/8"-14	21.95	19.25	15.47	12.29	52.10	30 mm	Metric
DAJCM125M-1212	1-1/16"-12	1-1/16"-12	21.95	21.95	15.47	15.47	54.90	30 mm	Metric
DAJCM125M-1204IN	1-1/16"-12	7/16"-20	21.95	13.97	15.47	4.37	47.00	1-1/8"	Imperial
DAJCM125M-1206IN	1-1/16"-12	9/16"-18	21.95	14.12	15.47	7.54	46.99	1-1/8"	Imperial
DAJCM125M-1208IN	1-1/16"-12	3/4"-16	21.95	16.69	15.47	9.93	49.50	1-1/8"	Imperial
DAJCM125M-1210IN	1-1/16"-12	7/8"-14	21.95	19.25	15.47	12.29	52.10	1-1/8"	Imperial
DAJCM125M-1212IN	1-1/16"-12	1-1/16"-12	21.95	21.95	15.47	15.47	54.90	1-1/8"	Imperial
DAJCM125M-1412	1-3/16"-12	1-1/16"-12	23.00	21.95	18.00	15.47	55.00	32 mm	Metric
DAJCM125M-1414	1-3/16"-12	1-3/16"-12	23.00	23.00	18.00	18.00	56.10	32 mm	Metric
DAJCM125M-1412IN	1-3/16"-12	1-1/16"-12	23.00	21.95	18.00	15.47	55.00	1-1/4"	Imperial
DAJCM125M-1414IN	1-3/16"-12	1-3/16"-12	23.00	23.00	18.00	18.00	56.10	1-1/4"	Imperial
DAJCM125M-1606	1-5/16"-12	9/16"-18	23.14	14.12	21.44	7.54	48.00	36 mm	Metric
DAJCM125M-1608	1-5/16"-12	3/4"-16	23.14	16.69	21.44	9.93	50.80	36 mm	Metric
DAJCM125M-1610	1-5/16"-12	7/8"-14	23.14	19.25	21.44	12.29	53.40	36 mm	Metric
DAJCM125M-1612	1-5/16"-12	1-1/16"-12	23.14	21.95	21.44	15.47	56.00	36 mm	Metric
DAJCM125M-1616	1-5/16"-12	1-5/16"-12	23.14	23.14	21.44	21.44	57.20	36 mm	Metric
DAJCM125M-1606IN	1-5/16"-12	9/16"-18	23.14	14.12	21.44	7.54	48.00	1-3/8"	Imperial
DAJCM125M-1608IN	1-5/16"-12	3/4"-16	23.14	16.69	21.44	9.93	50.80	1-3/8"	Imperial
DAJCM125M-1610IN	1-5/16"-12	7/8"-14	23.14	19.25	21.44	12.29	53.40	1-3/8"	Imperial
DAJCM125M-1612IN	1-5/16"-12	1-1/16"-12	23.14	21.95	21.44	15.47	56.00	1-3/8"	Imperial
DAJCM125M-1616IN	1-5/16"-12	1-5/16"-12	23.14	23.14	21.44	21.44	57.20	1-3/8"	Imperial
DAJCM125M-2012	1-5/8"-12	1-1/16"-12	24.33	21.95	27.38	15.47	59.40	46 mm	Metric
DAJCM125M-2016	1-5/8"-12	1-5/16"-12	24.33	23.14	27.38	21.44	60.50	46 mm	Metric
DAJCM125M-2020	1-5/8"-12	1-5/8"-12	24.33	24.33	27.38	27.38	61.70	46 mm	Metric
DAJCM125M-2012IN	1-5/8"-12	1-1/16"-12	24.33	21.95	27.38	15.47	59.40	1-11/16"	Imperial
DAJCM125M-2016IN	1-5/8"-12	1-5/16"-12	24.33	23.14	27.38	21.44	60.50	1-11/16"	Imperial
DAJCM125M-2020IN	1-5/8"-12	1-5/8"-12	24.33	24.33	27.38	27.38	61.70	1-11/16"	Imperial
DAJCM125M-2412	1-7/8"-12	1-1/16"-12	27.51	21.95	33.32	15.47	64.30	50 mm	Metric
DAJCM125M-2416	1-7/8"-12	1-5/16"-12	27.51	23.14	33.32	21.44	65.50	50 mm	Metric
DAJCM125M-2420	1-7/8"-12	1-5/8"-12	27.51	24.33	33.32	27.38	65.70	50 mm	Metric
DAJCM125M-2424	1-7/8"-12	1-7/8"-12	27.50	27.50	33.32	33.32	69.85	50 mm	Metric
DAJCM125M-2412IN	1-7/8"-12	1-1/16"-12	27.51	21.95	33.32	15.47	64.30	2"	Imperial
DAJCM125M-2416IN	1-7/8"-12	1-5/16"-12	27.51	23.14	33.32	21.44	65.50	2"	Imperial
DAJCM125M-2420IN	1-7/8"-12	1-5/8"-12	27.51	24.33	33.32	27.38	65.70	2"	Imperial
DAJCM125M-2424IN	1-7/8"-12	1-7/8"-12	27.50	27.50	33.32	33.32	69.85	2"	Imperial
DAJCM125M-3216	2-1/2"-12	1-5/16"-12	33.86	23.14	45.24	21.44	75.70	65 mm	Metric
DAJCM125M-3220	2-1/2"-12	1-5/8"-12	33.86	24.33	45.24	27.38	76.80	65 mm	Metric
DAJCM125M-3224	2-1/2"-12	1-7/8"-12	33.86	27.50	45.24	33.32	80.10	65 mm	Metric
DAJCM125M-3232	2-1/2"-12	2-1/2"-12	33.86	33.86	45.24	45.24	86.51	65 mm	Metric
DAJCM125M-3216IN	2-1/2"-12	1-5/16"-12	33.86	23.14	45.24	21.44	75.70	2-5/8"	Imperial
DAJCM125M-3220IN	2-1/2"-12	1-5/8"-12	33.86	24.33	45.24	27.38	76.80	2-5/8"	Imperial
DAJCM125M-3224IN	2-1/2"-12	1-7/8"-12	33.86	27.50	45.24	33.32	80.10	2-5/8"	Imperial
DAJCM125M-3232IN	2-1/2"-12	2-1/2"-12	33.86	33.86	45.24	45.24	86.51	2-5/8"	Imperial

DAJCM125M-LH

Straight Connector JIC Male – JIC Male Large Hexagon

D

A

JC

M

1

25

M

LH

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DAE

Adaptor

BSPP

Male

Straight

BSPP

Male

Large Hexagon

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM125M-LH

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

UNF × UNF

Other Features:


Large Hexagon

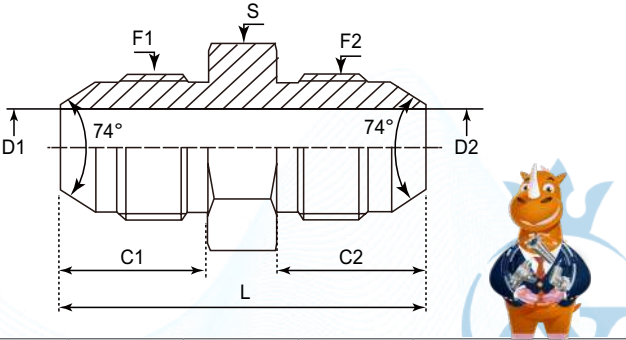


PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	-	-
DAJCM125M-LH-0302	3/8"-24	5/16"-24	12.17	11.38	3.18	1.57	30.48	17 mm	Metric
DAJCM125M-LH-0303	3/8"-24	3/8"-24	12.17	12.17	3.18	3.18	31.20	17 mm	Metric
DAJCM125M-LH-0302IN	3/8"-24	5/16"-24	12.17	11.38	3.18	1.57	30.48	5/8"	Imperial
DAJCM125M-LH-0303IN	3/8"-24	3/8"-24	12.17	12.17	3.18	3.18	31.2	5/8"	Imperial
DAJCM125M-LH-0404	7/16"-20	7/16"-20	13.97	13.97	4.37	4.37	34.80	17 mm	Metric
DAJCM125M-LH-0404IN	7/16"-20	7/16"-20	13.97	13.97	4.37	4.37	34.80	11/16"	Imperial
DAJCM125M-LH-0504	1/2"-20	7/16"-20	13.97	13.97	5.94	4.37	34.80	19 mm	Metric
DAJCM125M-LH-0505	1/2"-20	1/2"-20	13.97	13.97	5.94	5.94	34.80	19 mm	Metric
DAJCM125M-LH-0504IN	1/2"-20	7/16"-20	13.97	13.97	5.94	4.37	34.80	3/4"	Imperial
DAJCM125M-LH-0505IN	1/2"-20	1/2"-20	13.97	13.97	5.94	5.94	34.80	3/4"	Imperial
DAJCM125M-LH-0606	9/16"-18	9/16"-18	14.12	14.12	7.54	7.54	35.81	22 mm	Metric
DAJCM125M-LH-0606IN	9/16"-18	9/16"-18	14.12	14.12	7.54	7.54	35.81	13/16"	Imperial
DAJCM125M-LH-0804	3/4"-16	7/16"-20	16.69	13.97	9.93	4.37	38.40	27 mm	Metric
DAJCM125M-LH-0806	3/4"-16	9/16"-18	16.69	14.12	9.93	7.54	38.60	27 mm	Metric
DAJCM125M-LH-0808	3/4"-16	3/4"-16	16.69	16.69	9.93	9.93	41.20	27 mm	Metric
DAJCM125M-LH-0804IN	3/4"-16	7/16"-20	16.69	13.97	9.93	4.37	38.40	1"	Imperial
DAJCM125M-LH-0806IN	3/4"-16	9/16"-18	16.69	14.12	9.93	7.54	38.60	1"	Imperial
DAJCM125M-LH-0808IN	3/4"-16	3/4"-16	16.69	16.69	9.93	9.93	41.20	1"	Imperial
DAJCM125M-LH-1008	7/8"-14	3/4"-16	19.25	16.69	12.29	9.93	45.21	30 mm	Metric
DAJCM125M-LH-1010	7/8"-14	7/8"-14	19.25	19.25	12.29	12.29	47.80	30 mm	Metric
DAJCM125M-LH-1008IN	7/8"-14	3/4"-16	19.25	16.69	12.29	9.93	45.21	1-1/8"	Imperial
DAJCM125M-LH-1010IN	7/8"-14	7/8"-14	19.25	19.25	12.29	12.29	47.80	1-1/8"	Imperial
DAJCM125M-LH-1208	1-1/16"-12	3/4"-16	21.95	16.69	15.47	9.93	49.53	36 mm	Metric
DAJCM125M-LH-1210	1-1/16"-12	7/8"-14	21.95	19.25	15.47	12.29	52.10	36 mm	Metric
DAJCM125M-LH-1212	1-1/16"-12	1-1/16"-12	21.95	21.95	15.47	15.47	54.90	36 mm	Metric
DAJCM125M-LH-1208IN	1-1/16"-12	3/4"-16	21.95	16.69	15.47	9.93	49.53	1-3/8"	Imperial
DAJCM125M-LH-1210IN	1-1/16"-12	7/8"-14	21.95	19.25	15.47	12.29	52.10	1-3/8"	Imperial
DAJCM125M-LH-1212IN	1-1/16"-12	1-1/16"-12	21.95	21.95	15.47	15.47	54.90	1-3/8"	Imperial
DAJCM125M-LH-1608	1-5/16"-12	3/4"-16	23.14	16.69	21.44	9.93	50.75	41 mm	Metric
DAJCM125M-LH-1616	1-5/16"-12	1-5/16"-12	23.14	23.14	21.44	21.44	57.20	41 mm	Metric
DAJCM125M-LH-1608IN	1-5/16"-12	3/4"-16	23.14	16.69	21.44	9.93	50.75	1-5/8"	Imperial
DAJCM125M-LH-1616IN	1-5/16"-12	1-5/16"-12	23.14	23.14	21.44	21.44	57.20	1-5/8"	Imperial
DAJCM125M-LH-2020	1-5/8"-12	1-5/8"-12	24.33	24.33	27.38	27.38	61.70	50 mm	Metric
DAJCM125M-LH-2020IN	1-5/8"-12	1-5/8"-12	24.33	24.33	27.38	27.38	61.70	1-7/8"	Imperial

DAJCM1305

Straight Connector JIC Male – SAE Male + O Ring



DME&JDE Code:	DAJCM1305
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Male x Male
Thread Types:	UNF x UNF
Sealing Method:	O Ring

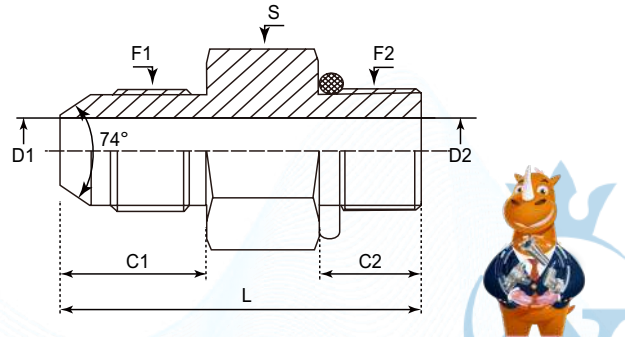

Part Number	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Hex	Revision History
#	UNF	UNF	mm	mm	mm	mm	mm	-	-	
DAJCM1305-0202	5/16"-24	5/16"-24	11.38	7.54	1.57	1.57	26.9	11 mm	Metric	
DAJCM1305-0202IN	5/16"-24	5/16"-24	11.38	7.54	1.57	1.57	26.9	7/16"	Imperial	
DAJCM1305-0302	3/8"-24	5/16"-24	12.17	7.54	3.18	1.6	27.9	12 mm	Metric	
DAJCM1305-0303	3/8"-24	3/8"-24	12.17	7.54	3.18	3.18	27.94	12 mm	Metric	
DAJCM1305-0302IN	3/8"-24	5/16"-24	12.17	7.54	3.18	1.6	27.9	1/2"	Imperial	
DAJCM1305-0303IN	3/8"-24	3/8"-24	12.17	7.54	3.18	3.18	27.94	1/2"	Imperial	
DAJCM1305-0402	7/16"-20	5/16"-24	13.97	7.54	4.37	1.6	29.7	12 mm	Metric	
DAJCM1305-0403	7/16"-20	3/8"-24	13.97	7.54	4.37	3.18	29.7	12 mm	Metric	
DAJCM1305-0404	7/16"-20	7/16"-20	13.97	9.14	4.37	4.37	31.20	14 mm	Metric	
DAJCM1305-0405	7/16"-20	1/2"-20	13.97	9.14	4.37	5.94	31.20	17 mm	Metric	
DAJCM1305-0406	7/16"-20	9/16"-18	13.97	9.93	4.37	7.54	32.80	17 mm	Metric	
DAJCM1305-0408	7/16"-20	3/4"-16	13.97	11.13	4.37	9.93	34.80	22 mm	Metric	
DAJCM1305-0410	7/16"-20	7/8"-14	13.97	12.70	4.37	12.29	37.90	27 mm	Metric	
DAJCM1305-0412	7/16"-20	1-1/16"-12	13.97	15.09	4.37	15.47	41.98	32 mm	Metric	
DAJCM1305-0416	7/16"-20	1-5/16"-12	13.97	15.09	4.37	21.44	42.80	41 mm	Metric	
DAJCM1305-0402IN	7/16"-20	5/16"-24	13.97	7.54	4.37	1.6	29.7	1/2"	Imperial	
DAJCM1305-0403IN	7/16"-20	3/8"-24	13.97	7.54	4.37	3.18	29.7	1/2"	Imperial	
DAJCM1305-0404IN	7/16"-20	7/16"-20	13.97	9.14	4.37	4.37	31.20	9/16"	Imperial	
DAJCM1305-0405IN	7/16"-20	1/2"-20	13.97	9.14	4.37	5.94	31.20	5/8"	Imperial	
DAJCM1305-0406IN	7/16"-20	9/16"-18	13.97	9.93	4.37	7.54	32.80	11/16"	Imperial	
DAJCM1305-0408IN	7/16"-20	3/4"-16	13.97	11.13	4.37	9.93	34.80	7/8"	Imperial	
DAJCM1305-0410IN	7/16"-20	7/8"-14	13.97	12.70	4.37	12.29	37.90	1"	Imperial	
DAJCM1305-0412IN	7/16"-20	1-1/16"-12	13.97	15.09	4.37	15.47	41.98	1-1/4"	Imperial	
DAJCM1305-0416IN	7/16"-20	1-5/16"-12	13.97	15.09	4.37	21.44	42.80	1-1/2"	Imperial	
DAJCM1305-0502	1/2"-20	5/16"-24	13.97	7.54	5.94	1.60	29.60	14 mm	Metric	
DAJCM1305-0503	1/2"-20	3/8"-24	13.97	7.54	5.94	3.18	29.70	14 mm	Metric	
DAJCM1305-0504	1/2"-20	7/16"-20	13.97	9.14	5.94	4.37	31.20	17 mm	Metric	
DAJCM1305-0505	1/2"-20	1/2"-20	13.97	9.14	5.94	5.94	31.20	17 mm	Metric	
DAJCM1305-0506	1/2"-20	9/16"-18	13.97	9.93	5.94	7.54	32.77	17 mm	Metric	

DAJCM1305-0508	1/2"-20	3/4"-16	13.97	11.13	5.94	9.93	34.90	22 mm	Metric	
DAJCM1305-0502IN	1/2"-20	5/16"-24	13.97	7.54	5.94	1.60	29.60	5/8"	Imperial	
DAJCM1305-0503IN	1/2"-20	3/8"-24	13.97	7.54	5.94	3.18	29.70	9/16"	Imperial	
DAJCM1305-0504IN	1/2"-20	7/16"-20	13.97	9.14	5.94	4.37	31.20	5/8"	Imperial	
DAJCM1305-0505IN	1/2"-20	1/2"-20	13.97	9.14	5.94	5.94	31.20	5/8"	Imperial	
DAJCM1305-0506IN	1/2"-20	9/16"-18	13.97	9.93	5.94	7.54	32.77	11/16"	Imperial	
DAJCM1305-0508IN	1/2"-20	3/4"-16	13.97	11.13	5.94	9.93	34.90	7/8"	Imperial	
DAJCM1305-0602	9/16"-18	5/16"-24	14.12	7.54	7.54	1.60	29.80	17 mm	Metric	
DAJCM1305-0603	9/16"-18	3/8"-24	14.12	7.54	7.54	3.18	30.80	17 mm	Metric	
DAJCM1305-0604	9/16"-18	7/16"-20	14.12	9.14	7.54	4.37	32.30	17 mm	Metric	
DAJCM1305-0605	9/16"-18	1/2"-20	14.12	9.14	7.54	6.00	32.26	17 mm	Metric	
DAJCM1305-0606	9/16"-18	9/16"-18	14.12	9.93	7.54	7.54	33.00	17 mm	Metric	
DAJCM1305-0608	9/16"-18	3/4"-16	14.12	11.13	7.54	9.93	35.05	22 mm	Metric	
DAJCM1305-0610	9/16"-18	7/8"-14	14.12	12.70	7.54	12.29	38.00	27 mm	Metric	
DAJCM1305-0612	9/16"-18	1-1/16"-12	14.12	15.09	7.54	15.47	42.22	32 mm	Metric	
DAJCM1305-0614	9/16"-18	1-3/16"-12	14.12	15.09	7.54	18.26	43.50	36 mm	Metric	
DAJCM1305-0616	9/16"-18	1-5/16"-12	14.12	15.09	7.54	21.44	42.93	41 mm	Metric	
DAJCM1305-0602IN	9/16"-18	5/16"-24	14.12	7.54	7.54	1.60	29.80	5/8"	Imperial	
DAJCM1305-0603IN	9/16"-18	3/8"-24	14.12	7.54	7.54	3.18	30.80	5/8"	Imperial	
DAJCM1305-0604IN	9/16"-18	7/16"-20	14.12	9.14	7.54	4.37	32.30	5/8"	Imperial	
DAJCM1305-0605IN	9/16"-18	1/2"-20	14.12	9.14	7.54	6.00	32.26	5/8"	Imperial	
DAJCM1305-0606IN	9/16"-18	9/16"-18	14.12	9.93	7.54	7.54	33.00	11/16"	Imperial	
DAJCM1305-0608IN	9/16"-18	3/4"-16	14.12	11.13	7.54	9.93	35.05	7/8"	Imperial	
DAJCM1305-0610IN	9/16"-18	7/8"-14	14.12	12.70	7.54	12.29	38.00	1"	Imperial	
DAJCM1305-0612IN	9/16"-18	1-1/16"-12	14.12	15.09	7.54	15.47	42.22	1-1/4"	Imperial	
DAJCM1305-0614IN	9/16"-18	1-3/16"-12	14.12	15.09	7.54	18.26	43.50	1-3/8"	Imperial	
DAJCM1305-0616IN	9/16"-18	1-5/16"-12	14.12	15.09	7.54	21.44	42.93	1-1/2"	Imperial	
DAJCM1305-0804	3/4"-16	7/16"-20	16.69	9.14	9.93	4.37	37.90	22 mm	Metric	
DAJCM1305-0806	3/4"-16	9/16"-18	16.69	9.93	9.93	7.54	36.60	22 mm	Metric	
DAJCM1305-0808	3/4"-16	3/4"-16	16.69	11.13	9.93	9.93	37.59	22 mm	Metric	
DAJCM1305-0810	3/4"-16	7/8"-14	16.69	12.70	9.93	12.29	40.62	27 mm	Metric	
DAJCM1305-0812	3/4"-16	1-1/16"-12	16.69	15.09	9.93	15.47	44.70	32 mm	Metric	
DAJCM1305-0814	3/4"-16	1-3/16"-12	16.69	15.09	9.93	18.26	44.70	36 mm	Metric	
DAJCM1305-0816	3/4"-16	1-5/16"-12	16.69	15.09	9.93	21.44	45.50	41 mm	Metric	
DAJCM1305-0820	3/4"-16	1-5/8"-12	16.69	15.09	9.93	27.38	47.50	50 mm	Metric	
DAJCM1305-0804IN	3/4"-16	7/16"-20	16.69	9.14	9.93	4.37	37.90	13/16"	Imperial	
DAJCM1305-0806IN	3/4"-16	9/16"-18	16.69	9.93	9.93	7.54	36.60	13/16"	Imperial	
DAJCM1305-0808IN	3/4"-16	3/4"-16	16.69	11.13	9.93	9.93	37.59	7/8"	Imperial	
DAJCM1305-0810IN	3/4"-16	7/8"-14	16.69	12.70	9.93	12.29	40.62	1"	Imperial	
DAJCM1305-0812IN	3/4"-16	1-1/16"-12	16.69	15.09	9.93	15.47	44.70	1-1/4"	Imperial	
DAJCM1305-0814IN	3/4"-16	1-3/16"-12	16.69	15.09	9.93	18.26	44.70	1-3/8"	Imperial	
DAJCM1305-0816IN	3/4"-16	1-5/16"-12	16.69	15.09	9.93	21.44	45.50	1-1/2"	Imperial	
DAJCM1305-0820IN	3/4"-16	1-5/8"-12	16.69	15.09	9.93	27.38	47.50	1-7/8"	Imperial	
DAJCM1305-1006	7/8"-14	9/16"-18	19.25	9.93	12.29	7.54	43.43	24 mm	Metric	
DAJCM1305-1008	7/8"-14	3/4"-16	19.25	11.13	12.29	9.93	41.66	24 mm	Metric	
DAJCM1305-1010	7/8"-14	7/8"-14	19.25	12.70	12.29	12.29	43.20	27 mm	Metric	
DAJCM1305-1012	7/8"-14	1-1/16"-12	19.25	15.09	12.29	15.47	47.24	32 mm	Metric	
DAJCM1305-1014	7/8"-14	1-3/16"-12	19.25	15.09	12.29	18.26	47.30	36 mm	Metric	
DAJCM1305-1016	7/8"-14	1-5/16"-12	19.25	15.09	12.29	21.44	48.00	41 mm	Metric	
DAJCM1305-1020	7/8"-14	1 5/8"-12	19.25	15.09	12.29	27.38	50.00	50 mm	Metric	
DAJCM1305-1006IN	7/8"-14	9/16"-18	19.25	9.93	12.29	7.54	43.43	15/16"	Imperial	
DAJCM1305-1008IN	7/8"-14	3/4"-16	19.25	11.13	12.29	9.93	41.66	1"	Imperial	2024/6/4,Dimension S of item AR09805(6400-1008) has been changed from 15/16"23.81(-0.8,0)mm to 1"/25.4(-0.4,0)mm

DME&JDE GROUP YOUR CONNECTORS & HOSES OEM SOLUTIONS									
DAJCM1305-1010IN	7/8"-14	7/8"-14	19.25	12.70	12.29	12.29	43.20	1"	Imperial
DAJCM1305-1012IN	7/8"-14	1-1/16"-12	19.25	15.09	12.29	15.47	47.24	1-1/4"	Imperial
DAJCM1305-1014IN	7/8"-14	1-3/16"-12	19.25	15.09	12.29	18.26	47.30	1-3/8"	Imperial
DAJCM1305-1016IN	7/8"-14	1-5/16"-12	19.25	15.09	12.29	21.44	48.00	1-1/2"	Imperial
DAJCM1305-1020IN	7/8"-14	1-5/8"-12	19.25	15.09	12.29	27.38	50.00	1-7/8"	Imperial
DAJCM1305-1204	1-1/16"-12	7/16"-20	21.95	9.14	15.47	4.37	46.40	30 mm	Metric
DAJCM1305-1206	1-1/16"-12	9/16"-18	21.95	9.93	15.47	7.54	47.20	30 mm	Metric
DAJCM1305-1208	1-1/16"-12	3/4"-16	21.95	11.13	15.47	9.93	49.30	30 mm	Metric
DAJCM1305-1210	1-1/16"-12	7/8"-14	21.95	12.70	15.47	12.29	47.80	30 mm	Metric
DAJCM1305-1212	1-1/16"-12	1-1/16"-12	21.95	15.09	15.47	15.47	50.04	32 mm	Metric
DAJCM1305-1214	1-1/16"-12	1-3/16"-12	21.95	15.09	15.47	18.26	49.78	36 mm	Metric
DAJCM1305-1216	1-1/16"-12	1-5/16"-12	21.95	15.09	15.47	21.44	50.60	41 mm	Metric
DAJCM1305-1220	1-1/16"-12	1-5/8"-12	21.95	15.09	15.47	27.38	52.80	50 mm	Metric
DAJCM1305-1224	1-1/16"-12	1-7/8"-12	21.95	15.09	15.47	33.32	55.60	55 mm	Metric
DAJCM1305-1204IN	1-1/16"-12	7/16"-20	21.95	9.14	15.47	4.37	46.40	1-1/8"	Imperial
DAJCM1305-1206IN	1-1/16"-12	9/16"-18	21.95	9.93	15.47	7.54	47.20	1-1/8"	Imperial
DAJCM1305-1208IN	1-1/16"-12	3/4"-16	21.95	11.13	15.47	9.93	49.30	1-1/8"	Imperial
DAJCM1305-1210IN	1-1/16"-12	7/8"-14	21.95	12.70	15.47	12.29	47.80	1-1/8"	Imperial
DAJCM1305-1212IN	1-1/16"-12	1-1/16"-12	21.95	15.09	15.47	15.47	50.04	1-1/4"	Imperial
DAJCM1305-1214IN	1-1/16"-12	1-3/16"-12	21.95	15.09	15.47	18.26	49.78	1-3/8"	Imperial
DAJCM1305-1216IN	1-1/16"-12	1-5/16"-12	21.95	15.09	15.47	21.44	50.60	1-1/2"	Imperial
DAJCM1305-1220IN	1-1/16"-12	1-5/8"-12	21.95	15.09	15.47	27.38	52.80	1-7/8"	Imperial
DAJCM1305-1224IN	1-1/16"-12	1-7/8"-12	21.95	15.09	15.47	33.32	55.60	2-1/8"	Imperial
DAJCM1305-1412	1-3/16"-12	1-1/16"-12	23.00	15.09	18.00	15.47	50.60	32 mm	Metric
DAJCM1305-1414	1-3/16"-12	1-3/16"-12	22.61	15.09	18.26	18.26	50.60	36 mm	Metric
DAJCM1305-1416	1-3/16"-12	1-5/16"-12	23.00	15.09	18.00	21.44	51.30	41 mm	Metric
DAJCM1305-1412IN	1-3/16"-12	1-1/16"-12	23.00	15.09	18.00	15.47	50.60	1-1/4"	Imperial
DAJCM1305-1414IN	1-3/16"-12	1-3/16"-12	22.61	15.09	18.26	18.26	50.60	1-3/8"	Imperial
DAJCM1305-1416IN	1-3/16"-12	1-5/16"-12	23.00	15.09	18.00	21.44	51.30	1-1/2"	Imperial
DAJCM1305-1606IN	1-5/16"-12	9/16"-18	23.14	9.93	21.44	7.54	49.00	1-3/8"	Imperial
DAJCM1305-1608IN	1-5/16"-12	3/4"-16	23.14	11.13	21.44	9.93	51.10	1-3/8"	Imperial
DAJCM1305-1610IN	1-5/16"-12	7/8"-14	23.14	12.70	21.44	12.29	52.58	1-3/8"	Imperial
DAJCM1305-1612IN	1-5/16"-12	1-1/16"-12	23.14	15.09	21.44	15.47	51.80	1-3/8"	Imperial
DAJCM1305-1614IN	1-5/16"-12	1-3/16"-12	23.14	15.09	21.44	18.26	51.82	1-3/8"	Imperial
DAJCM1305-1616IN	1-5/16"-12	1-5/16"-12	23.14	15.09	21.44	21.44	51.80	1-1/2"	Imperial
DAJCM1305-1620IN	1-5/16"-12	1-5/8"-12	23.14	15.09	21.44	27.38	53.90	1-7/8"	Imperial
DAJCM1305-1624IN	1-5/16"-12	1-7/8"-12	23.14	15.09	21.44	33.32	56.39	2-1/8"	Imperial
DAJCM1305-2012	1-5/8"-12	1-1/16"-12	24.33	15.09	27.38	15.47	58.40	46 mm	Metric
DAJCM1305-2016	1-5/8"-12	1-5/16"-12	24.33	15.09	27.38	21.44	59.20	46 mm	Metric
DAJCM1305-2020	1-5/8"-12	1-5/8"-12	24.33	15.09	27.38	27.38	55.10	50 mm	Metric
DAJCM1305-2024	1-5/8"-12	1-7/8"-12	24.33	15.09	27.38	33.32	56.90	55 mm	Metric
DAJCM1305-2032	1-5/8"-12	2-1/2"-12	24.33	15.09	27.38	45.25	59.10	70 mm	Metric
DAJCM1305-2012IN	1-5/8"-12	1-1/16"-12	24.33	15.09	27.38	15.47	58.40	1-11/16"	Imperial
DAJCM1305-2016IN	1-5/8"-12	1-5/16"-12	24.33	15.09	27.38	21.44	59.20	1-11/16"	Imperial
DAJCM1305-2020IN	1-5/8"-12	1-5/8"-12	24.33	15.09	27.38	27.38	55.10	1-7/8"	Imperial
DAJCM1305-2024IN	1-5/8"-12	1-7/8"-12	24.33	15.09	27.38	33.32	56.90	2-1/8"	Imperial
DAJCM1305-2032IN	1-5/8"-12	2-1/2"-12	24.33	15.09	27.38	45.25	59.10	2-3/4"	Imperial
DAJCM1305-2420	1-7/8"-12	1-5/8"-12	27.51	15.09	33.32	27.38	64.26	50 mm	Metric
DAJCM1305-2424	1-7/8"-12	1-7/8"-12	27.51	15.09	33.32	33.32	60.20	55 mm	Metric
DAJCM1305-2420IN	1-7/8"-12	1-5/8"-12	27.51	15.09	33.32	27.38	64.26	2"	Imperial
DAJCM1305-2424IN	1-7/8"-12	1-7/8"-12	27.51	15.09	33.32	33.32	60.20	2-1/8"	Imperial
DAJCM1305-3216	2-1/2"-12	1-5/16"-12	33.86	15.09	45.24	21.44	74.70	65 mm	Metric
DAJCM1305-3220	2-1/2"-12	1-5/8"-12	33.86	15.09	45.24	27.38	74.70	65 mm	Metric
DAJCM1305-3224	2-1/2"-12	1-7/8"-12	33.86	15.09	45.24	33.32	74.68	65 mm	Metric
DAJCM1305-3232	2-1/2"-12	2-1/2"-12	33.86	15.09	45.24	45.24	70.60	70 mm	Metric
DAJCM1305-3216IN	2-1/2"-12	1-5/16"-12	33.86	15.09	45.24	21.44	74.70	2-5/8"	Imperial
DAJCM1305-3220IN	2-1/2"-12	1-5/8"-12	33.86	15.09	45.24	27.38	74.70	2-5/8"	Imperial
DAJCM1305-3224IN	2-1/2"-12	1-7/8"-12	33.86	15.09	45.24	33.32	74.68	2-5/8"	Imperial
DAJCM1305-3232IN	2-1/2"-12	2-1/2"-12	33.86	15.09	45.24	45.24	70.60	2-3/4"	Imperial

Certificate:

ISO 9001

Quality Management System

ISO 14001

Environmental Management System

MSHA

Mining Safety and Health Administration

DAkkS

German Accreditation

CE

Conformity

UKCA

United Kingdom Conformity Assessed

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

</

DAJCM106Q-0820	3/4"-16	1-1/4"-11	16.69	18.60	9.93	27.50	50.50	50.00
DAJCM106Q-1004	7/8"-14	1/4"-19	19.25	11.20	12.29	7.50	40.50	24.00
DAJCM106Q-1006	7/8"-14	3/8"-19	19.25	11.20	12.29	9.90	40.50	24.00
DAJCM106Q-1008	7/8"-14	1/2"-14	19.25	14.50	12.30	12.30	44.00	27.00
DAJCM106Q-1010	7/8"-14	5/8"-14	19.25	14.50	12.29	12.29	45.50	32.00
DAJCM106Q-1012	7/8"-14	3/4"-14	19.25	14.50	12.29	15.50	46.50	36.00
DAJCM106Q-1016	7/8"-14	1"-11	19.25	18.60	12.29	21.50	51.00	46.00
DAJCM106Q-1204	1-1/16"-12	1/4"-19	21.95	11.20	21.95	11.20	43.50	30.00
DAJCM106Q-1206	1-1/16"-12	3/8"-19	21.95	11.20	15.47	9.90	43.50	30.00
DAJCM106Q-1208	1-1/16"-12	1/2"-14	21.95	14.50	15.47	12.00	46.00	30.00
DAJCM106Q-1210	1-1/16"-12	5/8"-14	21.95	14.50	15.47	14.00	48.00	32.00
DAJCM106Q-1212	1-1/16"-12	3/4"-14	21.95	14.50	15.47	15.47	49.20	36.00
DAJCM106Q-1216	1-1/16"-12	1"-11	21.95	18.60	15.47	21.50	52.00	46.00
DAJCM106Q-1220	1-1/16"-12	1-1/4"-11	21.95	18.60	15.47	27.50	56.00	50.00
DAJCM106Q-1224	1-1/16"-12	1-1/2"-11	21.95	18.60	15.47	33.00	55.00	55.00
DAJCM106Q-1412	1-3/16"-12	3/4"-14	23.00	14.50	18.00	15.50	51.50	36.00
DAJCM106Q-1608	1-5/16"-12	1/2"-14	23.14	14.50	21.44	12.00	51.00	36.00
DAJCM106Q-1610	1-5/16"-12	5/8"-14	23.14	14.50	21.44	14.00	51.00	36.00
DAJCM106Q-1612	1-5/16"-12	3/4"-14	23.14	14.50	21.44	15.50	48.50	36.00
DAJCM106Q-1616	1-5/16"-12	1"-11	23.14	18.60	21.44	21.44	53.50	46.00
DAJCM106Q-1620	1-5/16"-12	1-1/4"-11	23.14	18.60	21.44	27.50	57.00	50.00
DAJCM106Q-1624	1-5/16"-12	1-1/2"-11	23.14	18.60	21.44	33.00	56.00	55.00
DAJCM106Q-2012	1-5/8"-12	3/4"-14	24.33	14.50	27.38	15.50	51.00	46.00
DAJCM106Q-2016	1-5/8"-12	1"-11	24.33	18.60	27.38	21.50	55.00	46.00
DAJCM106Q-2020	1-5/8"-12	1-1/4"-11	24.33	18.60	27.38	27.38	57.00	50.00
DAJCM106Q-2024	1-5/8"-12	1-1/2"-11	24.33	18.60	27.38	33.00	57.50	55.00
DAJCM106Q-2032	1-5/8"-12	2"-11	24.33	18.60	27.38	45.00	60.50	70.00
DAJCM106Q-2416	1-7/8"-12	1"-11	27.51	18.60	33.32	21.50	59.50	50.00
DAJCM106Q-2420	1-7/8"-12	1-1/4"-11	27.51	18.60	33.32	27.50	61.50	55.00
DAJCM106Q-2424	1-7/8"-12	1-1/2"-11	27.51	18.60	33.00	33.00	61.50	55.00
DAJCM106Q-2432	1-7/8"-12	2"-11	27.51	18.60	33.32	45.00	63.50	70.00
DAJCM106Q-3216	2-1/2"-12	1"-11	33.86	18.60	45.25	21.50	69.10	65.00
DAJCM106Q-3220	2-1/2"-12	1-1/4"-11	33.86	18.60	45.25	27.50	69.10	65.00
DAJCM106Q-3224	2-1/2"-12	1-1/2"-11	33.86	18.60	45.25	33.00	69.10	65.00
DAJCM106Q-3232	2-1/2"-12	2"-11	33.86	18.60	45.00	45.00	70.00	70.00

DAJCM1065

Straight Connector JIC Male – BSPP Male + O Ring Seal

D

A

JC

M

1

06

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type



Adaptor

JIC UNF

Male

Straight

BSPP

Male + O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM1065

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

UNF × BSPP

Sealing Method:

O Ring

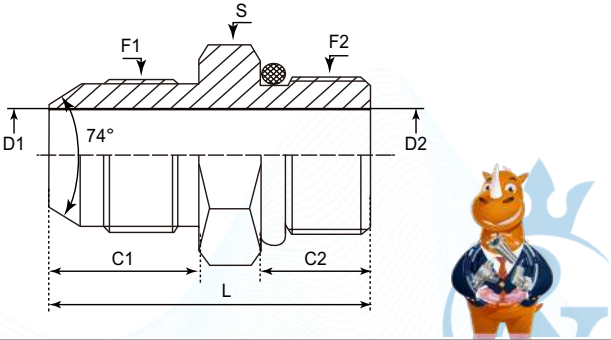

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJCM1065-0402	7/16"-20	1/8"-28	13.97	7.60	4.37	4.37	30.00	14.00
DAJCM1065-0404	7/16"-20	1/4"-19	13.97	11.20	4.37	7.50	35.00	19.00
DAJCM1065-0406	7/16"-20	3/8"-19	13.97	11.20	4.37	9.90	35.00	22.00
DAJCM1065-0408	7/16"-20	1/2"-14	13.97	14.50	4.37	12.30	38.00	30.00
DAJCM1065-0412	7/16"-20	3/4"-14	13.97	14.50	4.37	15.50	39.50	36.00
DAJCM1065-0502	1/2"-20	1/8"-28	13.97	7.60	5.94	4.40	30.00	14.00
DAJCM1065-0504	1/2"-20	1/4"-19	13.97	11.20	5.94	5.94	34.00	19.00
DAJCM1065-0506	1/2"-20	3/8"-19	13.97	11.20	5.94	9.90	34.50	22.00
DAJCM1065-0508	1/2"-20	1/2"-14	13.97	14.50	5.94	12.30	37.50	27.00
DAJCM1065-0602	9/16"-18	1/8"-28	14.12	7.60	7.54	4.40	29.50	17.00
DAJCM1065-0604	9/16"-18	1/4"-19	14.12	11.20	7.50	7.50	32.00	19.00
DAJCM1065-0606	9/16"-18	3/8"-19	14.12	11.20	7.54	9.90	34.50	22.00
DAJCM1065-0608	9/16"-18	1/2"-14	14.12	14.50	7.54	12.30	38.00	27.00
DAJCM1065-0612	9/16"-18	3/4"-14	14.12	14.50	7.54	15.50	39.50	36.00
DAJCM1065-0804	3/4"-16	1/4"-19	16.69	11.20	9.93	7.50	35.00	19.00
DAJCM1065-0806	3/4"-16	3/8"-19	16.69	11.20	9.93	9.93	36.00	22.00
DAJCM1065-0808	3/4"-16	1/2"-14	16.69	14.50	9.93	12.30	41.50	27.00
DAJCM1065-0810	3/4"-16	5/8"-14	16.69	14.50	9.93	14.00	42.50	32.00
DAJCM1065-0812	3/4"-16	3/4"-14	16.69	14.50	9.93	15.50	45.00	36.00
DAJCM1065-0816	3/4"-16	1"-11	16.69	18.60	9.93	21.50	48.00	46.00

DME&JDE GROUP YOUR CONNECTORS & HOSES OEM SOLUTIONS								
DAJCM1065-0820	3/4"-16	1-1/4"-11	16.69	18.60	9.93	27.50	50.50	50.00
DAJCM1065-1004	7/8"-14	1/4"-19	19.25	11.20	12.29	7.50	40.50	24.00
DAJCM1065-1006	7/8"-14	3/8"-19	19.25	11.20	12.29	9.90	40.50	24.00
DAJCM1065-1008	7/8"-14	1/2"-14	19.25	14.50	12.30	12.30	44.00	27.00
DAJCM1065-1010	7/8"-14	5/8"-14	19.25	14.50	12.29	12.29	45.50	32.00
DAJCM1065-1012	7/8"-14	3/4"-14	19.25	14.50	12.29	15.50	46.50	36.00
DAJCM1065-1016	7/8"-14	1"-11	19.25	18.60	12.29	21.50	51.00	46.00
DAJCM1065-1204	1-1/16"-12	1/4"-19	21.95	11.20	21.95	11.20	43.50	30.00
DAJCM1065-1206	1-1/16"-12	3/8"-19	21.95	11.20	15.47	9.90	43.50	30.00
DAJCM1065-1208	1-1/16"-12	1/2"-14	21.95	14.50	15.47	12.00	46.00	30.00
DAJCM1065-1210	1-1/16"-12	5/8"-14	21.95	14.50	15.47	14.00	48.00	32.00
DAJCM1065-1212	1-1/16"-12	3/4"-14	21.95	14.50	15.47	15.47	49.20	36.00
DAJCM1065-1216	1-1/16"-12	1"-11	21.95	18.60	15.47	21.50	52.00	46.00
DAJCM1065-1220	1-1/16"-12	1-1/4"-11	21.95	18.60	15.47	27.50	56.00	50.00
DAJCM1065-1224	1-1/16"-12	1-1/2"-11	21.95	18.60	15.47	33.00	55.00	55.00
DAJCM1065-1412	1-3/16"-12	3/4"-14	23.00	14.50	18.00	15.50	51.50	36.00
DAJCM1065-1608	1-5/16"-12	1/2"-14	23.14	14.50	21.44	12.00	51.00	36.00
DAJCM1065-1610	1-5/16"-12	5/8"-14	23.14	14.50	21.44	14.00	51.00	36.00
DAJCM1065-1612	1-5/16"-12	3/4"-14	23.14	14.50	21.44	15.50	48.50	36.00
DAJCM1065-1616	1-5/16"-12	1"-11	23.14	18.60	21.44	21.44	53.50	46.00
DAJCM1065-1620	1-5/16"-12	1-1/4"-11	23.14	18.60	21.44	27.50	57.00	50.00
DAJCM1065-1624	1-5/16"-12	1-1/2"-11	23.14	18.60	21.44	33.00	56.00	55.00
DAJCM1065-2012	1-5/8"-12	3/4"-14	24.33	14.50	27.38	15.50	51.00	46.00
DAJCM1065-2016	1-5/8"-12	1"-11	24.33	18.60	27.38	21.50	55.00	46.00
DAJCM1065-2020	1-5/8"-12	1-1/4"-11	24.33	18.60	27.38	27.38	57.00	50.00
DAJCM1065-2024	1-5/8"-12	1-1/2"-11	24.33	18.60	27.38	33.00	57.50	55.00
DAJCM1065-2032	1-5/8"-12	2"-11	24.33	18.60	27.38	45.00	60.50	70.00
DAJCM1065-2416	1-7/8"-12	1"-11	27.51	18.60	33.32	21.50	59.50	50.00
DAJCM1065-2420	1-7/8"-12	1-1/4"-11	27.51	18.60	33.32	27.50	61.50	55.00
DAJCM1065-2424	1-7/8"-12	1-1/2"-11	27.51	18.60	33.00	33.00	61.50	55.00
DAJCM1065-2432	1-7/8"-12	2"-11	27.51	18.60	33.32	45.00	63.50	70.00
DAJCM1065-3216	2-1/2"-12	1"-11	33.86	18.60	45.25	21.50	69.10	65.00
DAJCM1065-3220	2-1/2"-12	1-1/4"-11	33.86	18.60	45.25	27.50	69.10	65.00
DAJCM1065-3224	2-1/2"-12	1-1/2"-11	33.86	18.60	45.25	33.00	69.10	65.00
DAJCM1065-3232	2-1/2"-12	2"-11	33.86	18.60	45.00	45.00	70.00	70.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DME&JDE GROUP YOUR CONNECTORS & HOSES OEM SOLUTIONS								
DAJCM152Q								
Straight JIC Male - Metric Male + Retaining Ring + O Ring Seal								
D Company DME A Product Range Adaptor JC Thread Types JIC UNF M Connection Type Male 1 Adaptor Structure Straight 52 Thread Types Metric 0 Connection Type Male + Retaining Ring + O Ring								
German Technology Equipment SHIELD FLEX New-Standard								
F1 S F2 D1 74° D2 C1 L C2								
PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSP	mm	mm	mm	mm	mm	mm
DAJCM152Q-0408	7/16"-20	M8X1	13.97	9.50	2.00	2.00	30.00	14.00
DAJCM152Q-0410	7/16"-20	M10X1	13.97	9.00	4.37	4.37	30.00	14.00
DAJCM152Q-0412	7/16"-20	M12X1.5	13.97	11.00	4.37	6.00	32.00	17.00
DAJCM152Q-0414	7/16"-20	M14X1.5	13.97	11.00	4.37	7.50	34.00	19.00
DAJCM152Q-0416	7/16"-20	M16X1.5	13.97	11.50	4.37	9.00	35.00	22.00
DAJCM152Q-0418	7/16"-20	M18X1.5	13.97	12.50	4.37	10.00	36.50	24.00
DAJCM152Q-0422	7/16"-20	M22X1.5	13.97	13.00	4.37	12.00	38.50	27.00
DAJCM152Q-0510	1/2"-20	M10X1	13.97	9.00	5.94	4.50	30.00	17.00
DAJCM152Q-0512	1/2"-20	M12X1.5	13.97	11.00	5.94	5.94	33.00	17.00
DAJCM152Q-0514	1/2"-20	M14X1.5	13.97	11.00	5.94	5.94	34.50	19.00
DAJCM152Q-0516	1/2"-20	M16X1.5	13.97	11.50	5.94	9.00	35.00	22.00
DAJCM152Q-0610	9/16"-18	M10X1	14.12	9.00	7.54	4.50	32.00	17.00
DAJCM152Q-0612	9/16"-18	M12X1.5	14.12	11.00	7.54	6.00	34.00	17.00
DAJCM152Q-0614	9/16"-18	M14X1.5	14.12	11.00	7.54	7.54	33.50	19.00
DAJCM152Q-0616	9/16"-18	M16X1.5	14.12	11.50	7.54	9.00	35.00	22.00
DAJCM152Q-0618	9/16"-18	M18X1.5	14.12	12.50	7.54	10.00	37.00	24.00
DAJCM152Q-0620	9/16"-18	M20X1.5	14.12	14.00	7.54	12.00	37.50	27.00

Certificate:

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



DAJCM152Q-0622	9/16"-18	M22X1.5	14.12	13.00	7.54	12.00	37.00	27.00
DAJCM152Q-0718	5/8"-18	M18X1.5	15.70	12.50	7.14	11.00	38.50	24.00
DAJCM152Q-0720	5/8"-18	M20X1.5	15.70	14.00	7.14	12.00	39.00	27.00
DAJCM152Q-0812	3/4"-16	M12X1.5	16.69	9.50	9.93	4.00	35.50	22.00
DAJCM152Q-0814	3/4"-16	M14X1.5	16.69	11.00	9.93	7.50	37.50	22.00
DAJCM152Q-0816	3/4"-16	M16X1.5	16.69	11.50	9.00	9.00	38.00	22.00
DAJCM152Q-0818	3/4"-16	M18X1.5	16.69	13.00	9.00	9.00	39.50	24.00
DAJCM152Q-0820	3/4"-16	M20X1.5	16.69	14.00	9.93	9.93	41.00	27.00
DAJCM152Q-0822	3/4"-16	M22X1.5	16.69	13.50	9.93	9.93	42.00	27.00
DAJCM152Q-0824	3/4"-16	M24X1.5	16.69	14.00	9.93	14.00	42.00	30.00
DAJCM152Q-0826	3/4"-16	M26X1.5	16.69	16.00	9.93	16.00	46.00	32.00
DAJCM152Q-1008	7/8"-14	M8X1	19.25	9.50	12.29	2.00	38.50	24.00
DAJCM152Q-1016	7/8"-14	M16X1.5	19.25	11.50	12.29	9.00	40.50	24.00
DAJCM152Q-1018	7/8"-14	M18X1.5	19.25	12.50	11.00	11.00	42.00	24.00
DAJCM152Q-1020	7/8"-14	M20X1.5	19.25	14.00	12.29	12.29	43.60	27.00
DAJCM152Q-1022	7/8"-14	M22X1.5	19.25	13.00	12.29	12.29	44.50	27.00
DAJCM152Q-1218	1-1/16"-12	M18X1.5	21.95	12.50	15.47	11.00	47.50	27.00
DAJCM152Q-1220	1-1/16"-12	M20X1.5	21.95	12.50	15.47	11.00	45.50	27.00
DAJCM152Q-1222	1-1/16"-12	M22X1.5	21.95	14.00	15.47	14.00	45.50	27.00
DAJCM152Q-1226	1-1/16"-12	M26X1.5	21.95	18.00	15.47	15.47	51.00	32.00
DAJCM152Q-1227	1-1/16"-12	M27X2	21.95	18.00	15.47	15.47	51.00	32.00
DAJCM152Q-1230	1-1/16"-12	M30X2	21.95	18.50	15.47	17.00	53.00	36.00
DAJCM152Q-1233	1-1/16"-12	M33X2	21.95	16.00	15.47	23.00	49.00	41.00
DAJCM152Q-1236	1-1/16"-12	M36X2	21.95	17.00	15.47	20.00	53.00	41.00
DAJCM152Q-1622	1-5/16"-12	M22X1.5	23.14	13.00	21.44	14.00	48.00	36.00
DAJCM152Q-1627	1-5/16"-12	M27X2	23.14	18.00	21.44	13.00	53.00	36.00
DAJCM152Q-1630	1-5/16"-12	M30X2	23.14	18.50	21.44	17.00	53.00	36.00
DAJCM152Q-1633	1-5/16"-12	M33X2	23.14	18.50	21.44	21.44	53.00	41.00
DAJCM152Q-1636	1-5/16"-12	M36X2	23.14	17.00	21.44	20.00	54.00	41.00
DAJCM152Q-2033	1-5/8"-12	M33X2	24.33	18.50	27.38	23.00	56.50	42.88
DAJCM152Q-2042	1-5/8"-12	M42X2	24.33	16.00	27.38	30.00	58.00	50.00

DAJCM1525

Straight Connector JIC Male - Metric Male + O Ring Seal

D

A

JC

M

1

52

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type



Adaptor

JIC UNF

Male

Straight

Metric

Male + O Ring

DME&JDE Code: DAJCM1525

Product Type Hydraulic adaptor


Standard: JIC and SAE-ORB

Structure: Straight

Connection Type: Male × Male

Thread Types: UNF × Metric

Sealing Method: O Ring

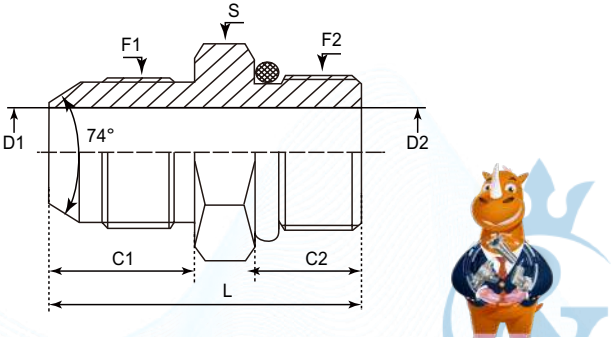

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSP	mm	mm	mm	mm	mm	mm
DAJCM1525-0408	7/16"-20	M8X1	13.97	9.50	2.00	2.00	30.00	14.00
DAJCM1525-0410	7/16"-20	M10X1	13.97	9.00	4.37	4.37	30.00	14.00
DAJCM1525-0412	7/16"-20	M12X1.5	13.97	11.00	4.37	6.00	32.00	17.00
DAJCM1525-0414	7/16"-20	M14X1.5	13.97	11.00	4.37	7.50	34.00	19.00
DAJCM1525-0416	7/16"-20	M16X1.5	13.97	11.50	4.37	9.00	35.00	22.00
DAJCM1525-0418	7/16"-20	M18X1.5	13.97	12.50	4.37	10.00	36.50	24.00
DAJCM1525-0422	7/16"-20	M22X1.5	13.97	13.00	4.37	12.00	38.50	27.00
DAJCM1525-0510	1/2"-20	M10X1	13.97	9.00	5.94	4.50	30.00	17.00
DAJCM1525-0512	1/2"-20	M12X1.5	13.97	11.00	5.94	5.94	33.00	17.00
DAJCM1525-0514	1/2"-20	M14X1.5	13.97	11.00	5.94	5.94	34.50	19.00
DAJCM1525-0516	1/2"-20	M16X1.5	13.97	11.50	5.94	9.00	35.00	22.00
DAJCM1525-0610	9/16"-18	M10X1	14.12	9.00	7.54	4.50	32.00	17.00
DAJCM1525-0612	9/16"-18	M12X1.5	14.12	11.00	7.54	6.00	34.00	17.00
DAJCM1525-0614	9/16"-18	M14X1.5	14.12	11.00	7.54	7.54	33.50	19.00
DAJCM1525-0616	9/16"-18	M16X1.5	14.12	11.50	7.54	9.00	35.00	22.00
DAJCM1525-0618	9/16"-18	M18X1.5	14.12	12.50	7.54	10.00	37.00	24.00
DAJCM1525-0620	9/16"-18	M20X1.5	14.12	14.00	7.54	12.00	37.50	27.00

DAJCM1525-0622	9/16"-18	M22X1.5	14.12	13.00	7.54	12.00	37.00	27.00
DAJCM1525-0718	5/8"-18	M18X1.5	15.70	12.50	7.14	11.00	38.50	24.00
DAJCM1525-0720	5/8"-18	M20X1.5	15.70	14.00	7.14	12.00	39.00	27.00
DAJCM1525-0812	3/4"-16	M12X1.5	16.69	9.50	9.93	4.00	35.50	22.00
DAJCM1525-0814	3/4"-16	M14X1.5	16.69	11.00	9.93	7.50	37.50	22.00
DAJCM1525-0816	3/4"-16	M16X1.5	16.69	11.50	9.00	9.00	38.00	22.00
DAJCM1525-0818	3/4"-16	M18X1.5	16.69	13.00	9.00	9.00	39.50	24.00
DAJCM1525-0820	3/4"-16	M20X1.5	16.69	14.00	9.93	9.93	41.00	27.00
DAJCM1525-0822	3/4"-16	M22X1.5	16.69	13.50	9.93	9.93	42.00	27.00
DAJCM1525-0824	3/4"-16	M24X1.5	16.69	14.00	9.93	14.00	42.00	30.00
DAJCM1525-0826	3/4"-16	M26X1.5	16.69	16.00	9.93	16.00	46.00	32.00
DAJCM1525-1008	7/8"-14	M8X1	19.25	9.50	12.29	2.00	38.50	24.00
DAJCM1525-1016	7/8"-14	M16X1.5	19.25	11.50	12.29	9.00	40.50	24.00
DAJCM1525-1018	7/8"-14	M18X1.5	19.25	12.50	11.00	11.00	42.00	24.00
DAJCM1525-1020	7/8"-14	M20X1.5	19.25	14.00	12.29	12.29	43.60	27.00
DAJCM1525-1022	7/8"-14	M22X1.5	19.25	13.00	12.29	12.29	44.50	27.00
DAJCM1525-1218	1-1/16"-12	M18X1.5	21.95	12.50	15.47	11.00	47.50	27.00
DAJCM1525-1220	1-1/16"-12	M20X1.5	21.95	12.50	15.47	11.00	45.50	27.00
DAJCM1525-1222	1-1/16"-12	M22X1.5	21.95	14.00	15.47	14.00	45.50	27.00
DAJCM1525-1226	1-1/16"-12	M26X1.5	21.95	18.00	15.47	15.47	51.00	32.00
DAJCM1525-1227	1-1/16"-12	M27X2	21.95	18.00	15.47	15.47	51.00	32.00
DAJCM1525-1230	1-1/16"-12	M30X2	21.95	18.50	15.47	17.00	53.00	36.00
DAJCM1525-1233	1-1/16"-12	M33X2	21.95	16.00	15.47	23.00	49.00	41.00
DAJCM1525-1236	1-1/16"-12	M36X2	21.95	17.00	15.47	20.00	53.00	41.00
DAJCM1525-1622	1-5/16"-12	M22X1.5	23.14	13.00	21.44	14.00	48.00	36.00
DAJCM1525-1627	1-5/16"-12	M27X2	23.14	18.00	21.44	13.00	53.00	36.00
DAJCM1525-1630	1-5/16"-12	M30X2	23.14	18.50	21.44	17.00	53.00	36.00
DAJCM1525-1633	1-5/16"-12	M33X2	23.14	18.50	21.44	21.44	53.00	41.00
DAJCM1525-1636	1-5/16"-12	M36X2	23.14	17.00	21.44	20.00	54.00	41.00
DAJCM1525-2033	1-5/8"-12	M33X2	24.33	18.50	27.38	23.00	56.50	42.88
DAJCM1525-2042	1-5/8"-12	M42X2	24.33	16.00	27.38	30.00	58.00	50.00



DAJCM1061

Straight Connector JIC Male – BSPP 60° Male with ED Ring

D

A

JC

M

1

061

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Adaptor

JIC UNF

Male

Straight

BSPP Male with ED Ring

- DME&JDE Code:

DAJCM1061
- Product Type

Hydraulic adaptor
- Standard:

JIC and SAE-ORB
- Structure:

Straight
- Connection Type:


Male × Male
- Thread Types:

UNF × BSPP 60°
- Sealing Method:

ED Ring

German Technology Equipment

New-Standard

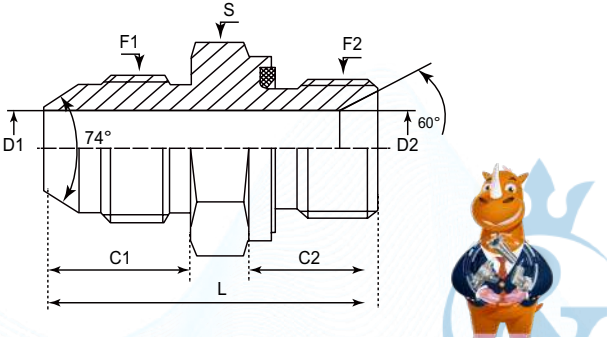

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJCM1061-0402	7/16"-20	1/8"-28	13.97	8.00	4.00	4.00	29.00	14.00
DAJCM1061-0404	7/16"-20	1/4"-19	13.97	12.00	4.37	4.37	34.00	19.00
DAJCM1061-0406	7/16"-20	3/8"-19	13.97	12.00	4.37	7.90	34.00	22.00
DAJCM1061-0408	7/16"-20	1/2"-14	13.97	14.00	4.37	11.10	39.50	27.00
DAJCM1061-0502	1/2"-20	1/8"-28	13.97	8.00	5.94	4.00	30.50	17.00
DAJCM1061-0504	1/2"-20	1/4"-19	13.97	12.00	5.94	4.70	34.00	19.00
DAJCM1061-0506	1/2"-20	3/8"-19	13.97	12.00	5.94	7.90	36.00	22.00
DAJCM1061-0602	9/16"-18	1/8"-28	14.12	8.00	7.54	4.00	30.00	17.00
DAJCM1061-0604	9/16"-18	1/4"-19	14.12	12.00	6.00	6.00	34.00	19.00
DAJCM1061-0606	9/16"-18	3/8"-19	14.12	12.00	7.54	7.54	34.50	22.00
DAJCM1061-0608	9/16"-18	1/2"-14	14.12	14.00	7.54	12.00	38.00	27.00
DAJCM1061-0610	9/16"-18	5/8"-14	14.12	14.00	7.54	14.00	40.00	30.00
DAJCM1061-0612	9/16"-18	3/4"-14	14.12	16.00	7.54	16.70	45.00	32.00
DAJCM1061-0616	9/16"-18	1"-11	14.12	18.00	7.54	22.20	45.50	41.00
DAJCM1061-0804	3/4"-16	1/4"-19	16.69	12.00	9.93	6.00	38.50	19.00



DAJCM1061-0806	3/4"-16	3/8"-19	16.69	12.00	9.00	9.00	37.50	22.00
DAJCM1061-0808	3/4"-16	1/2"-14	16.69	14.00	9.93	12.00	39.50	27.00
DAJCM1061-0810	3/4"-16	5/8"-14	16.69	14.00	9.93	14.00	43.00	30.00
DAJCM1061-0812	3/4"-16	3/4"-14	16.69	16.00	9.93	16.70	46.70	32.00
DAJCM1061-0816	3/4"-16	1"-11	16.69	18.00	9.93	22.20	48.00	41.00
DAJCM1061-1006	7/8"-14	3/8"-19	19.25	12.00	12.29	7.90	41.30	24.00
DAJCM1061-1008	7/8"-14	1/2"-14	19.25	14.00	12.00	12.00	45.00	27.00
DAJCM1061-1010	7/8"-14	5/8"-14	19.25	14.00	12.29	12.29	45.30	30.00
DAJCM1061-1012	7/8"-14	3/4"-14	19.25	16.00	12.29	16.70	49.00	32.00
DAJCM1061-1016	7/8"-14	1"-11	19.25	18.00	12.29	22.20	50.80	41.00
DAJCM1061-1206	1-1/16"-12	3/8"-19	21.95	12.00	15.47	7.90	48.00	27.00
DAJCM1061-1208	1-1/16"-12	1/2"-14	21.95	14.00	15.47	12.00	48.00	27.00
DAJCM1061-1210	1-1/16"-12	5/8"-14	21.95	14.00	14.00	14.00	50.00	30.00
DAJCM1061-1212	1-1/16"-12	3/4"-14	21.95	16.00	15.47	15.47	52.00	32.00
DAJCM1061-1216	1-1/16"-12	1"-11	21.95	18.00	15.47	22.20	53.50	41.00
DAJCM1061-1220	1-1/16"-12	1-1/4"-11	21.95	20.00	15.47	28.60	56.00	50.00
DAJCM1061-1412	1-3/16"-12	3/4"-14	23.00	16.00	16.70	16.70	53.00	32.00
DAJCM1061-1612	1-5/16"-12	3/4"-14	23.14	16.00	21.44	16.70	52.50	36.00
DAJCM1061-1616	1-5/16"-12	1"-11	23.14	18.00	21.44	21.44	55.00	41.00
DAJCM1061-1620	1-5/16"-12	1-1/4"-11	23.14	20.00	21.44	28.60	57.50	50.00
DAJCM1061-1624	1-5/16"-12	1-1/2"-11	23.14	22.00	21.44	33.30	62.00	55.00
DAJCM1061-2012	1-5/8"-12	3/4"-14	24.33	16.00	27.38	16.70	54.50	46.00
DAJCM1061-2016	1-5/8"-12	1"-11	24.33	18.00	27.38	23.00	58.50	46.00
DAJCM1061-2020	1-5/8"-12	1-1/4"-11	24.33	20.00	27.38	27.38	58.50	50.00
DAJCM1061-2024	1-5/8"-12	1-1/2"-11	24.33	22.00	27.38	33.30	63.50	55.00
DAJCM1061-2420	1-7/8"-12	1-1/4"-11	27.51	20.00	33.32	30.00	62.00	50.00
DAJCM1061-2424	1-7/8"-12	1-1/2"-11	27.51	22.00	33.32	33.32	65.00	55.00
DAJCM1061-2432	1-7/8"-12	2"-11	27.51	22.00	33.32	45.25	68.00	70.00
DAJCM1061-3232	2-1/2"-12	2"-11	33.86	22.00	45.25	45.25	74.00	70.00



DAJCM1521

Straight Connector JIC Male – Metric Male with ED Ring

D

A

JC

M

1

521

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Adaptor

JIC UNF

Male

Straight

Metric Male with ED Ring

- DME&JDE Code:

DAJCM1521
- Product Type

Hydraulic adaptor
- Standard:

JIC and SAE-ORB
- Structure:

Straight
- Connection Type:


Male × Male
- Thread Types:

UNF × Metric
- Sealing Method:

ED Ring

German Technology Equipment

New-Standard

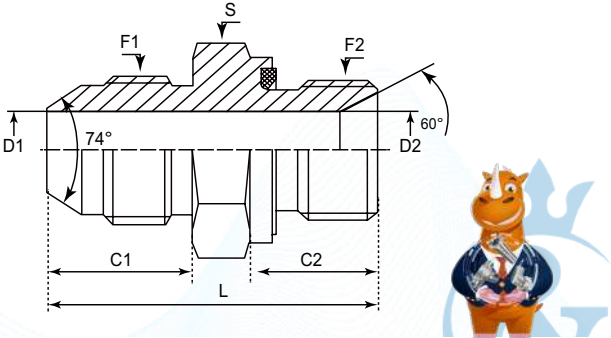

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAJCM1521-0408	7/16"-20	M8X1	13.97	8.00	3.00	3.00	31.00	14.00
DAJCM1521-0410	7/16"-20	M10X1	13.97	8.00	4.37	4.37	31.00	14.00
DAJCM1521-0412	7/16"-20	M12X1.5	13.97	12.00	4.37	4.37	34.00	17.00
DAJCM1521-0414	7/16"-20	M14X1.5	13.97	12.00	4.37	7.00	35.50	19.00
DAJCM1521-0416	7/16"-20	M16X1.5	13.97	12.00	4.37	4.37	36.50	22.00
DAJCM1521-0418	7/16"-20	M18X1.5	13.97	12.00	4.37	9.00	35.00	24.00
DAJCM1521-0422	7/16"-20	M22X1.5	13.97	14.00	4.37	12.00	38.50	27.00
DAJCM1521-0510	1/2"-20	M10X1	13.97	8.00	5.94	4.40	31.00	14.00
DAJCM1521-0514	1/2"-20	M14X1.5	13.97	12.00	5.94	5.94	33.00	19.00
DAJCM1521-0608	9/16"-18	M8X1	14.12	8.00	7.54	3.00	30.00	17.00
DAJCM1521-0610	9/16"-18	M10X1	14.12	8.00	7.54	4.40	30.00	17.00
DAJCM1521-0612	9/16"-18	M12X1.5	14.12	12.00	6.00	6.00	34.50	17.00
DAJCM1521-0614	9/16"-18	M14X1.5	14.12	12.00	7.00	7.00	33.00	19.00
DAJCM1521-0616	9/16"-18	M16X1.5	14.12	12.00	7.54	7.54	36.50	22.00
DAJCM1521-0618	9/16"-18	M18X1.5	14.12	12.00	7.54	7.54	35.00	24.00
DAJCM1521-0620	9/16"-18	M20X1.5	14.12	14.00	7.54	12.00	37.70	27.00
DAJCM1521-0622	9/16"-18	M22X1.5	14.12	14.00	7.54	12.00	38.20	27.00
DAJCM1521-0627	9/16"-18	M27X2	14.12	16.00	7.54	15.00	41.20	32.00



DAJCM1521-0812	3/4"-16	M12X1.5	16.69	12.00	9.93	6.00	38.50	19.00
DAJCM1521-0814	3/4"-16	M14X1.5	16.69	12.00	9.93	7.00	38.50	22.00
DAJCM1521-0816	3/4"-16	M16X1.5	16.69	12.00	9.00	9.00	37.70	22.00
DAJCM1521-0818	3/4"-16	M18X1.5	16.69	12.00	9.93	9.93	39.00	24.00
DAJCM1521-0822	3/4"-16	M22X1.5	16.69	14.00	9.93	12.00	40.70	27.00
DAJCM1521-0826	3/4"-16	M26X1.5	16.69	16.00	9.93	15.00	45.00	32.00
DAJCM1521-0827	3/4"-16	M27X1.5	16.69	16.00	9.93	15.00	44.00	32.00
DAJCM1521-0833	3/4"-16	M33X1.5	16.69	18.00	9.93	20.00	45.50	41.00
DAJCM1521-1016	7/8"-14	M16X1.5	19.25	12.00	12.29	9.00	41.00	24.00
DAJCM1521-1018	7/8"-14	M18X1.5	19.25	12.00	12.30	9.00	41.50	24.00
DAJCM1521-1022	7/8"-14	M22X1.5	19.25	14.00	12.29	12.29	43.50	27.00
DAJCM1521-1026	7/8"-14	M26X1.5	19.25	16.00	12.29	12.29	47.30	32.00
DAJCM1521-1027	7/8"-14	M27X2	19.25	16.00	12.29	12.29	47.30	32.00
DAJCM1521-1218	1-1/16"-12	M18X1.5	21.95	12.00	15.47	9.00	44.00	30.00
DAJCM1521-1220	1-1/16"-12	M20X1.5	21.95	14.00	15.47	12.00	46.00	27.00
DAJCM1521-1222	1-1/16"-12	M22X1.5	21.95	14.00	15.47	12.00	46.50	30.00
DAJCM1521-1226	1-1/16"-12	M26X1.5	21.95	16.00	15.47	15.47	50.00	32.00
DAJCM1521-1230	1-1/16"-12	M30X2	21.95	18.00	15.47	21.50	50.00	36.00
DAJCM1521-1233	1-5/16"-12	M33X2	21.95	18.00	15.47	20.00	50.50	41.00
DAJCM1521-1622	1-5/16"-12	M22X1.5	23.14	14.00	21.44	12.00	48.00	36.00
DAJCM1521-1626	1-5/16"-12	M26X1.5	23.14	16.00	21.44	13.00	50.00	36.00
DAJCM1521-1627	1-5/16"-12	M27X2	23.14	16.00	21.44	15.00	50.00	36.00
DAJCM1521-1630	1-5/16"-12	M30X2	23.14	18.00	21.44	21.44	51.00	36.00
DAJCM1521-1633	1-5/16"-12	M33X2	23.14	18.00	21.44	21.44	51.50	41.00
DAJCM1521-1642	1-5/16"-12	M42X2	23.14	20.00	21.44	25.00	59.00	50.00
DAJCM1521-2033	1-5/8"-11	M33X2	24.33	18.00	27.38	23.00	56.50	46.00
DAJCM1521-2042	1-5/8"-11	M42X2	24.33	20.00	27.38	27.38	59.50	50.00
DAJCM1521-2048	1-5/8"-11	M48X2	24.33	22.00	27.38	36.00	66.00	55.00
DAJCM1521-2442	1-7/8"-12	M42X2	27.51	20.00	33.32	28.60	63.50	50.00
DAJCM1521-2448	1-7/8"-12	M48X2	27.51	22.00	33.32	33.32	67.50	55.00



DAJCM122M


Straight Connector JIC Male – SAE Male Inverted Flare

D	A	JC	M	1	22	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DAE	Adaptor	JIC UNF	Male	Straight	SAE UNF	Male

German Technology Equipment

New-Standard

DME&JDE Code:	DAJCM122M
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	UNF× UNF

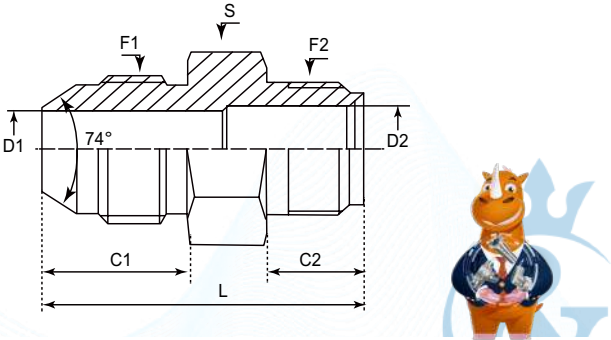

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	L	D1	D2	S	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	-	-
DAJCM122M-0403	7/16"-20	3/8"-24	13.97	9.10	29.80	4.37	4.93	12 mm	Metric
DAJCM122M-0404	7/16"-20	7/16"-20	13.97	9.10	29.80	4.37	6.53	14 mm	Metric
DAJCM122M-0403IN	7/16"-20	3/8"-24	13.97	9.10	29.80	4.37	4.93	1/2"	Imperial
DAJCM122M-0404IN	7/16"-20	7/16"-20	13.97	9.10	29.80	4.37	6.53	9/16"	Imperial
DAJCM122M-0505	1/2"-20	1/2"-20	13.97	10.20	31.00	5.94	8.10	17 mm	Metric
DAJCM122M-0505IN	1/2"-20	1/2"-20	13.97	10.20	31.00	5.94	8.10	5/8"	Imperial
DAJCM122M-0605	9/16"-18	1/2"-20	14.12	10.20	31.20	7.54	7.54	17 mm	Metric
DAJCM122M-0606	9/16"-18	9/16"-24	14.12	10.20	31.20	7.54	7.54	17 mm	Metric
DAJCM122M-0607	9/16"-18	5/8"-18	14.12	10.20	32.20	7.54	9.70	17 mm	Metric
DAJCM122M-0605IN	9/16"-18	1/2"-20	14.12	10.20	31.20	7.54	7.54	5/8"	Imperial
DAJCM122M-0606IN	9/16"-18	9/16"-24	14.12	10.20	31.20	7.54	7.54	11/16"	Imperial
DAJCM122M-0607IN	9/16"-18	5/8"-18	14.12	10.20	32.20	7.54	9.70	11/16"	Imperial
DAJCM122M-0705	5/8"-18	1/2"-20	15.70	10.20	33.80	7.14	7.14	17 mm	Metric
DAJCM122M-0707	5/8"-18	5/8"-18	15.70	10.20	33.80	7.14	9.70	17 mm	Metric
DAJCM122M-0705IN	5/8"-18	1/2"-20	15.70	10.20	33.80	7.14	7.14	11/16"	Imperial
DAJCM122M-0707IN	5/8"-18	5/8"-18	15.70	10.20	33.80	7.14	9.70	11/16"	Imperial
DAJCM122M-0807	3/4"-16	5/8"-18	16.69	10.20	35.70	9.70	9.70	22 mm	Metric
DAJCM122M-0808	3/4"-16	3/4"-16	16.69	11.20	36.00	9.90	9.90	22 mm	Metric
DAJCM122M-0807IN	3/4"-16	5/8"-18	16.69	10.20	35.70	9.70	9.70	13/16"	Imperial
DAJCM122M-0808IN	3/4"-16	3/4"-16	16.69	11.20	36.00	9.90	9.90	7/8"	Imperial




DAJCM152M

Straight Connector JIC Male Cone – Metric Male 60° Cone

D	A	JC	M	1	52	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	Straight	Metric	Male



DME&JDE Code:	DAJCM152M
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	UNF Conex× Metric 60° Cone

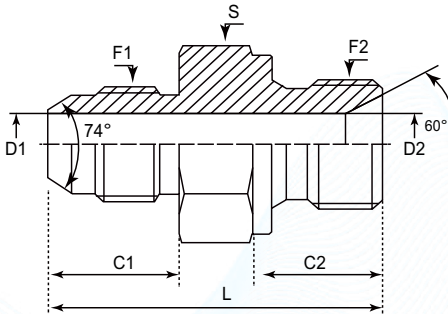

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	Metric	mm	mm	mm	mm	mm	-
DAJCM152M-0312	3/8"-24	M12X1.5	12.20	10.00	3.18	3.18	31.20	17.00
DAJCM152M-0406	7/16"-20	M6X1	13.97	8.00	4.37	2.00	29.50	12.00
DAJCM152M-0410	7/16"-20	M10X1	13.97	8.00	3.50	3.50	29.50	14.00
DAJCM152M-0412	7/16"-20	M12X1.5	13.97	10.00	4.00	4.00	31.50	17.00
DAJCM152M-0414	7/16"-20	M14X1.5	13.97	12.00	4.37	6.00	35.00	19.00
DAJCM152M-0612	9/16"-18	M12X1.5	14.12	10.00	7.54	4.00	31.50	17.00
DAJCM152M-0614	9/16"-18	M14X1.5	14.12	12.00	6.00	6.00	35.00	19.00
DAJCM152M-0616	9/16"-18	M16X1.5	14.12	12.00	7.54	7.54	35.50	22.00
DAJCM152M-0618	9/16"-18	M18X1.5	14.12	12.00	7.54	10.00	34.00	24.00
DAJCM152M-0620	9/16"-18	M20X1.5	14.12	14.00	7.54	12.00	40.00	27.00
DAJCM152M-0622	9/16"-18	M22X1.5	14.12	14.00	7.54	14.10	39.00	27.00
DAJCM152M-0812	3/4"-16	M12X1.5	16.69	10.00	9.93	4.00	37.00	22.00
DAJCM152M-0814	3/4"-16	M14X1.5	16.69	12.00	9.93	6.00	37.50	19.00
DAJCM152M-0818	3/4"-16	M18X1.5	16.69	12.00	9.93	9.93	36.50	24.00
DAJCM152M-0820	3/4"-16	M20X1.5	16.69	14.00	9.93	12.00	42.50	27.00
DAJCM152M-0822	3/4"-16	M22X1.5	16.69	14.00	9.93	14.10	41.50	27.00
DAJCM152M-0824	3/4"-16	M24X1.5	16.69	14.00	9.93	15.50	43.00	30.00
DAJCM152M-1016	7/8"-14	M16X1.5	19.25	12.00	12.29	8.00	42.50	24.00
DAJCM152M-1018	7/8"-14	M18X1.5	19.25	12.00	12.29	10.00	40.00	24.00
DAJCM152M-1022	7/8"-14	M22X1.5	19.25	14.00	12.29	12.29	44.00	27.00
DAJCM152M-1025	7/8"-14	M25X1.5	19.25	16.00	12.29	14.50	49.00	30.00
DAJCM152M-1026	7/8"-14	M26X1.5	19.25	16.00	12.29	15.00	50.00	32.00
DAJCM152M-1030	7/8"-14	M30X2	19.25	18.00	12.29	21.50	51.50	36.00
DAJCM152M-1216	1-1/16"-12	M16X1.5	21.95	12.00	15.47	8.00	46.00	27.00
DAJCM152M-1222	1-1/16"-12	M22X1.5	21.95	14.00	15.47	14.10	49.00	27.00
DAJCM152M-1224	1-1/16"-12	M24X1.5	21.95	14.00	15.47	15.47	48.50	30.00
DAJCM152M-1225	1-1/16"-12	M25X1.5	21.95	16.00	14.50	14.50	52.00	30.00
DAJCM152M-1226	1-1/16"-12	M26X1.5	21.95	16.00	15.00	15.00	52.00	32.00
DAJCM152M-1227	1-1/16"-12	M27X2	21.95	16.00	15.47	15.47	52.00	32.00
DAJCM152M-1230	1-1/16"-12	M30X2	21.95	18.00	15.47	21.50	53.50	36.00
DAJCM152M-1236	1-1/16"-12	M36X2	21.95	18.00	15.47	25.00	55.00	46.00
DAJCM152M-1630	1-5/16"-12	M30X2	23.14	18.00	21.44	21.44	54.50	36.00
DAJCM152M-1633	1-5/16"-12	M33X2	23.14	19.00	21.44	21.44	57.00	41.00
DAJCM152M-1642	1-5/16"-12	M42X2	23.14	20.00	21.44	28.60	58.60	50.00
DAJCM152M-1645	1-5/16"-12	M45X2	23.14	20.00	21.44	32.00	63.80	55.00
DAJCM152M-2045	1-5/8"-12	M45X2	24.33	20.00	27.38	32.00	65.00	55.00
DAJCM152M-2050	1-5/8"-12	M50X2	24.33	20.00	27.38	35.00	64.00	60.00


DAJCM105M

Straight Connector JIC Male – BSPP 60° Male

D	A	JC	M	1	05	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	Straight	BSPP	Male



DME&JDE Code:	DAJCM105M
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	UNF × BSPP 60°

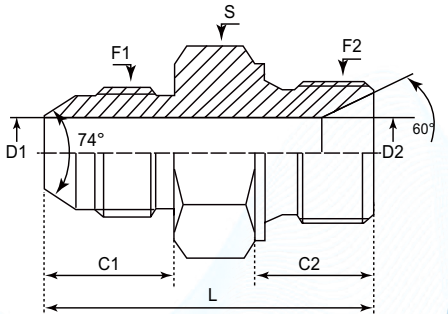

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJCM105M-0204	5/16"-24	1/4"-19	11.38	11.00	1.57	4.70	32.00	19.00
DAJCM105M-0402	7/16"-20	1/8"-28	13.97	8.00	3.50	3.50	29.00	14.00
DAJCM105M-0404	7/16"-20	1/4"-19	13.97	11.00	4.37	4.37	34.50	19.00
DAJCM105M-0406	7/16"-20	3/8"-19	13.97	12.00	4.37	7.90	34.00	22.00
DAJCM105M-0408	7/16"-20	1/2"-14	13.97	14.00	4.37	11.10	38.00	27.00
DAJCM105M-0412	7/16"-20	3/4"-14	13.97	16.00	4.37	16.70	41.00	32.00
DAJCM105M-0502	1/2"-20	1/8"-28	13.97	8.00	5.94	3.50	29.00	14.00
DAJCM105M-0504	1/2"-20	1/4"-19	13.97	11.00	4.70	4.70	34.50	19.00
DAJCM105M-0506	1/2"-20	3/8"-19	13.97	12.00	5.94	7.90	33.50	22.00
DAJCM105M-0508	1/2"-20	1/2"-14	13.97	14.00	5.94	11.10	38.00	27.00
DAJCM105M-0602	9/16"-18	1/8"-28	14.12	8.00	7.54	3.50	30.00	17.00
DAJCM105M-0604	9/16"-18	1/4"-19	14.12	11.00	7.54	4.70	34.50	19.00
DAJCM105M-0606	9/16"-18	3/8"-19	14.12	12.00	7.54	7.54	34.50	22.00
DAJCM105M-0608	9/16"-18	1/2"-14	14.12	14.00	7.54	11.10	38.00	27.00
DAJCM105M-0610	9/16"-18	5/8"-14	14.12	16.00	7.54	14.00	42.00	30.00
DAJCM105M-0612	9/16"-18	3/4"-14	14.12	16.00	7.54	16.70	42.00	32.00
DAJCM105M-0706	5/8"-18	3/8"-19	15.70	12.00	7.14	7.14	35.30	22.00
DAJCM105M-0804	3/4"-16	1/4"-19	16.69	11.00	9.93	4.70	36.00	19.00
DAJCM105M-0806	3/4"-16	3/8"-19	16.69	12.00	9.93	7.90	37.50	22.00

DAJCM105M-0808	3/4"-16	1/2"-14	16.69	14.00	9.93	9.93	41.00	27.00
DAJCM105M-0810	3/4"-16	5/8"-14	16.69	16.00	9.93	14.00	43.50	30.00
DAJCM105M-0812	3/4"-16	3/4"-14	16.69	16.00	9.93	16.70	45.00	32.00
DAJCM105M-0816	3/4"-16	1"-11	16.69	19.00	9.93	22.20	47.50	41.00
DAJCM105M-1004	7/8"-14	1/4"-19	19.25	11.00	12.29	4.70	42.00	24.00
DAJCM105M-1006	7/8"-14	3/8"-19	19.25	12.00	12.29	7.90	40.50	24.00
DAJCM105M-1008	7/8"-14	1/2"-14	19.25	14.00	11.10	11.10	43.50	27.00
DAJCM105M-1010	7/8"-14	5/8"-14	19.25	16.00	12.29	12.29	47.00	30.00
DAJCM105M-1012	7/8"-14	3/4"-14	19.25	16.00	12.29	16.70	47.50	32.00
DAJCM105M-1016	7/8"-14	1"-11	19.25	19.00	12.29	22.20	49.80	41.00
DAJCM105M-1206	1-1/16"-12	3/8"-19	21.95	12.00	15.47	7.90	46.00	30.00
DAJCM105M-1208	1-1/16"-12	1/2"-14	21.95	14.00	15.47	11.10	47.00	27.00
DAJCM105M-1212	1-1/16"-12	3/4"-14	21.95	16.00	15.47	15.47	50.00	32.00
DAJCM105M-1216	1-1/16"-12	1"-11	21.95	19.00	15.47	22.20	52.50	41.00
DAJCM105M-1220	1-1/16"-12	1-1/4"-11	21.95	20.00	15.47	28.60	56.00	50.00
DAJCM105M-1224	1-1/16"-12	1-1/2"-11	21.95	22.00	15.47	33.30	60.00	55.00
DAJCM105M-1412	1-3/16"-12	3/4"-14	23.00	16.00	16.70	16.70	51.00	32.00
DAJCM105M-1416	1-3/16"-12	1"-11	23.00	19.00	18.00	22.20	55.00	41.00
DAJCM105M-1608	1-5/16"-12	1/2"-14	23.14	14.00	21.44	11.10	49.00	36.00
DAJCM105M-1612	1-5/16"-12	3/4"-14	23.14	16.00	21.44	16.70	51.00	36.00
DAJCM105M-1616	1-5/16"-12	1"-11	23.14	19.00	21.44	21.44	53.50	41.00
DAJCM105M-1620	1-5/16"-12	1 1/4"-11	23.14	20.00	21.44	28.60	57.00	50.00
DAJCM105M-2012	1-5/8"-12	3/4"-14	24.33	16.00	27.38	16.70	54.50	46.00
DAJCM105M-2016	1-5/8"-12	1"-11	24.33	19.00	27.38	22.20	55.50	46.00
DAJCM105M-2020	1-5/8"-12	1-1/4"-11	24.33	20.00	27.38	27.38	58.50	50.00
DAJCM105M-2024	1-5/8"-12	1-1/2"-11	24.33	22.00	27.38	33.30	62.30	55.00
DAJCM105M-2032	1-5/8"-12	2"-11	24.33	25.00	27.38	45.25	67.00	70.00
DAJCM105M-2416	1-7/8"-12	1"-11	27.51	19.00	33.32	22.20	60.50	50.00
DAJCM105M-2420	1-7/8"-12	1-1/4"-11	27.51	20.00	33.32	28.60	61.50	50.00
DAJCM105M-2424	1-7/8"-12	1-1/2"-11	27.51	22.00	33.30	33.30	65.50	55.00
DAJCM105M-2432	1-7/8"-12	2"-11	27.51	25.00	33.30	45.25	70.15	70.00
DAJCM105M-3220	2-1/2"-12	1-1/4"-11	33.86	20.00	45.25	28.60	69.50	65.00
DAJCM105M-3224	2-1/2"-12	1-1/2"-11	33.86	22.00	45.25	33.30	71.50	65.00
DAJCM105M-3232	2-1/2"-12	2"-11	33.86	25.00	45.25	45.25	76.50	70.00



DAJCM107M

Straight Connector JIC Male – BSPT Male 60°

D

A

JC

M

1

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

JIC UNF

Male

Straight


BSPT

Male

German Technology Equipment

New-Standard

- DAE&JDE Code: DAJCM107M
- Product Type Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: Straight
- Connection Type: Male × Male
- Thread Types: UNF × BSPT 60°

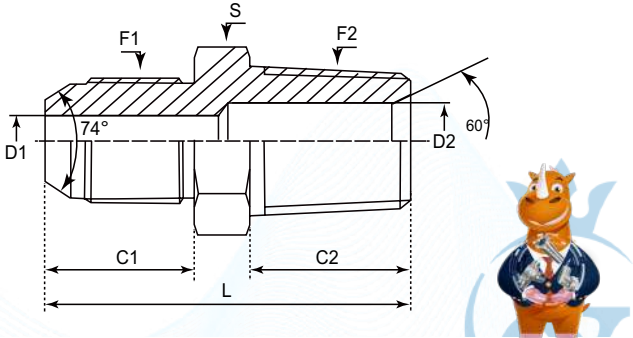

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSPT	mm	mm	mm	mm	mm	mm
DAJCM107M-0202	5/16"-24	1/8"-28	11.38	10.00	1.57	4.50	28.00	12.00
DAJCM107M-0302	3/8"-24	1/8"-28	12.00	10.00	3.20	3.20	28.00	12.00
DAJCM107M-0402	7/16"-20	1/8"-28	13.97	10.00	4.37	4.37	30.00	12.00
DAJCM107M-0404	7/16"-20	1/4"-19	13.97	14.00	4.37	6.00	34.50	17.00
DAJCM107M-0406	7/16"-20	3/8"-19	13.97	15.00	4.37	9.00	36.00	19.00
DAJCM107M-0408	7/16"-20	1/2"-14	13.97	19.00	4.37	12.00	41.00	24.00
DAJCM107M-0412	7/16"-20	3/4"-14	13.97	20.00	4.37	16.70	43.50	30.00
DAJCM107M-0504	1/2"-20	1/4"-19	13.97	13.00	5.94	5.94	33.00	14.00
DAJCM107M-0508	1/2"-20	1/2"-14	13.97	19.00	5.94	12.00	42.00	24.00
DAJCM107M-0602	9/16"-18	1/8"-28	14.12	10.00	7.54	4.50	31.00	17.00
DAJCM107M-0604	9/16"-18	1/4"-19	14.12	14.00	6.00	6.00	34.00	17.00
DAJCM107M-0606	9/16"-18	3/8"-19	14.12	15.00	7.54	9.00	36.50	19.00
DAJCM107M-0608	9/16"-18	1/2"-14	14.12	19.00	7.54	12.00	41.00	24.00
DAJCM107M-0702	5/8"-18	1/8"-28	15.70	10.00	7.14	4.50	33.00	17.00
DAJCM107M-0704	5/8"-18	1/4"-19	15.70	14.00	7.14	6.00	37.00	17.00
DAJCM107M-0706	5/8"-18	3/8"-19	15.70	15.00	7.14	9.00	38.50	19.00
DAJCM107M-0708	5/8"-18	1/2"-14	15.70	19.00	7.14	12.00	45.00	24.00



DAJCM128M-0606	9/16"-18	3/8"-18	14.12	14.22	7.54	7.54	36.32	19 mm	Metric	
DAJCM128M-0608	9/16"-18	1/2"-14	14.12	19.05	7.54	13.49	42.93	22 mm	Metric	
DAJCM128M-0612	9/16"-18	3/4"-14	14.12	19.05	7.54	18.26	44.45	27 mm	Metric	
DAJCM128M-0616	9/16"-18	1"-11-1/2	14.12	23.88	7.54	23.83	49.50	36 mm	Metric	
DAJCM128M-0602IN	9/16"-18	1/8"-27	14.12	9.65	7.54	4.78	31.50	5/8"	Imperial	
DAJCM128M-0604IN	9/16"-18	1/4"-18	14.12	14.22	7.54	7.14	36.32	5/8"	Imperial	2024/6/4,Dimension D1 of item AR05280(2404-0604)has been changed from 7.14±0.2mm to 7.54±0.1mm
DAJCM128M-0606IN	9/16"-18	3/8"-18	14.12	14.22	7.54	7.54	36.32	3/4"	Imperial	
DAJCM128M-0608IN	9/16"-18	1/2"-14	14.12	19.05	7.54	13.49	42.93	7/8"	Imperial	
DAJCM128M-0612IN	9/16"-18	3/4"-14	14.12	19.05	7.54	18.26	44.45	1-1/8"	Imperial	
DAJCM128M-0616IN	9/16"-18	1"-11-1/2	14.12	23.88	7.54	23.83	49.50	1-3/8"	Imperial	
DAJCM128M-0704	5/8"-18	1/4"-18	15.70	14.22	7.14	7.14	37.00	17 mm	Metric	
DAJCM128M-0706	5/8"-18	3/8"-18	15.70	14.22	7.14	10.31	37.90	19 mm	Metric	
DAJCM128M-0704IN	5/8"-18	1/4"-18	15.70	14.22	7.14	7.14	37.00	11/16"	Imperial	
DAJCM128M-0706IN	5/8"-18	3/8"-18	15.70	14.22	7.14	10.31	37.90	3/4"	Imperial	
DAJCM128M-0802	3/4"-16	1/8"-27	16.69	9.65	9.93	4.78	34.00	19 mm	Metric	
DAJCM128M-0804	3/4"-16	1/4"-18	16.69	14.22	9.93	7.14	38.31	22 mm	Metric	
DAJCM128M-0806	3/4"-16	3/8"-18	16.69	14.22	9.93	9.93	38.86	19 mm	Metric	
DAJCM128M-0808	3/4"-16	1/2"-14	16.69	19.05	9.93	13.49	45.47	22 mm	Metric	
DAJCM128M-0812	3/4"-16	3/4"-14	16.69	19.05	9.93	18.26	46.99	27 mm	Metric	
DAJCM128M-0816	3/4"-16	1"-11-1/2	16.69	23.88	9.93	23.83	52.07	36 mm	Metric	
DAJCM128M-0802IN	3/4"-16	1/8"-27	16.69	9.65	9.93	4.78	34.00	13/16"	Imperial	
DAJCM128M-0804IN	3/4"-16	1/4"-18	16.69	14.22	9.93	7.14	38.31	13/16"	Imperial	
DAJCM128M-0806IN	3/4"-16	3/8"-18	16.69	14.22	9.93	9.93	38.86	13/16"	Imperial	
DAJCM128M-0808IN	3/4"-16	1/2"-14	16.69	19.05	9.93	13.49	45.47	7/8"	Imperial	
DAJCM128M-0812IN	3/4"-16	3/4"-14	16.69	19.05	9.93	18.26	46.99	1-1/8"	Imperial	
DAJCM128M-0816IN	3/4"-16	1"-11-1/2	16.69	23.88	9.93	23.83	52.07	1-3/8"	Imperial	
DAJCM128M-1004	7/8"-14	1/4"-18	19.25	14.22	12.29	7.14	43.20	24 mm	Metric	
DAJCM128M-1006	7/8"-14	3/8"-18	19.25	14.22	12.29	10.31	43.20	24 mm	Metric	
DAJCM128M-1008	7/8"-14	1/2"-14	19.25	19.05	12.29	13.49	48.00	24 mm	Metric	
DAJCM128M-1012	7/8"-14	3/4"-14	19.25	19.05	12.29	18.26	49.53	27 mm	Metric	
DAJCM128M-1016	7/8"-14	1"-11-1/2	19.25	23.88	12.29	23.83	54.53	36 mm	Metric	
DAJCM128M-1004IN	7/8"-14	1/4"-18	19.25	14.22	12.29	7.14	43.20	15/16"	Imperial	
DAJCM128M-1006IN	7/8"-14	3/8"-18	19.25	14.22	12.29	10.31	43.20	15/16"	Imperial	
DAJCM128M-1008IN	7/8"-14	1/2"-14	19.25	19.05	12.29	13.49	48.00	15/16"	Imperial	
DAJCM128M-1012IN	7/8"-14	3/4"-14	19.25	19.05	12.29	18.26	49.53	1-1/8"	Imperial	
DAJCM128M-1016IN	7/8"-14	1"-11-1/2	19.25	23.88	12.29	23.83	54.53	1-3/8"	Imperial	

DAJCM128M-1224IN	1-1/16"-12	1-1/2"-11-1/2	21.95	25.40	15.47	38.10	62.50	2"	Imperial	
DAJCM128M-1232IN	1-1/16"-12	2"-11-1/2	21.95	26.16	15.47	49.23	66.90	2-4/8"	Imperial	
DAJCM128M-1408	1-3/16"-12	1/2"-14	23.00	19.05	18.00	13.49	53.10	32 mm	Metric	
DAJCM128M-1412	1-3/16"-12	3/4"-14	23.00	19.05	18.26	18.26	53.10	32 mm	Metric	
DAJCM128M-1416	1-3/16"-12	1"-11-1/2	23.00	23.88	18.00	23.83	57.90	36 mm	Metric	
DAJCM128M-1408IN	1-3/16"-12	1/2"-14	23.00	19.05	18.00	13.49	53.10	1-1/4"	Imperial	
DAJCM128M-1412IN	1-3/16"-12	3/4"-14	23.00	19.05	18.26	18.26	53.10	1-1/4"	Imperial	
DAJCM128M-1416IN	1-3/16"-12	1"-11-1/2	23.00	23.88	18.00	23.83	57.90	1-3/8"	Imperial	
DAJCM128M-1606	1-5/16"-12	3/8"-18	23.14	14.22	21.44	10.31	48.80	36 mm	Metric	
DAJCM128M-1608	1-5/16"-12	1/2"-14	23.14	19.05	21.44	13.49	53.60	36 mm	Metric	
DAJCM128M-1612	1-5/16"-12	3/4"-14	23.14	19.05	21.44	18.26	53.59	36 mm	Metric	
DAJCM128M-1616	1-5/16"-12	1"-11-1/2	23.14	23.88	21.44	21.44	58.42	36 mm	Metric	
DAJCM128M-1620	1-5/16"-12	1-1/4"-11-1/2	23.14	24.64	21.44	31.75	60.96	46 mm	Metric	
DAJCM128M-1624	1-5/16"-12	1-1/2"-11-1/2	23.14	25.40	21.44	38.10	63.80	50 mm	Metric	
DAJCM128M-1632	1-5/16"-12	2"-11-1/2	23.14	26.16	21.44	49.23	68.30	65 mm	Metric	
DAJCM128M-1606IN	1-5/16"-12	3/8"-18	23.14	14.22	21.44	10.31	48.80	1-3/8"	Imperial	
DAJCM128M-1608IN	1-5/16"-12	1/2"-14	23.14	19.05	21.44	13.49	53.60	1-3/8"	Imperial	
DAJCM128M-1612IN	1-5/16"-12	3/4"-14	23.14	19.05	21.44	18.26	53.59	1-3/8"	Imperial	
DAJCM128M-1616IN	1-5/16"-12	1"-11-1/2	23.14	23.88	21.44	21.44	58.42	1-3/8"	Imperial	
DAJCM128M-1620IN	1-5/16"-12	1-1/4"-11-1/2	23.14	24.64	21.44	31.75	60.96	1-11/16"	Imperial	
DAJCM128M-1624IN	1-5/16"-12	1-1/2"-11-1/2	23.14	25.40	21.44	38.10	63.80	2"	Imperial	
DAJCM128M-1632IN	1-5/16"-12	2"-11-1/2	23.14	26.16	21.44	49.23	68.30	2-5/8"	Imperial	
DAJCM128M-2012	1-5/8"-12	3/4"-14	24.33	19.05	27.38	18.26	56.64	46 mm	Metric	
DAJCM128M-2016	1-5/8"-12	1"-11-1/2	24.33	23.88	27.38	23.83	61.47	46 mm	Metric	
DAJCM128M-2020	1-5/8"-12	1-1/4"-11-1/2	24.33	24.64	27.38	31.75	62.23	46 mm	Metric	
DAJCM128M-2024	1-5/8"-12	1-1/2"-11-1/2	24.33	25.40	27.38	38.10	64.77	50 mm	Metric	
DAJCM128M-2032	1-5/8"-12	2"-11-1/2	24.33	26.16	27.38	49.23	69.30	65 mm	Metric	
DAJCM128M-2012IN	1-5/8"-12	3/4"-14	24.33	19.05	27.38	18.26	56.64	1-11/16"	Imperial	
DAJCM128M-2016IN	1-5/8"-12	1"-11-1/2	24.33	23.88	27.38	23.83	61.47	1-11/16"	Imperial	
DAJCM128M-2020IN	1-5/8"-12	1-1/4"-11-1/2	24.33	24.64	27.38	31.75	62.23	1-11/16"	Imperial	
DAJCM128M-2024IN	1-5/8"-12	1-1/2"-11-1/2	24.33	25.40	27.38	38.10	64.77	2"	Imperial	
DAJCM128M-2032IN	1-5/8"-12	2"-11-1/2	24.33	26.16	27.38	49.23	69.30	2-5/8"	Imperial	
DAJCM128M-2412	1-7/8"-12	3/4"-14	27.51	19.05	33.32	18.26	61.72	50 mm	Metric	
DAJCM128M-2416	1-7/8"-12	1"-11-1/2	27.51	23.88	33.32	23.83	66.60	50 mm	Metric	
DAJCM128M-2420	1-7/8"-12	1-1/4"-11-1/2	27.51	24.64	31.75	31.75	67.30	50 mm	Metric	
DAJCM128M-2424	1-7/8"-12	1-1/2"-11-1/2	27.51	25.40	33.32	38.10	67.95	50 mm	Metric	
DAJCM128M-2432	1-7/8"-12	2"-11-1/2	27.51	26.16	33.32	49.23	72.60	65 mm	Metric	
DAJCM128M-2412IN	1-7/8"-12	3/4"-14	27.51	19.05	33.32	18.26	61.72	2"	Imperial	
DAJCM128M-2416IN	1-7/8"-12	1"-11-1/2	27.51	23.88	33.32	23.83	66.60	2"	Imperial	
DAJCM128M-2420IN	1-7/8"-12	1-1/4"-11-1/2	27.51	24.64	31.75	31.75	67.30	2"	Imperial	
DAJCM128M-2424IN	1-7/8"-12	1-1/2"-11-1/2	27.51	25.40	33.32	38.10	67.95	2"	Imperial	
DAJCM128M-2432IN	1-7/8"-12	2"-11-1/2	27.51	26.16	33.32	49.23	72.60	2-5/8"	Imperial	
DAJCM128M-3220	2-1/2"-12	1-1/4"-11-1/2	33.86	24.64	45.25	31.75	77.50	65 mm	Metric	
DAJCM128M-3224	2-1/2"-12	1-1/2"-11-1/2	33.86	25.40	45.25	38.10	78.20	65 mm	Metric	
DAJCM128M-3232	2-1/2"-12	2"-11-1/2	33.86	26.16	45.24	49.23	78.99	65 mm	Metric	
DAJCM128M-3240	2-1/2"-12	2"1/2-8	33.86	38.86	45.25	59.00	88.39	85 mm	Metric	
DAJCM128M-3220IN	2-1/2"-12	1-1/4"-11-1/2	33.86	24.64	45.25	31.75	77.50	2-5/8"	Imperial	
DAJCM128M-3224IN	2-1/2"-12	1-1/2"-11-1/2	33.86	25.40	45.25	38.10	78.20	2-5/8"	Imperial	
DAJCM128M-3232IN	2-1/2"-12	2"-11-1/2	33.86	26.16	45.24	49.23	78.99	2-5/8"	Imperial	
DAJCM128M-3240IN	2-1/2"-12	2"-1/2-8	33.86	38.86	45.25	59.00	88.39	3-1/4"	Imperial	

DAJCM152JM


Straight Connector JIC Male – JIS Metric Male 60°

D	A	JC	M	1	52J	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	Straight	JIS Metric	Male

 German Technology Equipment

New-Standard

DME&JDE Code:	DAJCM152JM
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	UNF × JIS Metric 60°

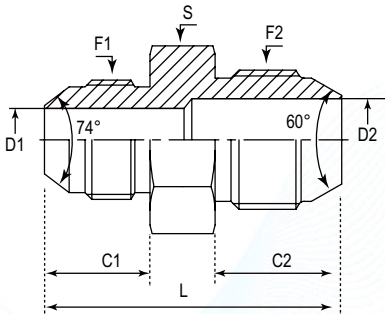

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	JIS Metric	mm	mm	mm	mm	mm	-
DAJCM152JM-0414	7/16"-20	M14X1.5	13.97	17.00	4.37	4.37	37.00	17.00
DAJCM152JM-0616	9/16"-18	M16X1.5	14.12	18.00	7.00	7.00	40.00	17.00
DAJCM152JM-0618	9/16"-18	M18X1.5	14.12	18.00	7.54	7.54	40.50	19.00
DAJCM152JM-0822	3/4"-16	M22X1.5	16.69	20.00	9.93	12.00	47.00	24.00
DAJCM152JM-1024	7/8"-14	M24X1.5	19.25	21.50	12.29	15.00	51.00	27.00
DAJCM152JM-1230	1-1/16"-12	M30X1.5	21.95	26.00	15.47	18.50	59.00	32.00
DAJCM152JM-1633	1-5/16"-12	M33X1.5	23.14	30.00	20.00	20.00	64.00	36.00

DAJCM105JM


Straight Connector JIC Male – JIS BSPP Male 60°

D	A	JC	M	1	05	J	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Thread Type	Connection Type
DME	Adaptor	JIC UNF	Male	Straight	BSPP	JIS	Male

 German Technology Equipment

New-Standard

DME&JDE Code:	DAJCM105JM
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	UNF × JIS BSPP 60°

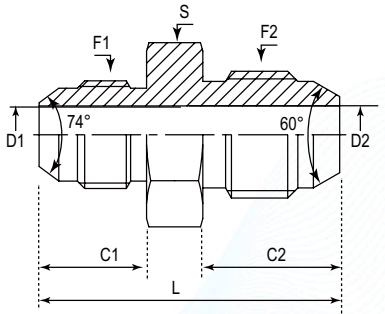

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJCM105JM-0402	7/16"-20	1/8"-28	13.97	12.00	3.20	3.20	32.00	14.00
DAJCM105JM-0606	9/16"-18	3/8"-19	14.12	18.00	7.54	7.54	40.50	19.00
DAJCM105JM-0808	3/4"-16	1/2"-14	16.69	20.00	9.93	9.93	45.00	22.00
DAJCM105JM-1212	1-1/16"-12	3/4"-14	21.95	22.00	15.47	15.47	55.00	30.00
DAJCM105JM-1616	1-5/16"-12	1"-11	23.14	24.00	20.00	20.00	60.00	36.00
DAJCM105JM-2020	1-5/8"-12	1-1/4"-11	24.33	27.00	27.38	27.38	65.00	46.00
DAJCM105JM-2424	1-7/8"-12	1-1/2"-11	27.51	27.00	33.32	33.32	69.50	50.00



DAJCM105F

Straight Connector JIC Male – BSPP Female 60°

D

A

JC

M

1

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Straight

BSPP

Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJCM105F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Male × Female

Thread Types:

UNF × BSPP 60°

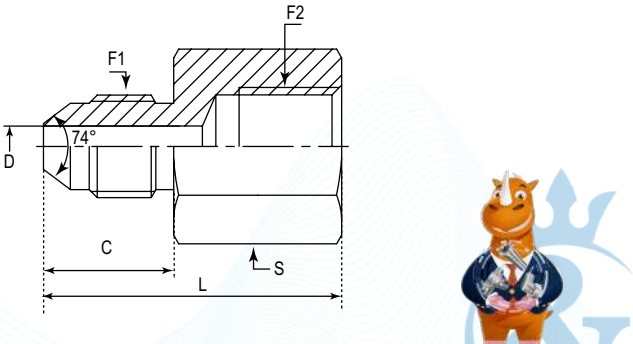

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	UNF	BSPP	mm	mm	mm	mm
DAJCM105F-0402	7/16"-20	1/8"-28	13.97	4.37	29.50	14.00
DAJCM105F-0404	7/16"-20	1/4"-19	13.97	4.37	34.00	19.00
DAJCM105F-0406	7/16"-20	3/8"-19	13.97	4.37	34.00	22.00
DAJCM105F-0408	7/16"-20	1/2"-14	13.97	4.37	38.00	27.00
DAJCM105F-0504	1/2"-20	1/4"-19	13.97	5.94	35.50	19.00
DAJCM105F-0508	1/2"-20	1/2"-14	13.97	5.94	38.00	27.00
DAJCM105F-0602	9/16"-18	1/8"-28	14.12	7.54	29.00	17.00
DAJCM105F-0604	9/16"-18	1/4"-19	14.12	7.54	35.50	19.00
DAJCM105F-0606	9/16"-18	3/8"-19	14.12	7.54	34.00	22.00
DAJCM105F-0608	9/16"-18	1/2"-14	14.12	7.54	38.00	27.00
DAJCM105F-0802	3/4"-16	1/8"-28	16.69	9.93	37.50	19.00
DAJCM105F-0804	3/4"-16	1/4"-19	16.69	9.93	37.50	19.00
DAJCM105F-0806	3/4"-16	3/8"-19	16.69	9.93	36.50	22.00
DAJCM105F-0808	3/4"-16	1/2"-14	16.69	9.93	40.80	27.00
DAJCM105F-0812	3/4"-16	3/4"-14	16.69	9.93	45.50	32.00
DAJCM105F-1008	7/8"-14	1/2"-14	19.25	12.29	45.00	27.00
DAJCM105F-1010	7/8"-14	5/8"-14	19.25	12.29	48.00	32.00
DAJCM105F-1206	1-1/16"-12	3/8"-19	21.95	15.47	41.00	27.00
DAJCM105F-1208	1-1/16"-12	1/2"-14	21.95	15.47	46.00	27.00
DAJCM105F-1212	1-1/16"-12	3/4"-14	21.95	15.47	48.00	32.00
DAJCM105F-1616	1-5/16"-12	1"-11	23.14	21.44	55.00	41.00
DAJCM105F-2020	1-5/8"-12	1-1/4"-11	24.33	27.38	57.50	50.00
DAJCM105F-2424	1-7/8"-12	1-1/2"-11	27.51	33.32	65.50	55.00
DAJCM105F-3232	2-1/2"-12	2"-11	33.86	45.25	72.00	70.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

CE

UK CA

DAJCM107F

Straight Connector JIC Male – BSPT Female

D

A

JC

M

1

07

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Straight

BSPT

Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJCM107F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Male × Female

Thread Types:

UNF × BSPT

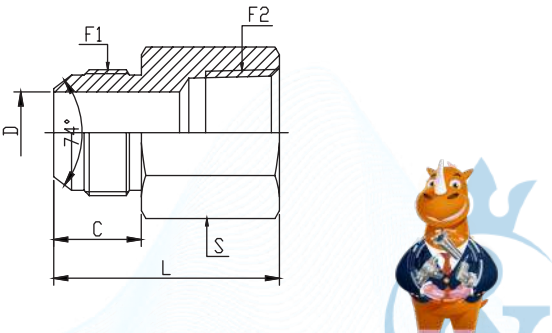

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S	Cross Number
#	UNF	BSPT	mm	mm	mm	mm	-
DAJCM107F-0402	7/16"-20	1/8"-28	13.97	4.37	30.00	14.00	AB-02-07
DAJCM107F-0404	7/16"-20	1/4"-19	13.97	4.37	35.50	19.00	AB-04-07
DAJCM107F-0504	1/2"-20	1/4"-19	13.97	5.94	35.50	19.00	AB-04-08
DAJCM107F-0604	9/16"-18	1/4"-19	14.12	7.54	35.50	19.00	AB-04-09
DAJCM107F-0606	9/16"-18	3/8"-19	14.12	7.54	36.50	22.00	AB-06-09
DAJCM107F-0608	9/16"-18	1/2"-14	14.12	7.54	42.50	27.00	AB-08-09
DAJCM107F-0806	3/4"-16	3/8"-19	16.69	9.93	39.50	22.00	AB-06-12
DAJCM107F-0808	3/4"-16	1/2"-14	16.69	9.93	45.50	27.00	AB-08-12
DAJCM107F-1004	7/8"-14	1/4"-19	19.25	12.29	42.00	27.00	AB-04-14
DAJCM107F-1008	7/8"-14	1/2"-14	19.25	12.29	48.00	27.00	AB-08-14
DAJCM107F-1212	1-1/16"-12	3/4"-14	21.95	15.47	52.50	36.00	AB-12-17
DAJCM107F-1616	1-5/16"-12	1"-11	23.14	21.44	59.50	41.00	AB-16-21

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

CE

UK CA

DAJCM152F

Straight Connector JIC Male – Metric Fixed Female

D

A

JC

M

1

52

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Straight

Metric

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM152F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

UNF × Metric



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	UNF	Metric	mm	mm	mm	mm
DAJCM152F-0414	7/16"-20	M14×1.5	13.97	4.37	33.5	19
DAJCM152F-0618	9/16"-18	M18×1.5	14.12	7.54	35.5	24
DAJCM152F-0822	3/4"-16	M22×1.5	16.69	9.93	38.5	27
DAJCM152F-1024	7/8"-14	M24×1.5	19.25	12.29	44	32
DAJCM152F-1230	1-1/16"-12	M30×1.5	21.95	15.47	51	36
DAJCM152F-1633	1-5/16"-12	M33×1.5	23.14	21.44	54.61	41



DAJCM105JF

Straight Connector JIC Male – JIS BSPP Fixed Female

D

A

JC

M

1

05J

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Straight

JIS BSPP

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM105JF

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

UNF × JIS BSPP



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	UNF	BSPP	mm	mm	mm	mm
DAJCM105JF-0404	7/16"-20	1/4"-19	13.97	4.37	36.00	19.00
DAJCM105JF-0604	9/16"-18	1/4"-19	14.12	7.54	36.50	19.00
DAJCM105JF-0606	9/16"-18	3/8"-19	14.12	7.54	35.05	22.00
DAJCM105JF-0806	3/4"-16	3/8"-19	16.69	9.93	36.00	24.00
DAJCM105JF-0808	3/4"-16	1/2"-14	16.69	9.93	37.00	27.00
DAJCM105JF-1616	1-5/16"-12	1"-11	23.14	19.69	54.10	41.00
DAJCM105JF-2020	1-5/8"-12	1-1/4"-11	24.33	27.38	60.00	50.00
DAJCM105JF-2424	1-7/8"-12	1-1/2"-11	27.51	33.32	66.50	55.00



DAJCM152JF

Straight Connector JIC Male – JIS Metric Female

D

A

JC

M

1

52J

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Straight

JIS Metric

Female

 German Technology Equipment


New-Standard

DME&JDE Code:

DAJCM152F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Male × Female

Thread Types:

UNF × JIS Metric

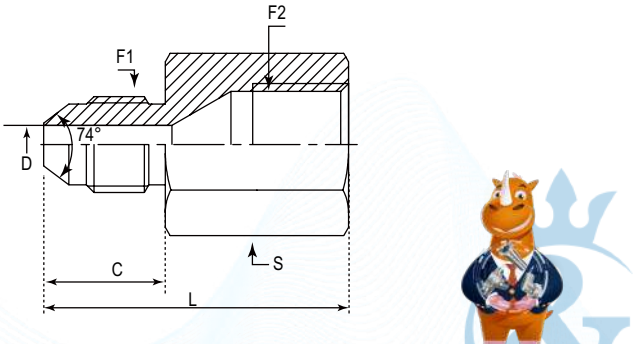

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	UNF	Metric	mm	mm	mm	mm
DAJCM152JF-0414	7/16"-20	M14X1.5	13.97	4.37	35.00	19.00
DAJCM152JF-0618	9/16"-18	M18X1.5	14.12	7.54	36.83	24.00
DAJCM152JF-0822	3/4"-16	M22X1.5	16.69	9.93	42.50	26.97
DAJCM152JF-1024	7/8"-14	M24X1.5	19.25	12.29	41.90	31.75
DAJCM152JF-1230	1-1/16"-12	M30X1.5	21.95	15.47	48.50	36.00
DAJCM152JF-1633	1-5/16"-12	M33X1.5	23.14	21.44	54.61	41.00

Certificate:



DAJCM128F

Straight Connector JIC Male – NPTF Female

D

A

JC

M

1

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Straight

NPTF

Female

 German Technology Equipment


New-Standard

DME&JDE Code:

DAJCM128F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Male × Female

Thread Types:

UNF × NPTF

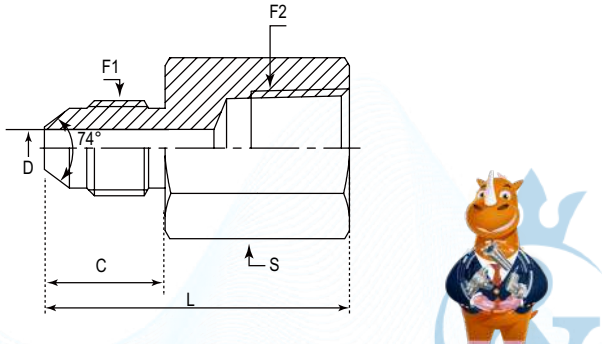

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S	Hex	Revision History
#	UNF	BSPP	mm	mm	mm	mm	-	
DAJCM128F-0202	5/16"-24	1/8"-27	11.38	1.57	28.50	14 mm	Metric	
DAJCM128F-0204	5/16"-24	1/4"-18	11.38	1.57	32.80	19 mm	Metric	
DAJCM128F-0202IN	5/16"-24	1/8"-27	11.38	1.57	28.50	9/16"	Imperial	
DAJCM128F-0204IN	5/16"-24	1/4"-18	11.38	1.57	32.80	3/4"	Imperial	
DAJCM128F-0302	3/8"-24	1/8"-27	12.00	3.20	28.70	14 mm	Metric	
DAJCM128F-0304	3/8"-24	1/4"-18	12.17	3.18	33.40	19 mm	Metric	
DAJCM128F-0302IN	3/8"-24	1/8"-27	12.00	3.20	28.70	9/16"	Imperial	
DAJCM128F-0304IN	3/8"-24	1/4"-18	12.17	3.18	33.40	3/4"	Imperial	
DAJCM128F-0402	7/16"-20	1/8"-27	13.97	4.37	30.20	14 mm	Metric	
DAJCM128F-0404	7/16"-20	1/4"-18	13.97	4.37	35.30	19 mm	Metric	
DAJCM128F-0406	7/16"-20	3/8"-18	13.97	4.37	36.80	22 mm	Metric	
DAJCM128F-0408	7/16"-20	1/2"-14	13.97	4.37	42.70	29 mm	Metric	
DAJCM128F-0402IN	7/16"-20	1/8"-27	13.97	4.37	30.20	9/16"	Imperial	
DAJCM128F-0404IN	7/16"-20	1/4"-18	13.97	4.37	35.30	3/4"	Imperial	
DAJCM128F-0406IN	7/16"-20	3/8"-18	13.97	4.37	36.80	7/8"	Imperial	
DAJCM128F-0408IN	7/16"-20	1/2"-14	13.97	4.37	42.70	1-1/8"	Imperial	
DAJCM128F-0502	1/2"-20	1/8"-27	13.97	5.94	29.70	14 mm	Metric	
DAJCM128F-0504	1/2"-20	1/4"-18	13.97	5.94	35.60	19 mm	Metric	
DAJCM128F-0506	1/2"-20	3/8"-18	13.97	5.94	36.80	22 mm	Metric	
DAJCM128F-0502IN	1/2"-20	1/8"-27	13.97	5.94	29.70	9/16"	Imperial	
DAJCM128F-0504IN	1/2"-20	1/4"-18	13.97	5.94	35.60	3/4"	Imperial	
DAJCM128F-0506IN	1/2"-20	3/8"-18	13.97	5.94	36.80	7/8"	Imperial	
DAJCM128F-0602	9/16"-18	1/8"-27	14.12	7.54	31.20	16 mm	Metric	
DAJCM128F-0604	9/16"-18	1/4"-18	14.12	7.14	35.60	19 mm	Metric	
DAJCM128F-0606	9/16"-18	3/8"-18	14.12	7.54	39.60	22 mm	Metric	
DAJCM128F-0608	9/16"-18	1/2"-14	14.12	7.54	42.90	29 mm	Metric	
DAJCM128F-0612	9/16"-18	3/4"-14	14.12	7.54	44.45	36 mm	Metric	
DAJCM128F-0602IN	9/16"-18	1/8"-27	14.12	7.54	31.20	5/8"	Imperial	
DAJCM128F-0604IN	9/16"-18	1/4"-18	14.12	7.54	35.60	3/4"	Imperial	2024/6/4, Dimension D of AR05690(2405-0604) has been changed from 7.14±0.2mm to 7.54±0.1mm
DAJCM128F-0606IN	9/16"-18	3/8"-18	14.12	7.54	39.60	7/8"	Imperial	

Certificate:





DAJCM1251

Straight Connector JIC Male – JIC Swivel Female

D	A	JC	M	I	251
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	JIC UNF	Male	Straight	JIC Swivel Female



DME&JDE Code: **DAJCM1251**


Product Type: **Hydraulic adaptor**

Standard: **JIC and SAE-ORB**

Structure: **Straight**

Connection Type: **Male × Swivel Female**

Thread Types: **UNF × UNF**

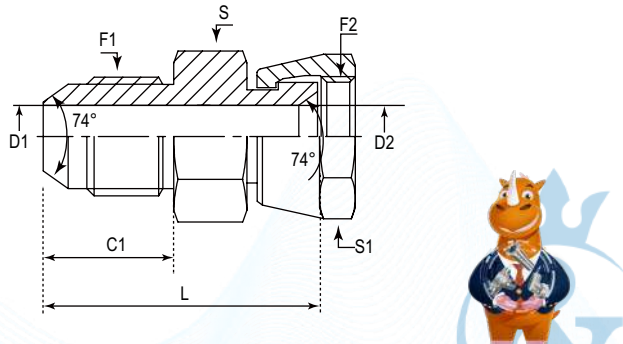

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	L	D1	D2	S	S1	Hex
#	UNF	NPTF	mm	mm	mm	mm	-	-	-
DAJCM1251-0304	3/8"-24	7/16"-20	12.00	3.18	3.18	26.00	12 mm	14 mm	Metric
DAJCM1251-0304IN	3/8"-24	7/16"-20	12.00	3.18	3.18	26.00	1/2"	9/16"	Imperial
DAJCM1251-0404	7/16"-20	7/16"-20	13.97	4.37	4.37	28.00	12 mm	14 mm	Metric
DAJCM1251-0405	7/16"-20	1/2"-20	13.97	4.37	5.94	30.00	14 mm	17 mm	Metric
DAJCM1251-0406	7/16"-20	9/16"-18	13.97	4.37	7.54	30.00	14 mm	17 mm	Metric
DAJCM1251-0408	7/16"-20	3/4"-16	13.97	4.37	9.93	33.50	22 mm	22 mm	Metric
DAJCM1251-0410	7/16"-20	7/8"-14	13.97	4.37	12.29	37.00	22 mm	27 mm	Metric
DAJCM1251-0404IN	7/16"-20	7/16"-20	13.97	4.37	4.37	28.00	1/2"	9/16"	Imperial
DAJCM1251-0405IN	7/16"-20	1/2"-20	13.97	4.37	5.94	30.00	9/16"	5/8"	Imperial
DAJCM1251-0406IN	7/16"-20	9/16"-18	13.97	4.37	7.54	30.00	9/16"	11/16"	Imperial
DAJCM1251-0408IN	7/16"-20	3/4"-16	13.97	4.37	9.93	33.50	13/16"	7/8"	Imperial
DAJCM1251-0410IN	7/16"-20	7/8"-14	13.97	4.37	12.29	37.00	7/8"	1"	Imperial
DAJCM1251-0505	1/2"-20	1/2"-20	13.97	5.94	5.94	29.00	14 mm	17 mm	Metric
DAJCM1251-0506	1/2"-20	9/16"-18	13.97	5.94	7.54	31.00	17 mm	17 mm	Metric
DAJCM1251-0508	1/2"-20	3/4"-16	13.97	5.94	9.93	34.50	17 mm	22 mm	Metric
DAJCM1251-0505IN	1/2"-20	1/2"-20	13.97	5.94	5.94	29.00	9/16"	5/8"	Imperial
DAJCM1251-0506IN	1/2"-20	9/16"-18	13.97	5.94	7.54	31.00	5/8"	11/16"	Imperial
DAJCM1251-0508IN	1/2"-20	3/4"-16	13.97	5.94	9.93	34.50	3/4"	7/8"	Imperial
DAJCM1251-0604	9/16"-18	7/16"-20	14.12	7.54	4.37	29.00	17 mm	14 mm	Metric
DAJCM1251-0605	9/16"-18	1/2"-20	14.12	7.54	5.94	30.00	17 mm	17 mm	Metric
DAJCM1251-0606	9/16"-18	9/16"-18	14.12	7.54	7.54	32.13	17 mm	17 mm	Metric
DAJCM1251-0608	9/16"-18	3/4"-16	14.12	7.54	9.93	33.22	17 mm	22 mm	Metric
DAJCM1251-0610	9/16"-18	7/8"-14	14.12	7.54	12.29	37.20	22 mm	27 mm	Metric
DAJCM1251-0612	9/16"-18	1-1/16"-12	14.12	7.54	15.47	37.50	27 mm	32 mm	Metric
DAJCM1251-0616	9/16"-18	1-5/16"-12	14.12	7.54	21.44	39.50	36 mm	41 mm	Metric
DAJCM1251-0604IN	9/16"-18	7/16"-20	14.12	7.54	4.37	29.00	5/8"	9/16"	Imperial
DAJCM1251-0605IN	9/16"-18	1/2"-20	14.12	7.54	5.94	30.00	5/8"	5/8"	Imperial
DAJCM1251-0606IN	9/16"-18	9/16"-18	14.12	7.54	7.54	32.13	5/8"	11/16"	Imperial
DAJCM1251-0608IN	9/16"-18	3/4"-16	14.12	7.54	9.93	33.22	13/16"	7/8"	Imperial
DAJCM1251-0610IN	9/16"-18	7/8"-14	14.12	7.54	12.29	37.20	7/8"	1"	Imperial
DAJCM1251-0612IN	9/16"-18	1-1/16"-12	14.12	7.54	15.47	37.50	1"	1-1/4"	Imperial
DAJCM1251-0616IN	9/16"-18	1-5/16"-12	14.12	7.54	21.44	39.50	13/8"	1-1/2"	Imperial
DAJCM1251-0806	3/4"-16	9/16"-18	16.69	9.93	7.54	36.50	22 mm	17 mm	Metric

Certificate:

DAJCM1251-0808	3/4"-16	3/4"-16	16.69	9.93	9.93	37.60	22 mm	22 mm	Metric
DAJCM1251-0810	3/4"-16	7/8"-14	16.69	9.93	12.29	39.80	24 mm	27 mm	Metric
DAJCM1251-0812	3/4"-16	1-1/16"-12	16.69	9.93	15.47	40.00	27 mm	32 mm	Metric
DAJCM1251-0816	3/4"-16	1-5/16"-12	16.69	9.93	21.44	42.20	36 mm	41 mm	Metric
DAJCM1251-0806IN	3/4"-16	9/16"-18	16.69	9.93	7.54	36.50	13/16"	11/16"	Imperial
DAJCM1251-0808IN	3/4"-16	3/4"-16	16.69	9.93	9.93	37.60	13/16"	7/8"	Imperial
DAJCM1251-0810IN	3/4"-16	7/8"-14	16.69	9.93	12.29	39.80	15/16"	1"	Imperial
DAJCM1251-0812IN	3/4"-16	1-1/16"-12	16.69	9.93	15.47	40.00	1"	11/4"	Imperial
DAJCM1251-0816IN	3/4"-16	1-5/16"-12	16.69	9.93	21.44	42.20	13/8"	11/2"	Imperial
DAJCM1251-1004	7/8"-14	7/16"-20	19.25	12.29	4.37	37.50	24 mm	17 mm	Metric
DAJCM1251-1006	7/8"-14	9/16"-18	19.25	12.29	7.54	39.50	24 mm	17 mm	Metric
DAJCM1251-1008	7/8"-14	3/4"-16	19.25	12.29	9.93	41.50	24 mm	22 mm	Metric
DAJCM1251-1010	7/8"-14	7/8"-14	19.25	12.29	12.29	42.00	24 mm	27 mm	Metric
DAJCM1251-1012	7/8"-14	1-1/16"-12	19.25	12.29	15.47	43.00	27 mm	32 mm	Metric
DAJCM1251-1016	7/8"-14	1-5/16"-12	19.25	12.29	21.44	44.80	36 mm	41 mm	Metric
DAJCM1251-1004IN	7/8"-14	7/16"-20	19.25	12.29	4.37	37.50	15/16"	9/16"	Imperial
DAJCM1251-1006IN	7/8"-14	9/16"-18	19.25	12.29	7.54	39.50	15/16"	11/16"	Imperial
DAJCM1251-1008IN	7/8"-14	3/4"-16	19.25	12.29	9.93	41.50	15/16"	7/8"	Imperial
DAJCM1251-1010IN	7/8"-14	7/8"-14	19.25	12.29	12.29	42.00	15/16"	1"	Imperial
DAJCM1251-1012IN	7/8"-14	1-1/16"-12	19.25	12.29	15.47	43.00	1"	1-1/4"	Imperial
DAJCM1251-1016IN	7/8"-14	1-5/16"-12	19.25	12.29	21.44	44.80	1-3/8"	1-1/2"	Imperial
DAJCM1251-1204	1-1/16"-12	7/16"-20	21.95	15.47	4.37	41.00	30 mm	17 mm	Metric
DAJCM1251-1206	1-1/16"-12	9/16"-18	21.95	15.47	7.54	43.30	30 mm	17 mm	Metric
DAJCM1251-1208	1-1/16"-12	3/4"-16	21.95	15.47	9.93	44.00	30 mm	22 mm	Metric
DAJCM1251-1210	1-1/16"-12	7/8"-14	21.95	15.47	12.29	45.00	30 mm	27 mm	Metric
DAJCM1251-1212	1-1/16"-12	1-1/16"-12	21.95	15.47	15.47	44.90	30 mm	32 mm	Metric
DAJCM1251-1216	1-1/16"-12	1-5/16"-12	21.95	15.47	21.44	47.50	36 mm	41 mm	Metric
DAJCM1251-1220	1-1/16"-12	1-5/8"-12	21.95	15.47	27.42	50.80	46 mm	50 mm	Metric
DAJCM1251-1224	1-1/16"-12	1-7/8"-12	21.95	15.47	33.32	54.50	50 mm	60 mm	Metric
DAJCM1251-1204IN	1-1/16"-12	7/16"-20	21.95	15.47	4.37	41.00	1-1/8"	9/16"	Imperial
DAJCM1251-1206IN	1-1/16"-12	9/16"-18	21.95	15.47	7.54	43.30	1-1/8"	11/16"	Imperial
DAJCM1251-1208IN	1-1/16"-12	3/4"-16	21.95	15.47	9.93	44.00	1-1/8"	7/8"	Imperial
DAJCM1251-1210IN	1-1/16"-12	7/8"-14	21.95	15.47	12.29	45.00	1-1/8"	1"	Imperial
DAJCM1251-1212IN	1-1/16"-12	1-1/16"-12	21.95	15.47	15.47	44.90	1-1/8"	1-1/4"	Imperial
DAJCM1251-1216IN	1-1/16"-12	1-5/16"-12	21.95	15.47	21.44	47.50	1-3/8"	1-1/2"	Imperial
DAJCM1251-1220IN	1-1/16"-12	1-5/8"-12	21.95	15.47	27.42	50.80	1-11/16"	2"	Imperial
DAJCM1251-1224IN	1-1/16"-12	1-7/8"-12	21.95	15.47	33.32	54.50	2"	2-1/4"	Imperial
DAJCM1251-1608	1-5/16"-12	3/4"-16	23.14	21.44	9.93	45.50	36 mm	22 mm	Metric
DAJCM1251-1612	1-5/16"-12	1-1/16"-12	23.14	21.44	15.47	47.50	36 mm	32 mm	Metric
DAJCM1251-1616	1-5/16"-12	1-5/16"-12	23.14	21.44	21.44	49.00	36 mm	41 mm	Metric
DAJCM1251-1620	1-5/16"-12	1-5/8"-12	23.14	21.44	27.42	52.00	46 mm	50 mm	Metric
DAJCM1251-1624	1-5/16"-12	1-7/8"-12	23.14	21.44	33.32	55.60	50 mm	60 mm	Metric
DAJCM1251-1608IN	1-5/16"-12	3/4"-16	23.14	21.44	9.93	45.50	1-3/8"	7/8"	Imperial
DAJCM1251-1612IN	1-5/16"-12	1-1/16"-12	23.14	21.44	15.47	47.50	1-3/8"	1-1/4"	Imperial
DAJCM1251-1616IN	1-5/16"-12	1-5/16"-12	23.14	21.44	21.44	49.00	1-3/8"	1-1/2"	Imperial
DAJCM1251-1620IN	1-5/16"-12	1-5/8"-12	23.14	21.44	27.42	52.00	1-11/16"	2"	Imperial
DAJCM1251-1624IN	1-5/16"-12	1-7/8"-12	23.14	21.44	33.32	55.60	2"	2-1/4"	Imperial
DAJCM1251-2016	1-5/8"-12	1-5/16"-12	24.33	27.38	21.44	51.80	46 mm	41 mm	Metric
DAJCM1251-2020	1-5/8"-12	1-5/8"-12	24.33	27.38	27.38	53.20	46 mm	50 mm	Metric
DAJCM1251-2024	1-5/8"-12	1-7/8"-12	24.33	27.38	33.32	56.80	50 mm	60 mm	Metric
DAJCM1251-2016IN	1-5/8"-12	1-5/16"-12	24.33	27.38	21.44	51.80	1-11/16"	1-1/2"	Imperial
DAJCM1251-2020IN	1-5/8"-12	1-5/8"-12	24.33	27.38	27.38	53.20	1-11/16"	2"	Imperial
DAJCM1251-2024IN	1-5/8"-12	1-7/8"-12	24.33	27.38	33.32	56.80	2"	2-1/4"	Imperial
DAJCM1251-2424	1-7/8"-12	1-7/8"-12	27.51	33.32	33.32	60.00	50 mm	60 mm	Metric
DAJCM1251-2424IN	1-7/8"-12	1-7/8"-12	27.51	33.32	33.32	60.00	2"	2-1/4"	Imperial
DAJCM1251-3224	2-1/2"-12	1-7/8"-12	33.86	45.24	33.32	70.50	65 mm	60 mm	Metric
DAJCM1251-3232	2-1/2"-12	2-1/2"-12	33.86	45.24	45.24	71.00	65 mm	73 mm	Metric
DAJCM1251-3224IN	2-1/2"-12	1-7/8"-12	33.86	45.24	33.32	70.50	2-5/8"	2-1/4"	Imperial
DAJCM1251-3232IN	2-1/2"-12	2-1/2"-12	33.86	45.24	45.24	71.00	2-5/8"	2-7/8"	Imperial

Certificate:






DAJCM1081

Straight Connector JIC Male – BSPP Swivel Female 60° Cone

D	A	JC	M	1	081
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	JIC UNF	Male	Straight	BSPP Swivel Female



DME&JDE Code:	DAJCM1081
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Male × Swivel Female
Thread Types:	UNF × BSPP 60° Cone

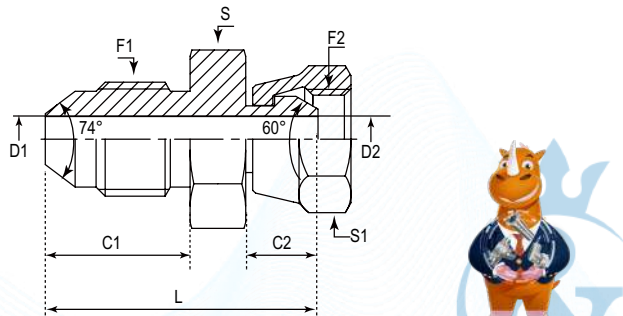

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	S1	Revision History
#	UNF	BSPP	mm	mm	mm	mm	mm	mm	mm	
DAJCM1081-0402	7/16"-20	1/8"-28	13.97	9.50	4.37	3.50	29.00	14.00	14.00	
DAJCM1081-0404	7/16"-20	1/4"-19	13.97	11.50	4.37	4.37	33.50	17.00	19.00	
DAJCM1081-0406	7/16"-20	3/8"-19	13.97	12.50	4.37	7.90	34.00	17.00	22.00	
DAJCM1081-0408	7/16"-20	1/2"-14	13.97	15.00	4.37	11.10	37.50	22.00	27.00	
DAJCM1081-0504	1/2"-20	1/4"-19	13.97	11.50	4.70	4.70	33.00	14.00	19.00	
DAJCM1081-0506	1/2"-20	3/8"-19	13.97	12.50	5.94	5.94	36.00	19.00	22.00	
DAJCM1081-0604	9/16"-18	1/4"-19	14.12	11.50	7.54	4.70	34.00	19.00	19.00	
DAJCM1081-0606	9/16"-18	3/8"-19	14.12	12.50	7.54	7.54	35.00	19.00	22.00	
DAJCM1081-0608	9/16"-18	1/2"-14	14.12	15.00	7.54	11.10	36.50	22.00	27.00	
DAJCM1081-0806	3/4"-16	3/8"-19	16.69	12.50	9.93	7.90	36.50	22.00	22.00	
DAJCM1081-0808	3/4"-16	1/2"-14	16.69	15.00	9.93	9.93	40.70	27.00	27.00	
DAJCM1081-0810	3/4"-16	5/8"-14	16.69	15.50	9.93	14.30	44.20	24.00	30.00	
DAJCM1081-0812	3/4"-16	3/4"-14	16.69	17.50	9.93	16.70	42.50	27.00	32.00	
DAJCM1081-1006	7/8"-14	3/8"-19	19.25	12.50	12.29	7.90	40.00	24.00	22.00	
DAJCM1081-1008	7/8"-14	1/2"-14	19.25	15.00	12.29	11.10	42.00	24.00	27.00	
DAJCM1081-1010	7/8"-14	5/8"-14	19.25	15.50	12.29	12.29	43.00	24.00	30.00	
DAJCM1081-1012	7/8"-14	3/4"-14	19.25	17.50	12.29	16.70	45.50	27.00	32.00	
DAJCM1081-1208	1-1/16"-12	1/2"-14	21.95	15.00	15.47	11.10	47.00	30.00	27.00	
DAJCM1081-1212	1-1/16"-12	3/4"-14	21.95	17.50	15.47	15.47	50.20	30.00	32.00	
DAJCM1081-1216	1-1/16"-12	1"-11	21.95	19.50	15.47	22.20	52.00	32.00	41.00	
DAJCM1081-1612	1-5/16"-12	3/4"-14	23.14	17.50	21.44	16.70	51.50	36.00	32.00	
DAJCM1081-1616	1-5/16"-12	1"-11	23.14	19.50	21.44	21.44	53.70	41.00	41.00	2024/6/4, Dimension S of item AT05990(DAJCM1081-1616) has been changed from 38±0.8mm to 41(-0.5,0)mm
DAJCM1081-2020	1-5/8"-12	1-1/4"-11	24.33	21.00	27.38	27.38	57.00	46.00	50.00	
DAJCM1081-2424	1-7/8"-12	1-1/2"-11	27.51	22.00	33.32	33.32	62.50	50.00	55.00	
DAJCM1081-3232	2-1/2"-12	2"-11	33.86	23.00	45.25	45.25	77.00	65.00	70.00	

Certificate:


DAJC1106Q

Straight JIC Swivel Female – BSPP Male + Retaining Ring + O Ring

D	A	JC	1	1	06	Q
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Swivel Female	Straight	BSPP	Male + Retaining Ring + O Ring



DME&JDE Code:	DAJC1106Q
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Female × Male
Thread Types:	UNF Swivel Female × BSPP
Sealing Method:	Retaining Ring + O Ring

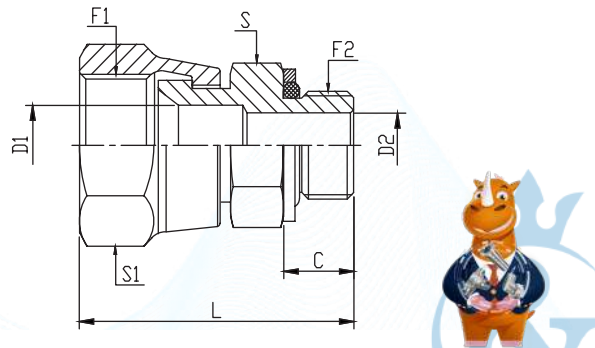

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJC1106Q-0402	7/16"-20	1/8"-28	7.60	24.00	4.37	4.37	14.00	14.00
DAJC1106Q-0404	7/16"-20	1/4"-19	11.20	27.80	4.37	7.50	19.00	17.00
DAJC1106Q-0502	1/2"-20	1/8"-28	7.60	24.00	5.94	4.40	17.00	17.00
DAJC1106Q-0504	1/2"-20	1/4"-19	11.20	27.80	5.94	7.50	19.00	17.00
DAJC1106Q-0506	1/2"-20	3/8"-19	11.20	29.00	5.94	9.90	22.00	17.00
DAJC1106Q-0604	9/16"-18	1/4"-19	11.20	29.00	7.54	7.54	19.00	19.00
DAJC1106Q-0606	9/16"-18	3/8"-19	11.20	30.00	7.54	9.90	22.00	19.00
DAJC1106Q-0608	9/16"-18	1/2"-14	14.50	33.00	7.54	12.29	27.00	19.00
DAJC1106Q-0804	3/4"-16	1/4"-19	11.20	31.00	9.93	7.50	19.00	22.00
DAJC1106Q-0806	3/4"-16	3/8"-19	11.20	30.00	9.93	9.93	22.00	24.00
DAJC1106Q-0808	3/4"-16	1/2"-14	14.50	34.00	9.93	12.30	30.00	24.00
DAJC1106Q-0812	3/4"-16	3/4"-14	14.50	36.00	9.93	15.47	36.00	24.00
DAJC1106Q-1006	7/8"-14	3/8"-19	11.20	34.00	12.29	9.93	24.00	27.00
DAJC1106Q-1008	7/8"-14	1/2"-14	14.50	35.00	12.29	12.29	27.00	27.00
DAJC1106Q-1010	7/8"-14	5/8"-14	14.50	37.00	12.29	12.29	30.00	27.00
DAJC1106Q-1012	7/8"-14	3/4"-14	14.50	38.00	12.29	12.29	36.00	27.00
DAJC1106Q-1208	1-1/16"-12	1/2"-14	14.50	38.50	15.47	12.29	30.00	32.00
DAJC1106Q-1212	1-1/16"-12	3/4"-14	14.50	40.00	15.47	15.47	36.00	32.00
DAJC1106Q-1216	1-1/16"-12	1"-11	18.60	44.00	15.47	21.44	41.00	32.00
DAJC1106Q-1612	1-5/16"-12	3/4"-14	14.50	40.00	21.44	15.50	36.00	41.00
DAJC1106Q-1616	1-5/16"-12	1"-11	18.60	46.50	21.44	21.44	46.00	41.00
DAJC1106Q-1620	1-5/16"-12	1-1/4"-11	18.60	48.00	21.44	27.38	50.00	41.00
DAJC1106Q-2016	1-5/8"-12	1"-11	18.60	48.00	27.38	21.50	46.00	50.00
DAJC1106Q-2020	1-5/8"-12	1-1/4"-11	18.60	50.00	27.38	27.38	50.00	50.00
DAJC1106Q-2024	1-5/8"-12	1-1/2"-11	18.60	49.00	27.42	33.00	55.00	50.00
DAJC1106Q-2424	1-7/8"-12	1-1/2"-11	18.60	49.00	33.00	33.00	55.00	55.00
DAJC1106Q-3232	2-1/2"-12	2"-11	18.60	50.80	45.00	45.00	70.00	75.00

Certificate:






DAJC11065

Straight Connector JIC Swivel Female – BSPP Male + O Ring

D	A	JC	1	1	06	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Swivel Female	Straight	BSPP	Male + O Ring



DME&JDE Code:	DAJC11065
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Swivel Female × Male
Thread Types:	UNF × BSPP
Sealing Method:	O Ring

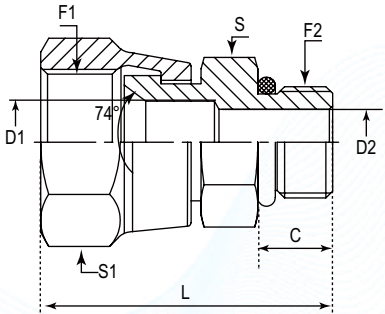

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJC11065-0402	7/16"-20	1/8"-28	7.60	24.00	4.37	4.37	14.00	14.00
DAJC11065-0404	7/16"-20	1/4"-19	11.20	27.80	4.37	7.50	19.00	17.00
DAJC11065-0502	1/2"-20	1/8"-28	7.60	24.00	5.94	4.40	17.00	17.00
DAJC11065-0504	1/2"-20	1/4"-19	11.20	27.80	5.94	7.50	19.00	17.00
DAJC11065-0506	1/2"-20	3/8"-19	11.20	29.00	5.94	9.90	22.00	17.00
DAJC11065-0604	9/16"-18	1/4"-19	11.20	29.00	7.54	7.54	19.00	19.00
DAJC11065-0606	9/16"-18	3/8"-19	11.20	30.00	7.54	9.90	22.00	19.00
DAJC11065-0608	9/16"-18	1/2"-14	14.50	33.00	7.54	12.29	27.00	19.00
DAJC11065-0804	3/4"-16	1/4"-19	11.20	31.00	9.93	7.50	19.00	22.00
DAJC11065-0806	3/4"-16	3/8"-19	11.20	30.00	9.93	9.93	22.00	24.00
DAJC11065-0808	3/4"-16	1/2"-14	14.50	34.00	9.93	12.30	27.00	24.00
DAJC11065-0812	3/4"-16	3/4"-14	14.50	36.00	9.93	15.47	36.00	24.00
DAJC11065-1006	7/8"-14	3/8"-19	11.20	34.00	12.29	9.93	24.00	27.00
DAJC11065-1008	7/8"-14	1/2"-14	14.50	35.00	12.29	12.29	27.00	27.00
DAJC11065-1010	7/8"-14	5/8"-14	14.50	37.00	12.29	12.29	30.00	27.00
DAJC11065-1012	7/8"-14	3/4"-14	14.50	38.00	12.29	12.29	36.00	27.00
DAJC11065-1208	1-1/16"-12	1/2"-14	14.50	38.50	15.47	12.29	30.00	32.00
DAJC11065-1212	1-1/16"-12	3/4"-14	14.50	40.00	15.47	15.47	36.00	32.00
DAJC11065-1216	1-1/16"-12	1"-11	18.60	44.00	15.47	21.44	41.00	32.00
DAJC11065-1612	1-5/16"-12	3/4"-14	14.50	40.00	21.44	15.50	36.00	41.00
DAJC11065-1616	1-5/16"-12	1"-11	18.60	46.50	21.44	21.44	46.00	41.00
DAJC11065-1620	1-5/16"-12	1-1/4"-11	18.60	48.00	21.44	27.38	50.00	41.00
DAJC11065-2016	1-5/8"-12	1"-11	18.60	48.00	27.38	21.50	46.00	50.00
DAJC11065-2020	1-5/8"-12	1-1/4"-11	18.60	50.00	27.38	27.38	50.00	50.00
DAJC11065-2024	1-5/8"-12	1-1/2"-11	18.60	49.00	27.42	33.00	55.00	50.00
DAJC11065-2424	1-7/8"-12	1-1/2"-11	18.60	49.00	33.00	33.00	55.00	55.00
DAJC11065-3232	2-1/2"-12	2"-11	18.60	50.80	45.00	45.00	70.00	75.00

Certificate:


DAJC11061

Straight Connector JIC Swivel Female – BSPP Male 60° with ED Seal

D	A	JC	1	1	061
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types
DME	Adaptor	JIC UNF	Swivel Female	Straight	BSPP Male with ED Seal



DME&JDE Code:	DAJC11061
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Swivel Female × Male
Thread Types:	UNF × BSPP
Sealing Method:	ED Ring

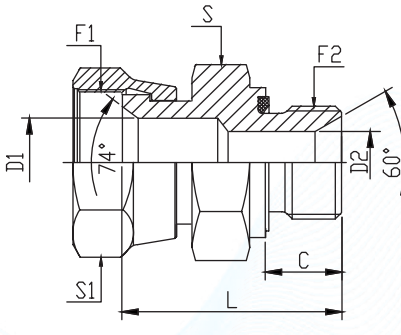

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJC11061-0402	7/16"-20	1/8"-28	8.00	4.00	4.00	23.00	14.00	14.00
DAJC11061-0404	7/16"-20	1/4"-19	12.00	4.37	4.37	28.00	19.00	17.00
DAJC11061-0604	9/16"-18	1/4"-19	12.00	7.54	6.00	30.00	19.00	19.00
DAJC11061-0606	9/16"-18	3/8"-19	12.00	7.50	7.50	31.00	22.00	19.00
DAJC11061-0608	9/16"-18	1/2"-14	14.00	7.54	11.10	35.00	27.00	19.00
DAJC11061-0804	3/4"-16	1/4"-19	12.00	9.93	6.00	33.00	19.00	22.00
DAJC11061-0806	3/4"-16	3/8"-19	12.00	9.93	7.90	30.00	22.00	24.00
DAJC11061-0808	3/4"-16	1/2"-14	14.00	9.93	9.93	37.00	27.00	22.00
DAJC11061-0810	3/4"-16	5/8"-14	14.00	9.93	14.00	37.00	30.00	22.00
DAJC11061-1008	7/8"-14	1/2"-14	14.00	12.00	12.00	36.50	27.00	27.00
DAJC11061-1208	1-1/16"-12	1/2"-14	14.00	15.47	14.00	39.00	27.00	32.00
DAJC11061-1212	1-1/16"-12	3/4"-14	16.00	15.47	18.00	41.00	32.00	32.00
DAJC11061-1216	1-1/16"-12	1"-11	18.00	15.47	22.20	44.00	41.00	32.00
DAJC11061-1612	1-5/16"-12	3/4"-14	16.00	21.44	18.00	43.00	36.00	41.00
DAJC11061-1616	1-5/16"-12	1"-11	18.00	21.40	21.40	46.00	41.00	41.00
DAJC11061-2016	1-5/8"-12	1"-11	18.00	27.42	23.00	48.00	41.00	50.00
DAJC11061-2020	1-5/8"-12	1-1/4"-11	20.00	27.42	27.42	52.50	50.00	50.00
DAJC11061-2424	1-7/8"-12	1-1/2"-11	22.00	33.00	33.00	58.00	55.00	60.00

Certificate:



DAJC1152Q

Straight JIC Swivel Female – Metric Male + Retaining Ring + O Ring

D

A

JC

1

1

52

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Swivel Female

Straight

Metric

Male + Retaining Ring + O Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJC1152Q

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Swivel Female × Male

Thread Types:

UNF ×Metric

Sealing Method:

O Ring + Retaining Ring

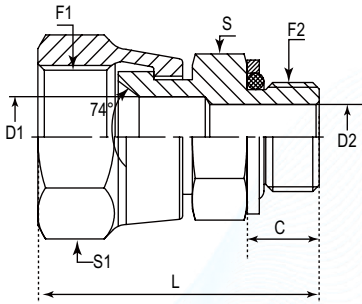

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAJC1152Q-0410	7/16"-20	M10X1	9.00	25.00	4.00	4.00	14.00	17.00
DAJC1152Q-0512	1/2"-20	M12X1.5	11.00	26.00	5.94	5.94	17.00	17.00
DAJC1152Q-0614	9/16"-18	M14X1.5	11.00	27.30	7.50	7.50	19.00	19.00
DAJC1152Q-0616	9/16"-18	M16X1.5	11.50	28.00	7.50	9.00	22.00	19.00
DAJC1152Q-0618	9/16"-18	M18X1.5	12.50	30.00	7.50	11.00	24.00	19.00
DAJC1152Q-0622	9/16"-18	M22X1.5	13.00	31.00	7.50	14.00	27.00	19.00
DAJC1152Q-0818	3/4"-16	M18X1.5	12.50	31.00	9.93	9.93	24.00	24.00
DAJC1152Q-0822	3/4"-16	M22X1.5	13.00	32.00	9.90	14.00	27.00	24.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

CE

UK CA

DAJC11305

Straight Connector JIC Swivel Female – SAE Male + O Ring

D

A

JC

1

1

30

30

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Swivel Female

Straight

SAE UNF

Male + O Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJC11305

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Swivel Female × Male

Thread Types:

UNF × UNF

Sealing Method:

O Ring

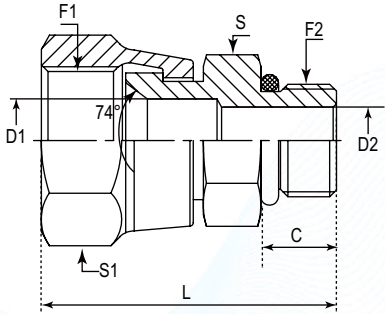

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1	Hex	Revision History
#	UNF	UNF	mm	mm	mm	mm	-	-	-	2024/6/4,Mark dimension of item series with prefix "6402" has been generally updated: Dimension L has been changed to D1,Dimension D1 has been changed to D2,Dimension D2 has been changed to L;
DAJC11305-0404	7/16"-20	7/16"-20	9.14	4.37	4.37	34.1	14 mm	14 mm	Metric	
DAJC11305-0405	7/16"-20	1/2"-20	9.14	4.37	5.94	34.8	17 mm	14 mm	Metric	
DAJC11305-0406	7/16"-20	9/16"-18	9.93	4.37	7.54	34.7	17 mm	14 mm	Metric	
DAJC11305-0404IN	7/16"-20	7/16"-20	9.14	4.37	4.37	34.1	9/16"	9/16"	Imperial	
DAJC11305-0405IN	7/16"-20	1/2"-20	9.14	4.37	5.94	34.8	5/8"	9/16"	Imperial	
DAJC11305-0406IN	7/16"-20	9/16"-18	9.93	4.37	7.54	34.7	11/16"	9/16"	Imperial	
DAJC11305-0505	1/2"-20	1/2"-20	9.14	5.94	5.94	34.80	17 mm	17 mm	Metric	
DAJC11305-0505IN	1/2"-20	1/2"-20	9.14	5.94	5.94	34.80	5/8"	5/8"	Imperial	
DAJC11305-0604	9/16"-18	7/16"-20	9.14	7.54	4.37	27.8	14 mm	19 mm	Metric	
DAJC11305-0606	9/16"-18	9/16"-18	9.93	7.54	7.54	38.4	17 mm	19 mm	Metric	
DAJC11305-0608	9/16"-18	3/4"-16	11.13	7.54	9.93	40.5	22 mm	19 mm	Metric	
DAJC11305-0610	9/16"-18	7/8"-14	12.7	7.54	12.29	43.5	27 mm	19 mm	Metric	
DAJC11305-0612	9/16"-18	1-1/16"-12	15.09	7.54	15.47	38	32 mm	19 mm	Metric	
DAJC11305-0604IN	9/16"-18	7/16"-20	9.14	7.54	4.37	27.8	9/16"	11/16"	Imperial	
DAJC11305-0606IN	9/16"-18	9/16"-18	9.93	7.54	7.54	38.4	11/16"	11/16"	Imperial	
DAJC11305-0608IN	9/16"-18	3/4"-16	11.13	7.54	9.93	40.5	7/8"	11/16"	Imperial	
DAJC11305-0610IN	9/16"-18	7/8"-14	12.7	7.54	12.29	43.5	1"	11/16"	Imperial	
DAJC11305-0612IN	9/16"-18	1-1/16"-12	15.09	7.54	15.47	38	1-1/4"	11/16"	Imperial	
DAJC11305-0806	3/4"-16	9/16"-18	9.93	7.54	7.54	39.9	27 mm	22 mm	Metric	
DAJC11305-0808	3/4"-16	3/4"-16	11.13	9.93	9.93	42.8	22 mm	22 mm	Metric	

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

CE

UK CA

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



DAJC11305-0810	3/4"-16	7/8"-14	12.7	9.93	12.29	46	27 mm	22 mm	Metric	
DAJC11305-0812	3/4"-16	1-1/16"-12	15.09	9.93	15.47	49	32 mm	22 mm	Metric	
DAJC11305-0806IN	3/4"-16	9/16"-18	9.93	7.54	7.54	39.9	13/16"	7/8"	Imperial	
DAJC11305-0808IN	3/4"-16	3/4"-16	11.13	9.93	9.93	42.8	7/8"	7/8"	Imperial	2024/6/4,Dimension D2 of item AR10010(6402-0808) has been changed from 9.91mm to 9.93±0.2mm.
DAJC11305-0810IN	3/4"-16	7/8"-14	12.7	9.93	12.29	46	1"	7/8"	Imperial	
DAJC11305-0812IN	3/4"-16	1-1/16"-12	15.09	9.93	15.47	49	1-1/4"	7/8"	Imperial	
DAJC11305-1006	7/8"-14	9/16"-18	9.93	12.29	7.54	34	22 mm	27 mm	Metric	
DAJC11305-1008	7/8"-14	3/4"-16	11.13	12.29	9.93	44.5	27 mm	27 mm	Metric	
DAJC11305-1010	7/8"-14	7/8"-14	12.7	12.29	12.29	50.1	27 mm	27 mm	Metric	
DAJC11305-1012	7/8"-14	1-1/16"-12	15.09	12.29	15.47	53.3	32 mm	27 mm	Metric	
DAJC11305-1006IN	7/8"-14	9/16"-18	9.93	12.29	7.54	34	7/8"	1"	Imperial	
DAJC11305-1008IN	7/8"-14	3/4"-16	11.13	12.29	9.93	44.5	1"	1"	Imperial	
DAJC11305-1010IN	7/8"-14	7/8"-14	12.7	12.29	12.29	50.1	1"	1"	Imperial	
DAJC11305-1012IN	7/8"-14	1-1/16"-12	15.09	12.29	15.47	53.3	1-1/4"	1"	Imperial	
DAJC11305-1208	1-1/16"-12	3/4"-16	11.13	15.47	9.93	53	27 mm	32 mm	Metric	
DAJC11305-1210	1-1/16"-12	7/8"-14	12.7	15.47	12.29	51.6	27 mm	32 mm	Metric	
DAJC11305-1212	1-1/16"-12	1-1/16"-12	15.09	15.47	15.47	55.7	32 mm	32 mm	Metric	
DAJC11305-1216	1-1/16"-12	1-5/16"-12	15.09	15.47	21.44	56.9	41 mm	32 mm	Metric	
DAJC11305-1208IN	1-1/16"-12	3/4"-16	11.13	15.47	9.93	53	1"	1-1/4"	Imperial	
DAJC11305-1210IN	1-1/16"-12	7/8"-14	12.7	15.47	12.29	51.6	1"	1-1/4"	Imperial	
DAJC11305-1212IN	1-1/16"-12	1-1/16"-12	15.09	15.47	15.47	55.7	1-1/4"	1-1/4"	Imperial	
DAJC11305-1216IN	1-1/16"-12	1-5/16"-12	15.09	15.47	21.44	56.9	1-1/2"	1-1/4"	Imperial	
DAJC11305-1612	1-5/16"-12	1-1/16"-12	15.09	21.44	15.47	54.3	41 mm	41 mm	Metric	
DAJC11305-1616	1-5/16"-12	1-5/16"-12	15.09	21.44	21.44	58.8	41 mm	41 mm	Metric	
DAJC11305-1620	1-5/16"-12	1-5/8"-12	15.09	21.44	27.38	60.5	50 mm	41 mm	Metric	
DAJC11305-1612IN	1-5/16"-12	1-1/16"-12	15.09	21.44	15.47	54.3	1-1/2"	1-1/2"	Imperial	
DAJC11305-1616IN	1-5/16"-12	1-5/16"-12	15.09	21.44	21.44	58.8	1-1/2"	1-1/2"	Imperial	
DAJC11305-1620IN	1-5/16"-12	1-5/8"-12	15.09	21.44	27.38	60.5	1-7/8"	1-1/2"	Imperial	
DAJC11305-2016	1-5/8"-12	1-5/16"-12	15.09	27.42	21.44	48.7	50 mm	50 mm	Metric	
DAJC11305-2020	1-5/8"-12	1-5/8"-12	15.09	27.38	27.38	61.7	50 mm	50 mm	Metric	
DAJC11305-2016IN	1-5/8"-12	1-5/16"-12	15.09	27.42	21.44	48.7	1-7/8"	2"	Imperial	
DAJC11305-2020IN	1-5/8"-12	1-5/8"-12	15.09	27.38	27.38	61.7	1-7/8"	2"	Imperial	
DAJC11305-2424	1-7/8"-12	1-7/8"-12	15.09	33.32	33.32	67.7	55 mm	55 mm	Metric	
DAJC11305-2424IN	1-7/8"-12	1-7/8"-12	15.09	33.32	33.32	67.7	2-1/8"	2-1/4"	Imperial	
DAJC11305-3232	2-1/2"-12	2-1/2"-12	15.09	45.24	45.24	79.1	70 mm	75 mm	Metric	
DAJC11305-3232IN	2-1/2"-12	2-1/2"-12	15.09	45.24	45.24	79.1	2-3/4"	2-7/8"	Imperial	

DAJC11525

Straight Connector JIC Swivel Female – Metric Male + O Ring

D	A	JC	1	1	52	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
	Adaptor	JIC UNF	Swivel Female	Straight	Metric	Male + 0 Ring

DME&JDE Code: DAJC11525

Product Type	Hydraulic adaptor


Standard: JIC and SAE-ORB

Structure: Straight

Connection Type: Swivel Female x Male

Thread Types: UNF x Metric

Sealing Method: O Ring

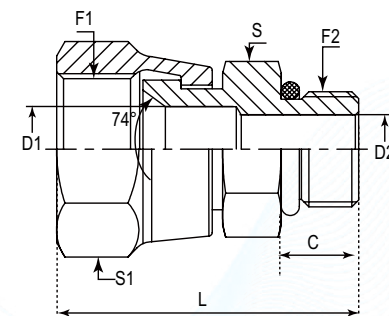

Part Number	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAJC11525-0410	7/16"-20	M10X1	9.00	25.00	4.00	4.00	14.00	17.00
DAJC11525-0512	1/2"-20	M12X1.5	11.00	26.00	5.94	5.94	17.00	17.00
DAJC11525-0614	9/16"-18	M14X1.5	11.00	27.30	7.50	7.50	19.00	19.00
DAJC11525-0616	9/16"-18	M16X1.5	11.50	28.00	7.50	9.00	22.00	19.00
DAJC11525-0618	9/16"-18	M18X1.5	12.50	30.00	7.50	11.00	24.00	19.00
DAJC11525-0622	9/16"-18	M22X1.5	13.00	31.00	7.50	14.00	27.00	19.00
DAJC11525-0818	3/4"-16	M18X1.5	12.50	31.00	9.93	9.93	24.00	24.00
DAJC11525-0822	3/4"-16	M22X1.5	13.00	32.00	9.90	14.00	27.00	24.00

DAJC1128M

Straight Connector JIC Swivel Female – NPTF Male 60°

D

A

JC

1

1

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DAE

Adaptor

JIC UNF

Swivel Female

Straight

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJC1128M

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Swivel Female × Male

Thread Types:

UNF × NPTF 60°

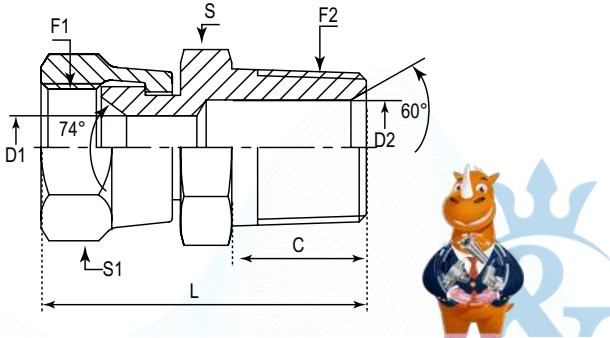

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1	S1
#	UNF	NPTF	mm	mm	mm	mm	mm	mm	mm
DAJC1128M-0202	5/16"-24	1/8"-27	9.65	24.90	1.57	4.78	11 mm	11 mm	Metric
DAJC1128M-0202IN	5/16"-24	1/8"-27	9.65	24.90	1.57	4.78	7/16"	7/16"	Imperial
DAJC1128M-0402	7/16"-20	1/8"-27	9.65	25.50	4.37	4.37	12 mm	14 mm	Metric
DAJC1128M-0404	7/16"-20	1/4"-18	14.22	30.71	4.37	7.14	14 mm	14 mm	Metric
DAJC1128M-0406	7/16"-20	3/8"-18	14.22	31.20	4.37	10.31	19 mm	14 mm	Metric
DAJC1128M-0408	7/16"-20	1/2"-14	19.05	36.80	4.37	13.49	22 mm	14 mm	Metric
DAJC1128M-0402IN	7/16"-20	1/8"-27	9.65	25.50	4.37	4.37	1/2"	9/16"	Imperial
DAJC1128M-0404IN	7/16"-20	1/4"-18	14.22	30.71	4.37	7.14	9/16"	9/16"	Imperial
DAJC1128M-0406IN	7/16"-20	3/8"-18	14.22	31.20	4.37	10.31	3/4"	9/16"	Imperial
DAJC1128M-0408IN	7/16"-20	1/2"-14	19.05	36.80	4.37	13.49	7/8"	9/16"	Imperial
DAJC1128M-0502	1/2"-20	1/8"-27	9.65	26.20	4.78	4.78	14 mm	17 mm	Metric
DAJC1128M-0504	1/2"-20	1/4"-18	14.22	31.50	5.94	7.14	17 mm	17 mm	Metric
DAJC1128M-0502IN	1/2"-20	1/8"-27	9.65	26.20	4.78	4.78	9/16"	5/8"	Imperial
DAJC1128M-0504IN	1/2"-20	1/4"-18	14.22	31.50	5.94	7.14	5/8"	5/8"	Imperial
DAJC1128M-0602	9/16"-18	1/8"-27	9.65	26.50	7.54	4.78	14 mm	17 mm	Metric
DAJC1128M-0604	9/16"-18	1/4"-18	14.22	32.50	7.14	7.14	17 mm	19 mm	Metric
DAJC1128M-0606	9/16"-18	3/8"-18	14.22	32.10	7.54	10.31	19 mm	19 mm	Metric
DAJC1128M-0608	9/16"-18	1/2"-14	19.05	38.50	7.54	13.49	22 mm	19 mm	Metric
DAJC1128M-0602IN	9/16"-18	1/8"-27	9.65	26.50	7.54	4.78	9/16"	5/8"	Imperial
DAJC1128M-0604IN	9/16"-18	1/4"-18	14.22	32.50	7.14	7.14	5/8"	11/16"	Imperial



DAJC1128M-0606IN	9/16"-18	3/8"-18	14.22	32.10	7.54	10.31	3/4"	11/16"	Imperial
DAJC1128M-0608IN	9/16"-18	1/2"-14	19.05	38.50	7.54	13.49	7/8"	11/16"	Imperial
DAJC1128M-0804	3/4"-16	1/4"-18	14.22	33.22	9.90	7.14	22 mm	22 mm	Metric
DAJC1128M-0806	3/4"-16	3/8"-18	14.22	33.40	9.90	9.90	19 mm	22 mm	Metric
DAJC1128M-0808	3/4"-16	1/2"-14	19.05	39.57	9.93	13.49	22 mm	22 mm	Metric
DAJC1128M-0812	3/4"-16	3/4"-14	19.05	42.40	9.90	18.26	30 mm	22 mm	Metric
DAJC1128M-0804IN	3/4"-16	1/4"-18	14.22	33.22	9.90	7.14	7/8"	7/8"	Imperial
DAJC1128M-0806IN	3/4"-16	3/8"-18	14.22	33.40	9.90	9.90	13/16"	7/8"	Imperial
DAJC1128M-0808IN	3/4"-16	1/2"-14	19.05	39.57	9.93	13.49	7/8"	7/8"	Imperial
DAJC1128M-0812IN	3/4"-16	3/4"-14	19.05	42.40	9.90	18.26	1-1/8"	7/8"	Imperial
DAJC1128M-1006	7/8"-14	3/8"-18	14.22	36.50	10.31	10.31	27 mm	27 mm	Metric
DAJC1128M-1008	7/8"-14	1/2"-14	19.05	40.65	12.29	12.29	24 mm	27 mm	Metric
DAJC1128M-1012	7/8"-14	3/4"-14	19.05	42.70	12.29	18.26	30 mm	27 mm	Metric
DAJC1128M-1006IN	7/8"-14	3/8"-18	14.22	36.50	10.31	10.31	1"	1"	Imperial
DAJC1128M-1008IN	7/8"-14	1/2"-14	19.05	40.65	12.29	12.29	15/16"	1"	Imperial
DAJC1128M-1012IN	7/8"-14	3/4"-14	19.05	42.70	12.29	18.26	1-1/8"	1"	Imperial
DAJC1128M-1208	1-1/16"-12	1/2"-14	19.05	40.00	15.47	13.49	27 mm	32 mm	Metric
DAJC1128M-1212	1-1/16"-12	3/4"-14	19.05	43.60	15.47	18.26	30 mm	32 mm	Metric
DAJC1128M-1216	1-1/16"-12	1"-11-1/2	23.88	48.50	15.47	23.83	36 mm	32 mm	Metric
DAJC1128M-1208IN	1-1/16"-12	1/2"-14	19.05	40.00	15.47	13.49	1"	1-1/4"	Imperial
DAJC1128M-1212IN	1-1/16"-12	3/4"-14	19.05	43.60	15.47	18.26	1-1/8"	1-1/4"	Imperial
DAJC1128M-1216IN	1-1/16"-12	1"-11-1/2	23.88	48.50	15.47	23.83	1-3/8"	1-1/4"	Imperial
DAJC1128M-1412	1-3/16"-12	3/4"-14	19.05	43.30	18.26	18.26	32 mm	36 mm	Metric
DAJC1128M-1412IN	1-3/16"-12	3/4"-14	19.05	43.30	18.26	18.26	1-1/4"	1-3/8"	Imperial
DAJC1128M-1612	1-5/16"-12	3/4"-14	19.05	44.10	21.44	18.26	32 mm	41 mm	Metric
DAJC1128M-1616	1-5/16"-12	1"-11-1/2	23.88	65.30	21.44	23.83	36 mm	41 mm	Metric
DAJC1128M-1612IN	1-5/16"-12	3/4"-14	19.05	44.10	21.44	18.26	1-1/4"	1-1/2"	Imperial
DAJC1128M-1616IN	1-5/16"-12	1"-11-1/2	23.88	65.30	21.44	23.83	1-3/8"	1-1/2"	Imperial
DAJC1128M-2016	1-5/8"-12	1"-11-1/2	23.88	52.70	27.42	23.83	46 mm	50 mm	Metric
DAJC1128M-2020	1-5/8"-12	1-1/4"-11-1/2	24.64	56.13	27.42	31.75	46 mm	50 mm	Metric
DAJC1128M-2016IN	1-5/8"-12	1"-11-1/2	23.88	52.70	27.42	23.83	1-11/16"	2"	Imperial
DAJC1128M-2020IN	1-5/8"-12	1-1/4"-11-1/2	24.64	56.13	27.42	31.75	1-11/16"	2"	Imperial
DAJC1128M-2420	1-7/8"-12	1-1/4"-11-1/2	24.64	56.50	33.32	31.75	50 mm	55 mm	Metric
DAJC1128M-2424	1-7/8"-12	1-1/2"-11-1/2	25.40	57.70	33.32	38.10	50 mm	55 mm	Metric
DAJC1128M-2420IN	1-7/8"-12	1-1/4"-11-1/2	24.64	56.50	33.32	31.75	2"	2-1/4"	Imperial
DAJC1128M-2424IN	1-7/8"-12	1-1/2"-11-1/2	25.40	57.70	33.32	38.10	2"	2-1/4"	Imperial
DAJC1128M-3232	2-1/2"-12	2"-11-1/2	26.16	63.50	45.24	49.23	65 mm	75 mm	Metric
DAJC1128M-3232IN	2-1/2"-12	2"-11-1/2	26.16	63.50	45.24	49.23	2-5/8"	2-7/8"	Imperial






DAJC1107M

Straight Connector JIC Swivel Female – BSPT Male 60°

D	A	JC	1	1	07	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Swivel Female	Straight	BSPT	Male



DME&JDE Code:	DAJC1107M
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Swivel Female × Male
Thread Types:	UNF × BSPT 60°

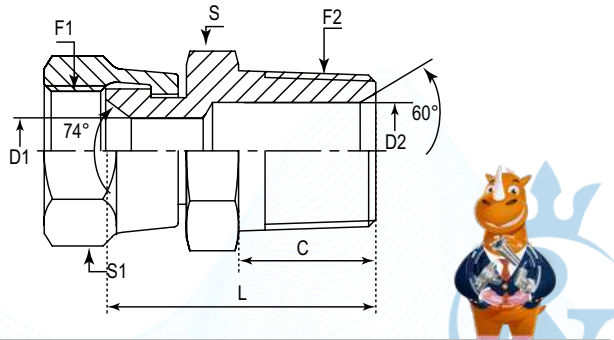

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	UNF	BSPT	mm	mm	mm	mm	mm	mm
DAJC1107M-0402	7/16"-20	1/8"-28	10.00	24.50	4.37	4.37	12.00	17.00
DAJC1107M-0404	7/16"-20	1/4"-19	14.00	28.50	4.37	6.00	14.00	17.00
DAJC1107M-0406	7/16"-20	3/8"-19	15.00	30.50	4.37	9.00	19.00	17.00
DAJC1107M-0504	1/2"-20	1/4"-19	14.00	29.00	5.94	5.94	14.00	17.00
DAJC1107M-0602	9/16"-18	1/8"-28	10.00	26.50	7.54	4.50	14.00	19.00
DAJC1107M-0606	9/16"-18	3/8"-19	15.00	31.00	7.54	9.00	17.00	19.00
DAJC1107M-0608	9/16"-18	1/2"-14	19.00	36.50	7.54	12.00	24.00	19.00
DAJC1107M-0804	3/4"-16	1/4"-19	14.00	31.50	9.93	6.00	19.00	24.00
DAJC1107M-0806	3/4"-16	3/8"-19	15.00	32.50	9.00	9.00	19.00	24.00
DAJC1107M-0808	3/4"-16	1/2"-14	19.00	37.50	9.93	12.00	24.00	24.00
DAJC1107M-1006	7/8"-14	3/8"-19	15.00	34.00	12.29	9.00	24.00	27.00
DAJC1107M-1012	7/8"-14	3/4"-14	20.00	42.50	12.29	16.70	30.00	27.00
DAJC1107M-1206	1-1/16"-12	3/8"-19	15.00	37.50	15.47	9.00	27.00	32.00
DAJC1107M-1208	1-1/16"-12	1/2"-14	19.00	43.00	15.47	12.00	27.00	32.00
DAJC1107M-1212	1-1/16"-12	3/4"-14	20.00	41.50	15.47	16.70	30.00	32.00
DAJC1107M-1216	1-1/16"-12	1"-11	24.00	48.50	15.47	22.20	36.00	32.00
DAJC1107M-1612	1-5/16"-12	3/4"-14	19.00	45.00	21.44	15.50	32.00	41.00
DAJC1107M-1616	1-5/16"-12	1"-11	24.00	47.50	21.44	22.20	36.00	41.00
DAJC1107M-2020	1-5/8"-12	1-1/4"-11	25.00	52.00	27.38	28.60	46.00	50.00
DAJC1107M-2424	1-7/8"-12	1-1/2"-11	25.00	57.50	33.32	33.32	50.00	55.00

Certificate:


DAJCF125M

Straight Connector JIC Fixed Female – JIC Male

D	A	JC	F	1	25	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Female	Straight	JIC UNF	Male



DME&JDE Code:	DAJCF125M
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Fixed Female × Male
Thread Types:	UNF × UNF

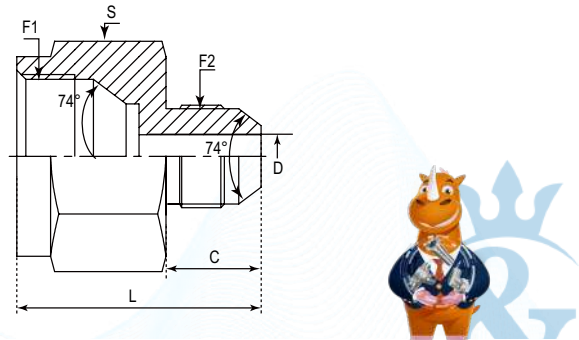

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S	Hex	Revision History
#	UNF	UNF	mm	mm	mm	-	-	
DAJCF125M-0203	5/16"-24	3/8"-24	12.17	1.57	24.9	11 mm	Metric	
DAJCF125M-0204	5/16"-24	7/16"-20	13.97	1.57	27.5	14 mm	Metric	
DAJCF125M-0203IN	5/16"-24	3/8"-24	12.17	1.57	24.9	7/16"	Imperial	
DAJCF125M-0204IN	5/16"-24	7/16"-20	13.97	1.57	27.5	9/16"	Imperial	
DAJCF125M-0304	3/8"-24	7/16"-20	13.97	3.18	28.30	14 mm	Metric	
DAJCF125M-0304IN	3/8"-24	7/16"-20	13.97	3.18	28.30	9/16"	Imperial	
DAJCF125M-0402	7/16"-20	5/16"-24	11.38	1.57	26.64	14 mm	Metric	
DAJCF125M-0403	7/16"-20	3/8"-24	12.17	3.18	27.18	14 mm	Metric	
DAJCF125M-0404	7/16"-20	7/16"-20	13.97	4.37	29.21	14 mm	Metric	
DAJCF125M-0405	7/16"-20	1/2"-20	13.97	4.37	29.21	17 mm	Metric	
DAJCF125M-0406	7/16"-20	9/16"-18	14.12	4.37	29.50	17 mm	Metric	
DAJCF125M-0402IN	7/16"-20	5/16"-24	11.38	1.57	26.64	9/16"	Imperial	
DAJCF125M-0403IN	7/16"-20	3/8"-24	12.17	3.18	27.18	9/16"	Imperial	
DAJCF125M-0404IN	7/16"-20	7/16"-20	13.97	4.37	29.21	9/16"	Imperial	
DAJCF125M-0405IN	7/16"-20	1/2"-20	13.97	4.37	29.21	5/8"	Imperial	
DAJCF125M-0406IN	7/16"-20	9/16"-18	14.12	4.37	29.50	5/8"	Imperial	
DAJCF125M-0504	1/2"-20	7/16"-20	13.97	4.37	30.23	17 mm	Metric	
DAJCF125M-0506	1/2"-20	9/16"-18	14.12	5.94	30.23	17 mm	Metric	
DAJCF125M-0508	1/2"-20	3/4"-16	16.69	5.94	32.30	19 mm	Metric	
DAJCF125M-0504IN	1/2"-20	7/16"-20	13.97	4.37	30.23	5/8"	Imperial	
DAJCF125M-0506IN	1/2"-20	9/16"-18	14.12	5.94	30.23	5/8"	Imperial	
DAJCF125M-0508IN	1/2"-20	3/4"-16	16.69	5.94	32.30	13/16"	Imperial	
DAJCF125M-0604	9/16"-18	7/16"-20	13.97	4.37	30.15	17 mm	Metric	
DAJCF125M-0605	9/16"-18	1/2"-20	13.97	5.94	30.00	17 mm	Metric	
DAJCF125M-0606	9/16"-18	9/16"-18	14.12	7.54	30.10	17 mm	Metric	
DAJCF125M-0608	9/16"-18	3/4"-16	16.69	7.54	32.56	22 mm	Metric	
DAJCF125M-0610	9/16"-18	7/8"-14	19.25	7.54	35.05	24 mm	Metric	
DAJCF125M-0612	9/16"-18	1-1/16"-12	21.95	7.54	34.90	30 mm	Metric	
DAJCF125M-0616	9/16"-18	1-5/16"-12	23.14	7.54	40.90	36 mm	Metric	
DAJCF125M-0604IN	9/16"-18	7/16"-20	13.97	4.37	30.15	11/16"	Imperial	
DAJCF125M-0605IN	9/16"-18	1/2"-20	13.97	5.94	30.00	11/16"	Imperial	
DAJCF125M-0606IN	9/16"-18	9/16"-18	14.12	7.54	30.10	11/16"	Imperial	
DAJCF125M-0608IN	9/16"-18	3/4"-16	16.69	7.54	32.56	13/16"	Imperial	
DAJCF125M-0610IN	9/16"-18	7/8"-14	19.25	7.54	35.05	15/16"	Imperial	

Certificate:



DAJCF125M-0612IN	9/16"-18	1-1/16"-12	21.95	7.54	34.90	1-1/8"	Imperial	
DAJCF125M-0616IN	9/16"-18	1-5/16"-12	23.14	7.54	40.90	1-3/8"	Imperial	
DAJCF125M-0804	3/4"-16	7/16"-20	13.97	4.37	33.02	22 mm	Metric	
DAJCF125M-0805	3/4"-16	1/2"-20	13.97	5.94	36.83	22 mm	Metric	
DAJCF125M-0806	3/4"-16	9/16"-18	14.12	7.54	33.27	24 mm	Metric	
DAJCF125M-0808	3/4"-16	3/4"-16	16.69	9.93	40.13	24 mm	Metric	
DAJCF125M-0810	3/4"-16	7/8"-14	19.25	9.93	32.80	24 mm	Metric	
DAJCF125M-0812	3/4"-16	1-1/16"-12	21.95	9.93	40.89	30 mm	Metric	
DAJCF125M-0816	3/4"-16	1-5/16"-12	23.14	9.93	44.70	36 mm	Metric	
DAJCF125M-0804IN	3/4"-16	7/16"-20	13.97	4.37	33.02	7/8"	Imperial	
DAJCF125M-0805IN	3/4"-16	1/2"-20	13.97	5.94	36.83	7/8"	Imperial	
DAJCF125M-0806IN	3/4"-16	9/16"-18	14.12	7.54	33.27	7/8"	Imperial	
DAJCF125M-0808IN	3/4"-16	3/4"-16	16.69	9.93	40.13	7/8"	Imperial	
DAJCF125M-0810IN	3/4"-16	7/8"-14	19.25	9.93	32.80	15/16"	Imperial	
DAJCF125M-0812IN	3/4"-16	1-1/16"-12	21.95	9.93	40.89	1-1/8"	Imperial	
DAJCF125M-0816IN	3/4"-16	1-5/16"-12	23.14	9.93	44.70	1-3/8"	Imperial	
DAJCF125M-1004	7/8"-14	7/16"-20	13.97	4.37	35.30	27 mm	Metric	
DAJCF125M-1005	7/8"-14	1/2"-20	13.97	5.94	35.80	27 mm	Metric	
DAJCF125M-1006	7/8"-14	9/16"-18	14.12	7.54	35.80	27 mm	Metric	
DAJCF125M-1008	7/8"-14	3/4"-16	16.69	9.93	35.80	27 mm	Metric	
DAJCF125M-1010	7/8"-14	7/8"-14	19.25	12.29	38.00	27 mm	Metric	
DAJCF125M-1012	7/8"-14	1-1/16"-12	21.95	12.29	38.10	30 mm	Metric	
DAJCF125M-1016	7/8"-14	1-5/16"-12	23.14	12.29	44.70	36 mm	Metric	
DAJCF125M-1004IN	7/8"-14	7/16"-20	13.97	4.37	35.30	1"	Imperial	
DAJCF125M-1005IN	7/8"-14	1/2"-20	13.97	5.94	35.80	1"	Imperial	
DAJCF125M-1006IN	7/8"-14	9/16"-18	14.12	7.54	35.80	1"	Imperial	
DAJCF125M-1008IN	7/8"-14	3/4"-16	16.69	9.93	35.80	1"	Imperial	
DAJCF125M-1010IN	7/8"-14	7/8"-14	19.25	12.29	38.00	1"	Imperial	
DAJCF125M-1012IN	7/8"-14	1-1/16"-12	21.95	12.29	38.10	1-1/8"	Imperial	
DAJCF125M-1016IN	7/8"-14	1-5/16"-12	23.14	12.29	44.70	1-3/8"	Imperial	
DAJCF125M-1204	1-1/16"-12	7/16"-20	13.97	4.37	38.10	32 mm	Metric	
DAJCF125M-1205	1-1/16"-12	1/2"-20	13.97	5.94	38.10	32 mm	Metric	
DAJCF125M-1206	1-1/16"-12	9/16"-18	14.12	7.54	37.10	32 mm	Metric	
DAJCF125M-1208	1-1/16"-12	3/4"-16	16.69	9.93	42.70	32 mm	Metric	
DAJCF125M-1210	1-1/16"-12	7/8"-14	19.25	12.29	41.66	32 mm	Metric	
DAJCF125M-1212	1-1/16"-12	1-1/16"-12	21.95	15.47	41.66	32 mm	Metric	
DAJCF125M-1216	1-1/16"-12	1-5/16"-12	23.14	15.47	46.20	36 mm	Metric	
DAJCF125M-1220	1-1/16"-12	1-5/8"-12	24.33	15.47	43.50	46 mm	Metric	
DAJCF125M-1204IN	1-1/16"-12	7/16"-20	13.97	4.37	38.10	1-1/4"	Imperial	
DAJCF125M-1205IN	1-1/16"-12	1/2"-20	13.97	5.94	38.10	1-1/4"	Imperial	
DAJCF125M-1206IN	1-1/16"-12	9/16"-18	14.12	7.54	37.10	1-1/4"	Imperial	
DAJCF125M-1208IN	1-1/16"-12	3/4"-16	16.69	9.93	42.70	1-1/4"	Imperial	
DAJCF125M-1210IN	1-1/16"-12	7/8"-14	19.25	12.29	42.67	1-1/4"	Imperial	2024/6/4 Dimension L of item AR08760(2406-1210) has been changed from 41.66±0.5mm to 42.67±0.5mm
DAJCF125M-1212IN	1-1/16"-12	1-1/16"-12	21.95	15.47	41.66	1-1/4"	Imperial	
DAJCF125M-1216IN	1-1/16"-12	1-5/16"-12	23.14	15.47	46.20	1-3/8"	Imperial	
DAJCF125M-1220IN	1-1/16"-12	1-5/8"-12	24.33	15.47	43.50	1-11/16"	Imperial	
DAJCF125M-1408	1-3/16"-12	3/4"-16	16.69	9.93	42.93	36 mm	Metric	
DAJCF125M-1410	1-3/16"-12	7/8"-14	19.25	12.29	43.94	36 mm	Metric	
DAJCF125M-1412	1-3/16"-12	1-1/16"-12	21.95	15.47	46.74	36 mm	Metric	
DAJCF125M-1414	1-3/16"-12	1-3/16"-12	22.61	15.47	46.28	36 mm	Metric	
DAJCF125M-1416	1-3/16"-12	1-5/16"-12	23.14	18.26	50.44	36 mm	Metric	
DAJCF125M-1408IN	1-3/16"-12	3/4"-16	16.69	9.93	42.93	1-3/8"	Imperial	
DAJCF125M-1410IN	1-3/16"-12	7/8"-14	19.25	12.29	43.94	1-3/8"	Imperial	
DAJCF125M-1412IN	1-3/16"-12	1-1/16"-12	21.95	15.47	46.74	1-3/8"	Imperial	
DAJCF125M-1414IN	1-3/16"-12	1-3/16"-12	22.61	15.47	46.28	1-3/8"	Imperial	
DAJCF125M-1416IN	1-3/16"-12	1-5/16"-12	23.14	18.26	50.44	1-3/8"	Imperial	
DAJCF125M-1604	1-5/16"-12	7/16"-20	13.97	4.37	46.70	41 mm	Metric	
DAJCF125M-1605	1-5/16"-12	1/2"-20	13.97	5.94	46.70	41 mm	Metric	
DAJCF125M-1606	1-5/16"-12	9/16"-18	14.12	7.54	46.70	41 mm	Metric	
DAJCF125M-1608	1-5/16"-12	3/4"-16	16.69	9.93	43.70	41 mm	Metric	
DAJCF125M-1610	1-5/16"-12	7/8"-14	19.25	12.29	45.47	41 mm	Metric	

DAJCF125M-1612	1-5/16"-12	1-1/16"-12	21.95	15.47	48.30	41 mm	Metric	
DAJCF125M-1614	1-5/16"-12	1-3/16"-12	22.61	18.26	48.51	41 mm	Metric	
DAJCF125M-1616	1-5/16"-12	1-5/16"-12	23.14	21.44	49.00	41 mm	Metric	
DAJCF125M-1620	1-5/16"-12	1-5/8"-12	24.33	21.44	43.43	46 mm	Metric	
DAJCF125M-1624	1-5/16"-12	1-7/8"-12	27.51	21.44	54.48	50 mm	Metric	
DAJCF125M-1604IN	1-5/16"-12	7/16"-20	13.97	4.37	46.70	1-1/2"	Imperial	
DAJCF125M-1605IN	1-5/16"-12	1/2"-20	13.97	5.94	46.70	1-1/2"	Imperial	
DAJCF125M-1606IN	1-5/16"-12	9/16"-18	14.12	7.54	46.70	1-1/2"	Imperial	
DAJCF125M-1608IN	1-5/16"-12	3/4"-16	16.69	9.93	43.70	1-1/2"	Imperial	
DAJCF125M-1610IN	1-5/16"-12	7/8"-14	19.25	12.29	45.47	1-1/2"	Imperial	
DAJCF125M-1612IN	1-5/16"-12	1-1/16"-12	21.95	15.47	48.30	1-1/2"	Imperial	
DAJCF125M-1614IN	1-5/16"-12	1-3/16"-12	22.61	18.26	48.51	1-1/2"	Imperial	
DAJCF125M-1616IN	1-5/16"-12	1-5/16"-12	23.14	21.44	49.00	1-1/2"	Imperial	
DAJCF125M-1620IN	1-5/16"-12	1-5/8"-12	24.33	21.44	43.43	1-11/16"	Imperial	
DAJCF125M-1624IN	1-5/16"-12	1-7/8"-12	27.51	21.44	54.48	2"	Imperial	
DAJCF125M-2004	1-5/8"-12	7/16"-20	13.97	4.37	42.60	50 mm	Metric	
DAJCF125M-2005	1-5/8"-12	1/2"-20	13.97	5.94	42.60	50 mm	Metric	
DAJCF125M-2006	1-5/8"-12	9/16"-18	14.12	7.54	42.60	50 mm	Metric	
DAJCF125M-2008	1-5/8"-12	3/4"-16	16.69	9.93	46.70	50 mm	Metric	
DAJCF125M-2010	1-5/8"-12	7/8"-14	19.25	12.29	50.80	50 mm	Metric	
DAJCF125M-2012	1-5/8"-12	1-1/16"-12	21.95	15.47	50.80	50 mm	Metric	
DAJCF125M-2016	1-5/8"-12	1-5/16"-12	23.14	21.44	50.90	50 mm	Metric	
DAJCF125M-2020	1-5/8"-12	1-5/8"-12	24.33	27.38	52.10	50 mm	Metric	
DAJCF125M-2024	1-5/8"-12	1-7/8"-12	27.51	27.38	54.36	50 mm	Metric	
DAJCF125M-2004IN	1-5/8"-12	7/16"-20	13.97	4.37	42.60	2"	Imperial	
DAJCF125M-2005IN	1-5/8"-12	1/2"-20	13.97	5.94	42.60	2"	Imperial	
DAJCF125M-2006IN	1-5/8"-12	9/16"-18	14.12	7.54	42.60	2"	Imperial	
DAJCF125M-2008IN	1-5/8"-12	3/4"-16	16.69	9.93	46.70	2"	Imperial	
DAJCF125M-2010IN	1-5/8"-12	7/8"-14	19.25	12.29	50.80	2"	Imperial	
DAJCF125M-2012IN	1-5/8"-12	1-1/16"-12	21.95	15.47	50.80	2"	Imperial	
DAJCF125M-2016IN	1-5/8"-12	1-5/16"-12	23.14	21.44	50.90	2"	Imperial	
DAJCF125M-2020IN	1-5/8"-12	1-5/8"-12	24.33	27.38	52.10	2"	Imperial	
DAJCF125M-2024IN	1-5/8"-12	1-7/8"-12	27.51	27.38	54.36	2"	Imperial	
DAJCF125M-2404	1-7/8"-12	7/16"-20	13.97	4.37	44.30	55 mm	Metric	
DAJCF125M-2405	1-7/8"-12	1/2"-20	13.97	5.94	44.30	55 mm	Metric	
DAJCF125M-2406	1-7/8"-12	9/16"-18	14.12	7.54	52.00	55 mm	Metric	
DAJCF125M-2408	1-7/8"-12	3/4"-16	16.69	9.93	47.00	55 mm	Metric	
DAJCF125M-2410	1-7/8"-12	7/8"-14	19.25	12.29	55.60	55 mm	Metric	
DAJCF125M-2412	1-7/8"-12	1-1/16"-12	21.95	15.47	53.34	55 mm	Metric	
DAJCF125M-2416	1-7/8"-12	1-5/16"-12	23.14	21.44	54.61	55 mm	Metric	
DAJCF125M-2420	1-7/8"-12	1-5/8"-12	24.33	27.38	55.63	55 mm	Metric	
DAJCF125M-2424	1-7/8"-12	1-7/8"-12	27.51	27.38	62.68	55 mm	Metric	
DAJCF125M-2432	1-7/8"-12	2-1/2"-12	33.86	33.32	60.80	65 mm	Metric	
DAJCF125M-2404IN	1-7/8"-12	7/16"-20	13.97	4.37	44.30	2-1/4"	Imperial	
DAJCF125M-2405IN	1-7/8"-12	1/2"-20	13.97	5.94	44.30	2-1/4"	Imperial	
DAJCF125M-2406IN	1-7/8"-12	9/16"-18	14.12	7.54	52.00	2-1/4"	Imperial	
DAJCF125M-2408IN	1-7/8"-12	3/4"-16	16.69	9.93	47.00	2-1/4"	Imperial	
DAJCF125M-2410IN	1-7/8"-12	7/8"-14	19.25	12.29	55.60	2-1/4"	Imperial	
DAJCF125M-2412IN	1-7/8"-12	1-1/16"-12	21.95	15.47	53.34	2-1/4"	Imperial	
DAJCF125M-2416IN	1-7/8"-12	1-5/16"-12	23.14	21.44	54.61	2-1/4"	Imperial	
DAJCF125M-2420IN	1-7/8"-12	1-5/8"-12	24.33	27.38	55.63	2-1/4"	Imperial	
DAJCF125M-2424IN	1-7/8"-12	1-7/8"-12	27.51	27.38	62.68	2-1/4"	Imperial	
DAJCF125M-2432IN	1-7/8"-12	2-1/2"-12	33.86	33.32	60.80	2-5/8"	Imperial	
DAJCF125M-3208	2-1/2"-12	3/4"-16	16.70	9.93	60.00	73 mm	Metric	
DAJCF125M-3212	2-1/2"-12	1-1/16"-12	21.95	15.47	58.40	73 mm	Metric	
DAJCF125M-3216	2-1/2"-12	1-5/16"-12	23.14	21.44	67.50	73 mm	Metric	
DAJCF125M-3220	2-1/2"-12	1-5/8"-12	24.33	27.38	70.50	73 mm	Metric	
DAJCF125M-3224	2-1/2"-12	1-7/8"-12	27.51	33.32	69.70	73 mm	Metric	
DAJCF125M-3208IN	2-1/2"-12	3/4"-16	16.70	9.93	60.00	2-7/8"	Imperial	
DAJCF125M-3212IN	2-1/2"-12	1-1/16"-12	21.95	15.47	58.40	2-7/8"	Imperial	
DAJCF125M-3216IN	2-1/2"-12	1-5/16"-12	23.14	21.44	67.50	2-7/8"	Imperial	
DAJCF125M-3220IN	2-1/2"-12	1-5/8"-12	24.33	27.38	70.50	2-7/8"	Imperial	
DAJCF125M-3224IN	2-1/2"-12	1-7/8"-12	27.51	33.32	69.70	2-7/8"	Imperial	

DAJC3125M

Straight Connector JIC Swivel Female – JIC Male

D

A

JC

3

1

25

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DAE

Adaptor

BSPP

Male

Straight

BSPP

Male

 German Technology Equipment



New-Standard

DAE&JDE Code:

DAJC3125M

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Swivel Female × Male

Thread Types:

UNF × UNF

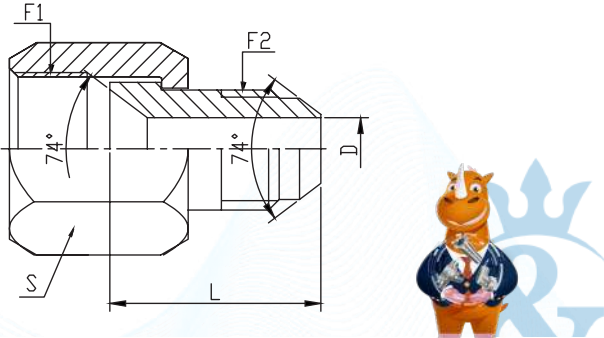

PART NUMBER	F1 (Thread)	F2 (Thread)	D	L	S	Hex
#	UNF	UNF	mm	mm	-	-
DAJC3125M-0504	1/2"-20	7/16"-20	5.94	24.60	17 mm	Metric
DAJC3125M-0504IN	1/2"-20	7/16"-20	5.94	24.60	5/8"	Imperial
DAJC3125M-0604	9/16"-18	7/16"-20	4.40	24.60	19 mm	Metric
DAJC3125M-0605	9/16"-18	1/2"-20	5.94	24.60	19 mm	Metric
DAJC3125M-0604IN	9/16"-18	7/16"-20	4.40	24.60	13/16"	Imperial
DAJC3125M-0605IN	9/16"-18	1/2"-20	5.94	24.60	13/16"	Imperial
DAJC3125M-0804	3/4"-16	7/16"-20	4.37	25.40	22 mm	Metric
DAJC3125M-0805	3/4"-16	1/2"-20	5.94	25.40	22 mm	Metric
DAJC3125M-0806	3/4"-16	9/16"-18	7.50	25.50	22 mm	Metric
DAJC3125M-0804IN	3/4"-16	7/16"-20	4.37	25.40	13/16"	Imperial
DAJC3125M-0805IN	3/4"-16	1/2"-20	5.94	25.40	13/16"	Imperial
DAJC3125M-0806IN	3/4"-16	9/16"-18	7.50	25.50	13/16"	Imperial
DAJC3125M-1004	7/8"-14	7/16"-20	4.37	26.10	27 mm	Metric
DAJC3125M-1005	7/8"-14	1/2"-20	5.94	26.10	27 mm	Metric
DAJC3125M-1006	7/8"-14	9/16"-18	7.50	28.50	27 mm	Metric
DAJC3125M-1008	7/8"-14	3/4"-16	9.93	29.50	27 mm	Metric
DAJC3125M-1004IN	7/8"-14	7/16"-20	4.37	26.10	1-1/8"	Imperial
DAJC3125M-1005IN	7/8"-14	1/2"-20	5.94	26.10	1-1/8"	Imperial
DAJC3125M-1006IN	7/8"-14	9/16"-18	7.50	28.50	1-1/8"	Imperial
DAJC3125M-1008IN	7/8"-14	3/4"-16	9.93	29.50	1-1/8"	Imperial
DAJC3125M-1204	1-1/16"-12	7/16"-20	4.40	27.70	32 mm	Metric
DAJC3125M-1205	1-1/16"-12	1/2"-20	5.94	27.70	32 mm	Metric
DAJC3125M-1206	1-1/16"-12	9/16"-18	7.50	27.70	32 mm	Metric
DAJC3125M-1208	1-1/16"-12	3/4"-16	9.93	30.40	32 mm	Metric
DAJC3125M-1210	1-1/16"-12	7/8"-14	12.29	32.80	32 mm	Metric
DAJC3125M-1204IN	1-1/16"-12	7/16"-20	4.40	27.70	1-1/4"	Imperial
DAJC3125M-1205IN	1-1/16"-12	1/2"-20	5.94	27.70	1-1/4"	Imperial



Certificate:



DAJC3125M-1206IN	1-1/16"-12	9/16"-18	7.50	27.70	1-1/4"	Imperial
DAJC3125M-1208IN	1-1/16"-12	3/4"-16	9.93	30.40	1-1/4"	Imperial
DAJC3125M-1210IN	1-1/16"-12	7/8"-14	12.29	32.80	1-1/4"	Imperial
DAJC3125M-1604	1-5/16"-12	7/16"-20	4.37	30.00	41 mm	Metric
DAJC3125M-1605	1-5/16"-12	1/2"-20	5.94	30.00	41 mm	Metric
DAJC3125M-1606	1-5/16"-12	9/16"-18	7.54	30.00	41 mm	Metric
DAJC3125M-1608	1-5/16"-12	3/4"-16	9.93	32.50	41 mm	Metric
DAJC3125M-1610	1-5/16"-12	7/8"-14	12.29	34.60	41 mm	Metric
DAJC3125M-1612	1-5/16"-12	1-1/16"-12	15.50	37.30	41 mm	Metric
DAJC3125M-1604IN	1-5/16"-12	7/16"-20	4.37	30.00	1-1/2"	Imperial
DAJC3125M-1605IN	1-5/16"-12	1/2"-20	5.94	30.00	1-1/2"	Imperial
DAJC3125M-1606IN	1-5/16"-12	9/16"-18	7.54	30.00	1-1/2"	Imperial
DAJC3125M-1608IN	1-5/16"-12	3/4"-16	9.93	32.50	1-1/2"	Imperial
DAJC3125M-1610IN	1-5/16"-12	7/8"-14	12.29	34.60	1-1/2"	Imperial
DAJC3125M-1612IN	1-5/16"-12	1-1/16"-12	15.50	37.30	1-1/2"	Imperial
DAJC3125M-2004	1-5/8"-12	7/16"-20	4.37	31.00	50 mm	Metric
DAJC3125M-2005	1-5/8"-12	1/2"-20	5.94	31.00	50 mm	Metric
DAJC3125M-2006	1-5/8"-12	9/16"-18	7.54	31.10	50 mm	Metric
DAJC3125M-2008	1-5/8"-12	3/4"-16	9.93	33.60	50 mm	Metric
DAJC3125M-2010	1-5/8"-12	7/8"-14	12.29	36.20	50 mm	Metric
DAJC3125M-2012	1-5/8"-12	1-1/16"-12	15.50	38.90	50 mm	Metric
DAJC3125M-2016	1-5/8"-12	1-5/16"-12	21.40	40.40	50 mm	Metric
DAJC3125M-2004IN	1-5/8"-12	7/16"-20	4.37	31.00	1-7/8"	Imperial
DAJC3125M-2005IN	1-5/8"-12	1/2"-20	5.94	31.00	1-7/8"	Imperial
DAJC3125M-2006IN	1-5/8"-12	9/16"-18	7.54	31.10	1-7/8"	Imperial
DAJC3125M-2008IN	1-5/8"-12	3/4"-16	9.93	33.60	1-7/8"	Imperial
DAJC3125M-2010IN	1-5/8"-12	7/8"-14	12.29	36.20	1-7/8"	Imperial
DAJC3125M-2012IN	1-5/8"-12	1-1/16"-12	15.50	38.90	1-7/8"	Imperial
DAJC3125M-2016IN	1-5/8"-12	1-5/16"-12	21.40	40.40	1-7/8"	Imperial
DAJC3125M-2404	1-7/8"-12	7/16"-20	4.37	37.70	60 mm	Metric
DAJC3125M-2405	1-7/8"-12	1/2"-20	5.94	37.70	60 mm	Metric
DAJC3125M-2406	1-7/8"-12	9/16"-18	7.54	37.90	60 mm	Metric
DAJC3125M-2408	1-7/8"-12	3/4"-16	9.93	40.50	60 mm	Metric
DAJC3125M-2410	1-7/8"-12	7/8"-14	12.29	43.00	60 mm	Metric
DAJC3125M-2412	1-7/8"-12	1-1/16"-12	15.47	45.70	60 mm	Metric
DAJC3125M-2416	1-7/8"-12	1-5/16"-12	21.44	42.00	60 mm	Metric
DAJC3125M-2420	1-7/8"-12	1-5/8"-12	27.40	43.00	60 mm	Metric
DAJC3125M-2404IN	1-7/8"-12	7/16"-20	4.37	37.70	2-5/16"	Imperial
DAJC3125M-2405IN	1-7/8"-12	1/2"-20	5.94	37.70	2-5/16"	Imperial
DAJC3125M-2406IN	1-7/8"-12	9/16"-18	7.54	37.90	2-5/16"	Imperial
DAJC3125M-2408IN	1-7/8"-12	3/4"-16	9.93	40.50	2-5/16"	Imperial
DAJC3125M-2410IN	1-7/8"-12	7/8"-14	12.29	43.00	2-5/16"	Imperial
DAJC3125M-2412IN	1-7/8"-12	1-1/16"-12	15.47	45.70	2-5/16"	Imperial
DAJC3125M-2416IN	1-7/8"-12	1-5/16"-12	21.44	42.00	2-5/16"	Imperial
DAJC3125M-2420IN	1-7/8"-12	1-5/8"-12	27.40	43.00	2-5/16"	Imperial
DAJC3125M-3224	2-1/2"-12	1-7/8"-12	33.32	55.50	75 mm	Metric
DAJC3125M-3224IN	2-1/2"-12	1-7/8"-12	33.32	55.50	2-7/8"	Imperial

Certificate:





DAJCF1251

Straight Connector JIC Fixed Female – JIC Swivel Female

D

A

JC

F

1

251

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DAE

Adaptor

JIC UNF

Female

Straight

JIC Swivel Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCF1251

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Female × Swivel Female

Thread Types:

UNF × UNF

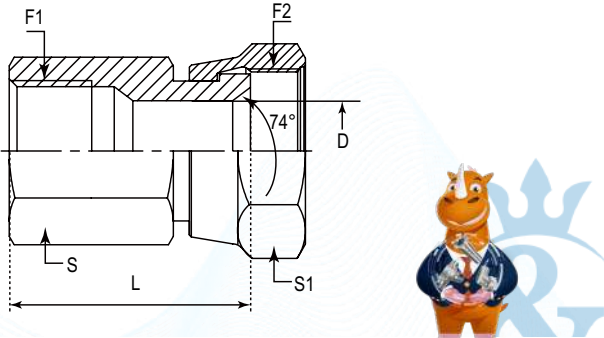

PART NUMBER	F1 (Thread)	F2 (Thread)	D	L	S	S1	Hex
#	UNF	UNF	mm	mm	-	-	-
DAJCF1251-0404	7/16"-20	7/16"-20	4.37	25.00	14 mm	14 mm	Metric
DAJCF1251-0404IN	7/16"-20	7/16"-20	4.37	25.00	9/16"	9/16"	Imperial
DAJCF1251-0505	1/2"-20	1/2"-20	5.94	25.00	17 mm	17 mm	Metric
DAJCF1251-0505IN	1/2"-20	1/2"-20	5.94	25.00	5/8"	5/8"	Imperial
DAJCF1251-0606	9/16"-18	9/16"-18	7.54	25.50	19 mm	19 mm	Metric
DAJCF1251-0606IN	9/16"-18	9/16"-18	7.54	25.50	13/16"	13/16"	Imperial
DAJCF1251-0808	3/4"-16	3/4"-16	9.93	32.00	22 mm	24 mm	Metric
DAJCF1251-0808IN	3/4"-16	3/4"-16	9.93	32.00	13/16"	15/16"	Imperial
DAJCF1251-1010	7/8"-14	7/8"-14	12.30	36.00	27 mm	27 mm	Metric
DAJCF1251-1010IN	7/8"-14	7/8"-14	12.30	36.00	1-1/8"	1-1/8"	Imperial
DAJCF1251-1212	1-1/16"-12	1-1/16"-12	15.47	37.00	32 mm	32 mm	Metric
DAJCF1251-1212IN	1-1/16"-12	1-1/16"-12	15.47	37.00	1-1/4"	1-1/4"	Imperial
DAJCF1251-1616	1-5/16"-12	1-5/16"-12	21.44	40.00	41 mm	41 mm	Metric
DAJCF1251-1616IN	1-5/16"-12	1-5/16"-12	21.44	40.00	1-1/2"	1-1/2"	Imperial
DAJCF1251-2020	1-5/8"-12	1-5/8"-12	27.42	43.00	50 mm	50 mm	Metric
DAJCF1251-2020IN	1-5/8"-12	1-5/8"-12	27.42	43.00	1-7/8"	1-7/8"	Imperial
DAJCF1251-2424	1-7/8"-12	1-7/8"-12	33.32	50.00	60 mm	60 mm	Metric
DAJCF1251-2424IN	1-7/8"-12	1-7/8"-12	33.32	50.00	2-5/16"	2-5/16"	Imperial



DAJC11251

Straight Connector JIC Swivel Female – JIC Swivel Female

D

A

JC

1

1

251

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

DAE

Adaptor

BSP

Male

Straight

BSP

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJC11251

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Swivel Female × Swivel Female

Thread Types:

UNF × UNF

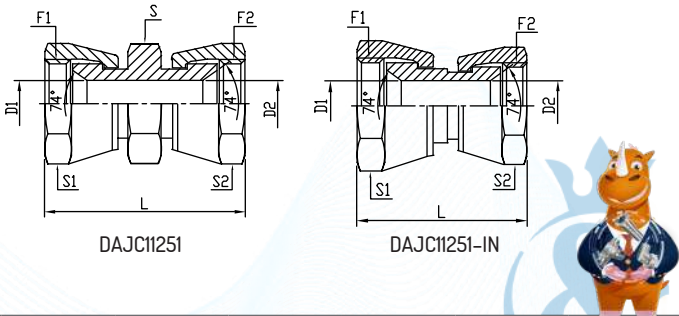

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L	Hex	S	S1	S2
#	UNF	UNF	mm	mm	mm	Hex	mm/inch	mm/inch	mm/inch
DAJC11251-0202IN	5/16"-24	5/16"-24	1.57	1.57	33.00	Imperial	/	11.13"	11.13"
DAJC11251-0303IN	3/8"-24	3/8"-24	3.18	3.18	33.00	Imperial	/	12.7"	12.7"
DAJC11251-0404	7/16"-20	7/16"-20	4.37	4.37	41.00	Metric	11 mm	14 mm	14 mm
DAJC11251-0404IN	7/16"-20	7/16"-20	4.37	4.37	32.80	Imperial	/	14.27"	14.27"
DAJC11251-0505	1/2"-20	1/2"-20	5.94	5.94	44.00	Metric	14 mm	17 mm	14 mm
DAJC11251-0505IN	1/2"-20	1/2"-20	5.94	5.94	38.20	Imperial	/	15.88"	15.88"
DAJC11251-0604	9/16"-18	7/16"-20	7.54	4.37	43.50	Metric	14 mm	19 mm	14 mm
DAJC11251-0604IN	9/16"-18	7/16"-20	7.54	4.37	36.40	Imperial	/	17.45"	14.27"
DAJC11251-0605IN	9/16"-18	1/2"-20	7.54	5.94	42.50	Imperial	/	17.45"	15.88"
DAJC11251-0606	9/16"-18	9/16"-18	7.54	7.54	48.30	Metric	14 mm	19 mm	19 mm
DAJC11251-0606IN	9/16"-18	9/16"-18	7.54	7.54	41.30	Imperial	/	22.23"	17.45"
DAJC11251-0804IN	3/4"-16	7/16"-20	9.93	4.37	45.20	Imperial	/	22.23"	14.27"
DAJC11251-0806	3/4"-16	9/16"-18	9.93	7.54	49.50	Metric	22 mm	22 mm	19 mm
DAJC11251-0806IN	3/4"-16	9/16"-18	9.93	7.54	41.60	Imperial	/	22.23"	17.45"
DAJC11251-0808	3/4"-16	3/4"-16	9.93	9.93	52.70	Metric	22 mm	22 mm	22 mm
DAJC11251-0808IN	3/4"-16	3/4"-16	9.93	9.93	45.10	Imperial	/	22.23"	22.23"
DAJC11251-1006IN	7/8"-14	9/16"-18	12.29	7.54	47.40	Imperial	/	25.4"	17.45"
DAJC11251-1008IN	7/8"-14	3/4"-16	12.29	9.93	46.80	Imperial	/	25.4"	22.23"
DAJC11251-1010	7/8"-14	7/8"-14	12.29	12.29	61.50	Metric	22 mm	27 mm	27 mm
DAJC11251-1010IN	7/8"-14	7/8"-14	12.29	12.29	50.60	Imperial	/	25.4"	25.4"
DAJC11251-1208	1-1/16"-12	3/4"-16	15.47	9.93	61.00	Metric	32 mm	32 mm	22 mm
DAJC11251-1208IN	1-1/16"-12	3/4"-16	15.47	9.93	53.60	Imperial	/	31.75"	22.23"
DAJC11251-1210	1-1/16"-12	7/8"-14	15.47	12.29	64.00	Metric	32 mm	32 mm	27 mm
DAJC11251-1210IN	1-1/16"-12	7/8"-14	15.47	12.29	56.40	Imperial	/	31.75"	25.4"
DAJC11251-1212	1-1/16"-12	1-1/16"-12	15.47	15.47	64.50	Metric	32 mm	32 mm	32 mm
DAJC11251-1212IN	1-1/16"-12	1-1/16"-12	15.47	15.47	56.50	Imperial	/	31.75"	31.75"
DAJC11251-1414IN	1-3/16"-12	1-3/16"-12	18.26	18.26	58.90	Imperial	/	34.93"	34.93"
DAJC11251-1612	1-5/16"-12	1-1/16"-12	15.47	15.47	69.90	Metric	36 mm	41 mm	32 mm
DAJC11251-1612IN	1-5/16"-12	1-1/16"-12	15.47	15.47	61.10	Imperial	/	38.1"	31.75"
DAJC11251-1616	1-5/16"-12	1-5/16"-12	21.44	21.44	70.00	Metric	36 mm	41 mm	41 mm
DAJC11251-1616IN	1-5/16"-12	1-5/16"-12	21.44	21.44	61.20	Imperial	/	38.1"	38.1"
DAJC11251-2020	1-5/8"-12	1-5/8"-12	27.38	27.42	77.80	Metric	46 mm	50 mm	50 mm
DAJC11251-2020IN	1-5/8"-12	1-5/8"-12	27.38	27.42	64.80	Imperial	/	5.08"	50.8"
DAJC11251-2424IN	1-7/8"-12	1-7/8"-12	33.32	33.32	72.80	Imperial	/	57.15"	57.15"
DAJC11251-3232IN	2-1/2"-12	2-1/2"-12	45.24	45.24	87.90	Imperial	/	73.02"	73.02"



DAJC1128F

Straight Connector JIC Swivel Female – NPTF Female

D

A

JC

1

1

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Swivel Female

Straight

NPTF

Female

German Technology Equipment

New-Standard

DME&JDE Code:

DAJC1128F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Swivel Female × Female

Thread Types:

UNF × NPTF

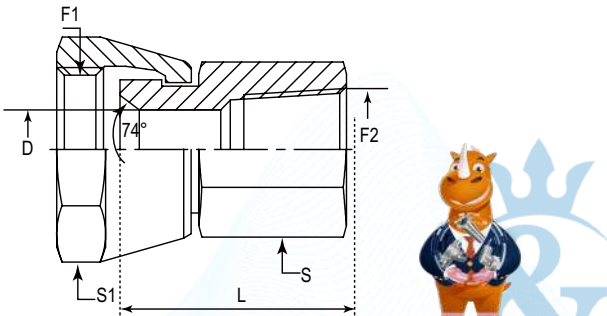

PART NUMBER	F1 (Thread)	F2 (Thread)	D	L	S	S1	Hex
#	UNF	NPTF	mm	mm	-	-	-
DAJC1128F-0202	5/16"-24	1/8"-27	1.57	22.60	14 mm	11 mm	Metric
DAJC1128F-0204	5/16"-24	1/4"-18	1.57	30.50	19 mm	11 mm	Metric
DAJC1128F-0202IN	5/16"-24	1/8"-27	1.57	22.60	9/16"	7/16"	Imperial
DAJC1128F-0204IN	5/16"-24	1/4"-18	1.57	30.50	3/4"	7/16"	Imperial
DAJC1128F-0402	7/16"-20	1/8"-27	4.37	23.40	14 mm	14 mm	Metric
DAJC1128F-0404	7/16"-20	1/4"-18	4.37	29.70	19 mm	14 mm	Metric
DAJC1128F-0406	7/16"-20	3/8"-18	4.37	31.50	22 mm	14 mm	Metric
DAJC1128F-0402IN	7/16"-20	1/8"-27	4.37	23.40	9/16"	9/16"	Imperial
DAJC1128F-0404IN	7/16"-20	1/4"-18	4.37	29.70	3/4"	9/16"	Imperial
DAJC1128F-0406IN	7/16"-20	3/8"-18	4.37	31.50	7/8"	9/16"	Imperial
DAJC1128F-0504	1/2"-20	1/4"-18	5.94	30.70	19 mm	17 mm	Metric
DAJC1128F-0504IN	1/2"-20	1/4"-18	5.94	30.70	3/4"	5/8"	Imperial
DAJC1128F-0602	9/16"-18	1/8"-27	7.54	25.50	14 mm	17 mm	Metric
DAJC1128F-0604	9/16"-18	1/4"-18	7.54	31.88	19 mm	17 mm	Metric
DAJC1128F-0606	9/16"-18	3/8"-18	7.54	33.27	22 mm	17 mm	Metric
DAJC1128F-0608	9/16"-18	1/2"-14	7.54	37.34	27 mm	17 mm	Metric
DAJC1128F-0602IN	9/16"-18	1/8"-27	7.54	25.50	9/16"	11/16"	Imperial
DAJC1128F-0604IN	9/16"-18	1/4"-18	7.54	31.88	3/4"	11/16"	Imperial
DAJC1128F-0606IN	9/16"-18	3/8"-18	7.54	33.27	7/8"	11/16"	Imperial
DAJC1128F-0608IN	9/16"-18	1/2"-14	7.54	37.34	1-1/8"	11/16"	Imperial
DAJC1128F-0708	5/8"-18	1/2"-14	7.14	37.20	27 mm	19 mm	Metric
DAJC1128F-0708IN	5/8"-18	1/2"-14	7.14	37.20	1-1/8"	3/4"	Imperial
DAJC1128F-0806	3/4"-16	3/8"-18	9.93	34.54	22 mm	22 mm	Metric
DAJC1128F-0808	3/4"-16	1/2"-14	9.93	37.60	27 mm	22 mm	Metric
DAJC1128F-0812	3/4"-16	3/4"-14	9.93	41.80	36 mm	22 mm	Metric
DAJC1128F-0806IN	3/4"-16	3/8"-18	9.93	34.54	7/8"	7/8"	Imperial
DAJC1128F-0808IN	3/4"-16	1/2"-14	9.93	37.60	1-1/8"	7/8"	Imperial
DAJC1128F-0812IN	3/4"-16	3/4"-14	9.93	41.80	1-3/8"	7/8"	Imperial
DAJC1128F-1006	7/8"-14	3/8"-18	12.29	35.50	22 mm	27 mm	Metric
DAJC1128F-1008	7/8"-14	1/2"-14	12.29	41.15	27 mm	27 mm	Metric
DAJC1128F-1012	7/8"-14	3/4"-14	12.29	42.60	36 mm	27 mm	Metric
DAJC1128F-1006IN	7/8"-14	3/8"-18	12.29	35.50	7/8"	1"	Imperial
DAJC1128F-1008IN	7/8"-14	1/2"-14	12.29	41.15	1-1/8"	1"	Imperial
DAJC1128F-1012IN	7/8"-14	3/4"-14	12.29	42.60	1-3/8"	1"	Imperial
DAJC1128F-1208	1-1/16"-12	1/2"-14	15.47	42.16	27 mm	32 mm	Metric
DAJC1128F-1212	1-1/16"-12	3/4"-14	15.47	43.70	36 mm	32 mm	Metric
DAJC1128F-1208IN	1-1/16"-12	1/2"-14	15.47	42.16	1-1/8"	1-1/4"	Imperial
DAJC1128F-1212IN	1-1/16"-12	3/4"-14	15.47	43.70	1-3/8"	1-1/4"	Imperial
DAJC1128F-1412	1-3/16"-12	3/4"-14	18.26	44.50	36 mm	36 mm	Metric
DAJC1128F-1412IN	1-3/16"-12	3/4"-14	18.26	44.50	1-3/8"	1-3/8"	Imperial
DAJC1128F-1612	1-5/16"-12	3/4"-14	21.44	40.90	36 mm	41 mm	Metric
DAJC1128F-1616	1-5/16"-12	1-11-1/2"	21.44	51.30	41 mm	41 mm	Metric
DAJC1128F-1612IN	1-5/16"-12	3/4"-14	21.44	40.90	1-3/8"	1-1/2"	Imperial
DAJC1128F-1616IN	1-5/16"-12	1-11-1/2"	21.44	51.30	1-5/8"	1-1/2"	Imperial
DAJC1128F-2020	1-5/8"-12	1-1/4"-11-1/2"	27.42	55.90	50 mm	50 mm	Metric
DAJC1128F-2020IN	1-5/8"-12	1-1/4"-11-1/2"	27.42	55.90	2"	2"	Imperial
DAJC1128F-2424	1-7/8"-12	1-1/2"-11-1/2"	33.32	57.60	70 mm	32 mm	Metric
DAJC1128F-2424IN	1-7/8"-12	1-1/2"-11-1/2"	33.32	57.60	2-3/8"	2-1/4"	Imperial
DAJC1128F-3232	2-1/2"-12	2"-11-1/2"	45.24	57.27	73 mm	73 mm	Metric
DAJC1128F-3232IN	2-1/2"-12	2"-11-1/2"	45.24	57.27	2-7/8"	2-7/8"	Imperial

Certificate:

DAJC1105F

Straight Connector JIC Swivel Female – BSPP Fixed Female

D

A

JC

1

1

52

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Swivel Female

Straight

BSPP

Female

German Technology Equipment

New-Standard

DME&JDE Code:

DAJC1105F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Swivel Female × Fixed Male

Thread Types:

UNF × BSPP

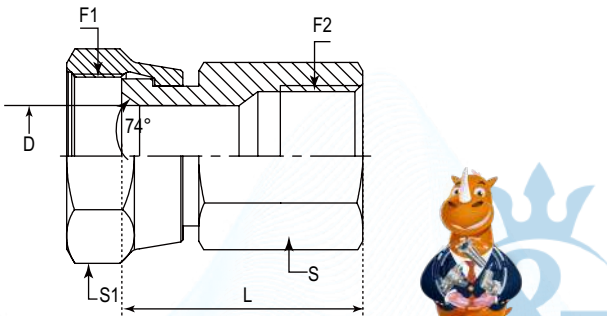

PART NUMBER	F1 (Thread)	F2 (Thread)	D	L	S	S1
#	UNF	BSPP	mm	mm	mm	mm
DAJC1105F-0404	7/16"-20	1/4"-19	4.37	27.50	19.00	17.00
DAJC1105F-0504	1/2"-20	1/4"-19	5.94	28.00	19.00	17.00
DAJC1105F-0604	9/16"-18	1/4"-19	7.54	28.50	19.00	19.00
DAJC1105F-0606	9/16"-18	3/8"-19	7.54	32.00	22.00	19.00
DAJC1105F-0804	3/4"-16	1/4"-19	9.93	31.00	22.00	24.00
DAJC1105F-0808	3/4"-16	1/2"-14	9.93	36.50	27.00	22.00
DAJC1105F-1008	7/8"-14	1/2"-14	12.29	36.00	27.00	27.00
DAJC1105F-1212	1-1/16"-12	3/4"-14	15.47	40.00	32.00	32.00
DAJC1105F-1616	1-5/16"-12	1"-11	21.44	43.50	41.00	41.00

Certificate:

DAJCF105F

Straight Coupling JIC Fixed Female – BSPP Fixed Female

D

A

JC

F

1

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Fixed Female

Straight

BSPP

Fixed Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCF105F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Fixed Female × Fixed Female

Thread Types:

UNF × BSPP



PART NUMBER	F1 (Thread)	F2 (Thread)	L	S
#	UNF	BSPP	mm	mm
DAJCF105F-0404	7/16"-20	1/4"-19	29.00	19.00
DAJCF105F-0604	9/16"-18	1/4"-19	29.00	19.00
DAJCF105F-0804	3/4"-16	1/4"-19	32.00	22.00
DAJCF105F-1004	7/8"-14	1/4"-19	32.00	27.00
DAJCF105F-1204	1-1/16"-12	1/4"-19	38.00	32.00
DAJCF105F-1604	1-5/16"-12	1/4"-19	40.00	41.00



DAJC1100B

Straight Connector JIC Female Swivel – Imperial/Metric Tube

D

A

JC

1

1

00

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Sealing Type

Welding Type

DME

Adaptor

JIC UNF

Female Swivel

Straight

Welding

Socket

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJC1100B

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Swivel Female

Thread Types:

UNF

Sealing Method:

Welding

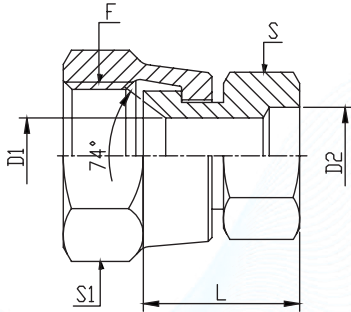

PART NUMBER	F1 (Thread)	D1	D2	L	S	S1	Hex
#	UNF	mm	mm	mm	-	-	-
DAJC1100B-0406	7/16"-20	4.37	6.25	17	12 mm	17 mm	Metric
DAJC1100B-0406IN	7/16"-20	4.37	6.25	17	1/2"	5/8"	Imperial
DAJC1100B-0510	1/2"-20	5.94	9.6	18.00	14 mm	17 mm	Metric
DAJC1100B-0510IN	1/2"-20	5.94	10.00	18.00	9/16"	5/8"	Imperial
DAJC1100B-0610	9/16"-18	7.54	9.6	18.50	14 mm	19 mm	Metric
DAJC1100B-0612	9/16"-18	7.54	12.7	19.50	17 mm	19 mm	Metric
DAJC1100B-0610IN	9/16"-18	7.54	10.00	18.50	9/16"	13/16"	Imperial
DAJC1100B-0612IN	9/16"-18	7.54	12.00	19.50	5/8"	13/16"	Imperial
DAJC1100B-0810	3/4"-16	7.54	9.6	21.00	19 mm	22 mm	Metric
DAJC1100B-0812	3/4"-16	9.93	12.7	20.50	19 mm	24 mm	Imperial
DAJC1100B-0816	3/4"-16	9.93	16	21.00	22 mm	24 mm	Imperial
DAJC1100B-0818	3/4"-16	9.93	18	21.00	24 mm	24 mm	Imperial
DAJC1100B-0810IN	3/4"-16	7.54	9.60	21.00	13/16"	13/16"	Imperial
DAJC1100B-0816IN	3/4"-16	9.93	16.00	21.00	13/16"	15/16"	Imperial
DAJC1100B-0818IN	3/4"-16	9.93	18.00	21.00	1"	15/16"	Imperial
DAJC1100B-1012	7/8"-14	9.93	12.7	22.50	22 mm	27 mm	Metric
DAJC1100B-1016	7/8"-14	12.29	16	22.00	22 mm	27 mm	Metric
DAJC1100B-1018	7/8"-14	12.29	18	22.00	24 mm	27 mm	Metric
DAJC1100B-1022	7/8"-14	12.29	22	22.00	27 mm	27 mm	Metric
DAJC1100B-1012IN	7/8"-14	9.93	12.70	22.50	13/16"	1"	Imperial
DAJC1100B-1016IN	7/8"-14	12.29	16.00	22.00	13/16"	1"	Imperial
DAJC1100B-1018IN	7/8"-14	12.29	18.00	22.00	15/16"	1"	Imperial
DAJC1100B-1022IN	7/8"-14	12.29	22.00	22.00	1"	1"	Imperial
DAJC1100B-1218	1-1/16"-12	15.47	18	28.50	27 mm	32 mm	Metric
DAJC1100B-1220	1-1/16"-12	15.47	19	28.50	27 mm	32 mm	Metric
DAJC1100B-1225	1-1/16"-12	15.47	25.4	29.50	32 mm	32 mm	Metric
DAJC1100B-1218IN	1-1/16"-12	15.47	18.00	28.50	1"	1-1/4"	Imperial
DAJC1100B-1220IN	1-1/16"-12	15.47	20.00	28.50	1"	1-1/4"	Imperial
DAJC1100B-1225IN	1-1/16"-12	15.47	25.00	29.50	1-1/4"	1-1/4"	Imperial
DAJC1100B-1625	1-5/16"-12	21.44	25.4	29.50	32 mm	41 mm	Metric
DAJC1100B-1627	1-5/16"-12	21.44	27	29.50	32 mm	41 mm	Metric
DAJC1100B-1632	1-5/16"-12	21.44	31.8	33.00	41 mm	41 mm	Metric
DAJC1100B-1625IN	1-5/16"-12	21.44	25.00	29.50	1-1/4"	1-1/2"	Imperial
DAJC1100B-1627IN	1-5/16"-12	21.44	27.00	29.50	1-1/4"	1-1/2"	Imperial
DAJC1100B-1632IN	1-5/16"-12	21.44	32.00	33.00	1-1/2"	1-1/2"	Imperial
DAJC1100B-2032	1-5/8"-12	27.38	31.8	33.00	41 mm	50 mm	Metric
DAJC1100B-2038	1-5/8"-12	27.38	38.1	35.50	46 mm	50 mm	Metric
DAJC1100B-2032IN	1-5/8"-12	27.38	32.00	33.00	1-1/2"	1-7/8"	Imperial
DAJC1100B-2038IN	1-5/8"-12	27.38	38.00	35.50	1-11/16"	1-7/8"	Imperial
DAJC1100B-2438	1-7/8"-12	33.32	38.1	35.50	50 mm	55 mm	Metric
DAJC1100B-2438IN	1-7/8"-12	33.32	38.00	35.50	1-7/8"	2-1/8"	Imperial



DAJCM1000

Male Plug JIC

D

A

JC

M

1

000

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Other Features

DME

Adaptor

JIC UNF

Male

Straight

Nut/Plug

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM1000

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Male

Thread Types:

UNF

Other Features:

Socket Welding



PART NUMBER	F1 (Thread)	C	D	L	S	Hex
#	UNF	mm	mm	mm	-	-
DAJCM1000-0200	5/16"-24	11.38	1.57	17.80	11 mm	Metric
DAJCM1000-0200IN	5/16"-24	11.38	1.57	17.80	7/16"	Imperial
DAJCM1000-0300	3/8"-24	12.17	3.18	12.17	11 mm	Metric
DAJCM1000-0300IN	3/8"-24	12.17	3.18	12.17	7/16"	Imperial
DAJCM1000-0400	7/16"-20	13.97	4.37	20.30	12 mm	Metric
DAJCM1000-0400IN	7/16"-20	13.97	4.37	20.30	1/2"	Imperial
DAJCM1000-0500	1/2"-20	13.97	5.94	20.30	14 mm	Metric
DAJCM1000-0500IN	1/2"-20	13.97	5.94	20.30	9/16"	Imperial
DAJCM1000-0600	9/16"-18	14.12	7.54	21.34	17 mm	Metric
DAJCM1000-0600IN	9/16"-18	14.12	7.54	21.34	5/8"	Imperial
DAJCM1000-0700	5/8"-18	15.70	7.14	22.50	17 mm	Metric
DAJCM1000-0700IN	5/8"-18	15.70	7.14	22.50	11/16"	Imperial
DAJCM1000-0800	3/4"-16	16.69	9.93	23.90	19 mm	Metric
DAJCM1000-0800IN	3/4"-16	16.69	9.93	23.90	13/16"	Imperial
DAJCM1000-1000	7/8"-14	19.25	12.29	27.90	24 mm	Metric
DAJCM1000-1000IN	7/8"-14	19.25	12.29	27.90	15/16"	Imperial
DAJCM1000-1200	1-1/16"-12	21.95	15.47	32.50	27 mm	Metric
DAJCM1000-1200IN	1-1/16"-12	21.95	15.47	32.50	1-1/8"	Imperial
DAJCM1000-1400	1-3/16"-12	23.00	18.00	33.30	32 mm	Metric
DAJCM1000-1400IN	1-3/16"-12	23.00	18.00	33.30	1-1/4"	Imperial
DAJCM1000-1600	1-5/16"-12	23.14	21.44	33.80	36 mm	Metric
DAJCM1000-1600IN	1-5/16"-12	23.14	21.44	33.80	1-3/8"	Imperial
DAJCM1000-2000	1-5/8"-12	24.33	27.40	36.80	46 mm	Metric
DAJCM1000-2000IN	1-5/8"-12	24.33	27.40	36.80	1-11/16"	Imperial
DAJCM1000-2400	1-7/8"-12	27.51	33.30	41.90	50 mm	Metric
DAJCM1000-2400IN	1-7/8"-12	27.51	33.30	41.90	2"	Imperial
DAJCM1000-3200	2-1/2"-12	33.86	45.24	52.10	65 mm	Metric
DAJCM1000-3200IN	2-1/2"-12	33.86	45.24	52.10	2-5/8"	Imperial

Certificate:         

DAJCM100B

Straight Bonding(Socket Welding) Connector JIC Male – Imperial/Metric Tube

D

A

JC

M

1

00

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Sealing Type

Welding Type

DME

Adaptor

JIC UNF

Male

Straight

Welding

Socket

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM100B

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Male × Metric

Thread Types:

UNF

Other Features:

Nut/Plug



PART NUMBER	F (Thread)	C	D1	D2	L	S	Hex
#	UNF	mm	mm	mm	mm	mm	-
DAJCM100B-0406	7/16"-20	13.97	4.37	6.25	20.32	12 mm	Metric
DAJCM100B-0406IN	7/16"-20	13.97	4.37	6.45	20.32	12.70"	Imperial
DAJCM100B-0410	7/16"-20	13.97	4.37	9.60	20.30	14 mm	Metric
DAJCM100B-0410IN	7/16"-20	13.97	4.37	9.68	20.30	14.00"	Imperial
DAJCM100B-0508	1/2"-20	13.97	5.94	8.10	20.32	14 mm	Metric
DAJCM100B-0508IN	1/2"-20	13.97	5.94	8.10	20.32	14.27"	Imperial
DAJCM100B-0510	1/2"-20	13.97	5.94	9.60	21.34	17 mm	Metric
DAJCM100B-0510IN	1/2"-20	13.97	5.94	9.68	21.34	15.88"	Imperial
DAJCM100B-0610	9/16"-18	14.12	7.54	9.60	21.34	17 mm	Metric
DAJCM100B-0610IN	9/16"-18	14.12	7.54	9.63	21.34	15.88"	Imperial
DAJCM100B-0612	9/16"-18	14.12	7.54	12.10	21.50	17 mm	Metric
DAJCM100B-0612IN	9/16"-18	14.12	7.54	12.85	21.50	17.00"	Imperial
DAJCM100B-0810	3/4"-16	16.69	7.54	9.60	23.88	22 mm	Metric
DAJCM100B-0810IN	3/4"-16	16.69	7.54	9.63	23.88	20.64"	Imperial
DAJCM100B-0812	3/4"-16	16.69	9.93	12.10	23.88	22 mm	Metric
DAJCM100B-0812IN	3/4"-16	16.69	9.93	12.80	23.88	20.64"	Imperial
DAJCM100B-0816	3/4"-16	16.69	9.93	16.15	23.90	22 mm	Metric
DAJCM100B-0816IN	3/4"-16	16.69	9.93	16.03	23.90	20.64"	Imperial
DAJCM100B-0812IN	3/4"-16	16.69	9.93	12.80	23.88	13/16"	Imperial
DAJCM100B-0816IN	3/4"-16	16.69	9.93	16.03	23.90	13/16"	Imperial
DAJCM100B-0818	3/4"-16	16.69	9.93	18.00	24.50	24 mm	Metric

Certificate:         

DAJCM100B-0820	3/4"-16	16.69	9.93	20	24.89	24 mm	Metric
DAJCM100B-0820IN	3/4"-16	16.69	9.93	19.20	24.89	23.81"	Imperial
DAJCM100B-1012	7/8"-14	19.25	9.93	12.10	27.90	24 mm	Metric
DAJCM100B-1012IN	7/8"-14	19.25	9.93	12.80	27.90	23.80"	Imperial
DAJCM100B-1016	7/8"-14	19.25	12.29	16.15	28.00	24 mm	Metric
DAJCM100B-1016IN	7/8"-14	19.25	12.29	16.00	28.00	23.80"	Imperial
DAJCM100B-1018	7/8"-14	19.25	12.29	18.00	28.00	24 mm	Metric
DAJCM100B-1020	7/8"-14	19.25	12.29	20.00	27.94	24 mm	Metric
DAJCM100B-1020IN	7/8"-14	19.25	12.29	19.20	27.94	23.81"	Imperial
DAJCM100B-1022	7/8"-14	19.25	12.29	22.00	33.00	27 mm	Metric
DAJCM100B-1216	1-1/16"-12	21.95	12.29	16.15	32.50	27 mm	Metric
DAJCM100B-1216IN	1-1/16"-12	21.95	12.29	16.03	32.50	28.60"	Imperial
DAJCM100B-1218	1-1/16"-12	21.95	12.29	18.00	33.00	27 mm	Metric
DAJCM100B-1220	1-1/16"-12	21.95	15.47	20.00	33.00	27 mm	Metric
DAJCM100B-1220IN	1-1/16"-12	21.95	15.47	19.20	33.00	28.58"	Imperial
DAJCM100B-1225	1-1/16"-12	21.95	15.47	25.13	32.51	32 mm	Metric
DAJCM100B-1225IN	1-1/16"-12	21.95	15.47	25.55	32.51	31.75"	Imperial
DAJCM100B-1625	1-5/16"-12	23.14	21.44	25.13	33.50	36 mm	Metric
DAJCM100B-1625IN	1-5/16"-12	23.14	21.44	25.58	33.50	34.93"	Imperial
DAJCM100B-1627	1-5/16"-12	23.14	21.44	27.00	35.00	36 mm	Metric
DAJCM100B-1632	1-5/16"-12	23.14	21.44	32.05	43.94	46 mm	Metric
DAJCM100B-1632IN	1-5/16"-12	23.14	21.44	31.93	43.94	42.88"	Imperial
DAJCM100B-2025	1-5/8"-12	24.33	21.44	25.13	36.83	46 mm	Metric
DAJCM100B-2025IN	1-5/8"-12	24.33	21.44	25.58	36.83	42.86"	Imperial
DAJCM100B-2032	1-5/8"-12	24.33	27.38	32.05	36.83	46 mm	Metric
DAJCM100B-2032IN	1-5/8"-12	24.33	27.38	31.90	36.83	42.86"	Imperial
DAJCM100B-2038	1-5/8"-12	24.33	27.38	38.00	43.40	50 mm	Metric
DAJCM100B-2038IN	1-5/8"-12	24.33	27.38	38.25	43.40	50.00"	Imperial
DAJCM100B-2432	1-7/8"-12	27.51	27.38	32.05	41.90	50 mm	Metric
DAJCM100B-2432IN	1-7/8"-12	27.51	27.38	31.90	41.90	50.80"	Imperial
DAJCM100B-2438	1-7/8"-12	27.51	33.32	38.00	46.74	50 mm	Metric
DAJCM100B-2438IN	1-7/8"-12	27.51	33.32	38.28	46.74	50.80"	Imperial
DAJCM100B-3250	2-1/2"-12	33.86	45.24	50.00	52.07	65 mm	Metric
DAJCM100B-3250IN	2-1/2"-12	33.86	45.24	50.95	52.07	66.68"	Imperial

DAJC31000

JIC Female Cap

D

A

JC

3

1

000

Company

Product Range

Thread Types

Adaptor Structure

Adaptor Structure

Other Features



Adaptor

JIC UNF

Slip-on Female

Straight

Nut/Plug

- DME&JDE Code:

DAJC31000
- Product Type

Hydraulic adaptor
- Standard:

JIC and SAE-ORB
- Structure:

Straight
- Connection Type:

Slip-on Female
- Thread Types:


UNF
- Other Features:

Nut/Plug

 German Technology Equipment



New-Standard



PART NUMBER	F1 (Thread)	L	S
#	UNF	mm	mm
DAJC31000-0400	7/16"-20	8.70	14.00
DAJC31000-0500	1/2"-20	10.30	17.00
DAJC31000-0600	9/16"-18	11.90	19.00
DAJC31000-0700	5/8"-18	11.00	22.00
DAJC31000-0800	3/4"-16	13.50	22.00
DAJC31000-1000	7/8"-14	13.50	27.00
DAJC31000-1200	1-1/16"-12	16.70	32.00
DAJC31000-1400	1-3/16"-12	15.90	36.00
DAJC31000-1600	1-5/16"-12	15.90	41.00
DAJC31000-2000	1-5/8"-12	19.10	50.00
DAJC31000-2400	1-7/8"-12	23.80	60.00
DAJC31000-3200	2-1/2"-12	30.10	73.00

DAJC31000-C

JIC Female Cap

D

A

JC

3

1

000

C

Company

Product Range

Thread Types

Adaptor Structure

Adaptor Structure

Adaptor Structure

Plug Type

DME

Adaptor

JIC UNF

Slip-on Female

Straight

Nut/Plug

Cap

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJC31000-C

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Female

Thread Types:

UNF

Other Features:

Nut/Plug



PART NUMBER	F1 (Thread)	D	L	S	Revision History
#	UNF	mm	mm	mm	
DAJC31000-C-02	5/16"-24	1.57	12.70	9.53	
DAJC31000-C-03	3/8"-24	3.18	14.30	11.11	
DAJC31000-C-04	7/16"-20	4.37	15.30	14.27	
DAJC31000-C-05	1/2"-20	5.94	15.47	15.87	
DAJC31000-C-06	9/16"-18	7.54	15.88	17.02	
DAJC31000-C-08	3/4"-16	9.93	19.00	22.23	2024/6/4,Dimension S of item AR08690(0304-C-06) has been changed from 5/8"/15.875(-0.8,0)mm to 17.02±0.25mm
DAJC31000-C-10	7/8"-14	12.29	21.44	25.40	
DAJC31000-C-12	1-1/16"-12	15.47	23.00	31.75	
DAJC31000-C-14	1-3/16"-12	18.26	24.60	34.93	
DAJC31000-C-16	1-5/16"-12	21.44	25.81	38.10	
DAJC31000-C-20	1-5/8"-12	27.38	26.97	50.80	
DAJC31000-C-24	1-7/8"-12	33.32	30.18	57.15	
DAJC31000-C-32	2-1/2"-12	45.24	36.53	73.03	

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

CE

UK CA

DAJCM130J

Straight Long Connector JIC Male – SAE Male + O Ring

D

A

JC

M

1

30

J

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Straight

SAE UNF

Male + O Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJCM130J

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

UNF × UNF

Sealing Method:

O Ring

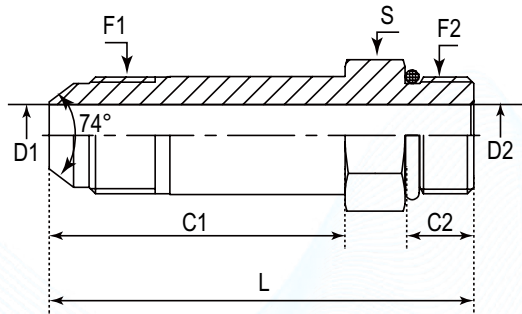

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	-	-
DAJCM130J-0404	7/16"-20	7/16"-20	35.30	9.14	4.37	4.37	52.80	14 mm	Metric
DAJCM130J-0405	7/16"-20	1/2"-20	35.30	9.14	4.37	5.94	52.90	17 mm	Metric
DAJCM130J-0406	7/16"-20	9/16"-18	35.30	9.93	4.37	7.54	54.40	17 mm	Metric
DAJCM130J-0404IN	7/16"-20	7/16"-20	35.30	9.14	4.37	4.37	52.80	9/16"	Imperial
DAJCM130J-0405IN	7/16"-20	1/2"-20	35.30	9.14	4.37	5.94	52.90	5/8"	Imperial
DAJCM130J-0406IN	7/16"-20	9/16"-18	35.30	9.93	4.37	7.54	54.40	11/16"	Imperial
DAJCM130J-0505	1/2"-20	1/2"-20	36.80	9.14	5.94	5.94	54.40	17 mm	Metric
DAJCM130J-0505IN	1/2"-20	1/2"-20	36.80	9.14	5.94	5.94	54.40	5/8"	Imperial
DAJCM130J-0606	9/16"-18	9/16"-18	39.62	9.93	7.54	7.54	58.50	17 mm	Metric
DAJCM130J-0608	9/16"-18	3/4"-16	39.62	11.13	7.54	9.93	60.40	22 mm	Metric
DAJCM130J-0606IN	9/16"-18	9/16"-18	39.62	9.93	7.54	7.54	58.50	11/16"	Imperial
DAJCM130J-0608IN	9/16"-18	3/4"-16	39.62	11.13	7.54	9.93	60.40	7/8"	Imperial
DAJCM130J-0806	3/4"-16	9/16"-18	47.80	9.93	9.93	7.54	67.70	22 mm	Metric
DAJCM130J-0808	3/4"-16	3/4"-16	47.80	11.13	9.93	9.93	68.60	22 mm	Metric
DAJCM130J-0810	3/4"-16	7/8"-14	51.82	12.70	9.93	12.29	74.70	27 mm	Metric
DAJCM130J-0812	3/4"-16	1-1/16"-12	51.82	15.09	9.93	15.47	80.00	32 mm	Metric
DAJCM130J-0806IN	3/4"-16	9/16"-18	47.80	9.93	9.93	7.54	67.70	13/16"	Imperial

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

CE

UK CA


DAJCM130J-0808IN	3/4"-16	3/4"-16	47.80	11.13	9.93	9.93	68.60	7/8"	Imperial
DAJCM130J-0810IN	3/4"-16	7/8"-14	51.82	12.70	9.93	12.29	74.70	1"	Imperial
DAJCM130J-0812IN	3/4"-16	1-1/16"-12	51.82	15.09	9.93	15.47	80.00	1-1/4"	Imperial
DAJCM130J-1010	7/8"-14	7/8"-14	53.10	12.70	12.29	12.29	77.20	27 mm	Metric
DAJCM130J-1012	7/8"-14	1-1/16"-12	53.10	15.09	12.29	15.47	81.30	32 mm	Metric
DAJCM130J-1010IN	7/8"-14	7/8"-14	53.10	12.70	12.29	12.29	77.20	1"	Imperial
DAJCM130J-1012IN	7/8"-14	1-1/16"-12	53.10	15.09	12.29	15.47	81.30	1-1/4"	Imperial
DAJCM130J-1208	1-1/16"-12	3/4"-16	63.50	11.13	15.47	9.93	87.89	27 mm	Metric
DAJCM130J-1210	1-1/16"-12	7/8"-14	63.50	12.70	15.47	12.29	89.40	27 mm	Metric
DAJCM130J-1212	1-1/16"-12	1-1/16"-12	63.50	15.09	15.47	15.47	91.70	32 mm	Metric
DAJCM130J-1216	1-1/16"-12	1-5/16"-12	63.50	15.09	15.47	21.44	91.70	41 mm	Metric
DAJCM130J-1208IN	1-1/16"-12	3/4"-16	63.50	11.13	15.47	9.93	87.89	1-1/8"	Imperial
DAJCM130J-1210IN	1-1/16"-12	7/8"-14	63.50	12.70	15.47	12.29	89.40	1-1/8"	Imperial
DAJCM130J-1212IN	1-1/16"-12	1-1/16"-12	63.50	15.09	15.47	15.47	91.70	1-1/4"	Imperial
DAJCM130J-1216IN	1-1/16"-12	1-5/16"-12	63.50	15.09	15.47	21.44	91.70	1-1/2"	Imperial
DAJCM130J-1414	1-3/16"-12	1-3/16"-12	68.30	15.09	18.26	18.26	96.50	36 mm	Metric
DAJCM130J-1414IN	1-3/16"-12	1-3/16"-12	68.30	15.09	18.26	18.26	96.50	1-3/8"	Imperial
DAJCM130J-1612	1-5/16"-12	1-1/16"-12	72.10	15.09	21.44	15.47	104.40	41 mm	Metric
DAJCM130J-1616	1-5/16"-12	1-5/16"-12	72.10	15.09	21.44	21.44	101.10	41 mm	Metric
DAJCM130J-1620	1-5/16"-12	1-5/8"-12	72.10	15.09	21.44	27.38	103.10	50 mm	Metric
DAJCM130J-1612IN	1-5/16"-12	1-1/16"-12	72.10	15.09	21.44	15.47	104.40	1-1/2"	Imperial
DAJCM130J-1616IN	1-5/16"-12	1-5/16"-12	72.10	15.09	21.44	21.44	101.10	1-1/2"	Imperial
DAJCM130J-1620IN	1-5/16"-12	1-5/8"-12	72.10	15.09	21.44	27.38	103.10	1-7/8"	Imperial
DAJCM130J-2016	1-5/8"-12	1-5/16"-12	88.10	15.09	27.38	21.44	120.00	50 mm	Metric
DAJCM130J-2020	1-5/8"-12	1-5/8"-12	88.10	15.09	27.38	27.38	119.10	50 mm	Metric
DAJCM130J-2016IN	1-5/8"-12	1-5/16"-12	88.10	15.09	27.38	21.44	120.00	1-7/8"	Imperial
DAJCM130J-2020IN	1-5/8"-12	1-5/8"-12	88.10	15.09	27.38	27.38	119.10	1-7/8"	Imperial
DAJCM130J-2424	1-7/8"-12	1-7/8"-12	98.60	15.09	33.32	33.32	131.30	55 mm	Metric
DAJCM130J-2424IN	1-7/8"-12	1-7/8"-12	98.60	15.09	33.32	33.32	131.30	2-1/8"	Imperial

DAJCM152Y

Long Connector JIC Male – Metric Male + Retaining Ring + O Ring

D	A	JC	M	1	52	Y
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection & Sealing Method
DAE	Adaptor	JIC UNF	Male	Straight	Metric	Male + Long O Ring + Retaining Ring

DME&JDE Code:	DAJCM152Y
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	UNF × Metric
Sealing Method:	O Ring

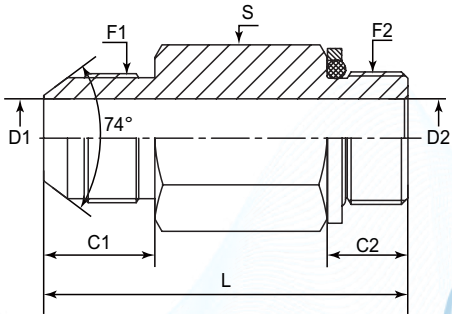

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	METRIC	mm	mm	mm	mm	mm	mm
DAJCM152Y-0410	7/16"-20	M10X1	35.00	8.50	4.37	4.37	51.00	14
DAJCM152Y-0510	1/2"-20	M10X1	37.00	8.50	5.94	4.50	53.00	17
DAJCM152Y-0512	1/2"-20	M12X1.5	37.00	11.00	5.94	6.00	55.50	17
DAJCM152Y-0514	1/2"-20	M14X1.5	37.00	11.00	5.94	7.50	56.50	19
DAJCM152Y-0614	9/16"-18	M14X1.5	39.00	11.00	7.54	7.54	58.50	19
DAJCM152Y-0616	9/16"-18	M16X1.5	39.00	11.50	7.54	9.00	60.00	22
DAJCM152Y-0816	3/4"-16	M16X1.5	48.00	11.50	9.00	9.00	69.00	22
DAJCM152Y-0818	3/4"-16	M18X1.5	48.00	12.50	9.93	11.00	70.50	24
DAJCM152Y-1018	7/8"-14	M18X1.5	53.00	12.50	12.29	11.00	75.50	24
DAJCM152Y-1020	7/8"-14	M20X1.5	53.00	12.50	12.29	12.00	76.00	27
DAJCM152Y-1022	7/8"-14	M22X1.5	53.00	13.00	12.29	14.00	78.00	27
DAJCM152Y-1222	1-1/16"-12	M22X1.5	63.00	13.00	15.47	12.00	88.00	27
DAJCM152Y-1227	1-1/16"-12	M27X2	63.00	16.00	15.47	18.00	92.50	32
DAJCM152Y-1627	1-5/16"-12	M27X2	72.00	16.00	21.44	18.00	102.00	36
DAJCM152Y-1633	1-5/16"-12	M33X2	72.00	16.00	21.44	21.44	102.50	41
DAJCM152Y-2042	1-5/8"-12	M42X2	88.00	16.00	27.38	30.00	121.00	50
DAJCM152Y-2448	1-7/8"-12	M48X2	98.00	17.50	33.32	36.00	136.00	55

DAJCM152J

Straight Long Connector JIC Male – Metric Male + O Ring

D

A

JC

M

1

52

J

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection & Sealing Method

DME

Adaptor

JIC UNF

Male

Straight

Metric

Male + O Ring Long Connection

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM152J

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Male x Male

Thread Types:

UNF x Metric

Sealing Method:

O Ring

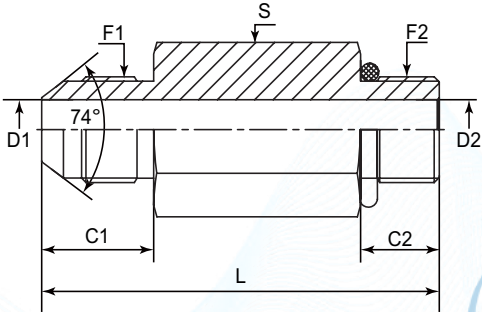

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	METRIC	mm	mm	mm	mm	mm	mm
DAJCM152J-0410	7/16"-20	M10X1	35.00	8.50	4.37	4.37	51.00	14
DAJCM152J-0510	1/2"-20	M10X1	37.00	8.50	5.94	4.50	53.00	17
DAJCM152J-0512	1/2"-20	M12X1.5	37.00	11.00	5.94	6.00	55.50	17
DAJCM152J-0514	1/2"-20	M14X1.5	37.00	11.00	5.94	7.50	56.50	19
DAJCM152J-0614	9/16"-18	M14X1.5	39.00	11.00	7.54	7.54	58.50	19
DAJCM152J-0616	9/16"-18	M16X1.5	39.00	11.50	7.54	9.00	60.00	22
DAJCM152J-0816	3/4"-16	M16X1.5	48.00	11.50	9.00	9.00	69.00	22
DAJCM152J-0818	3/4"-16	M18X1.5	48.00	12.50	9.93	11.00	70.50	24
DAJCM152J-1018	7/8"-14	M18X1.5	53.00	12.50	12.29	11.00	75.50	24
DAJCM152J-1022	7/8"-14	M22X1.5	53.00	13.00	12.29	14.00	78.00	27
DAJCM152J-1222	1-1/16"-12	M22X1.5	63.00	13.00	15.47	12.00	88.00	27
DAJCM152J-1227	1-1/16"-12	M27X2	63.00	16.00	15.47	18.00	92.50	32
DAJCM152J-1627	1-5/16"-12	M27X2	72.00	16.00	21.44	18.00	102.00	36
DAJCM152J-1633	1-5/16"-12	M33X2	72.00	16.00	21.44	21.44	102.50	41
DAJCM152J-2042	1-5/8"-12	M42X2	88.00	16.00	27.38	30.00	121.00	50
DAJCM152J-2448	1-7/8"-12	M48X2	98.00	17.50	33.32	36.00	136.00	55

Certificate:



DAJCM128P

Straight Long Connector JIC Male – NPTF Male 60°

D

A

JC

M

1

28

P

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Straight

NPTF

Male Long Connection

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM128P

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Connection Type:

Male x Male

Thread Types:

UNF x NPTF

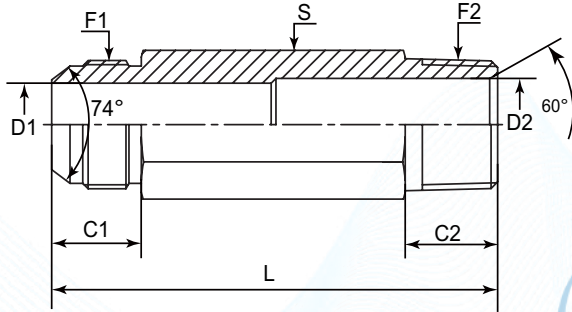

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Hex
#	UNF	NPTF	mm	mm	mm	mm	mm	-	-
DAJCM128P-0402	7/16"-20	1/8"-27	13.97	9.65	4.37	4.78	45.70	12 mm	Metric
DAJCM128P-0404	7/16"-20	1/4"-18	13.97	14.22	4.37	7.14	57.20	14 mm	Metric
DAJCM128P-0402IN	7/16"-20	1/8"-27	13.97	9.65	4.37	4.78	45.70	1/2"	Imperial
DAJCM128P-0404IN	7/16"-20	1/4"-18	13.97	14.22	4.37	7.14	57.20	9/16"	Imperial
DAJCM128P-0502	1/2"-20	1/8"-27	13.97	9.65	5.94	4.78	49.30	14 mm	Metric
DAJCM128P-0504	1/2"-20	1/4"-18	13.97	14.22	5.94	7.14	57.10	14 mm	Metric
DAJCM128P-0502IN	1/2"-20	1/8"-27	13.97	9.65	5.94	4.78	49.30	9/16"	Imperial
DAJCM128P-0504IN	1/2"-20	1/4"-18	13.97	14.22	5.94	7.14	57.10	9/16"	Imperial
DAJCM128P-0602	9/16"-18	1/8"-27	14.12	9.65	7.54	4.78	55.90	17 mm	Metric
DAJCM128P-0604	9/16"-18	1/4"-18	14.12	14.22	7.14	7.14	57.20	17 mm	Metric
DAJCM128P-0606	9/16"-18	3/8"-18	14.12	14.22	7.54	10.31	63.50	19 mm	Metric
DAJCM128P-0608	9/16"-18	1/2"-14	14.12	19.05	7.54	13.49	74.80	22 mm	Metric
DAJCM128P-0602IN	9/16"-18	1/8"-27	14.12	9.65	7.54	4.78	55.90	5/8"	Imperial
DAJCM128P-0604IN	9/16"-18	1/4"-18	14.12	14.22	7.14	7.14	57.20	5/8"	Imperial
DAJCM128P-0606IN	9/16"-18	3/8"-18	14.12	14.22	7.54	10.31	63.50	3/4"	Imperial
DAJCM128P-0608IN	9/16"-18	1/2"-14	14.12	19.05	7.54	13.49	74.80	7/8"	Imperial
DAJCM128P-0806	3/4"-16	3/8"-18	16.69	14.22	9.93	9.93	69.90	19 mm	Metric
DAJCM128P-0808	3/4"-16	1/2"-14	16.69	19.05	9.93	13.49	77.20	22 mm	Metric
DAJCM128P-0806IN	3/4"-16	3/8"-18	16.69	14.22	9.93	9.93	69.90	13/16"	Imperial
DAJCM128P-0808IN	3/4"-16	1/2"-14	16.69	19.05	9.93	13.49	77.20	7/8"	Imperial
DAJCM128P-1008	7/8"-14	1/2"-14	19.25	19.05	12.29	13.49	79.30	24 mm	Metric
DAJCM128P-1008IN	7/8"-14	1/2"-14	19.25	19.05	12.29	13.49	79.30	15/16"	Imperial
DAJCM128P-1208	1-1/16"-12	1/2"-14	21.95	19.05	15.47	13.49	88.90	27 mm	Metric
DAJCM128P-1212	1-1/16"-12	3/4"-14	21.95	19.05	15.47	18.26	88.90	27 mm	Metric
DAJCM128P-1208IN	1-1/16"-12	1/2"-14	21.95	19.05	15.47	13.49	88.90	1-1/8"	Imperial
DAJCM128P-1212IN	1-1/16"-12	3/4"-14	21.95	19.05	15.47	18.26	88.90	1-1/8"	Imperial
DAJCM128P-1612	1-5/16"-12	3/4"-14	23.14	19.05	21.44	18.26	96.80	36 mm	Metric
DAJCM128P-1616	1-5/16"-12	1"-11-1/2	23.14	23.88	21.44	23.83	101.60	36 mm	Metric
DAJCM128P-1612IN	1-5/16"-12	3/4"-14	23.14	19.05	21.44	18.26	96.80	1-3/8"	Imperial
DAJCM128P-1616IN	1-5/16"-12	1"-11-1/2	23.14	23.88	21.44	23.83	101.60	1-3/8"	Imperial
DAJCM128P-2020	1-5/8"-12	1-1/4"-11-1/2	24.33	24.64	27.38	31.75	114.30	46 mm	Metric
DAJCM128P-2020IN	1-5/8"-12	1-1/4"-11-1/2	24.33	24.64	27.38	31.75	114.30	1-11/16"	Imperial
DAJCM128P-2424	1-7/8"-12	1-1/2"-11-1/2	27.51	25.40	33.32	38.10	123.95	50 mm	Metric
DAJCM128P-2424IN	1-7/8"-12	1-1/2"-11-1/2	27.51	25.40	33.32	38.10	123.95	2"	Imperial
DAJCM128P-3232	2-1/2"-12	2"-11-1/2	33.86	26.16	45.24	49.23	142.80	65 mm	Metric
DAJCM128P-3232IN	2-1/2"-12	2"-11-1/2	33.86	26.16	45.24	49.23	142.80	2-5/8"	Imperial

Certificate:




DAJCM128M-LL

Straight X-Long Connector JIC Male – NPTF Male 60°

D	A	JC	M	1	28	M	LL
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type	Connector Feature
DME	Adaptor	JIC UNF	Male	Straight	NPTF	Male	X-Long



DME&JDE Code:	DAJCM128M-LL
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	UNF × NPTF

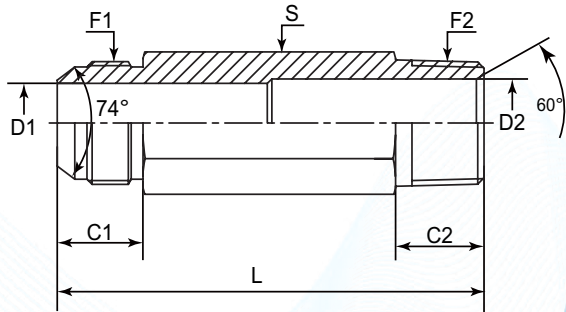

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Hex
#	UNF	NPTF	mm	mm	mm	mm	mm	-	-
DAJCM128M-LL-0402	7/16"-20	1/8"-27	13.97	9.65	4.37	4.78	65.00	12 mm	Metric
DAJCM128M-LL-0404	7/16"-20	1/4"-18	13.97	14.22	4.37	7.14	82.60	14 mm	Metric
DAJCM128M-LL-0402IN	7/16"-20	1/8"-27	13.97	9.65	4.37	4.78	65.00	1/2"	Imperial
DAJCM128M-LL-0404IN	7/16"-20	1/4"-18	13.97	14.22	4.37	7.14	82.60	9/16"	Imperial
DAJCM128M-LL-0502	1/2"-20	1/8"-27	13.97	9.65	5.94	4.78	71.40	14 mm	Metric
DAJCM128M-LL-0502IN	1/2"-20	1/8"-27	13.97	9.65	5.94	4.78	71.40	9/16"	Imperial
DAJCM128M-LL-0602	9/16"-18	1/8"-27	14.12	9.65	7.54	4.78	78.00	17 mm	Metric
DAJCM128M-LL-0604	9/16"-18	1/4"-18	14.12	14.22	7.14	7.14	82.60	17 mm	Metric
DAJCM128M-LL-0606	9/16"-18	3/8"-18	14.12	14.22	7.54	10.31	99.60	19 mm	Metric
DAJCM128M-LL-0608	9/16"-18	1/2"-14	14.12	19.05	7.54	13.49	104.40	22 mm	Metric
DAJCM128M-LL-0602IN	9/16"-18	1/8"-27	14.12	9.65	7.54	4.78	78.00	5/8"	Imperial
DAJCM128M-LL-0604IN	9/16"-18	1/4"-18	14.12	14.22	7.14	7.14	82.60	5/8"	Imperial
DAJCM128M-LL-0606IN	9/16"-18	3/8"-18	14.12	14.22	7.54	10.31	99.60	3/4"	Imperial
DAJCM128M-LL-0608IN	9/16"-18	1/2"-14	14.12	19.05	7.54	13.49	104.40	7/8"	Imperial
DAJCM128M-LL-0806	3/4"-16	3/8"-18	16.69	14.22	9.93	9.93	101.60	19 mm	Metric
DAJCM128M-LL-0808	3/4"-16	1/2"-14	16.69	19.05	9.93	13.49	106.70	22 mm	Metric
DAJCM128M-LL-0806IN	3/4"-16	3/8"-18	16.69	14.22	9.93	9.93	101.60	13/16"	Imperial
DAJCM128M-LL-0808IN	3/4"-16	1/2"-14	16.69	19.05	9.93	13.49	106.70	7/8"	Imperial
DAJCM128M-LL-1008	7/8"-14	1/2"-14	19.25	19.05	12.29	13.49	111.10	24 mm	Metric
DAJCM128M-LL-1008IN	7/8"-14	1/2"-14	19.25	19.05	12.29	13.49	111.10	15/16"	Imperial
DAJCM128M-LL-1212	1-1/16"-12	3/4"-14	21.95	19.05	15.47	18.26	127.00	27 mm	Metric
DAJCM128M-LL-1212IN	1-1/16"-12	3/4"-14	21.95	19.05	15.47	18.26	127.00	1-1/8"	Imperial
DAJCM128M-LL-1612	1-5/16"-12	3/4"-14	23.14	19.05	21.44	18.26	141.22	36 mm	Metric
DAJCM128M-LL-1616	1-5/16"-12	1"-11-1/2	23.14	23.88	21.44	23.83	146.05	36 mm	Metric
DAJCM128M-LL-1612IN	1-5/16"-12	3/4"-14	23.14	19.05	21.44	18.26	141.22	1-3/8"	Imperial
DAJCM128M-LL-1616IN	1-5/16"-12	1"-11-1/2	23.14	23.88	21.44	23.83	146.05	1-3/8"	Imperial




DAJCM106Y

Long Connector JIC Male – BSPP Male + Retaining Ring +O Ring

D	A	JC	M	1	06	Y
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection & Sealing Method
DME	Adaptor	JIC UNF	Male	Straight	BSPP	Male + Long O Ring + Retaining Ring



DME&JDE Code:	DAJCM106Y
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	UNF × BSPP
Sealing Method:	O Ring + Retaining Ring

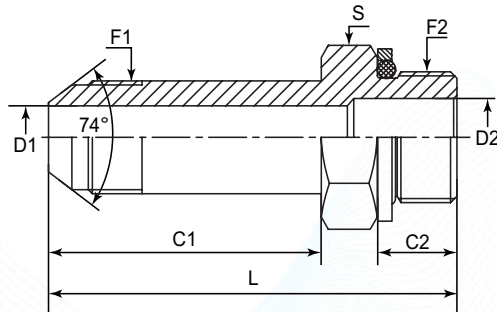

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSPP	mm	mm	mm	mm	mm	-
DAJCM106Y-0402	7/16"-20	1/8"-28	35.00	7.60	4.37	4.37	51.30	14
DAJCM106Y-0404	7/16"-20	1/4"-19	35.00	11.20	4.37	7.50	56.00	19
DAJCM106Y-0502	1/2"-20	1/8"-28	36.80	7.60	5.94	4.40	52.90	17
DAJCM106Y-0504	1/2"-20	1/4"-19	36.80	11.20	5.94	7.50	56.50	19
DAJCM106Y-0506	1/2"-20	3/8"-19	36.80	11.20	5.94	9.90	56.50	22
DAJCM106Y-0604	9/16"-18	1/4"-19	39.00	11.20	7.50	7.50	59.00	19
DAJCM106Y-0606	9/16"-18	3/8"-19	39.00	11.20	7.54	7.54	59.50	22
DAJCM106Y-0608	9/16"-18	1/2"-14	39.00	14.50	7.54	12.30	63.30	27
DAJCM106Y-0804	3/4"-16	1/4"-19	48.00	11.20	9.93	7.50	66.70	22
DAJCM106Y-0806	3/4"-16	3/8"-19	48.00	11.20	9.90	9.90	69.00	22
DAJCM106Y-0808	3/4"-16	1/2"-14	48.00	14.50	9.93	9.93	72.00	27
DAJCM106Y-1006	7/8"-14	3/8"-19	53.10	11.20	12.29	9.90	75.70	27
DAJCM106Y-1008	7/8"-14	1/2"-14	53.10	14.50	12.29	12.29	77.50	27
DAJCM106Y-1012	7/8"-14	3/4"-14	53.10	14.50	12.29	15.50	79.00	36
DAJCM106Y-1208	1-1/16"-12	1/2"-14	63.50	14.50	15.47	12.30	91.10	32
DAJCM106Y-1212	1-1/16"-12	3/4"-14	63.50	14.50	15.47	15.47	91.00	36
DAJCM106Y-1216	1-1/16"-12	1"-11	63.50	18.60	15.47	21.50	94.50	41
DAJCM106Y-1612	1-5/16"-12	3/4"-14	72.10	14.50	21.44	15.50	101.70	41
DAJCM106Y-1616	1-5/16"-12	1"-11	72.10	18.60	21.44	21.44	103.00	41
DAJCM106Y-1620	1-5/16"-12	1-1/4"-11	72.10	18.60	21.44	27.50	104.60	50
DAJCM106Y-2016	1-5/8"-12	1"-11	88.10	18.60	27.38	21.50	122.60	48
DAJCM106Y-2020	1-5/8"-12	1-1/4"-11	88.10	18.60	27.38	27.38	122.00	50
DAJCM106Y-2420	1-7/8"-12	1-1/4"-11	98.60	18.60	33.32	27.50	134.80	55
DAJCM106Y-2424	1-7/8"-12	1-1/2"-11	98.60	18.60	33.00	33.00	134.80	55



DAJCM106J

Straight Long Connector JIC Male – BSPP Male +O Ring

D

A

JC

M

1

06

J

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection & Sealing Method

DME

Adaptor

JIC UNF

Male

Straight

BSPP

Male + O Ring Long Connection

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM106J

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

UNF × BSPP

Sealing Method:

O Ring

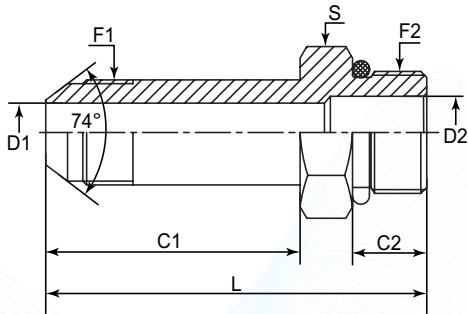

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSPP	mm	mm	mm	mm	mm	-
DAJCM106J-0404	7/16"-20	1/4"-19	35.00	11.20	4.37	7.50	56.00	19
DAJCM106J-0604	9/16"-18	1/4"-19	39.00	11.20	7.50	7.50	59.00	19
DAJCM106J-0606	9/16"-18	3/8"-19	39.00	11.20	7.54	7.54	59.50	22
DAJCM106J-0806	3/4"-16	3/8"-19	48.00	11.20	9.90	9.90	69.00	22
DAJCM106J-0808	3/4"-16	1/2"-14	48.00	14.50	9.93	9.93	72.00	27
DAJCM106J-1008	7/8"-14	1/2"-14	53.10	14.50	12.29	12.29	77.50	27
DAJCM106J-1212	1-1/16"-12	3/4"-14	63.50	14.50	15.47	15.47	91.00	36
DAJCM106J-1216	1-1/16"-12	1"-11	63.50	18.60	15.47	21.50	94.50	41
DAJCM106J-1616	1-5/16"-12	1"-11	72.10	18.60	21.44	21.44	103.00	41
DAJCM106J-2020	1-5/8"-12	1-1/4"-11	88.10	18.60	27.38	27.38	122.00	50

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAJCM125T

Straight Connector Bulkhead JIC Male – JIC Male

D

A

JC

M

1

25

T

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Other Features

DME

Adaptor

JIC UNF

Male

Straight

JIC

Bulkhead

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM125T

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

UNF × UNF

Other Features:

Bulkhead

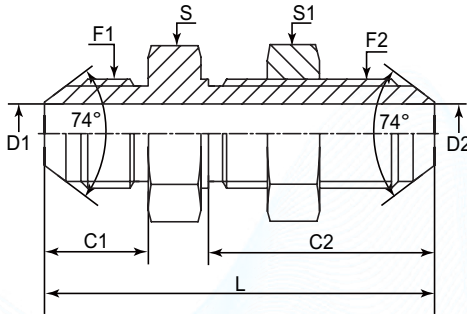

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	-	-	-
DAJCM125T-0303	3/8"-24	3/8"-24	12.17	28.20	3.18	3.18	48.26	17 mm	16 mm	Metric
DAJCM125T-0303IN	3/8"-24	3/8"-24	12.17	28.20	3.18	3.18	48.26	5/8"	5/8"	Imperial
DAJCM125T-0404	7/16"-20	7/16"-20	13.97	30.50	4.37	4.37	52.60	17 mm	17 mm	Metric
DAJCM125T-0406	7/16"-20	9/16"-18	13.97	32.51	4.37	7.54	55.12	22 mm	22 mm	Metric
DAJCM125T-0404IN	7/16"-20	7/16"-20	13.97	30.50	4.37	4.37	52.60	11/16"	11/16"	Imperial
DAJCM125T-0406IN	7/16"-20	9/16"-18	13.97	32.51	4.37	7.54	55.12	13/16"	13/16"	Imperial
DAJCM125T-0505	1/2"-20	1/2"-20	13.97	30.48	5.94	5.94	52.58	19 mm	19 mm	Metric
DAJCM125T-0505IN	1/2"-20	1/2"-20	13.97	30.48	5.94	5.94	52.58	3/4"	3/4"	Imperial
DAJCM125T-0604	9/16"-18	7/16"-20	14.12	30.50	7.54	4.37	53.30	22 mm	17 mm	Metric
DAJCM125T-0606	9/16"-18	9/16"-18	14.12	32.51	7.54	7.54	55.37	22 mm	22 mm	Metric
DAJCM125T-0604IN	9/16"-18	7/16"-20	14.12	30.50	7.54	4.37	53.30	13/16"	11/16"	Imperial
DAJCM125T-0606IN	9/16"-18	9/16"-18	14.12	32.51	7.54	7.54	55.37	13/16"	13/16"	Imperial
DAJCM125T-0808	3/4"-16	3/4"-16	16.69	36.58	9.93	9.93	61.98	24	24 mm	Metric
DAJCM125T-0808IN	3/4"-16	3/4"-16	16.69	36.58	9.93	9.93	61.98	1"	1"	Imperial
DAJCM125T-1008	7/8"-14	3/4"-16	19.30	38.00	9.90	9.90	65.00	27 mm	24 mm	Metric
DAJCM125T-1010	7/8"-14	7/8"-14	19.25	40.13	12.29	12.29	69.60	30 mm	30 mm	Metric
DAJCM125T-1008IN	7/8"-14	3/4"-16	19.30	38.00	9.90	9.90	65.00	1"	1"	Imperial
DAJCM125T-1010IN	7/8"-14	7/8"-14	19.25	40.13	12.29	12.29	69.60	1-1/8"	1-1/8"	Imperial
DAJCM125T-1212	1-1/16"-12	1-1/16"-12	21.95	44.45	15.47	15.47	78.49	36 mm	36 mm	Metric
DAJCM125T-1212IN	1-1/16"-12	1-1/16"-12	21.95	44.45	15.47	15.47	78.49	1-3/8"	1-3/8"	Imperial
DAJCM125T-1414	1-3/16"-12	1-3/16"-12	22.61	44.45	18.26	18.26	79.25	38 mm	38 mm	Metric
DAJCM125T-1414IN	1-3/16"-12	1-3/16"-12	22.61	44.45	18.26	18.26	79.25	1-1/2"	1-1/2"	Imperial
DAJCM125T-1612	1-5/16"-12	1-1/16"-12	23.14	44.45	21.44	15.47	79.76	41 mm	36 mm	Metric
DAJCM125T-1616	1-5/16"-12	1-5/16"-12	23.14	44.45	21.44	21.44	79.76	41 mm	41 mm	Metric
DAJCM125T-1612IN	1-5/16"-12	1-1/16"-12	23.14	44.45	21.44	15.47	79.76	1-5/8"	1-3/8"	Imperial
DAJCM125T-1616IN	1-5/16"-12	1-5/16"-12	23.14	44.45	21.44	21.44	79.76	1-5/8"	1-5/8"	Imperial
DAJCM125T-2020	1-5/8"-12	1-5/8"-12	24.30	45.70	27.38	27.38	84.07	50 mm	50 mm	Metric
DAJCM125T-2020IN	1-5/8"-12	1-5/8"-12	24.30	45.70	27.38	27.38	84.07	1-7/8"	1-7/8"	Imperial
DAJCM125T-2424	1-7/8"-12	1-7/8"-12	27.51	45.97	33.32	33.32	89.41	55 mm	55 mm	Metric
DAJCM125T-2424IN	1-7/8"-12	1-7/8"-12	27.51	45.97	33.32	33.32	89.41	2-1/8"	2-1/8"	Imperial
DAJCM125T-3232	2-1/2"-12	2-1/2"-12	33.86	53.09	45.24	45.24	106.68	70 mm	70 mm	Metric
DAJCM125T-3232IN	2-1/2"-12	2-1/2"-12	33.86	53.09	45.24	45.24	106.68	2-3/4"	2-3/4"	Imperial

Certificate:



Web: <https://www.dmejde.com>
E-mail: info@dmejde.com




DAJCT1305

Bulkhead Connector JIC Male Cone – SAE Male + O Ring

D	A	JC	T	1	30	5
Company	Product Range	Thread Types	Other Features	Adaptor Structure	Thread Types	Connection & Sealing Method
DME	Adaptor	JIC UNF	Bulkhead	Straight	SAE UNF	Male + O Ring



DME&JDE Code:	DAJCT1305
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	UNF × UNF
Other Features:	Bulkhead

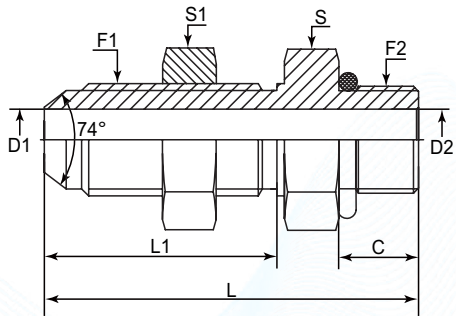

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L1	L	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	Inch	Inch	-
DAJCT1305-0404	7/16"-20	7/16"-20	9.14	4.37	4.37	30.50	50.00	17 mm	17 mm	Metric
DAJCT1305-0404IN	7/16"-20	7/16"-20	9.14	4.37	4.37	30.50	50.00	11/16"	11/16"	Imperial
DAJCT1305-0606	9/16"-18	9/16"-18	9.93	7.54	7.54	32.50	53.50	22 mm	22 mm	Metric
DAJCT1305-0606IN	9/16"-18	9/16"-18	9.93	7.54	7.54	32.50	53.50	13/16"	13/16"	Imperial
DAJCT1305-0808	3/4"-16	3/4"-16	11.13	9.93	9.93	36.60	59.70	27 mm	27 mm	Metric
DAJCT1305-0812	3/4"-16	1-1/16"-12	15.09	9.93	15.47	36.58	64.80	36 mm	27 mm	Metric
DAJCT1305-0808IN	3/4"-16	3/4"-16	11.13	9.93	9.93	36.60	59.70	1"	1"	Imperial
DAJCT1305-0812IN	3/4"-16	1-1/16"-12	15.09	9.93	15.47	36.58	64.80	1-3/8"	1"	Imperial
DAJCT1305-1010	7/8"-14	7/8"-14	12.70	12.29	12.29	40.10	66.90	27 mm	27 mm	Metric
DAJCT1305-1010IN	7/8"-14	7/8"-14	12.70	12.29	12.29	40.10	66.90	1-1/8"	1-1/8"	Imperial
DAJCT1305-1212	1-1/16"-12	1-1/16"-12	15.09	15.47	15.47	44.40	74.90	36 mm	36 mm	Metric
DAJCT1305-1212IN	1-1/16"-12	1-1/16"-12	15.09	15.47	15.47	44.40	74.90	1-3/8"	1-3/8"	Imperial
DAJCT1305-1616	1-5/16"-12	1-5/16"-12	15.09	21.44	21.44	44.40	75.80	41 mm	41 mm	Metric
DAJCT1305-1616IN	1-5/16"-12	1-5/16"-12	15.09	21.44	21.44	44.40	75.80	1-5/8"	1-5/8"	Imperial
DAJCT1305-2020	1-5/8"-12	1-5/8"-12	15.09	27.38	27.38	45.70	76.50	50 mm	50 mm	Metric
DAJCT1305-2020IN	1-5/8"-12	1-5/8"-12	15.09	27.38	27.38	45.70	76.50	1-7/8"	1-7/8"	Imperial

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, DEKRA, DIN, SAE, MA, CE, UKCA


DAJCT128M

Straight Connector Bulkhead JIC Male – NPTF Male 60°

D	A	JC	T	1	28	M
Company	Product Range	Thread Types	Other Features	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Bulkhead	Straight	NPTF	Male



DME&JDE Code:	DAJCT128M
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	UNF × NPTF 60°
Other Features:	Bulkhead

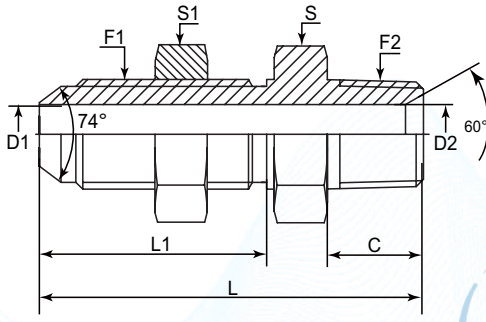

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L1	L	S	S1	Hex	Revision History
#	UNF	NPTF	mm	mm	mm	mm	mm	-	-	-	
DAJCT128M-0402	7/16"-20	1/8"-27	9.65	4.37	4.37	30.48	46.70	17 mm	17 mm	Metric	
DAJCT128M-0404	7/16"-20	1/4"-18	14.22	4.37	7.14	30.48	52.80	17 mm	17 mm	Metric	
DAJCT128M-0406	7/16"-20	3/8"-18	14.22	4.37	10.31	30.48	53.58	19 mm	17 mm	Metric	
DAJCT128M-0402IN	7/16"-20	1/8"-27	9.65	4.37	4.37	30.48	46.70	11/16"	11/16"	Imperial	
DAJCT128M-0404IN	7/16"-20	1/4"-18	14.22	4.37	7.14	30.48	52.80	11/16"	11/16"	Imperial	
DAJCT128M-0406IN	7/16"-20	3/8"-18	14.22	4.37	10.31	30.48	53.58	3/4"	11/16"	Imperial	
DAJCT128M-0604	9/16"-18	1/4"-18	14.22	7.14	7.14	32.51	55.60	22 mm	22 mm	Metric	
DAJCT128M-0606	9/16"-18	3/8"-18	14.22	7.54	10.31	32.51	55.60	22 mm	22 mm	Metric	
DAJCT128M-0608	9/16"-18	1/2"-14	19.05	7.54	13.49	32.51	61.20	27 mm	22 mm	Metric	
DAJCT128M-0604IN	9/16"-18	1/4"-18	14.22	7.14	7.14	32.51	55.60	13/16"	13/16"	Imperial	
DAJCT128M-0606IN	9/16"-18	3/8"-18	14.22	7.54	10.31	32.51	55.60	13/16"	13/16"	Imperial	
DAJCT128M-0608IN	9/16"-18	1/2"-14	19.05	7.54	13.49	32.51	61.20	1-1/8"	13/16"	Imperial	
DAJCT128M-0806	3/4"-16	3/8"-18	14.22	9.93	9.93	36.58	60.50	27 mm	24 mm	Metric	
DAJCT128M-0808	3/4"-16	1/2"-14	19.05	9.93	13.49	36.58	65.50	27 mm	24 mm	Metric	
DAJCT128M-0812	3/4"-16	3/4"-14	19.05	9.93	18.26	36.58	67.90	32 mm	24 mm	Metric	
DAJCT128M-0806IN	3/4"-16	3/8"-18	14.22	9.93	9.93	36.58	60.50	1-1/8"	1-1/8"	Imperial	
DAJCT128M-0808IN	3/4"-16	1/2"-14	19.05	9.93	13.49	36.58	65.50	1"	1-1/8"	Imperial	2024/6/4,Dimension S8S1 of item AR05643(2706-0808IN)has been changed from 1/8"/28.58((-0.5,0)) mm to 1/25.4(-0.4,0.4)mm
DAJCT128M-0812IN	3/4"-16	3/4"-14	19.05	9.93	18.26	36.58	67.90	1-1/4"	1-1/8"	Imperial	
DAJCT128M-1008	7/8"-14	1/2"-14	19.05	12.29	12.29	40.10	71.12	32 mm	30 mm	Metric	
DAJCT128M-1008IN	7/8"-14	1/2"-14	19.05	12.29	12.29	40.10	71.12	1-1/4"	1-1/4"	Imperial	
DAJCT128M-1208	1-1/16"-12	1/2"-14	19.05	15.47	13.49	44.45	74.20	36 mm	36 mm	Metric	
DAJCT128M-1212	1-1/16"-12	3/4"-14	19.05	15.47	18.26	44.45	74.20	36 mm	36 mm	Metric	
DAJCT128M-1208IN	1-1/16"-12	1/2"-14	19.05	15.47	13.49	44.45	74.20	1-3/8"	1-3/8"	Imperial	
DAJCT128M-1212IN	1-1/16"-12	3/4"-14	19.05	15.47	18.26	44.45	74.20	1-3/8"	1-3/8"	Imperial	
DAJCT128M-1612	1-5/16"-12	3/4"-14	19.05	21.44	18.26	39.62	73.70	41 mm	41 mm	Metric	
DAJCT128M-1616	1-5/16"-12	1"-11-1/2	23.88	21.44	21.44	39.62	78.50	41 mm	41 mm	Metric	
DAJCT128M-1612IN	1-5/16"-12	3/4"-14	19.05	21.44	18.26	39.62	73.70	1-1/2"	1-1/2"	Imperial	
DAJCT128M-1616IN	1-5/16"-12	1"-11-1/2	23.88	21.44	23.83	44.45	80.50	1-1/2"	1-1/2"	Imperial	2024/6/4,Dimension L of item AR05650(2706-1616IN)has been changed from 78.5±0.5mm to 80.5±0.5mm; 2024/6/4,Dimension D2 of item AR05650(2706-1616IN)has been changed from 21.44±0.2mm to 23.83(-0.127,+0.2)mm; 2024/6/4,Dimension L1 of item AR05650(2706-1616IN)has been changed from 39.62±0.5mm to 44.45±0.4mm;
DAJCT128M-2020	1-5/8"-12	1-1/4"-11-1/2	24.64	27.38	31.75	45.70	82.60	46 mm	50 mm	Metric	
DAJCT128M-2020IN	1-5/8"-12	1-1/4"-11-1/2	24.64	27.38	31.75	45.70	82.60	1-11/16"	1-11/16"	Imperial	
DAJCT128M-2424	1-7/8"-12	1-1/2"-11-1/2	25.40	33.32	38.10	45.97	87.50	55 mm	55 mm	Metric	
DAJCT128M-2424IN	1-7/8"-12	1-1/2"-11-1/2	25.40	33.32	38.10	45.97	87.50	2-1/8"	2-1/8"	Imperial	
DAJCT128M-3232	2-1/2"-12	2"-11-1/2	26.16	45.24	49.23	53.09	99.00	70 mm	70 mm	Metric	
DAJCT128M-3232IN	2-1/2"-12	2"-11-1/2	26.16	45.24	49.23	53.09	99.00	2-3/4"	2-3/4"	Imperial	

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, DEKRA, DIN, SAE, MA, CE, UKCA

DAJCT105M

Straight Connector Bulkhead JIC Male Cone – BSPP Male 60°

D

A

JC

T

1

05

M

Company

Product Range

Thread Types

Other Features

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Bulkhead

Straight

BSPP

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCT105M

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

UNF × BSPP 60°

Other Features:

Bulkhead

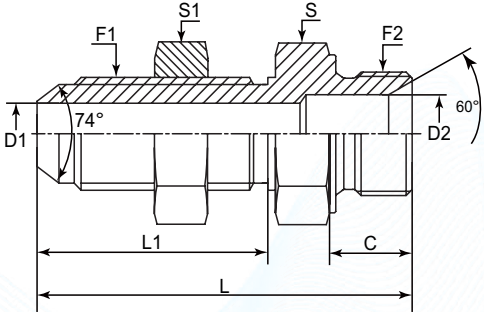

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L1	L	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	Inch	Inch
DAJCT105M-0404	7/16"-20	1/4"-19	11.00	4.37	4.37	30.50	50.50	19	17.46
DAJCT105M-0406	7/16"-20	3/8"-19	12.00	4.37	7.90	30.50	53.00	22	17.46
DAJCT105M-0606	9/16"-18	3/8"-19	12.00	7.54	7.54	32.51	54.00	22	20.64
DAJCT105M-0608	9/16"-18	1/2"-14	14.00	7.54	11.10	32.51	58.00	27	20.64
DAJCT105M-0808	3/4"-16	1/2"-14	14.00	9.93	9.93	36.58	62.50	27	25.4
DAJCT105M-1008	7/8"-14	1/2"-14	14.00	11.10	11.10	40.13	65.50	28.58	28.5
DAJCT105M-1212	1-1/16"-12	3/4"-14	16.00	15.47	15.47	44.45	71.50	32	34.9
DAJCT105M-1616	1-5/16"-12	1"-11	19.00	21.44	21.44	44.45	76.50	41	41



DAJCLN

JIC Bulkhead Nut

D

A

JC

LN

Company

Product Range

Thread Types

Other Features

DME

Adaptor

JIC UNF

Bulkhead Nut

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCLN

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Straight

Thread Types:

UNF Bulkhead Nut

Other Features:

Bulkhead



PART NUMBER	F (Thread)	L	S	
#	UNF	mm	-	-
DAJCLN-0400	7/16"-20	7.10	17 mm	Metric
DAJCLN-0400IN	7/16"-20	7.10	11/16"	Imperial
DAJCLN-0500	1/2"-20	7.11	19 mm	Metric
DAJCLN-0500IN	1/2"-20	7.11	3/4"	Imperial
DAJCLN-0600	9/16"-18	6.86	22 mm	Metric
DAJCLN-0600IN	9/16"-18	6.86	13/16"	Imperial
DAJCLN-0800	3/4"-16	7.90	24 mm	Metric
DAJCLN-0800IN	3/4"-16	7.90	15/16"	Imperial
DAJCLN-1000	7/8"-14	9.14	30 mm	Metric
DAJCLN-1000IN	7/8"-14	9.14	1-1/8"	Imperial
DAJCLN-1200	1-1/16"-12	10.50	36 mm	Metric
DAJCLN-1200IN	1-1/16"-12	10.50	1-3/8"	Imperial
DAJCLN-1400	1-3/16"-12	10.40	36 mm	Metric
DAJCLN-1400IN	1-3/16"-12	10.40	1-3/8"	Imperial
DAJCLN-1600	1-5/16"-12	10.40	41 mm	Metric
DAJCLN-1600IN	1-5/16"-12	10.40	1-1/2"	Imperial
DAJCLN-2000	1-5/8"-12	10.40	50 mm	Metric
DAJCLN-2000IN	1-5/8"-12	10.40	2"	Imperial
DAJCLN-2400	1-7/8"-12	10.50	55 mm	Metric
DAJCLN-2400IN	1-7/8"-12	10.50	2-1/8"	Imperial
DAJCLN-3200	2-1/2"-12	10.40	70 mm	Metric
DAJCLN-3200IN	1-1/16"-17	10.40	2-3/4"	Imperial




MJ-BJM

Straight Connector JIC Male – Banjo UNF

M	J	BJ	M
Company	Thread Types	Other Features	Standard
DME	JIC UNF	Banjo	Metric



DME&JDE Code:	MJ-BJM
Product Type	Hydraulic adaptor
Hose Fitting Type:	JIC and SAE-ORB
Structure:	Straight
Thread Types:	UNF
Other Features:	Banjo

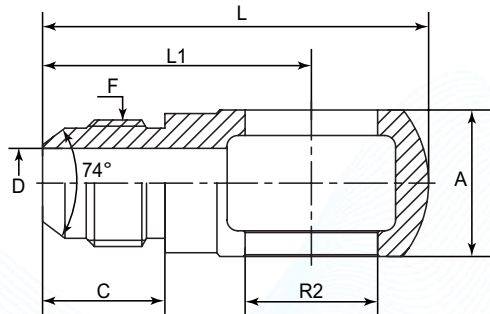

PART NUMBER	F (Thread)	A	C	D	R2	L1	L
#	UNF	mm	mm	mm	mm	mm	mm
MJ-BJM-0408	7/16"-20	9.20	13.97	4.37	8.10	27.00	34.50
MJ-BJM-0410	7/16"-20	10.20	13.97	4.37	10.10	26.00	34.50
MJ-BJM-0412	7/16"-20	12.10	13.97	4.37	12.10	30.00	40.00
MJ-BJM-0414	7/16"-20	14.00	13.97	4.37	14.10	30.50	42.00
MJ-BJM-0416	7/16"-20	16.00	13.97	4.37	16.10	30.00	44.00
MJ-BJM-0418	7/16"-20	20.00	13.97	4.37	18.10	33.50	49.50
MJ-BJM-0612	9/16"-18	12.00	14.12	7.54	12.10	29.60	39.60
MJ-BJM-0614	9/16"-18	14.00	14.12	7.54	14.10	30.10	42.10
MJ-BJM-0616	9/16"-18	16.00	14.12	7.54	16.10	30.10	44.10
MJ-BJM-0618	9/16"-18	20.00	14.12	7.54	18.10	33.60	49.60
MJ-BJM-0620	9/16"-18	22.00	14.12	7.54	20.00	36.10	54.10
MJ-BJM-0622	9/16"-18	25.00	14.12	7.54	22.10	37.70	57.20
MJ-BJM-0814	3/4"-16	14.00	16.69	7.54	14.10	32.70	45.00
MJ-BJM-0816	3/4"-16	16.00	16.69	7.54	16.10	32.70	46.70
MJ-BJM-0818	3/4"-16	20.00	16.69	9.93	18.10	36.20	52.20
MJ-BJM-0820	3/4"-16	22.00	16.69	9.93	20.00	38.70	56.70
MJ-BJM-0822	3/4"-16	25.00	16.69	9.93	22.10	40.30	59.80
MJ-BJM-1022	7/8"-14	25.00	19.25	12.29	22.10	42.80	62.30
MJ-BJM-1024	7/8"-14	24.00	19.25	12.29	24.00	46.80	66.80
MJ-BJM-1226	1-1/16"-12	30.00	21.95	15.47	26.10	48.50	71.50
MJ-BJM-1230	1-1/16"-12	36.00	21.95	15.47	30.20	52.00	79.00
MJ-BJM-1630	1-1/16"-12	36.00	23.14	21.44	30.20	53.10	80.10




DAJCM425M

45° Elbow JIC – JIC Male

D	A	JC	M	4	25	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	45° Elbow	JIC	Male



DME&JDE Code:	DAJCM425M
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	45° Elbow
Connection Type:	Male × Male
Thread Types:	UNF × UNF



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-
DAJCM425M-0303	3/8"-24	3/8"-24	3.18	3.18	17.50	17.50	11 mm	Metric
DAJCM425M-0303IN	3/8"-24	3/8"-24	3.18	3.18	17.50	17.50	7/16"	Imperial
DAJCM425M-0404	7/16"-20	7/16"-20	4.37	4.37	18.30	18.30	11 mm	Metric
DAJCM425M-0404IN	7/16"-20	7/16"-20	4.37	4.37	18.30	18.30	7/16"	Imperial
DAJCM425M-0505	1/2"-20	1/2"-20	5.94	5.94	19.60	19.60	14 mm	Metric
DAJCM425M-0505IN	1/2"-20	1/2"-20	5.94	5.94	19.60	19.60	9/16"	Imperial
DAJCM425M-0604	9/16"-18	7/16"-20	7.54	4.37	21.10	19.60	14 mm	Metric
DAJCM425M-0606	9/16"-18	9/16"-18	7.54	7.54	21.10	21.10	14 mm	Metric
DAJCM425M-0604IN	9/16"-18	7/16"-20	7.54	4.37	21.10	19.60	9/16"	Imperial
DAJCM425M-0606IN	9/16"-18	9/16"-18	7.54	7.54	21.10	21.10	9/16"	Imperial
DAJCM425M-0806	3/4"-16	9/16"-18	9.93	7.54	24.89	23.08	19 mm	Metric
DAJCM425M-0808	3/4"-16	3/4"-16	9.93	9.93	24.90	24.90	19 mm	Metric
DAJCM425M-0806IN	3/4"-16	9/16"-18	9.93	7.54	24.89	23.08	3/4"	Imperial
DAJCM425M-0808IN	3/4"-16	3/4"-16	9.93	9.93	24.90	24.90	3/4"	Imperial
DAJCM425M-1008	7/8"-14	3/4"-16	12.29	9.93	28.19	26.89	22 mm	Metric
DAJCM425M-1010	7/8"-14	7/8"-14	12.29	12.29	28.20	28.20	22 mm	Metric
DAJCM425M-1008IN	7/8"-14	3/4"-16	12.29	9.93	28.19	26.89	7/8"	Imperial
DAJCM425M-1010IN	7/8"-14	7/8"-14	12.29	12.29	28.20	28.20	7/8"	Imperial
DAJCM425M-1212	1-1/16"-12	1-1/16"-12	15.47	15.47	32.50	32.50	27 mm	Metric
DAJCM425M-1212IN	1-1/16"-12	1-1/16"-12	15.47	15.47	32.50	32.50	1-1/8"	Imperial
DAJCM425M-1616	1-5/16"-12	1-5/16"-12	21.44	21.44	37.34	37.34	33 mm	Metric
DAJCM425M-1616IN	1-5/16"-12	1-5/16"-12	21.44	21.44	37.34	37.34	1-5/16"	Imperial
DAJCM425M-2020	1-5/8"-12	1-5/8"-12	27.38	27.38	40.00	40.00	41mm	Metric
DAJCM425M-2020IN	1-5/8"-12	1-5/8"-12	27.38	27.38	40.00	40.00	1-1/2"	Imperial
DAJCM425M-2424	1-7/8"-12	1-7/8"-12	33.32	33.32	45.20	45.20	48mm	Metric
DAJCM425M-2424IN	1-7/8"-12	1-7/8"-12	33.32	33.32	45.20	45.20	1-7/8"	Imperial



DAJCM4305

45° Adjustable Elbow JIC Male – SAE Male + O Ring

D

A

JC

M

4

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection& Sealing Method

Adaptor

JIC UNF

Male


45° Elbow

SAE UNF

Male + O Ring

German Technology Equipment

New-Standard

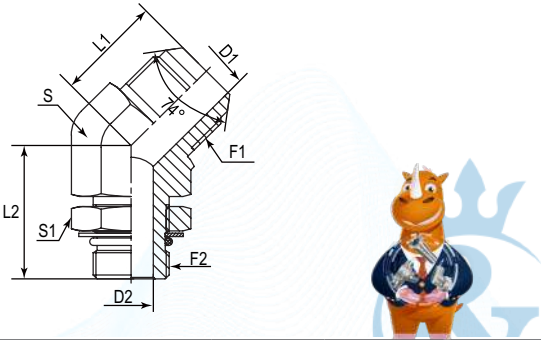

PART NUMBER	F1 (Thread)	F2(Thread)	L1	L2	D1	D2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAJCM4305-0202	5/16"-24	5/16"-24	17.5	22.4	1.57	1.57	11 mm	11 mm	Metric
DAJCM4305-0202IN	5/16"-24	5/16"-24	17.5	22.4	1.57	1.57	7/16"	7/16"	Imperial
DAJCM4305-0303	3/8"-24	3/8"-24	17.50	22.40	3.18	3.18	11 mm	12 mm	Metric
DAJCM4305-0303IN	3/8"-24	3/8"-24	17.50	22.40	3.18	3.18	7/16"	1/2"	Imperial
DAJCM4305-0404	7/16"-20	7/16"-20	18.30	26.70	4.37	4.37	11 mm	14 mm	Metric
DAJCM4305-0405	7/16"-20	1/2"-20	19.60	26.70	4.37	5.94	14 mm	17 mm	Metric
DAJCM4305-0406	7/16"-20	9/16"-18	20.80	29.00	4.37	7.54	14 mm	19 mm	Metric
DAJCM4305-0408	7/16"-20	3/4"-16	21.60	33.00	4.37	9.93	19 mm	22 mm	Metric
DAJCM4305-0404IN	7/16"-20	7/16"-20	18.30	26.70	4.37	4.37	7/16"	9/16"	Imperial
DAJCM4305-0405IN	7/16"-20	1/2"-20	19.60	26.70	4.37	5.94	9/16"	5/8"	Imperial
DAJCM4305-0406IN	7/16"-20	9/16"-18	20.80	29.00	4.37	7.54	9/16"	11/16"	Imperial
DAJCM4305-0408IN	7/16"-20	3/4"-16	21.60	33.00	4.37	9.93	3/4"	7/8"	Imperial
DAJCM4305-0504	1/2"-20	7/16"-20	19.60	26.70	5.94	4.37	14 mm	14 mm	Metric
DAJCM4305-0505	1/2"-20	1/2"-20	19.60	26.70	5.94	5.94	14 mm	17 mm	Metric
DAJCM4305-0506	1/2"-20	9/16"-18	20.80	29.00	5.94	7.54	14 mm	19 mm	Metric
DAJCM4305-0508	1/2"-20	3/4"-16	22.10	33.00	5.94	9.93	19 mm	22 mm	Metric
DAJCM4305-0504IN	1/2"-20	7/16"-20	19.60	26.70	5.94	4.37	9/16"	9/16"	Imperial
DAJCM4305-0505IN	1/2"-20	1/2"-20	19.60	26.70	5.94	5.94	9/16"	5/8"	Imperial
DAJCM4305-0506IN	1/2"-20	9/16"-18	20.80	29.00	5.94	7.54	9/16"	11/16"	Imperial
DAJCM4305-0508IN	1/2"-20	3/4"-16	22.10	33.00	5.94	9.93	3/4"	7/8"	Imperial
DAJCM4305-0604	9/16"-18	7/16"-20	21.10	27.40	7.54	4.37	14 mm	14 mm	Metric
DAJCM4305-0605	9/16"-18	1/2"-20	21.10	27.40	7.54	5.94	14 mm	17 mm	Metric
DAJCM4305-0606	9/16"-18	9/16"-18	21.10	29.00	7.54	7.54	14 mm	19 mm	Metric
DAJCM4305-0608	9/16"-18	3/4"-16	22.10	33.00	7.54	9.93	19 mm	22 mm	Metric
DAJCM4305-0610	9/16"-18	7/8"-14	22.40	38.60	7.54	12.29	22 mm	27 mm	Metric
DAJCM4305-0612	9/16"-18	1-1/16"-12	23.62	43.94	7.54	15.47	27 mm	32 mm	Metric
DAJCM4305-0604IN	9/16"-18	7/16"-20	21.10	27.40	7.54	4.37	9/16"	9/16"	Imperial

Certificate:

DAJCM4305-0605IN	9/16"-18	1/2"-20	21.10	27.40	7.54	5.94	9/16"	5/8"	Imperial
DAJCM4305-0606IN	9/16"-18	9/16"-18	21.10	29.00	7.54	7.54	9/16"	11/16"	Imperial
DAJCM4305-0608IN	9/16"-18	3/4"-16	22.10	33.00	7.54	9.93	3/4"	7/8"	Imperial
DAJCM4305-0610IN	9/16"-18	7/8"-14	22.40	38.60	7.54	12.29	7/8"	1"	Imperial
DAJCM4305-0612IN	9/16"-18	1-1/16"-12	23.62	43.94	7.54	15.47	1-1/16"	1-1/4"	Imperial
DAJCM4305-0804	3/4"-16	7/16"-20	24.90	28.20	9.93	4.37	19 mm	14 mm	Metric
DAJCM4305-0806	3/4"-16	9/16"-18	24.90	29.70	9.93	7.54	19 mm	19 mm	Metric
DAJCM4305-0808	3/4"-16	3/4"-16	24.90	33.00	9.93	9.93	19 mm	22 mm	Metric
DAJCM4305-0810	3/4"-16	7/8"-14	25.20	38.60	9.93	12.29	22 mm	27 mm	Metric
DAJCM4305-0812	3/4"-16	1-1/16"-12	26.40	43.90	9.93	15.47	27 mm	32 mm	Metric
DAJCM4305-0804IN	3/4"-16	7/16"-20	24.90	28.20	9.93	4.37	3/4"	9/16"	Imperial
DAJCM4305-0806IN	3/4"-16	9/16"-18	24.90	29.70	9.93	7.54	3/4"	11/16"	Imperial
DAJCM4305-0808IN	3/4"-16	3/4"-16	24.90	33.00	9.93	9.93	3/4"	7/8"	Imperial
DAJCM4305-0810IN	3/4"-16	7/8"-14	25.20	38.60	9.93	12.29	7/8"	1"	Imperial
DAJCM4305-0812IN	3/4"-16	1-1/16"-12	26.40	43.90	9.93	15.47	1-1/16"	1-1/4"	Imperial
DAJCM4305-1008	7/8"-14	3/4"-16	28.20	34.50	12.29	9.93	22 mm	22 mm	Metric
DAJCM4305-1010	7/8"-14	7/8"-14	28.20	38.60	12.29	12.29	22 mm	27 mm	Metric
DAJCM4305-1012	7/8"-14	1-1/16"-12	29.50	43.90	12.29	15.47	27 mm	32 mm	Metric
DAJCM4305-1008IN	7/8"-14	3/4"-16	28.20	34.50	12.29	9.93	7/8"	7/8"	Imperial
DAJCM4305-1010IN	7/8"-14	7/8"-14	28.20	38.60	12.29	12.29	7/8"	1"	Imperial
DAJCM4305-1012IN	7/8"-14	1-1/16"-12	29.50	43.90	12.29	15.47	1-1/16"	1-1/4"	Imperial
DAJCM4305-1208	1-1/16"-12	3/4"-16	32.50	35.80	15.47	9.93	27 mm	22 mm	Metric
DAJCM4305-1210	1-1/16"-12	7/8"-14	32.50	39.90	15.47	12.29	27 mm	27 mm	Metric
DAJCM4305-1212	1-1/16"-12	1-1/16"-12	32.50	43.90	15.47	15.47	27 mm	32 mm	Metric
DAJCM4305-1216	1-1/16"-12	1-5/16"-12	36.10	47.20	15.47	21.44	33 mm	41 mm	Metric
DAJCM4305-1208IN	1-1/16"-12	3/4"-16	32.50	35.80	15.47	9.93	1-1/16"	7/8"	Imperial
DAJCM4305-1210IN	1-1/16"-12	7/8"-14	32.50	39.90	15.47	12.29	1-1/16"	1"	Imperial
DAJCM4305-1212IN	1-1/16"-12	1-1/16"-12	32.50	43.90	15.47	15.47	1-1/16"	1-1/4"	Imperial
DAJCM4305-1216IN	1-1/16"-12	1-5/16"-12	36.10	47.20	15.47	21.44	1-5/16"	1-1/2"	Imperial
DAJCM4305-1414	1-3/16"-12	1-3/16"-12	36.83	47.24	18.26	18.26	33 mm	36 mm	Metric
DAJCM4305-1414IN	1-3/16"-12	1-3/16"-12	36.83	47.24	18.26	18.26	1-5/16"	1-3/8"	Imperial
DAJCM4305-1612	1-5/16"-12	1-1/16"-12	37.30	47.20	21.44	15.47	33 mm	32 mm	Metric
DAJCM4305-1614	1-5/16"-12	1-3/16"-12	37.30	47.20	21.44	18.26	33 mm	36 mm	Metric
DAJCM4305-1616	1-5/16"-12	1-5/16"-12	37.30	47.20	21.44	21.44	33 mm	41 mm	Metric
DAJCM4305-1620	1-5/16"-12	1-5/8"-12	39.10	48.50	21.44	27.38	41 mm	50 mm	Metric
DAJCM4305-1612IN	1-5/16"-12	1-1/16"-12	37.30	47.20	21.44	15.47	1-5/16"	1-1/4"	Imperial
DAJCM4305-1614IN	1-5/16"-12	1-3/16"-12	37.30	47.20	21.44	18.26	1-5/16"	1-3/8"	Imperial
DAJCM4305-1616IN	1-5/16"-12	1-5/16"-12	37.30	47.20	21.44	21.44	1-5/16"	1-1/2"	Imperial
DAJCM4305-1620IN	1-5/16"-12	1-5/8"-12	39.10	48.50	21.44	27.38	1-5/8"	1-7/8"	Imperial
DAJCM4305-2016	1-5/8"-12	1-5/16"-12	40.40	48.50	27.38	21.44	41 mm	41 mm	Metric
DAJCM4305-2020	1-5/8"-12	1-5/8"-12	40.30	48.50	27.38	27.38	41 mm	50 mm	Metric
DAJCM4305-2024	1-5/8"-12	1-7/8"-12	41.90	48.50	27.38	33.32	48 mm	55 mm	Metric
DAJCM4305-2016IN	1-5/8"-12	1-5/16"-12	40.40	48.50	27.38	21.44	1-5/8"	1-1/2"	Imperial
DAJCM4305-2020IN	1-5/8"-12	1-5/8"-12	40.30	48.50	27.38	27.38	1-5/8"	1-7/8"	Imperial
DAJCM4305-2024IN	1-5/8"-12	1-7/8"-12	41.90	48.50	27.38	33.32	1-7/8"	2-1/8"	Imperial
DAJCM4305-2420	1-7/8"-12	1-5/8"-12	45.20	48.50	33.32	27.38	48 mm	50 mm	Metric
DAJCM4305-2424	1-7/8"-12	1-7/8"-12	45.20	48.50	33.30	33.30	48 mm	55 mm	Metric
DAJCM4305-2420IN	1-7/8"-12	1-5/8"-12	45.20	48.50	33.32	27.38	1-7/8"	1-7/8"	Imperial
DAJCM4305-2424IN	1-7/8"-12	1-7/8"-12	45.20	48.50	33.30	33.30	1-7/8"	2-1/8"	Imperial
DAJCM4305-3232	2-1/2"-12	2-1/2"-12	56.40	50.40	45.24	45.24	65 mm	70 mm	Metric
DAJCM4305-3232IN	2-1/2"-12	2-1/2"-12	56.40	50.40	45.24	45.24	2-1/2"	2-3/4"	Imperial

Certificate:


DAJCM406Q

45° Adjustable Elbow JIC Male - BSPP Male + O Ring + Retaining Ring

D A JC M 4 06 0
Company Product Range Thread Types Connection Type Adaptor Structure Thread Types Connection & Sealing Method
DME Adaptor JIC UNF Male 45° Elbow BSPP Male + O Ring + Retaining Ring



- DME&JDE Code: DAJCM406Q
- Product Type: Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: 45° Elbow
- Connection Type: Adjustable Male × Male
- Thread Types: UNF × BSPP
- Sealing Method: O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJCM406Q-0402	7/16"-20	1/8"-28	4.37	4.40	18.00	26.50	11	14
DAJCM406Q-0404	7/16"-20	1/4"-19	4.37	7.50	21.00	29.00	14	19
DAJCM406Q-0406	7/16"-20	3/8"-19	4.37	9.90	22.00	33.00	19	22
DAJCM406Q-0502	1/2"-20	1/8"-28	5.94	4.40	20.00	27.00	14	14
DAJCM406Q-0504	1/2"-20	1/4"-19	5.94	7.50	21.00	29.00	14	19
DAJCM406Q-0604	9/16"-18	1/4"-19	7.54	7.50	21.00	29.00	14	19
DAJCM406Q-0606	9/16"-18	3/8"-19	7.54	9.90	22.00	33.00	19	22
DAJCM406Q-0608	9/16"-18	1/2"-14	7.54	12.30	22.00	38.50	22	27
DAJCM406Q-0804	3/4"-16	1/4"-19	9.93	7.50	25.00	30.50	19	19
DAJCM406Q-0806	3/4"-16	3/8"-19	9.93	9.90	25.00	33.00	19	22
DAJCM406Q-0808	3/4"-16	1/2"-14	9.93	12.30	25.50	38.50	22	27
DAJCM406Q-0812	3/4"-16	3/4"-14	9.93	15.50	26.50	44.00	27	36
DAJCM406Q-1006	7/8"-14	3/8"-19	12.29	9.90	28.00	35.00	22	22
DAJCM406Q-1008	7/8"-14	1/2"-14	12.29	12.30	28.00	38.50	22	27
DAJCM406Q-1010	7/8"-14	5/8"-14	12.29	14.00	28.00	40.00	27	32
DAJCM406Q-1012	7/8"-14	3/4"-14	12.29	15.50	30.00	44.00	27	36
DAJCM406Q-1208	1-1/16"-12	1/2"-14	15.47	12.30	32.50	40.50	27	27
DAJCM406Q-1212	1-1/16"-12	3/4"-14	15.47	15.50	32.50	44.00	27	36
DAJCM406Q-1216	1-1/16"-12	1"-11	15.47	21.50	35.80	47.00	33	41
DAJCM406Q-1612	1-5/16"-12	3/4"-14	21.44	15.50	37.00	47.00	36	36
DAJCM406Q-1616	1-5/16"-12	1"-11	21.44	21.50	37.00	47.00	33	41
DAJCM406Q-2016	1-5/8"-12	1"-11	27.38	21.50	40.50	48.50	41	41
DAJCM406Q-2020	1-5/8"-12	1-1/4"-11	27.38	27.50	40.50	48.50	41	50
DAJCM406Q-2424	1-7/8"-12	1-1/2"-11	33.32	33.00	45.00	49.00	48	55


DAJCM406S

45° Adjustable Elbow JIC Male - BSPP Male + O Ring

D A JC M 4 06 5
Company Product Range Thread Types Connection Type Adaptor Structure Thread Types Connection & Sealing Method
DME Adaptor BSPP Male 45° Elbow BSPP Male + O Ring



- DME&JDE Code: DAJCM406S
- Product Type: Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: 45° Elbow
- Connection Type: Adjustable Male × Male
- Thread Types: UNF × BSPP 60°
- Sealing Method: O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJCM406S-0402	7/16"-20	1/8"-28	4.37	4.40	18.00	26.50	11	14
DAJCM406S-0404	7/16"-20	1/4"-19	4.37	7.50	21.00	29.00	14	19
DAJCM406S-0406	7/16"-20	3/8"-19	4.37	9.90	22.00	33.00	19	22
DAJCM406S-0502	1/2"-20	1/8"-28	5.94	4.40	20.00	27.00	14	14
DAJCM406S-0504	1/2"-20	1/4"-19	5.94	7.50	21.00	29.00	14	19
DAJCM406S-0604	9/16"-18	1/4"-19	7.54	7.50	21.00	29.00	14	19
DAJCM406S-0606	9/16"-18	3/8"-19	7.54	9.90	22.00	33.00	19	22
DAJCM406S-0608	9/16"-18	1/2"-14	7.54	12.30	22.00	38.50	22	27
DAJCM406S-0804	3/4"-16	1/4"-19	9.93	7.50	25.00	30.50	19	19
DAJCM406S-0806	3/4"-16	3/8"-19	9.93	9.90	25.00	33.00	19	22
DAJCM406S-0808	3/4"-16	1/2"-14	9.93	12.30	25.50	38.50	22	27
DAJCM406S-0812	3/4"-16	3/4"-14	9.93	15.50	26.50	44.00	27	36
DAJCM406S-1006	7/8"-14	3/8"-19	12.29	9.90	28.00	35.00	22	22
DAJCM406S-1008	7/8"-14	1/2"-14	12.29	12.30	28.00	38.50	22	27
DAJCM406S-1010	7/8"-14	5/8"-14	12.29	14.00	28.00	40.00	27	32
DAJCM406S-1012	7/8"-14	3/4"-14	12.29	15.50	30.00	44.00	27	36
DAJCM406S-1208	1-1/16"-12	1/2"-14	15.47	12.30	32.50	40.50	27	27
DAJCM406S-1212	1-1/16"-12	3/4"-14	15.47	15.50	32.50	44.00	27	36
DAJCM406S-1216	1-1/16"-12	1"-11	15.47	21.50	35.80	47.00	33	41
DAJCM406S-1612	1-5/16"-12	3/4"-14	21.44	15.50	37.00	47.00	36	36
DAJCM406S-1616	1-5/16"-12	1"-11	21.44	21.50	37.00	47.00	33	41
DAJCM406S-2016	1-5/8"-12	1"-11	27.38	21.50	40.50	48.50	41	41
DAJCM406S-2020	1-5/8"-12	1-1/4"-11	27.38	27.50	40.50	48.50	41	50
DAJCM406S-2424	1-7/8"-12	1-1/2"-11	33.32	33.00	45.00	49.00	48	55


DAUNF152M

Straight Connector SAE Female O Ring – Metric Male 60°

D	A	UN	F	1	52	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	SAE UNF	Female	Straight	Metric	Male



DME&JDE Code:	DAUNF152M
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Straight
Connection Type:	Female × Male
Thread Types:	UNF × Metric
Sealing Method:	O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2(Thread)	C	D	L	S
#	UNF	METRIC	mm	mm	mm	mm
DAUNF152M-0408	7/16"-20	M8X1	8.50	3.00	28.50	17.46
DAUNF152M-0412	7/16"-20	M2X1	10.00	5.50	30.00	17.46
DAUNF152M-0614	9/16"-18	M14X1.5	12.00	6.00	35.00	20.64
DAUNF152M-0616	9/16"-18	M16X1.5	12.00	8.00	34.50	22
DAUNF152M-0622	9/16"-18	M22X1.5	14.00	14.10	29.00	27
DAUNF152M-0818	3/4"-16	M18X1.5	12.00	10.00	38.00	25.40
DAUNF152M-1022	7/8"-14	M22X1.5	14.00	14.10	41.00	28.58
DAUNF152M-1226	1-1/16"-12	M26X1.5	16.00	15.00	48.00	34.93
DAUNF152M-1227	1-1/16"-12	M27X2	16.00	15.00	48.00	34.93
DAUNF152M-1633	1-5/16"-12	M33X2	18.00	21.50	52.00	41.28

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com




DAJCM930P

90° Adjustable Long Elbow JIC Male – SAE Male + O Ring + Retaining Ring

D	A	JC	M	9	30	P
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	90° Elbow	SAE UNF	Male + O Ring + Retaining Ring



DME&JDE Code:	DAJCM930P
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Adjustable Male × Female
Thread Types:	UNF × UNF
Other Features:	O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAJCM930P-0404	7/16"-20	7/16"-20	4.37	4.37	22.60	30.20	11 mm	14 mm	Metric
DAJCM930P-0406	7/16"-20	9/16"-18	4.37	7.54	26.70	42.30	14 mm	19 mm	Metric
DAJCM930P-0404IN	7/16"-20	7/16"-20	4.37	4.37	22.60	30.20	7/16"	9/16"	Imperial
DAJCM930P-0406IN	7/16"-20	9/16"-18	4.37	7.54	26.70	42.30	9/16"	11/16"	Imperial
DAJCM930P-0606	9/16"-18	9/16"-18	7.54	7.54	26.90	42.30	14 mm	19 mm	Metric
DAJCM930P-0608	9/16"-18	3/4"-16	7.54	9.93	29.00	46.00	19 mm	22 mm	Metric
DAJCM930P-0606IN	9/16"-18	9/16"-18	7.54	7.54	26.90	42.30	9/16"	11/16"	Imperial
DAJCM930P-0608IN	9/16"-18	3/4"-16	7.54	9.93	29.00	46.00	3/4"	7/8"	Imperial
DAJCM930P-0806	3/4"-16	9/16"-18	9.93	7.54	31.80	44.50	19 mm	19 mm	Metric
DAJCM930P-0808	3/4"-16	3/4"-16	9.93	9.93	31.80	46.00	19 mm	22 mm	Metric
DAJCM930P-0810	3/4"-16	7/8"-14	9.93	12.29	33.80	54.10	22 mm	27 mm	Metric
DAJCM930P-0806IN	3/4"-16	9/16"-18	9.93	7.54	31.80	44.50	3/4"	11/16"	Imperial
DAJCM930P-0808IN	3/4"-16	3/4"-16	9.93	9.93	31.80	46.00	3/4"	7/8"	Imperial
DAJCM930P-0810IN	3/4"-16	7/8"-14	9.93	12.29	33.80	54.10	7/8"	1"	Imperial
DAJCM930P-1008	7/8"-14	3/4"-16	12.29	9.93	36.80	53.34	22 mm	22 mm	Metric
DAJCM930P-1010	7/8"-14	7/8"-14	12.29	12.29	36.80	54.90	22 mm	27 mm	Metric
DAJCM930P-1012	7/8"-14	1 1/16"-12	12.29	15.47	39.10	66.55	27 mm	32 mm	Metric
DAJCM930P-1008IN	7/8"-14	3/4"-16	12.29	9.93	36.80	53.34	7/8"	7/8"	Imperial
DAJCM930P-1010IN	7/8"-14	7/8"-14	12.29	12.29	36.80	54.90	7/8"	1"	Imperial
DAJCM930P-1012IN	7/8"-14	1-1/16"-12	12.29	15.47	39.10	66.55	1-1/16"	1-1/4"	Imperial
DAJCM930P-1210	1-1/16"-12	7/8"-14	15.47	12.29	42.20	62.74	27 mm	27 mm	Metric
DAJCM930P-1212	1-1/16"-12	1-1/16"-12	15.47	15.47	39.10	57.20	27 mm	32 mm	Metric
DAJCM930P-1210IN	1-1/16"-12	7/8"-14	15.47	12.29	42.20	62.74	1-1/16"	1"	Imperial
DAJCM930P-1212IN	1-1/16"-12	1-1/16"-12	15.47	15.47	39.10	57.20	1-1/16"	1-1/4"	Imperial
DAJCM930P-1612	1-5/16"-12	1-1/16"-12	21.44	15.47	42.20	62.70	33 mm	32 mm	Metric
DAJCM930P-1616	1-5/16"-12	1-5/16"-12	21.44	21.44	46.00	77.70	33 mm	41 mm	Metric
DAJCM930P-1612IN	1-5/16"-12	1-1/16"-12	21.44	15.47	42.20	62.70	1-5/16"	1-1/4"	Imperial
DAJCM930P-1616IN	1-5/16"-12	1-5/16"-12	21.44	21.44	46.00	77.70	1-5/16"	1-1/2"	Imperial
DAJCM930P-2020	1-5/8"-12	1-5/8"-12	27.38	27.38	52.30	88.30	41 mm	50 mm	Metric
DAJCM930P-2020IN	1-5/8"-12	1-5/8"-12	27.38	27.38	52.30	88.30	1-5/8"	1-7/8"	Imperial



Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



DAJCM452Q

45° Adjustable Elbow JIC Male – Metric Male + O Ring + Retaining Ring

D

A

JC

M

4

52

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

45° Elbow

Metric

Male + O Ring + Retaining Ring

 German Technology Equipment



New-Standard

- DME&JDE Code:

DAJCM452Q
- Product Type

Hydraulic adaptor
- Standard:


JIC and SAE-ORB
- Structure:

45° Elbow
- Connection Type:

Adjustable Male × Male
- Thread Types:

UNF × Metric
- Sealing Method:

O Ring + Retaining Ring

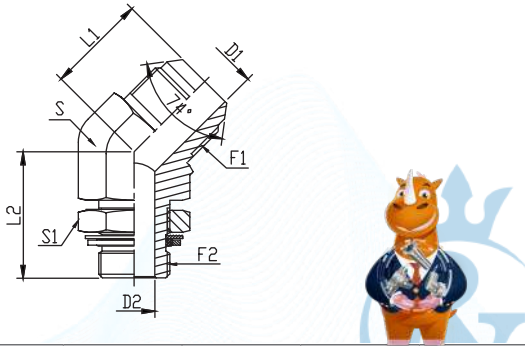

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAJCM452Q-0410	7/16"-20	M10X1	4.37	3.00	18.00	26.50	11.11	14.00
DAJCM452Q-0412	7/16"-20	M12X1.5	4.37	4.00	21.00	29.00	14.00	17.00
DAJCM452Q-0614	9/16"-18	M14X1.5	7.54	7.50	21.50	28.00	14.00	19.00
DAJCM452Q-0616	9/16"-18	M16X1.5	7.54	7.00	22.00	33.00	19.00	22.00
DAJCM452Q-0816	3/4"-16	M16X1.5	9.93	9.00	25.00	33.00	19.00	22.00
DAJCM452Q-0818	3/4"-16	M18X1.5	9.93	9.00	25.00	33.00	19.05	24.00
DAJCM452Q-0822	3/4"-16	M22X1.5	9.93	12.00	27.00	38.00	22.00	27.00
DAJCM452Q-1018	7/8"-14	M18X1.5	12.29	10.50	28.50	34.50	22.00	24.00
DAJCM452Q-1022	7/8"-14	M22X1.5	12.29	12.00	28.50	38.00	22.00	27.00
DAJCM452Q-1222	1-1/16"-12	M22X1.5	15.47	14.00	33.00	41.50	27.00	27.00
DAJCM452Q-1227	1-1/16"-12	M27X2	15.47	15.00	32.50	44.00	27.00	32.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:             

DAJCM4525

45° Adjustable Elbow JIC Male – Metric Male + O Ring

D

A

JC

M

4

52

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

45° Elbow

Metric

Male + O Ring

 German Technology Equipment



New-Standard

- DME&JDE Code:

DAJCM4525
- Product Type

Hydraulic adaptor
- Standard:


JIC and SAE-ORB
- Structure:

45° Elbow
- Connection Type:

Male × Male
- Thread Types:

UNF × Metric
- Sealing Method:

O Ring

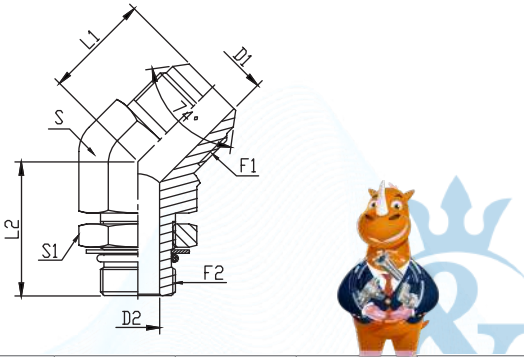

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAJCM4525-0410	7/16"-20	M10X1	4.37	3.00	18.00	26.50	11.11	14.00
DAJCM4525-0412	7/16"-20	M12X1.5	4.37	4.00	21.00	29.00	14.00	17.00
DAJCM4525-0614	9/16"-18	M14X1.5	7.54	7.50	21.50	28.00	14.00	19.00
DAJCM4525-0616	9/16"-18	M16X1.5	7.54	7.00	22.00	33.00	19.00	22.00
DAJCM4525-0816	3/4"-16	M16X1.5	9.93	9.00	25.00	33.00	19.00	22.00
DAJCM4525-0818	3/4"-16	M18X1.5	9.93	9.00	25.00	33.00	19.05	24.00
DAJCM4525-0822	3/4"-16	M22X1.5	9.93	12.00	27.00	38.00	22.00	27.00
DAJCM4525-1018	7/8"-14	M18X1.5	12.29	10.50	28.50	34.50	22.00	24.00
DAJCM4525-1022	7/8"-14	M22X1.5	12.29	12.00	28.50	38.00	22.00	27.00
DAJCM4525-1222	1-1/16"-12	M22X1.5	15.47	14.00	33.00	41.50	27.00	27.00
DAJCM4525-1227	1-1/16"-12	M27X2	15.47	15.00	32.50	44.00	27.00	32.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:             




DAJCM428M

45° Elbow Connector JIC Male – NPTF Male 60°

D	A	JC	M	4	28	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	45° Elbow	NPTF	Male



DME&JDE Code:	DAJCM428M
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	45° Elbow
Connection Type:	Male × Male
Thread Types:	UNF × NPTF 60°

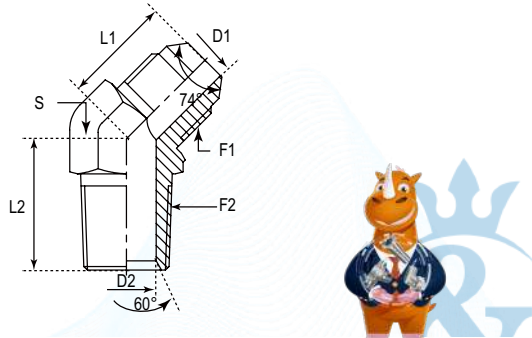

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	Hex
#	UNF	NPTF	mm	mm	mm	mm	-	-
DAJCM428M-0202	5/16"-24	1/8"-27	17.53	13.2	1.57	4.78	11 mm	Metric
DAJCM428M-0202IN	5/16"-24	1/8"-27	17.53	13.2	1.57	4.78	7/16"	Imperial
DAJCM428M-0302	3/8"-24	1/8"-27	17.5	13.2	3.18	4.78	11 mm	Metric
DAJCM428M-0302IN	3/8"-24	1/8"-27	17.5	13.2	3.18	4.78	7/16"	Imperial
DAJCM428M-0402	7/16"-20	1/8"-27	18.28	16.3	4.37	4.78	11 mm	Metric
DAJCM428M-0404	7/16"-20	1/4"-18	20.8	21.8	4.37	7.14	14 mm	Metric
DAJCM428M-0406	7/16"-20	3/8"-18	21.6	24.1	4.37	10.31	19 mm	Metric
DAJCM428M-0408	7/16"-20	1/2"-14	22.1	29.7	4.37	13.49	22 mm	Metric
DAJCM428M-0402IN	7/16"-20	1/8"-27	18.28	16.3	4.37	4.78	7/16"	Imperial
DAJCM428M-0404IN	7/16"-20	1/4"-18	20.8	21.8	4.37	7.14	9/16"	Imperial
DAJCM428M-0406IN	7/16"-20	3/8"-18	21.6	24.1	4.37	10.31	3/4"	Imperial
DAJCM428M-0408IN	7/16"-20	1/2"-14	22.1	29.7	4.37	13.49	7/8"	Imperial
DAJCM428M-0502	1/2"-20	1/8"-27	19.56	16.26	5.94	4.78	14 mm	Metric
DAJCM428M-0504	1/2"-20	1/4"-18	20.8	21.8	5.94	7.14	14 mm	Metric
DAJCM428M-0506	1/2"-20	3/8"-18	21.59	24.13	5.94	10.31	19 mm	Metric
DAJCM428M-0508	1/2"-20	1/2"-14	24.5	29.7	5.94	13.49	22 mm	Metric
DAJCM428M-0502IN	1/2"-20	1/8"-27	19.56	16.26	5.94	4.78	9/16"	Imperial
DAJCM428M-0504IN	1/2"-20	1/4"-18	20.8	21.8	5.94	7.14	9/16"	Imperial
DAJCM428M-0506IN	1/2"-20	3/8"-18	21.59	24.13	5.94	10.31	3/4"	Imperial
DAJCM428M-0508IN	1/2"-20	1/2"-14	24.5	29.7	5.94	13.49	7/8"	Imperial
DAJCM428M-0602	9/16"-18	1/8"-27	21.1	17	7.54	4.78	14 mm	Metric
DAJCM428M-0604	9/16"-18	1/4"-18	21.1	21.8	7.54	7.14	14 mm	Metric
DAJCM428M-0606	9/16"-18	3/8"-18	22.1	24.1	7.54	10.31	19 mm	Metric
DAJCM428M-0608	9/16"-18	1/2"-14	22.35	29.7	7.54	13.49	22 mm	Metric
DAJCM428M-0612	9/16"-18	3/4"-14	24.9	30.5	7.54	18.26	27 mm	Metric
DAJCM428M-0602IN	9/16"-18	1/8"-27	21.1	17	7.54	4.78	9/16"	Imperial
DAJCM428M-0604IN	9/16"-18	1/4"-18	21.1	21.8	7.54	7.14	9/16"	Imperial
DAJCM428M-0606IN	9/16"-18	3/8"-18	22.1	24.1	7.54	10.31	3/4"	Imperial

Certificate:

DAJCM428M-0608IN	9/16"-18	1/2"-14	22.35	29.7	7.54	13.49	7/8"	Imperial
DAJCM428M-0612IN	9/16"-18	3/4"-14	24.9	30.5	7.54	18.26	1-1/16"	Imperial
DAJCM428M-0804	3/4"-16	1/4"-18	24.9	24.1	9.93	7.14	19 mm	Metric
DAJCM428M-0806	3/4"-16	3/8"-18	24.9	24.1	9.93	10.31	19 mm	Metric
DAJCM428M-0808	3/4"-16	1/2"-14	25.2	29.7	9.93	13.49	22 mm	Metric
DAJCM428M-0812	3/4"-16	3/4"-14	26.4	30.5	9.93	18.26	27 mm	Metric
DAJCM428M-0816	3/4"-16	1"-11-1/2	35	37.6	9.93	23.83	33 mm	Metric
DAJCM428M-0804IN	3/4"-16	1/4"-18	24.9	24.1	9.93	7.14	3/4"	Imperial
DAJCM428M-0806IN	3/4"-16	3/8"-18	24.9	24.1	9.93	10.31	3/4"	Imperial
DAJCM428M-0808IN	3/4"-16	1/2"-14	25.2	29.7	9.93	13.49	7/8"	Imperial
DAJCM428M-0812IN	3/4"-16	3/4"-14	26.4	30.5	9.93	18.26	1-1/16"	Imperial
DAJCM428M-0816IN	3/4"-16	1"-11-1/2	35	37.6	9.93	23.83	1-5/16"	Imperial
DAJCM428M-1004	7/8"-14	1/4"-18	28.2	24.9	12.29	7.14	22 mm	Metric
DAJCM428M-1006	7/8"-14	3/8"-18	28.2	24.9	12.29	10.31	22 mm	Metric
DAJCM428M-1008	7/8"-14	1/2"-14	28.2	29.7	12.29	13.49	22 mm	Metric
DAJCM428M-1012	7/8"-14	3/4"-14	29.5	30.5	12.29	18.26	27 mm	Metric
DAJCM428M-1004IN	7/8"-14	1/4"-18	28.2	24.9	12.29	7.14	7/8"	Imperial
DAJCM428M-1006IN	7/8"-14	3/8"-18	28.2	24.9	12.29	10.31	7/8"	Imperial
DAJCM428M-1008IN	7/8"-14	1/2"-14	28.2	29.7	12.29	13.49	7/8"	Imperial
DAJCM428M-1012IN	7/8"-14	3/4"-14	29.5	30.5	12.29	18.26	1-1/16"	Imperial
DAJCM428M-1206	1-1/16"-12	3/8"-18	32.5	28.5	15.47	10.31	27 mm	Metric
DAJCM428M-1208	1-1/16"-12	1/2"-14	32.5	30.5	15.47	13.49	27 mm	Metric
DAJCM428M-1212	1-1/16"-12	3/4"-14	32.5	30.5	15.47	18.26	27 mm	Metric
DAJCM428M-1216	1-1/16"-12	1"-11-1/2	36.1	37.6	15.47	23.83	33 mm	Metric
DAJCM428M-1206IN	1-1/16"-12	3/8"-18	32.5	28.5	15.47	10.31	1-1/16"	Imperial
DAJCM428M-1208IN	1-1/16"-12	1/2"-14	32.5	30.5	15.47	13.49	1-1/16"	Imperial
DAJCM428M-1212IN	1-1/16"-12	3/4"-14	32.5	30.5	15.47	18.26	1-1/16"	Imperial
DAJCM428M-1216IN	1-1/16"-12	1"-11-1/2	36.1	37.6	15.47	23.83	1-5/16"	Imperial
DAJCM428M-1412	1-3/16"-12	3/4"-14	36.8	33	18.26	18.26	33 mm	Metric
DAJCM428M-1412IN	1-3/16"-12	3/4"-14	36.8	33	18.26	18.26	1-5/16"	Imperial
DAJCM428M-1608	1-5/16"-12	1/2"-14	37.3	32.8	21.44	13.49	33 mm	Metric
DAJCM428M-1612	1-5/16"-12	3/4"-14	37.3	32.8	21.44	18.26	33 mm	Metric
DAJCM428M-1616	1-5/16"-12	1"-11-1/2	37.3	37.6	21.44	23.83	33 mm	Metric
DAJCM428M-1620	1-5/16"-12	1-1/4"-11-1/2	39.12	42.4	21.44	31.75	41 mm	Metric
DAJCM428M-1608IN	1-5/16"-12	1/2"-14	37.3	32.8	21.44	13.49	1-5/16"	Imperial
DAJCM428M-1612IN	1-5/16"-12	3/4"-14	37.3	32.8	21.44	18.26	1-5/16"	Imperial
DAJCM428M-1616IN	1-5/16"-12	1"-11-1/2	37.3	37.6	21.44	23.83	1-5/16"	Imperial
DAJCM428M-1620IN	1-5/16"-12	1-1/4"-11-1/2	39.12	42.4	21.44	31.75	1-5/8"	Imperial
DAJCM428M-2016	1-5/8"-12	1"-11-1/2	40.39	41.66	27.38	23.83	41 mm	Metric
DAJCM428M-2020	1-5/8"-12	1-1/4"-11-1/2	40.4	42.4	27.38	31.75	41 mm	Metric
DAJCM428M-2024	1-5/8"-12	1-1/2"-11-1/2	41.9	45	27.38	38.1	48 mm	Metric
DAJCM428M-2016IN	1-5/8"-12	1"-11-1/2	40.39	41.66	27.38	23.83	1-5/8"	Imperial
DAJCM428M-2020IN	1-5/8"-12	1-1/4"-11-1/2	40.4	42.4	27.38	31.75	1-5/8"	Imperial
DAJCM428M-2024IN	1-5/8"-12	1-1/2"-11-1/2	41.9	45	27.38	38.1	1-7/8"	Imperial
DAJCM428M-2420	1-7/8"-12	1-1/4"-11-1/2	45.21	44.2	33.32	31.75	48 mm	Metric
DAJCM428M-2424	1-7/8"-12	1-1/2"-11-1/2	45.2	45	33.32	38.1	48 mm	Metric
DAJCM428M-2420IN	1-7/8"-12	1-1/4"-11-1/2	45.21	44.2	33.32	31.75	1-7/8"	Imperial
DAJCM428M-2424IN	1-7/8"-12	1-1/2"-11-1/2	45.2	45	33.32	38.1	1-7/8"	Imperial
DAJCM428M-3232	2-1/2"-12	2"-11-1/2	56.4	53.6	45.24	49.23	65 mm	Metric
DAJCM428M-3232IN	2-1/2"-12	2"-11-1/2	56.4	53.6	45.24	49.23	2-1/2"	Imperial

Certificate:



DAJCM407M

45° Elbow Connector JIC Male – BSPT Male 60°

D

A

JC

M

4

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

45° Elbow

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM407M

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


45° Elbow

Connection Type:

Male × Male

Thread Types:

UNF × BSPT 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	Hex
#	UNF	BSPP	mm	mm	mm	mm	mm	-
DAJCM407M-0402	7/16"-20	1/8"-28	19.6	16.3	4.37	4.5	11	Metric
DAJCM407M-0404	7/16"-20	1/4"-19	20.8	21.8	4.37	6	14	Metric
DAJCM407M-0406	7/16"-20	3/8"-19	21.6	24.1	4.37	9	19	Metric
DAJCM407M-0502	1/2"-20	1/8"-28	19.6	16.3	5.94	4.5	14	Metric
DAJCM407M-0504	1/2"-20	1/4"-19	20.83	21.84	5.94	6	14	Metric
DAJCM407M-0602	9/16"-18	1/8"-28	21.08	16.26	7.54	4.5	14	Metric
DAJCM407M-0604	9/16"-18	1/4"-19	21.1	21.8	7.54	6	14	Metric
DAJCM407M-0606	9/16"-18	3/8"-19	22.1	24.1	7.54	9	19	Metric
DAJCM407M-0608	9/16"-18	1/2"-14	24.89	29.72	7.54	12	22	Metric
DAJCM407M-0804	3/4"-16	1/4"-19	24.89	24.13	9.93	6	19	Metric
DAJCM407M-0806	3/4"-16	3/8"-19	24.9	24.1	9.93	9	19	Metric
DAJCM407M-0808	3/4"-16	1/2"-14	25.2	29.7	9.93	12	22	Metric
DAJCM407M-0812	3/4"-16	3/4"-14	28.19	30.48	9.93	16.7	27	Metric
DAJCM407M-1006	7/8"-14	3/8"-19	28.19	24.89	12.29	9	22	Metric
DAJCM407M-1008	7/8"-14	1/2"-14	28.2	29.7	12.29	12	22	Metric
DAJCM407M-1012	7/8"-14	3/4"-14	29.46	30.48	12.29	16.7	27	Metric
DAJCM407M-1208	1-1/16"-12	1/2"-14	32.51	30.48	15.47	12	27	Metric
DAJCM407M-1212	1-1/16"-12	3/4"-14	32.5	30.5	15.47	16.7	27	Metric
DAJCM407M-1216	1-1/16"-12	1"-11	36.1	37.6	15.47	22.2	33	Metric
DAJCM407M-1612	1-5/16"-12	3/4"-14	37.34	32.77	21.44	16.7	33	Metric
DAJCM407M-1616	1-5/16"-12	1"-11	37.3	37.6	21.44	22.2	33	Metric
DAJCM407M-2016	1-5/8"-12	1"-11	40.39	41.4	27.38	22.2	41	Metric
DAJCM407M-2020	1-5/8"-12	1-1/4"-11	40.39	42.42	27.38	28.6	41	Metric
DAJCM407M-2424	1-7/8"-12	1-1/2"-11	45.2	45	33.32	33.3	48	Metric

DAJCM428F

45° Elbow Connector JIC Male – NPTF Female

D

A

JC

M

4

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

45° Elbow

NPTF

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM428F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


45° Elbow

Connection Type:

Male × Female

Thread Types:

UNF × NPTF



PART NUMBER	F1 (Thread)	F2 (Thread)	D	L1	L2	S	Hex
#	UNF	NPTF	mm	mm	mm	mm	-
DAJCM428F-0402	7/16"-20	1/8"-27	4.37	21.08	12.7	14 mm	Metric
DAJCM428F-0404	7/16"-20	1/4"-18	4.37	21.60	15.80	19 mm	Metric
DAJCM428F-0402IN	7/16"-20	1/8"-27	4.37	21.08	12.7	9/16"	Imperial
DAJCM428F-0404IN	7/16"-20	1/4"-18	4.37	21.60	15.80	3/4"	Imperial
DAJCM428F-0604	9/16"-18	1/4"-18	7.54	22.10	17.53	19 mm	Metric
DAJCM428F-0606	9/16"-18	3/8"-18	7.54	22.35	19.05	22 mm	Metric
DAJCM428F-0604IN	9/16"-18	1/4"-18	7.54	22.10	17.53	3/4"	Imperial
DAJCM428F-0606IN	9/16"-18	3/8"-18	7.54	22.35	19.05	7/8"	Imperial
DAJCM428F-0806	3/4"-16	3/8"-18	9.93	25.15	19.05	22 mm	Metric
DAJCM428F-0808	3/4"-16	1/2"-14	9.93	26.40	23.90	27 mm	Metric
DAJCM428F-0806IN	3/4"-16	3/8"-18	9.93	25.15	19.05	7/8"	Imperial
DAJCM428F-0808IN	3/4"-16	1/2"-14	9.93	26.40	23.90	1-1/8"	Imperial
DAJCM428F-1008	7/8"-14	1/2"-14	12.29	32.50	23.10	27 mm	Metric
DAJCM428F-1008IN	7/8"-14	1/2"-14	12.29	32.50	23.10	1-1/8"	Imperial
DAJCM428F-1212	1-1/16"-12	3/4"-14	15.47	36.10	25.40	33 mm	Metric
DAJCM428F-1216	1-1/16"-12	1"-11-1/2	15.47	38.00	30.20	41 mm	Metric
DAJCM428F-1212IN	1-1/16"-12	3/4"-14	15.47	36.10	25.40	1-5/16"	Imperial
DAJCM428F-1216IN	1-1/16"-12	1"-11-1/2	15.47	38.00	30.20	1-1/2"	Imperial
DAJCM428F-1616	1-5/16"-12	1"-11-1/2	21.44	39.10	30.20	41 mm	Metric
DAJCM428F-1616IN	1-5/16"-12	1"-11-1/2	21.44	39.10	30.20	1-1/2"	Imperial



DAJCM425T

45° Elbow Connector Bulkhead JIC Male – JIC Male

D

A

JC

M

4

25

T

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

JIC UNF

Male


45° Elbow

JIC UNF

Male + Bulkhead

German Technology Equipment

New-Standard

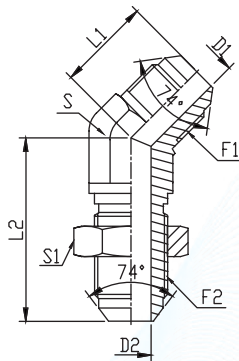

DME&JDE Code:

DAJCM425T

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

45° Elbow

Connection Type:

Male

Thread Types:

UNF × UNF

Other Features:

Bulkhead

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAJCM425T-0303	3/8"-24	3/8"-24	3.18	3.18	17.53	36.07	11 mm	16 mm	Metric
DAJCM425T-0303IN	3/8"-24	3/8"-24	3.18	3.18	17.53	36.07	7/16"	5/8"	Imperial
DAJCM425T-0404	7/16"-20	7/16"-20	4.37	4.37	18.29	38.86	11 mm	17 mm	Metric
DAJCM425T-0404IN	7/16"-20	7/16"-20	4.37	4.37	18.29	38.86	7/16"	11/16"	Imperial
DAJCM425T-0505	1/2"-20	1/2"-20	5.94	5.94	19.56	42.16	14 mm	19 mm	Metric
DAJCM425T-0505IN	1/2"-20	1/2"-20	5.94	5.94	19.56	42.16	9/16"	3/4"	Imperial
DAJCM425T-0606	9/16"-18	9/16"-18	7.54	7.54	21.08	42.42	14 mm	22 mm	Metric
DAJCM425T-0606IN	9/16"-18	9/16"-18	7.54	7.54	21.08	42.42	9/16"	13/16"	Imperial
DAJCM425T-0808	3/4"-16	3/4"-16	9.93	9.93	24.90	49.30	19 mm	24 mm	Metric
DAJCM425T-0808IN	3/4"-16	3/4"-16	9.93	9.93	24.90	49.30	3/4"	1"	Imperial
DAJCM425T-1010	7/8"-14	7/8"-14	12.29	12.29	28.20	55.10	22 mm	30 mm	Metric
DAJCM425T-1010IN	7/8"-14	7/8"-14	12.29	12.29	28.20	55.10	7/8"	1-1/8"	Imperial
DAJCM425T-1212	1-1/16"-12	1-1/16"-12	15.47	15.47	32.50	62.00	27 mm	36 mm	Metric
DAJCM425T-1212IN	1-1/16"-12	1-1/16"-12	15.47	15.47	32.50	62.00	1-1/16"	1-3/8"	Imperial
DAJCM425T-1616	1-5/16"-12	1-5/16"-12	21.44	21.44	37.34	65.02	33 mm	41 mm	Metric
DAJCM425T-1616IN	1-5/16"-12	1-5/16"-12	21.44	21.44	37.34	65.02	1-5/16"	1-5/8"	Imperial
DAJCM425T-2020	1-5/8"-12	1-5/8"-12	27.38	27.38	40.39	67.31	41 mm	50 mm	Metric
DAJCM425T-2020IN	1-5/8"-12	1-5/8"-12	27.38	27.38	40.39	67.31	1-5/8"	1-7/8"	Imperial
DAJCM425T-2424	1-7/8"-12	1-7/8"-12	33.32	33.32	45.21	67.82	48 mm	55 mm	Metric
DAJCM425T-2424IN	1-7/8"-12	1-7/8"-12	33.32	33.32	45.21	67.82	1-7/8"	2-1/8"	Imperial
DAJCM425T-3232	2-1/2"-12	2-1/2"-12	45.24	45.24	56.39	73.91	65 mm	70 mm	Metric
DAJCM425T-3232IN	2-1/2"-12	2-1/2"-12	45.24	45.24	56.39	73.91	2-1/2"	2-3/4"	Imperial

Certificate:

DAJCM4251

45° Elbow Connector JIC Male – JIC Swivel Female

D

A

JC

M

4

251

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Adaptor

JIC UNF


Male

45° Elbow

JIC Swivel Female

German Technology Equipment

New-Standard



DME&JDE Code:

DAJCM4251

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

45° Elbow

Connection Type:

Male × Swivel Female

Thread Types:

UNF × UNF

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	mm	-
DAJCM4251-0202	5/16"-24	5/16"-24	17.50	15.95	1.57	1.57	11 mm	11 mm	Metric
DAJCM4251-0202IN	5/16"-24	5/16"-24	17.50	15.95	1.57	1.57	7/16"	7/16"	Imperial
DAJCM4251-0303	3/8"-24	3/8"-24	17.50	15.95	3.18	3.18	11 mm	12 mm	Metric
DAJCM4251-0303IN	3/8"-24	3/8"-24	17.50	15.95	3.18	3.18	7/16"	1/2"	Imperial
DAJCM4251-0404	7/16"-20	7/16"-20	18.30	14.98	4.37	4.37	11 mm	14 mm	Metric
DAJCM4251-0404IN	7/16"-20	7/16"-20	18.30	14.98	4.37	4.37	7/16"	9/16"	Imperial
DAJCM4251-0505	1/2"-20	1/2"-20	19.60	15.60	5.94	5.94	14 mm	17 mm	Metric
DAJCM4251-0505IN	1/2"-20	1/2"-20	19.60	15.60	5.94	5.94	9/16"	5/8"	Imperial
DAJCM4251-0606	9/16"-18	9/16"-18	21.10	18.92	7.54	7.54	14 mm	19 mm	Metric
DAJCM4251-0606IN	9/16"-18	9/16"-18	21.10	18.92	7.54	7.54	9/16"	11/16"	Imperial
DAJCM4251-0707	5/8"-18	5/8"-18	22.00	19.60	7.14	7.14	19 mm	19 mm	Metric
DAJCM4251-0707IN	5/8"-18	5/8"-18	22.00	19.60	7.14	7.14	3/4"	3/4"	Imperial
DAJCM4251-0806	3/4"-16	9/16"-18	24.89	20.50	9.93	7.54	19 mm	19 mm	Metric
DAJCM4251-0808	3/4"-16	3/4"-16	24.89	21.79	9.93	9.93	19 mm	22 mm	Metric
DAJCM4251-0806IN	3/4"-16	9/16"-18	24.89	20.50	9.93	7.54	3/4"	11/16"	Imperial
DAJCM4251-0808IN	3/4"-16	3/4"-16	24.89	21.79	9.93	9.93	3/4"	7/8"	Imperial
DAJCM4251-1008	7/8"-14	3/4"-16	28.20	23.11	12.29	9.93	22 mm	22 mm	Metric
DAJCM4251-1010	7/8"-14	7/8"-14	28.19	23.88	12.29	12.29	22 mm	27 mm	Metric
DAJCM4251-1008IN	7/8"-14	3/4"-16	28.20	23.11	12.29	9.93	7/8"	7/8"	Imperial
DAJCM4251-1010IN	7/8"-14	7/8"-14	28.19	23.88	12.29	12.29	7/8"	1"	Imperial
DAJCM4251-1212	1-1/16"-12	1-1/16"-12	32.51	23.88	15.47	15.47	27 mm	32 mm	Metric
DAJCM4251-1212IN	1-1/16"-12	1-1/16"-12	32.51	23.88	15.47	15.47	1-1/16"	1-1/4"	Imperial
DAJCM4251-1414	1-3/16"-12	1-3/16"-12	36.80	26.40	18.26	18.26	33 mm	36 mm	Metric
DAJCM4251-1414IN	1-3/16"-12	1-3/16"-12	36.80	26.40	18.26	18.26	1-5/16"	1-3/8"	Imperial
DAJCM4251-1616	1-5/16"-12	1-5/16"-12	37.34	29.36	21.44	21.44	33 mm	41 mm	Metric
DAJCM4251-1616IN	1-5/16"-12	1-5/16"-12	37.34	29.36	21.44	21.44	1-5/16"	1-1/2"	Imperial
DAJCM4251-2020	1-5/8"-12	1-5/8"-12	40.40	35.66	27.38	27.42	41 mm	50 mm	Metric
DAJCM4251-2020IN	1-5/8"-12	1-5/8"-12	40.40	35.66	27.38	27.42	1-5/8"	2"	Imperial
DAJCM4251-2424	1-7/8"-12	1-7/8"-12	45.20	38.50	33.32	33.32	48 mm	55 mm	Metric
DAJCM4251-2424IN	1-7/8"-12	1-7/8"-12	45.20	38.50	33.32	33.32	1-7/8"	2-1/4"	Imperial
DAJCM4251-3232	2-1/2"-12	2-1/2"-12	56.39	50.04	45.24	45.24	65 mm	75 mm	Metric
DAJCM4251-3232IN	2-1/2"-12	2-1/2"-12	56.39	50.04	45.24	45.24	2-1/2"	2-7/8"	Imperial

Certificate:




DAJCM4081

45° Elbow Connector JIC Male – BSPP Swivel Female 60°

D	A	JC	M	4	081
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	JIC UNF	Male	45° Elbow	BSPP Swivel Female



DME&JDE Code:	DAJCM4081
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	45° Elbow
Connection Type:	Male × Swivel Female
Thread Types:	UNF × BSPP 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJCM4081-0404	7/16"-20	1/4"-19	4.37	4.37	20.00	20.00	11.00	19.00
DAJCM4081-0606	9/16"-18	3/8"-19	7.54	7.54	24.00	24.00	19.00	22.00
DAJCM4081-0808	3/4"-16	1/2"-14	9.90	11.10	30.00	30.00	19.00	27.00
DAJCM4081-1212	1-1/16"-12	3/4"-14	15.47	16.70	38.00	38.00	27.00	32.00
DAJCM4081-1616	1-5/16"-12	1"-11	21.44	21.44	42.00	42.00	33.00	41.00


DAJC14305

45° Adjustable Elbow JIC Swivel Female – SAE Male O Ring

D	A	JC	1	4	30	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Swivel Female	45° Elbow	SAE UNF	Male O Ring



DME&JDE Code:	DAJC14305
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	45° Elbow
Connection Type:	Adjustable Swivel Female × Male
Thread Types:	UNF × UNF
Sealing Method:	O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	mm	mm	-
DAJC14305-0404	7/16"-20	7/16"-20	26.70	14.98	4.37	4.37	11 mm	14 mm	14 mm	Metric
DAJC14305-0404IN	7/16"-20	7/16"-20	26.70	14.98	4.37	4.37	7/16"	9/16"	9/16"	Imperial
DAJC14305-0606	9/16"-18	9/16"-18	29.00	18.90	7.54	7.54	14 mm	17 mm	17 mm	Metric
DAJC14305-0606IN	9/16"-18	9/16"-18	29.00	18.90	7.54	7.54	9/16"	11/16"	11/16"	Imperial
DAJC14305-0808	3/4"-16	3/4"-16	33.00	21.80	9.93	9.93	19 mm	22 mm	22 mm	Metric
DAJC14305-0808IN	3/4"-16	3/4"-16	33.00	21.80	9.93	9.93	3/4"	7/8"	7/8"	Imperial
DAJC14305-1212	1-1/16"-12	1-1/16"-12	43.90	23.90	15.47	15.47	27 mm	32 mm	32 mm	Metric
DAJC14305-1212IN	1-1/16"-12	1-1/16"-12	43.90	23.90	15.47	15.47	1-1/16"	1-1/4"	1-1/4"	Imperial
DAJC14305-1616	1-5/16"-12	1-5/16"-12	47.20	29.36	21.44	21.44	33 mm	41 mm	41 mm	Metric
DAJC14305-1616IN	1-5/16"-12	1-5/16"-12	47.20	29.36	21.44	21.44	1-5/16"	1-1/2"	1-1/2"	Imperial
DAJC14305-2020	1-5/8"-12	1-5/8"-12	48.50	35.66	27.38	27.42	41 mm	50 mm	50 mm	Metric
DAJC14305-2020IN	1-5/8"-12	1-5/8"-12	48.50	35.66	27.38	27.42	1-5/8"	1-7/8"	1-7/8"	Imperial




DAJCM14251

45° Elbow Connector JIC Swivel Female – JIC Swivel Female

D	A	JC	1	4	251
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	JIC UNF	Swivel Female	45° Elbow	JIC Swivel Female



DME&JDE Code:	DAJCM14251
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	45° Elbow
Connection Type:	Swivel Female × Swivel Female
Thread Types:	UNF × UNF



PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1	S2	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-	-
DAJCM14251-0606	9/16"-18	9/16"-18	7.50	7.50	18.90	18.90	14 mm	19 mm	19 mm	Metric
DAJCM14251-0606IN	9/16"-18	9/16"-18	7.50	7.50	18.90	18.90	9/16"	3/4"	3/4"	Imperial
DAJCM14251-0808	3/4"-16	3/4"-16	9.90	9.90	21.80	21.80	19 mm	22 mm	22 mm	Metric
DAJCM14251-0808IN	3/4"-16	3/4"-16	9.90	9.90	21.80	21.80	3/4"	13/16"	13/16"	Imperial
DAJCM14251-1010	7/8"-14	7/8"-14	12.30	12.30	23.90	23.90	22 mm	27 mm	27 mm	Metric
DAJCM14251-1010IN	7/8"-14	7/8"-14	12.30	12.30	23.90	23.90	13/16"	1-1/8"	1-1/8"	Imperial
DAJCM14251-1212	1-1/16"-12	1-1/16"-12	15.47	15.47	23.90	23.90	27 mm	32 mm	32 mm	Metric
DAJCM14251-1212IN	1-1/16"-12	1-1/16"-12	15.47	15.47	23.90	23.90	1-1/8"	1-1/4"	1-1/4"	Imperial
DAJCM14251-1616	1-5/16"-12	1-5/16"-12	21.50	21.50	29.30	29.30	33 mm	41 mm	41 mm	Metric
DAJCM14251-1616IN	1-5/16"-12	1-5/16"-12	21.50	21.50	29.30	29.30	1-5/16"	1-1/2"	1-1/2"	Imperial

Certificate:


DAJCM925M

90° Elbow Connector JIC Male – JIC Male

D	A	JC	M	9	25	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type	Connection Type
DME	Adaptor	JIC UNF	Male	90° Elbow	JIC UNF	Male



DME&JDE Code:	DAJCM925M
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Male × Male
Thread Types:	UNF × UNF

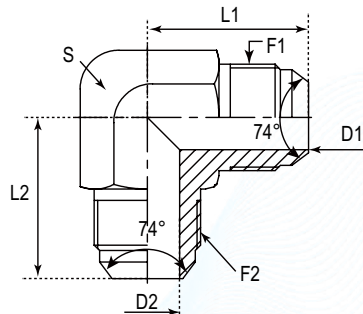

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	-
DAJCM925M-0202	5/16"-24	5/16"-24	19.60	19.60	1.57	1.57	11 mm	Metric
DAJCM925M-0202IN	5/16"-24	5/16"-24	19.60	19.60	1.57	1.57	7/16"	Imperial
DAJCM925M-0303	3/8"-24	3/8"-24	21.10	21.10	3.18	3.18	11 mm	Metric
DAJCM925M-0303IN	3/8"-24	3/8"-24	21.10	21.10	3.18	3.18	7/16"	Imperial
DAJCM925M-0404	7/16"-20	7/16"-20	22.61	22.61	4.37	4.37	11 mm	Metric
DAJCM925M-0404IN	7/16"-20	7/16"-20	22.61	22.61	4.37	4.37	7/16"	Imperial
DAJCM925M-0504	1/2"-20	7/16"-20	24.10	24.10	5.94	4.37	14 mm	Metric
DAJCM925M-0505	1/2"-20	1/2"-20	24.10	24.10	5.94	5.94	14 mm	Metric
DAJCM925M-0504IN	1/2"-20	7/16"-20	24.10	24.10	5.94	4.37	9/16"	Imperial
DAJCM925M-0505IN	1/2"-20	1/2"-20	24.10	24.10	5.94	5.94	9/16"	Imperial
DAJCM925M-0604	9/16"-18	7/16"-20	26.90	26.70	7.54	4.37	14 mm	Metric
DAJCM925M-0605	9/16"-18	1/2"-20	26.90	26.70	7.54	5.94	14 mm	Metric
DAJCM925M-0606	9/16"-18	9/16"-18	26.92	26.92	7.54	7.54	14 mm	Metric
DAJCM925M-0604IN	9/16"-18	7/16"-20	26.90	26.70	7.54	4.37	9/16"	Imperial
DAJCM925M-0605IN	9/16"-18	1/2"-20	26.90	26.70	7.54	5.94	9/16"	Imperial
DAJCM925M-0606IN	9/16"-18	9/16"-18	26.92	26.92	7.54	7.54	9/16"	Imperial
DAJCM925M-0806	3/4"-16	9/16"-18	31.80	29.00	9.93	7.54	19 mm	Metric
DAJCM925M-0808	3/4"-16	3/4"-16	31.80	31.80	9.93	9.93	19 mm	Metric
DAJCM925M-0806IN	3/4"-16	9/16"-18	31.80	29.00	9.93	7.54	3/4"	Imperial
DAJCM925M-0808IN	3/4"-16	3/4"-16	31.80	31.80	9.93	9.93	3/4"	Imperial
DAJCM925M-1008	7/8"-14	3/4"-16	36.80	33.80	12.29	9.93	22 mm	Metric
DAJCM925M-1010	7/8"-14	7/8"-14	36.80	36.80	12.29	12.29	22 mm	Metric
DAJCM925M-1008IN	7/8"-14	3/4"-16	36.80	33.80	12.29	9.93	7/8"	Imperial
DAJCM925M-1010IN	7/8"-14	7/8"-14	36.80	36.80	12.29	12.29	7/8"	Imperial
DAJCM925M-1208	1-1/16"-12	3/4"-16	42.20	36.10	15.47	9.93	27 mm	Metric
DAJCM925M-1210	1-1/16"-12	7/8"-14	42.16	39.12	15.47	12.29	27 mm	Metric
DAJCM925M-1212	1-1/16"-12	1-1/16"-12	42.20	42.20	15.47	15.47	27 mm	Metric
DAJCM925M-1208IN	1-1/16"-12	3/4"-16	42.20	36.10	15.47	9.93	1-1/16"	Imperial
DAJCM925M-1210IN	1-1/16"-12	7/8"-14	42.16	39.12	15.47	12.29	1-1/16"	Imperial
DAJCM925M-1212IN	1-1/16"-12	1-1/16"-12	42.20	42.20	15.47	15.47	1-1/16"	Imperial
DAJCM925M-1414	1-3/16"-12	1-3/16"-12	45.70	45.70	18.26	18.26	33 mm	Metric
DAJCM925M-1414IN	1-3/16"-12	1-3/16"-12	45.70	45.70	18.26	18.26	1-5/16"	Imperial
DAJCM925M-1612	1-5/16"-12	1-1/16"-12	46.00	44.70	21.44	15.47	33 mm	Metric
DAJCM925M-1616	1-5/16"-12	1-5/16"-12	46.00	46.00	21.44	21.44	33 mm	Metric
DAJCM925M-1612IN	1-5/16"-12	1-1/16"-12	46.00	44.70	21.44	15.47	1-5/16"	Imperial
DAJCM925M-1616IN	1-5/16"-12	1-5/16"-12	46.00	46.00	21.44	21.44	1-5/16"	Imperial
DAJCM925M-2016	1-5/8"-12	1-5/16"-12	52.30	51.00	27.38	21.44	41 mm	Metric
DAJCM925M-2020	1-5/8"-12	1-5/8"-12	52.30	52.30	27.38	27.38	41 mm	Metric
DAJCM925M-2016IN	1-5/8"-12	1-5/16"-12	52.30	51.00	27.38	21.44	1-5/8"	Imperial
DAJCM925M-2020IN	1-5/8"-12	1-5/8"-12	52.30	52.30	27.38	27.38	1-5/8"	Imperial
DAJCM925M-2424	1-7/8"-12	1-7/8"-12	59.20	59.20	33.32	33.32	48 mm	Metric
DAJCM925M-2424IN	1-7/8"-12	1-7/8"-12	59.20	59.20	33.32	33.32	1-7/8"	Imperial
DAJCM925M-3232	2-1/2"-12	2-1/2"-12	77.70	77.70	45.24	45.24	65 mm	Metric
DAJCM925M-3232IN	2-1/2"-12	2-1/2"-12	77.70	77.70	45.24	45.24	2-1/2"	Imperial

Certificate:




DAJCM9065

90° Adjustable Elbow JIC Male – BSPP Male + O Ring

D	A	JC	M	9	06	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	90° Elbow	BSPP	Male + O Ring



DME&JDE Code:	DAJCM9065
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Adjustable Male × Male
Thread Types:	UNF × BSPP
Sealing Method:	O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJCM9065-0402	7/16"-20	1/8"-28	4.37	4.40	22.50	26.00	11	14
DAJCM9065-0404	7/16"-20	1/4"-19	4.37	7.50	27.00	31.50	14	19
DAJCM9065-0406	7/16"-20	3/8"-19	4.37	9.90	28.50	36.50	19	22
DAJCM9065-0408	7/16"-20	1/2"-14	4.37	12.30	31.00	43.00	22	27
DAJCM9065-0502	1/2"-20	1/8"-28	5.94	4.40	24.00	28.00	14	14
DAJCM9065-0504	1/2"-20	1/4"-19	5.94	7.50	27.00	31.00	14	19
DAJCM9065-0506	1/2"-20	3/8"-19	5.94	9.90	28.50	36.50	19	22
DAJCM9065-0602	9/16"-18	1/8"-28	7.54	4.40	27.00	28.00	14	14
DAJCM9065-0604	9/16"-18	1/4"-19	7.54	7.50	27.00	31.50	14	19
DAJCM9065-0606	9/16"-18	3/8"-19	7.54	9.90	28.50	36.50	19	22
DAJCM9065-0608	9/16"-18	1/2"-14	7.54	12.30	31.00	43.00	22	27
DAJCM9065-0612	9/16"-18	3/4"-14	7.54	15.50	34.50	49.00	27	36
DAJCM9065-0804	3/4"-16	1/4"-19	9.93	7.50	31.50	33.50	19	19
DAJCM9065-0806	3/4"-16	3/8"-19	9.93	9.90	31.50	36.50	19	22
DAJCM9065-0808	3/4"-16	1/2"-14	9.93	12.30	34.00	43.00	22	27
DAJCM9065-0810	3/4"-16	5/8"-14	9.93	14.00	37.00	48.00	27	30
DAJCM9065-0812	3/4"-16	3/4"-14	9.93	15.50	37.00	49.00	27	36
DAJCM9065-0816	3/4"-16	1"-11	9.93	21.50	42.00	52.00	33	41
DAJCM9065-1006	7/8"-14	3/8"-19	12.29	9.90	36.50	39.50	22	22
DAJCM9065-1008	7/8"-14	1/2"-14	12.29	12.30	36.50	43.00	22	27
DAJCM9065-1010	7/8"-14	5/8"-14	12.29	14.00	39.50	46.00	27	30
DAJCM9065-1012	7/8"-14	3/4"-14	12.29	15.50	39.50	49.00	27	36
DAJCM9065-1016	7/8"-14	1"-11	12.29	21.50	42.00	52.00	33	41
DAJCM9065-1206	1-1/16"-12	3/8"-19	15.47	9.90	42.00	40.50	27	22
DAJCM9065-1208	1-1/16"-12	1/2"-14	15.47	12.30	42.00	45.50	27	27
DAJCM9065-1212	1-1/16"-12	3/4"-14	15.47	15.50	42.00	49.00	27	36
DAJCM9065-1216	1-1/16"-12	1"-11	15.47	21.50	44.70	52.00	33	41
DAJCM9065-1220	1-1/16"-12	1-1/4"-11	15.47	27.50	50.00	57.00	41	50
DAJCM9065-1612	1-5/16"-12	3/4"-14	21.44	15.50	46.00	52.00	33	36
DAJCM9065-1616	1-5/16"-12	1"-11	21.44	21.50	46.00	52.00	33	41
DAJCM9065-1620	1-5/16"-12	1-1/4"-11	21.44	27.50	51.00	57.00	41	50
DAJCM9065-1624	1-5/16"-12	1-1/2"-11	21.44	33.00	55.00	61.00	48	55
DAJCM9065-2016	1-5/8"-12	1"-11	27.38	21.50	52.00	57.00	41	41
DAJCM9065-2020	1-5/8"-12	1-1/4"-11	27.38	27.50	52.00	58.00	41	50
DAJCM9065-2024	1-5/8"-12	1-1/2"-11	27.38	33.00	56.00	62.00	48	55
DAJCM9065-2420	1-7/8"-12	1-1/4"-11	33.32	27.50	59.00	61.00	48	50
DAJCM9065-2424	1-7/8"-12	1-1/2"-11	33.32	33.00	59.00	61.00	48	55
DAJCM9065-3232	2-1/2"-12	2"-11	45.24	45.00	77.70	73.50	63.5	70

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, DEKRA, DIN, SAE, MA, CE, UKCA


DAJCM952Q

90° Adjustable Elbow JIC Male – Metric Male + O Ring + Retaining Ring

D	A	JC	M	9	52	0
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	90° Elbow	Metric	Male + O Ring + Retaining Ring



DME&JDE Code:	DAJCM952Q
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Adjustable Male × Male
Thread Types:	UNF × Metric
Sealing Method:	O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	Revision History
#	UNF	Metric	mm	mm	mm	mm	mm	mm	
DAJCM952Q-0410	7/16"-20	M10X1	4.37	3.00	22.50	27.50	11	14	2024/6/4,Dimension D2 of item AT04416(DAJCM952Q-0818)has been changed from 9±0.2mm to 11±0.2mm
DAJCM952Q-0412	7/16"-20	M12X1.5	4.37	6.00	26.70	32.50	14	17	
DAJCM952Q-0414	7/16"-20	M14X1.5	4.37	6.00	27.00	32.50	14	19	
DAJCM952Q-0510	1/2"-20	M10X1	5.94	4.00	27.00	28.50	14	14	
DAJCM952Q-0512	1/2"-20	M12X1.5	5.94	4.00	27.00	31.50	14	17	
DAJCM952Q-0514	1/2"-20	M14X1.5	5.94	6.00	27.00	32.50	14	19	
DAJCM952Q-0610	9/16"-18	M10X1	7.54	4.00	27.00	28.50	14	14	
DAJCM952Q-0612	9/16"-18	M12X1.5	7.54	4.00	27.00	31.50	14	17	
DAJCM952Q-0614	9/16"-18	M14X1.5	7.54	6.00	27.00	32.50	14	19	
DAJCM952Q-0616	9/16"-18	M16X1.5	7.54	7.00	28.50	36.50	19	22	
DAJCM952Q-0618	9/16"-18	M18X1.5	7.54	9.00	29.00	39.50	19	24	
DAJCM952Q-0816	3/4"-16	M16X1.5	9.93	7.00	31.50	36.50	19	22	
DAJCM952Q-0818	3/4"-16	M18X1.5	9.93	11.00	31.50	37.00	19	24	
DAJCM952Q-0820	3/4"-16	M20X1.5	9.93	12.00	33.80	43.00	22	27	
DAJCM952Q-0822	3/4"-16	M22X1.5	9.93	12.00	33.80	43.00	22	27	
DAJCM952Q-0827	3/4"-16	M27X2	9.93	15.00	36.00	50.00	27	32	
DAJCM952Q-1016	7/8"-14	M16X1.5	12.29	7.00	36.50	39.50	22	22	
DAJCM952Q-1018	7/8"-14	M18X1.5	12.29	9.00	36.50	41.50	22	24	
DAJCM952Q-1020	7/8"-14	M20X1.5	12.29	12.00	36.50	43.00	22	27	
DAJCM952Q-1022	7/8"-14	M22X1.5	12.29	12.00	36.50	43.00	22	27	
DAJCM952Q-1026	7/8"-14	M26X1.5	12.29	15.00	40.00	52.00	27	32	
DAJCM952Q-1222	1-1/16"-12	M22X1.5	15.47	14.00	42.00	45.50	27	27	
DAJCM952Q-1226	1-1/16"-12	M26X1.5	15.47	15.00	42.00	51.50	27	32	
DAJCM952Q-1227	1-1/16"-12	M27X2	15.47	15.00	42.00	51.50	27	32	
DAJCM952Q-1230	1-1/16"-12	M30X2	15.47	18.00	43.00	51.50	30	38	
DAJCM952Q-1627	1-5/16"-12	M27X2	21.44	15.00	46.00	55.00	33	32	
DAJCM952Q-1633	1-5/16"-12	M33X2	21.44	20.00	46.00	52.00	33	41	
DAJCM952Q-2042	1-5/8"-12	M42X2	27.38	26.00	52.00	60.00	41	50	
DAJCM952Q-2448	1-7/8"-12	M48X2	33.32	32.00	59.00	67.00	48	55	

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, DEKRA, DIN, SAE, MA, CE, UKCA


DAJCM9525

90° Adjustable Elbow JIC Male – Metric Male + O Ring

D	A	JC	M	9	52	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	90° Elbow	Metric	Male + O Ring



DME&JDE Code:	DAJCM9525
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Adjustable Male × Male
Thread Types:	UNF × Metric
Sealing Method:	O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAJCM9525-0410	7/16"-20	M10X1	4.37	3.00	22.50	27.50	11	14
DAJCM9525-0412	7/16"-20	M12X1.5	4.37	6.00	26.70	32.50	14	17
DAJCM9525-0414	7/16"-20	M14X1.5	4.37	6.00	27.00	32.50	14	19
DAJCM9525-0510	1/2"-20	M10X1	5.94	4.00	27.00	28.50	14	14
DAJCM9525-0512	1/2"-20	M12X1.5	5.94	4.00	27.00	31.50	14	17
DAJCM9525-0514	1/2"-20	M14X1.5	5.94	6.00	27.00	32.50	14	19
DAJCM9525-0610	9/16"-18	M10X1	7.54	4.00	27.00	28.50	14	14
DAJCM9525-0612	9/16"-18	M12X1.5	7.54	4.00	27.00	31.50	14	17
DAJCM9525-0614	9/16"-18	M14X1.5	7.54	6.00	27.00	32.50	14	19
DAJCM9525-0616	9/16"-18	M16X1.5	7.54	7.00	28.50	36.50	19	22
DAJCM9525-0618	9/16"-18	M18X1.5	7.54	9.00	29.00	39.50	19	24
DAJCM9525-0816	3/4"-16	M16X1.5	9.93	7.00	31.50	36.50	19	22
DAJCM9525-0818	3/4"-16	M18X1.5	9.93	9.00	31.50	37.00	19	24
DAJCM9525-0820	3/4"-16	M20X1.5	9.93	12.00	33.80	43.00	22	27
DAJCM9525-0822	3/4"-16	M22X1.5	9.93	12.00	33.80	43.00	22	27
DAJCM9525-0827	3/4"-16	M27X2	9.93	15.00	36.00	50.00	27	32
DAJCM9525-1016	7/8"-14	M16X1.5	12.29	7.00	36.50	39.50	22	22
DAJCM9525-1018	7/8"-14	M18X1.5	12.29	9.00	36.50	41.50	22	24
DAJCM9525-1022	7/8"-14	M22X1.5	12.29	12.00	36.50	43.00	22	27
DAJCM9525-1026	7/8"-14	M26X1.5	12.29	15.00	40.00	52.00	27	32
DAJCM9525-1222	1-1/16"-12	M22X1.5	15.47	14.00	42.00	45.50	27	27
DAJCM9525-1226	1-1/16"-12	M26X1.5	15.47	15.00	42.00	51.50	27	32
DAJCM9525-1227	1-1/16"-12	M27X2	15.47	15.00	42.00	51.50	27	32
DAJCM9525-1230	1-1/16"-12	M30X2	15.47	18.00	43.00	51.50	30	38
DAJCM9525-1627	1-5/16"-12	M27X2	21.44	15.00	46.00	55.00	33	32
DAJCM9525-1633	1-5/16"-12	M33X2	21.44	20.00	46.00	52.00	33	41
DAJCM9525-2042	1-5/8"-12	M42X2	27.38	26.00	52.00	60.00	41	50
DAJCM9525-2448	1-7/8"-12	M48X2	33.32	32.00	59.00	67.00	48	55

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, DEKRA, DIN, SAE, MA, CE, UKCA


DAJCM928M

90° Elbow Connector JIC Male – NPTF Male

D	A	JC	M	9	28	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	90° Elbow	NPTF	Male



DME&JDE Code:	DAJCM928M
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Male × Male
Thread Types:	UNF × NPTF



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	Hex
#	UNF	NPTF	mm	mm	mm	mm	-	-
DAJCM928M-0202	5/16"-24	1/8"-27	1.57	4.78	19.56	18.29	11 mm	Metric
DAJCM928M-0204	5/16"-24	1/4"-18	1.57	7.14	23.60	27.69	14 mm	Metric
DAJCM928M-0202IN	5/16"-24	1/8"-27	1.57	4.78	19.56	18.29	7/16"	Imperial
DAJCM928M-0204IN	5/16"-24	1/4"-18	1.57	7.14	23.60	27.69	9/16"	Imperial
DAJCM928M-0302	3/8"-24	1/8"-27	3.18	4.78	21.10	18.30	11 mm	Metric
DAJCM928M-0302IN	3/8"-24	1/8"-27	3.18	4.78	21.10	18.30	7/16"	Imperial
DAJCM928M-0401	7/16"-20	1/16"-27	4.37	2.77	22.61	19.81	11 mm	Metric
DAJCM928M-0402	7/16"-20	1/8"-27	4.37	4.78	22.61	19.81	11 mm	Metric
DAJCM928M-0404	7/16"-20	1/4"-18	4.37	7.14	26.67	27.69	14 mm	Metric
DAJCM928M-0406	7/16"-20	3/8"-18	4.37	10.31	28.50	31.00	19 mm	Metric
DAJCM928M-0408	7/16"-20	1/2"-14	4.37	13.49	30.70	37.30	22 mm	Metric
DAJCM928M-0412	7/16"-20	3/4"-14	4.37	18.26	31.80	40.40	27 mm	Metric
DAJCM928M-0401IN	7/16"-20	1/16"-27	4.37	2.77	22.61	19.81	7/16"	Imperial
DAJCM928M-0402IN	7/16"-20	1/8"-27	4.37	4.78	22.61	19.81	7/16"	Imperial
DAJCM928M-0404IN	7/16"-20	1/4"-18	4.37	7.14	26.67	27.69	9/16"	Imperial
DAJCM928M-0406IN	7/16"-20	3/8"-18	4.37	10.31	28.50	31.00	3/4"	Imperial
DAJCM928M-0408IN	7/16"-20	1/2"-14	4.37	13.49	30.70	37.30	7/8"	Imperial
DAJCM928M-0412IN	7/16"-20	3/4"-14	4.37	18.26	31.80	40.40	1-1/16"	Imperial
DAJCM928M-0502	1/2"-20	1/8"-27	5.94	4.78	24.10	19.80	14 mm	Metric
DAJCM928M-0504	1/2"-20	1/4"-18	5.94	7.14	26.70	27.70	14 mm	Metric
DAJCM928M-0506	1/2"-20	3/8"-18	5.94	10.31	28.50	31.00	19 mm	Metric
DAJCM928M-0508	1/2"-20	1/2"-14	5.94	13.49	30.70	37.30	22 mm	Metric
DAJCM928M-0502IN	1/2"-20	1/8"-27	5.94	4.78	24.10	19.80	9/16"	Imperial

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, DEKRA, DIN, SAE, MA, CE, UKCA

DAJCM928M-0504IN	1/2"-20	1/4"-18	5.94	7.14	26.70	27.70	9/16"	Imperial
DAJCM928M-0506IN	1/2"-20	3/8"-18	5.94	10.31	28.50	31.00	3/4"	Imperial
DAJCM928M-0508IN	1/2"-20	1/2"-14	5.94	13.49	30.70	37.30	7/8"	Imperial
DAJCM928M-0602	9/16"-18	1/8"-27	7.54	4.78	26.90	22.90	14 mm	Metric
DAJCM928M-0604	9/16"-18	1/4"-18	7.54	7.14	26.92	27.69	14 mm	Metric
DAJCM928M-0606	9/16"-18	3/8"-18	7.54	10.31	28.96	30.99	19 mm	Metric
DAJCM928M-0608	9/16"-18	1/2"-14	7.54	13.49	30.99	37.34	22 mm	Metric
DAJCM928M-0612	9/16"-18	3/4"-14	7.54	18.26	33.30	40.40	27 mm	Metric
DAJCM928M-0602IN	9/16"-18	1/8"-27	7.54	4.78	26.90	22.90	9/16"	Imperial
DAJCM928M-0604IN	9/16"-18	1/4"-18	7.54	7.14	26.92	27.69	9/16"	Imperial
DAJCM928M-0606IN	9/16"-18	3/8"-18	7.54	10.31	28.96	30.99	3/4"	Imperial
DAJCM928M-0608IN	9/16"-18	1/2"-14	7.54	13.49	30.99	37.34	7/8"	Imperial
DAJCM928M-0612IN	9/16"-18	3/4"-14	7.54	18.26	33.30	40.40	1-1/16"	Imperial
DAJCM928M-0802	3/4"-16	1/8"-27	9.93	4.78	31.80	26.20	19 mm	Metric
DAJCM928M-0804	3/4"-16	1/4"-18	9.93	7.14	31.80	31.00	19 mm	Metric
DAJCM928M-0806	3/4"-16	3/8"-18	9.93	10.31	31.80	31.00	19 mm	Metric
DAJCM928M-0808	3/4"-16	1/2"-14	9.93	13.49	33.78	37.34	22 mm	Metric
DAJCM928M-0812	3/4"-16	3/4"-14	9.93	18.26	36.10	40.40	27 mm	Metric
DAJCM928M-0816	3/4"-16	1"-11-1/2	9.93	23.83	38.60	50.00	33 mm	Metric
DAJCM928M-0802IN	3/4"-16	1/8"-27	9.93	4.78	31.80	26.20	3/4"	Imperial
DAJCM928M-0804IN	3/4"-16	1/4"-18	9.93	7.14	31.80	31.00	3/4"	Imperial
DAJCM928M-0806IN	3/4"-16	3/8"-18	9.93	10.31	31.80	31.00	3/4"	Imperial
DAJCM928M-0808IN	3/4"-16	1/2"-14	9.93	13.49	33.78	37.34	7/8"	Imperial
DAJCM928M-0812IN	3/4"-16	3/4"-14	9.93	18.26	36.10	40.40	1-1/16"	Imperial
DAJCM928M-0816IN	3/4"-16	1"-11-1/2	9.93	23.83	38.60	50.00	1-5/16"	Imperial
DAJCM928M-1006	7/8"-14	3/8"-18	12.29	10.31	36.80	32.50	22 mm	Metric
DAJCM928M-1008	7/8"-14	1/2"-14	12.29	13.49	36.80	37.30	22 mm	Metric
DAJCM928M-1012	7/8"-14	3/4"-14	12.29	18.26	39.10	40.40	27 mm	Metric
DAJCM928M-1016	7/8"-14	1"-11-1/2	12.29	23.83	41.70	50.00	33 mm	Metric
DAJCM928M-1006IN	7/8"-14	3/8"-18	12.29	10.31	36.80	32.50	7/8"	Imperial
DAJCM928M-1008IN	7/8"-14	1/2"-14	12.29	13.49	36.80	37.30	7/8"	Imperial
DAJCM928M-1012IN	7/8"-14	3/4"-14	12.29	18.26	39.10	40.40	1-1/16"	Imperial
DAJCM928M-1016IN	7/8"-14	1"-11-1/2	12.29	23.83	41.70	50.00	1-5/16"	Imperial
DAJCM928M-1206	1-1/16"-12	3/8"-18	15.47	10.31	42.20	35.60	27 mm	Metric
DAJCM928M-1208	1-1/16"-12	1/2"-14	15.47	13.49	42.20	40.40	27 mm	Metric
DAJCM928M-1212	1-1/16"-12	3/4"-14	15.47	18.26	42.16	40.39	27 mm	Metric
DAJCM928M-1216	1-1/16"-12	1"-11-1/2	15.47	23.83	44.70	50.00	33 mm	Metric
DAJCM928M-1220	1-1/16"-12	1-1/4"-11-1/2	15.47	31.75	50.00	60.50	41 mm	Metric
DAJCM928M-1224	1-1/16"-12	1-1/2"-11-1/2	15.47	38.10	53.60	67.10	48 mm	Metric
DAJCM928M-1206IN	1-1/16"-12	3/8"-18	15.47	10.31	42.20	35.60	1-1/16"	Imperial
DAJCM928M-1208IN	1-1/16"-12	1/2"-14	15.47	13.49	42.20	40.40	1-1/16"	Imperial



DAJCM928M-1212IN	1-1/16"-12	3/4"-14	15.47	18.26	42.16	40.39	1-1/16"	Imperial
DAJCM928M-1216IN	1-1/16"-12	1"-11-1/2	15.47	23.83	44.70	50.00	1-5/16"	Imperial
DAJCM928M-1220IN	1-1/16"-12	1-1/4"-11-1/2	15.47	31.75	50.00	60.50	1-5/8"	Imperial
DAJCM928M-1224IN	1-1/16"-12	1-1/2"-11-1/2	15.47	38.10	53.60	67.10	1-7/8"	Imperial
DAJCM928M-1408	1-3/16"-12	1/2"-14	18.26	13.49	45.72	42.93	33 mm	Metric
DAJCM928M-1412	1-3/16"-12	3/4"-14	18.26	18.26	45.70	42.90	33 mm	Metric
DAJCM928M-1416	1-3/16"-12	1"-11-1/2	18.26	23.83	45.72	50.04	33 mm	Metric
DAJCM928M-1408IN	1-3/16"-12	1/2"-14	18.26	13.49	45.72	42.93	1-5/16"	Imperial
DAJCM928M-1412IN	1-3/16"-12	3/4"-14	18.26	18.26	45.70	42.90	1-5/16"	Imperial
DAJCM928M-1416IN	1-3/16"-12	1"-11-1/2	18.26	23.83	45.72	50.04	1-5/16"	Imperial
DAJCM928M-1606	1-5/16"-12	3/8"-18	21.44	10.31	46.00	43.50	33 mm	Metric
DAJCM928M-1608	1-5/16"-12	1/2"-14	21.44	13.49	46.00	45.20	33 mm	Metric
DAJCM928M-1612	1-5/16"-12	3/4"-14	21.44	18.26	45.97	45.20	33 mm	Metric
DAJCM928M-1616	1-5/16"-12	1"-11-1/2	21.44	23.83	45.97	50.04	33 mm	Metric
DAJCM928M-1620	1-5/16"-12	1-1/4"-11-1/2	21.44	31.75	51.10	60.50	41 mm	Metric
DAJCM928M-1624	1-5/16"-12	1-1/2"-11-1/2	21.44	38.10	54.90	67.10	48 mm	Metric
DAJCM928M-1606IN	1-5/16"-12	3/8"-18	21.44	10.31	46.00	43.50	1-5/16"	Imperial
DAJCM928M-1608IN	1-5/16"-12	1/2"-14	21.44	13.49	46.00	45.20	1-5/16"	Imperial
DAJCM928M-1612IN	1-5/16"-12	3/4"-14	21.44	18.26	45.97	45.20	1-5/16"	Imperial
DAJCM928M-1616IN	1-5/16"-12	1"-11-1/2	21.44	23.83	45.97	50.04	1-5/16"	Imperial
DAJCM928M-1620IN	1-5/16"-12	1-1/4"-11-1/2	21.44	31.75	51.10	60.50	1-5/8"	Imperial
DAJCM928M-1624IN	1-5/16"-12	1-1/2"-11-1/2	21.44	38.10	54.90	67.10	1-7/8"	Imperial
DAJCM928M-2012	1- 5/8"-12	3/4"-14	27.38	18.26	52.32	54.86	41 mm	Metric
DAJCM928M-2016	1- 5/8"-12	1"-11-1/2	27.83	23.83	52.30	59.70	41 mm	Metric
DAJCM928M-2020	1- 5/8"-12	1-1/4"-11-1/2	27.38	31.75	52.32	60.45	41 mm	Metric
DAJCM928M-2024	1- 5/8"-12	1-1/2"-11-1/2	27.38	38.10	55.90	67.10	48 mm	Metric
DAJCM928M-2012IN	1- 5/8"-12	3/4"-14	27.38	18.26	52.32	54.86	1-5/8"	Imperial
DAJCM928M-2016IN	1- 5/8"-12	1"-11-1/2	27.83	23.83	52.30	59.70	1-5/8"	Imperial
DAJCM928M-2020IN	1- 5/8"-12	1-1/4"-11-1/2	27.38	31.75	52.32	60.45	1-5/8"	Imperial
DAJCM928M-2024IN	1- 5/8"-12	1-1/2"-11-1/2	27.38	38.10	55.90	67.10	1-7/8"	Imperial
DAJCM928M-2416	1- 7/8"-12	1"-11-1/2	33.32	23.83	59.20	65.50	48 mm	Metric
DAJCM928M-2420	1- 7/8"-12	1-1/4"-11-1/2	33.32	31.75	59.20	66.30	48 mm	Metric
DAJCM928M-2424	1- 7/8"-12	1-1/2"-11-1/2	33.32	38.10	59.20	67.10	48 mm	Metric
DAJCM928M-2432	1- 7/8"-12	2"-11-1/2	33.32	49.23	71.37	76.20	65 mm	Metric
DAJCM928M-2416IN	1- 7/8"-12	1"-11-1/2	33.32	23.83	59.20	65.50	1-7/8"	Imperial
DAJCM928M-2420IN	1- 7/8"-12	1-1/4"-11-1/2	33.32	31.75	59.20	66.30	1-7/8"	Imperial
DAJCM928M-2424IN	1- 7/8"-12	1-1/2"-11-1/2	33.32	38.10	59.20	67.10	1-7/8"	Imperial
DAJCM928M-2432IN	1- 7/8"-12	2"-11-1/2	33.32	49.23	71.37	76.20	2-1/2"	Imperial
DAJCM928M-3224	2- 1/2"-12	1-1/2"-11-1/2	45.24	38.10	77.70	75.40	65 mm	Metric
DAJCM928M-3232	2- 1/2"-12	2"-11-1/2	45.24	49.23	77.70	76.10	65 mm	Metric
DAJCM928M-3224IN	2- 1/2"-12	1-1/2"-11-1/2	45.24	38.10	77.70	75.40	2-1/2"	Imperial
DAJCM928M-3232IN	2- 1/2"-12	2"-11-1/2	45.24	49.23	77.70	76.10	2-1/2"	Imperial



DAJCM928F

90° Elbow Connector JIC Male – NPTF Female

D

A

JC

M

9

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

90° Elbow

NPTF

Female

 German Technology Equipment


New-Standard

DME&JDE Code:

DAJCM928F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


90° Elbow

Connection Type:

Male × Female

Thread Types:

UNF × NPTF

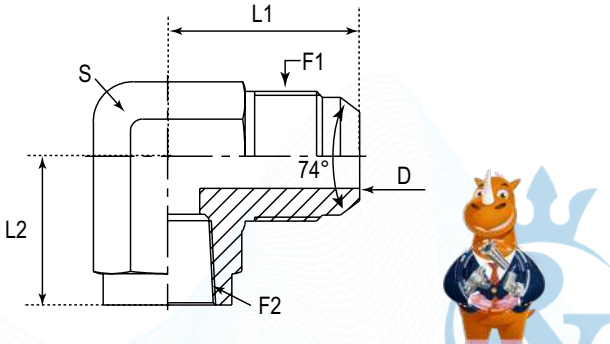

PART NUMBER	F1 (Thread)	F2 (Thread)	D	L1	L2	S	Hex
#	UNF	NPTF	mm	mm	mm	-	-
DAJCM928F-0202	5/16"-24	1/8"-27	1.57	25.4	16.8	14 mm	Metric
DAJCM928F-0202IN	5/16"-24	1/8"-27	1.57	25.4	16.8	9/16"	Imperial
DAJCM928F-0302	3/8"-24	1/8"-27	3.18	26.20	16.80	14 mm	Metric
DAJCM928F-0302IN	3/8"-24	1/8"-27	3.18	26.20	16.80	9/16"	Imperial
DAJCM928F-0402	7/16"-20	1/8"-27	4.37	27.40	16.80	14 mm	Metric
DAJCM928F-0404	7/16"-20	1/4"-18	4.37	31.00	22.40	19 mm	Metric
DAJCM928F-0406	7/16"-20	3/8"-18	4.37	32.80	25.90	22 mm	Metric
DAJCM928F-0408	7/16"-20	1/2"-14	4.37	35.56	31.24	27 mm	Metric
DAJCM928F-0402IN	7/16"-20	1/8"-27	4.37	27.40	16.80	9/16"	Imperial
DAJCM928F-0404IN	7/16"-20	1/4"-18	4.37	31.00	22.40	3/4"	Imperial
DAJCM928F-0406IN	7/16"-20	3/8"-18	4.37	32.80	25.90	7/8"	Imperial
DAJCM928F-0408IN	7/16"-20	1/2"-14	4.37	35.56	31.24	1-1/16"	Imperial
DAJCM928F-0502	1/2"-20	1/8"-27	5.94	27.40	16.80	14 mm	Metric
DAJCM928F-0504	1/2"-20	1/4"-18	5.94	31.00	22.40	19 mm	Metric
DAJCM928F-0506	1/2"-20	3/8"-18	5.94	32.80	25.90	22 mm	Metric
DAJCM928F-0502IN	1/2"-20	1/8"-27	5.94	27.40	16.80	9/16"	Imperial
DAJCM928F-0504IN	1/2"-20	1/4"-18	5.94	31.00	22.40	3/4"	Imperial
DAJCM928F-0506IN	1/2"-20	3/8"-18	5.94	32.80	25.90	7/8"	Imperial
DAJCM928F-0602	9/16"-18	1/8"-27	7.54	31.20	17.00	14 mm	Metric
DAJCM928F-0604	9/16"-18	1/4"-18	7.54	31.20	22.40	19 mm	Metric
DAJCM928F-0606	9/16"-18	3/8"-18	7.54	33.30	25.90	22 mm	Metric
DAJCM928F-0608	9/16"-18	1/2"-14	7.54	35.80	31.20	27 mm	Metric
DAJCM928F-0602IN	9/16"-18	1/8"-27	7.54	31.20	17.00	9/16"	Imperial

Certificate:



DAJCM928F-0604IN	9/16"-18	1/4"-18	7.54	31.20	22.40	3/4"	Imperial
DAJCM928F-0606IN	9/16"-18	3/8"-18	7.54	33.30	25.90	7/8"	Imperial
DAJCM928F-0608IN	9/16"-18	1/2"-14	7.54	35.80	31.20	1-1/16"	Imperial
DAJCM928F-0804	3/4"-16	1/4"-18	9.93	36.10	25.70	19 mm	Metric
DAJCM928F-0806	3/4"-16	3/8"-18	9.93	36.10	25.90	22 mm	Metric
DAJCM928F-0808	3/4"-16	1/2"-14	9.93	38.60	31.20	27 mm	Metric
DAJCM928F-0812	3/4"-16	3/4"-14	9.93	41.90	34.50	33 mm	Metric
DAJCM928F-0804IN	3/4"-16	1/4"-18	9.93	36.10	25.70	3/4"	Imperial
DAJCM928F-0806IN	3/4"-16	3/8"-18	9.93	36.10	25.90	7/8"	Imperial
DAJCM928F-0808IN	3/4"-16	1/2"-14	9.93	38.60	31.20	1-1/16"	Imperial
DAJCM928F-0812IN	3/4"-16	3/4"-14	9.93	41.90	34.50	1-5/16"	Imperial
DAJCM928F-1006	7/8"-14	3/8"-18	12.29	41.66	25.70	27 mm	Metric
DAJCM928F-1008	7/8"-14	1/2"-14	12.29	41.70	31.20	27 mm	Metric
DAJCM928F-1012	7/8"-14	3/4"-14	12.29	44.96	34.54	33 mm	Metric
DAJCM928F-1006IN	7/8"-14	3/8"-18	12.29	41.66	25.70	1-1/16"	Imperial
DAJCM928F-1008IN	7/8"-14	1/2"-14	12.29	41.70	31.20	1-1/16"	Imperial
DAJCM928F-1012IN	7/8"-14	3/4"-14	12.29	44.96	34.54	1-5/16"	Imperial
DAJCM928F-1208	1-1/16"-12	1/2"-14	15.47	48.00	34.30	27 mm	Metric
DAJCM928F-1212	1-1/16"-12	3/4"-14	15.47	48.00	34.50	33 mm	Metric
DAJCM928F-1216	1-1/16"-12	1"-11-1/2	15.47	53.90	41.20	41 mm	Metric
DAJCM928F-1208IN	1-1/16"-12	1/2"-14	15.47	48.00	34.30	1-1/16"	Imperial
DAJCM928F-1212IN	1-1/16"-12	3/4"-14	15.47	48.00	34.50	1-5/16"	Imperial
DAJCM928F-1216IN	1-1/16"-12	1"-11-1/2	15.47	53.90	41.20	1-5/8"	Imperial
DAJCM928F-1412	1-3/16"-12	3/4"-14	18.26	47.20	36.10	33 mm	Metric
DAJCM928F-1412IN	1-3/16"-12	3/4"-14	18.26	47.20	36.10	1-5/16"	Imperial
DAJCM928F-1612	1-5/16"-12	3/4"-14	21.44	55.10	35.30	33 mm	Metric
DAJCM928F-1616	1-5/16"-12	1"-11-1/2	21.44	55.10	41.20	41 mm	Metric
DAJCM928F-1620	1-5/16"-12	1-1/4"-11-1/2	21.44	57.91	43.18	48 mm	Metric
DAJCM928F-1612IN	1-5/16"-12	3/4"-14	21.44	55.10	35.30	1-5/16"	Imperial
DAJCM928F-1616IN	1-5/16"-12	1"-11-1/2	21.44	55.10	41.20	1-5/8"	Imperial
DAJCM928F-1620IN	1-5/16"-12	1-1/4"-11-1/2	21.44	57.91	43.18	1-7/8"	Imperial
DAJCM928F-2016	1-5/8"-12	1"-11-1/2	27.38	59.18	41.20	41 mm	Metric
DAJCM928F-2020	1-5/8"-12	1-1/4"-11-1/2	27.38	59.20	43.20	48 mm	Metric
DAJCM928F-2024	1-5/8"-12	1-1/2"-11-1/2	27.38	70.00	52.83	65 mm	Metric
DAJCM928F-2016IN	1-5/8"-12	1"-11-1/2	27.38	59.18	41.20	1-5/8"	Imperial
DAJCM928F-2020IN	1-5/8"-12	1-1/4"-11-1/2	27.38	59.20	43.20	1-7/8"	Imperial
DAJCM928F-2024IN	1-5/8"-12	1-1/2"-11-1/2	27.38	70.00	52.83	2-9/16"	Imperial
DAJCM928F-2424	1-7/8"-12	1-1/2"-11-1/2	33.32	73.40	52.80	65 mm	Metric
DAJCM928F-2424IN	1-7/8"-12	1-1/2"-11-1/2	33.32	73.40	52.80	2-9/16"	Imperial
DAJCM928F-3232	2-1/2"-12	2"-11-1/2	45.24	83.80	60.70	70 mm	Metric
DAJCM928F-3232IN	2-1/2"-12	2"-11-1/2	45.24	83.80	60.70	2-13/16"	Imperial

Certificate:



DAJCM905F

90° Elbow Connector JIC Male – BSPP Fixed Female

D

A

JC

M

9

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

90° Elbow

BSPP

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM905F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


90° Elbow

Connection Type:

Male × Fixed Female

Thread Types:

UNF × BSPP

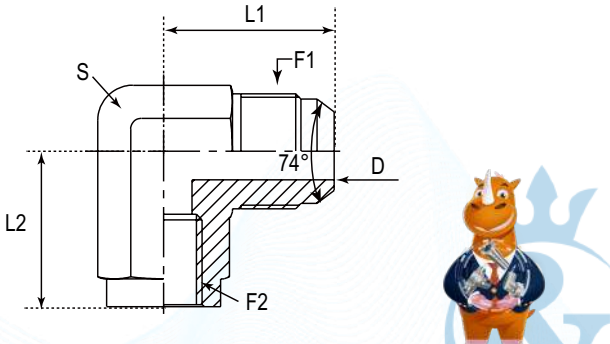

PART NUMBER	F1 (Thread)	F2 (Thread)	D	L	S	S1
#	UNF	BSPP	mm	mm	mm	mm
DAJCM905F-0402	7/16"-20	1/8"-28	4.37	27.40	16.80	14.00
DAJCM905F-0404	7/16"-20	1/4"-19	4.37	31.00	22.40	19.00
DAJCM905F-0406	7/16"-20	3/8"-19	4.37	32.80	25.90	22.00
DAJCM905F-0502	1/2"-20	1/8"-28	5.94	27.40	16.80	14.00
DAJCM905F-0504	1/2"-20	1/4"-19	5.94	31.00	22.40	19.00
DAJCM905F-0602	1/2"-20	1/8"-28	7.54	31.20	17.00	14.00
DAJCM905F-0604	9/16"-18	1/4"-19	7.54	31.20	22.40	19.00
DAJCM905F-0606	9/16"-18	3/8"-19	7.54	33.30	25.90	22.00
DAJCM905F-0608	9/16"-18	1/2"-14	7.54	35.80	31.20	27.00
DAJCM905F-0804	3/4"-16	1/4"-19	9.93	36.10	25.70	19.00
DAJCM905F-0806	3/4"-16	3/8"-19	9.93	36.10	25.90	22.00
DAJCM905F-0808	3/4"-16	1/2"-14	9.93	38.60	31.20	27.00
DAJCM905F-0812	3/4"-16	3/4"-14	9.93	41.90	34.50	33.00
DAJCM905F-1008	7/8"-14	1/2"-14	12.29	41.70	31.20	27.00
DAJCM905F-1208	1-1/16"-12	1/2"-14	15.47	48.00	34.30	27.00
DAJCM905F-1212	1 1/16"-12	3/4"-14	15.47	48.00	34.50	33.00
DAJCM905F-1216	1-1/16"-12	1"-11	15.47	53.90	41.20	41.00
DAJCM905F-1612	1-5/16"-12	3/4"-14	21.44	55.10	35.30	33.00
DAJCM905F-1616	1-5/16"-12	1"-11	21.44	55.10	41.20	41.00
DAJCM905F-2016	1-5/8"-12	1"-11	27.38	52.30	42.00	41.00
DAJCM905F-2020	1-5/8"-12	1 1/4"-11	27.38	59.20	43.20	48.00
DAJCM905F-2420	1-7/8"-12	1-1/4"-11	33.32	59.00	43.00	48.00
DAJCM905F-2424	1-7/8"-12	1-1/2"-11	33.32	73.40	52.80	65.00
DAJCM905F-3232	2-1/2"-12	2"-11	45.24	83.80	60.70	70.00

Certificate:



DAJCM905M

90° Elbow Connector JIC Male – BSPP Male 60°

D

A

JC

M

9

05

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

90° Elbow

BSPP

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM905M

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


90° Elbow

Connection Type:

Male × Male

Thread Types:

UNF × BSPP 60°

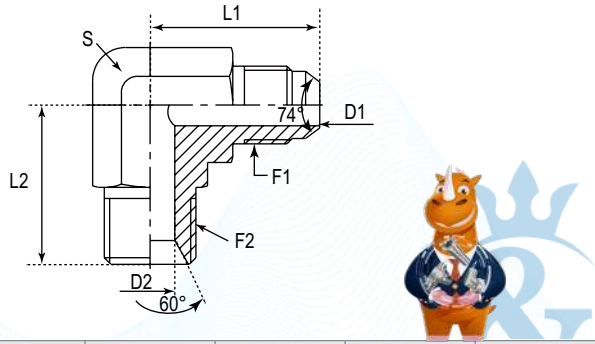

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S
#	UNF	BSPP	mm	mm	mm	mm	mm
DAJCM905M-0404	7/16"-20	1/4"-19	4.37	4.70	26.70	27.00	14
DAJCM905M-0406	7/16"-20	3/8"-19	4.37	7.90	27.00	29.00	9
DAJCM905M-0604	9/16"-18	1/4"-19	7.54	4.70	26.90	27.00	14
DAJCM905M-0606	9/16"-18	3/8"-19	7.54	7.90	28.96	29.00	19
DAJCM905M-0608	9/16"-18	1/2"-14	7.54	11.10	31.00	34.00	22
DAJCM905M-0806	3/4"-16	3/8"-19	9.93	7.90	31.80	29.00	19
DAJCM905M-0808	3/4"-16	1/2"-14	9.93	11.10	33.80	34.00	22
DAJCM905M-0812	3/4"-16	3/4"-14	9.93	16.70	38.80	41.00	27
DAJCM905M-1008	7/8"-14	1/2"-14	12.29	11.10	36.80	34.00	22
DAJCM905M-1012	7/8"-14	3/4"-14	12.29	16.70	39.10	41.00	27
DAJCM905M-1208	1-1/16"-12	1/2"-14	15.47	11.10	36.50	41.00	27
DAJCM905M-1212	1-1/16"-12	3/4"-14	15.47	16.70	42.20	42.00	27
DAJCM905M-1216	1-1/16"-12	1"-11	15.47	22.20	44.70	48.00	33
DAJCM905M-1612	1-5/16"-12	3/4"-14	21.44	16.70	44.80	48.00	33
DAJCM905M-1616	1-5/16"-12	1"-11	21.44	22.20	46.00	48.00	33
DAJCM905M-2020	1-5/8"-12	1-1/4"-11	27.38	28.60	52.30	51.00	41

Certificate:



DAJCM907M

90° Elbow Connector JIC Male – BSPT Male 60°

D

A

JC

M

9

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

JIC UNF

Male

90° Elbow

BSPT

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DAJCM907M

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


90° Elbow

Connection Type:

Male × Male

Thread Types:

UNF × BSPT 60°

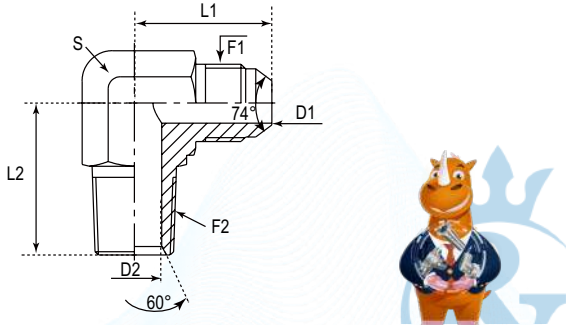

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S
#	UNF	BSPT	mm	mm	mm	mm	mm
DAJCM907M-0402	7/16"-20	1/8"-28	4.37	4.50	22.60	19.80	11
DAJCM907M-0404	7/16"-20	1/4"-19	4.37	6.00	26.70	27.70	14
DAJCM907M-0406	7/16"-20	3/8"-19	4.37	9.00	28.45	30.99	19
DAJCM907M-0408	7/16"-20	1/2"-14	4.37	12.00	30.70	37.30	22
DAJCM907M-0502	1/2"-20	1/8"-28	5.94	4.50	24.13	19.81	14
DAJCM907M-0504	1/2"-20	1/4"-19	5.94	6.00	26.67	27.69	14
DAJCM907M-0506	1/2"-20	3/8"-19	5.94	9.00	28.50	31.00	19
DAJCM907M-0602	9/16"-18	1/8"-28	7.54	4.50	26.90	22.90	14
DAJCM907M-0604	9/16"-18	1/4"-19	7.54	6.00	26.90	27.70	14
DAJCM907M-0606	9/16"-18	3/8"-19	7.54	9.00	29.00	31.00	19
DAJCM907M-0608	9/16"-18	1/2"-14	7.54	12.00	31.00	37.50	22
DAJCM907M-0612	9/16"-18	3/4"-14	7.54	16.70	33.30	40.40	27
DAJCM907M-0704	5/8"-18	1/4"-19	7.14	6.00	31.75	31.00	19
DAJCM907M-0706	5/8"-18	3/8"-19	7.14	9.00	31.75	31.00	19
DAJCM907M-0802	3/4"-16	1/8"-28	9.93	4.50	31.80	27.00	19
DAJCM907M-0804	3/4"-16	1/4"-19	9.93	6.00	31.80	31.00	19



DAJCM907M-0806	3/4"-16	3/8"-19	9.93	9.00	31.80	31.00	19
DAJCM907M-0808	3/4"-16	1/2"-14	9.93	12.00	33.80	37.30	22
DAJCM907M-0810	3/4"-16	5/8"-14	9.93	14.00	36.00	39.00	27
DAJCM907M-0812	3/4"-16	3/4"-14	9.93	16.70	36.10	40.40	27
DAJCM907M-0816	3/4"-16	1"-11	9.93	22.20	38.80	50.00	33
DAJCM907M-1006	7/8"-14	3/8"-19	12.29	9.00	36.80	32.50	22
DAJCM907M-1008	7/8"-14	1/2"-14	12.29	12.00	36.80	37.30	22
DAJCM907M-1010	7/8"-14	5/8"-14	12.29	14.00	39.00	39.00	27
DAJCM907M-1012	7/8"-14	3/4"-14	12.29	16.70	39.10	40.40	27
DAJCM907M-1016	7/8"-14	1"-11	12.29	22.20	41.70	50.00	33
DAJCM907M-1206	1-1/16"-12	3/8"-19	15.47	9.00	42.20	36.00	27
DAJCM907M-1208	1-1/16"-12	1/2"-14	15.47	12.00	42.20	40.40	27
DAJCM907M-1212	1-1/16"-12	3/4"-14	15.47	16.70	42.20	40.40	27
DAJCM907M-1216	1-1/16"-12	1"-11	15.47	22.20	44.70	50.00	33
DAJCM907M-1220	1-1/16"-12	1-1/4"-11	15.47	28.60	50.00	60.50	41
DAJCM907M-1608	1-5/16"-12	1/2"-14	21.44	12.00	46.00	45.00	33
DAJCM907M-1612	1-5/16"-12	3/4"-14	21.44	16.70	46.00	45.20	33
DAJCM907M-1616	1-5/16"-12	1"-11	21.44	22.20	46.00	50.00	33
DAJCM907M-1620	1-5/16"-12	1-1/4"-11	21.44	28.60	51.10	60.50	41
DAJCM907M-1632	1-5/16"-12	2"-11	21.44	46.00	71.00	76.19	65
DAJCM907M-2016	1-5/8"-12	1"-11	27.83	22.20	52.30	59.70	41
DAJCM907M-2020	1-5/8"-12	1-1/4"-11	27.38	28.60	52.30	60.50	41
DAJCM907M-2024	1-5/8"-12	1-1/2"-11	27.38	33.30	56.00	67.10	48
DAJCM907M-2420	1-7/8"-12	1-1/4"-11	33.32	28.60	59.20	67.10	48
DAJCM907M-2424	1-7/8"-12	1-1/2"-11	33.32	33.30	59.20	67.10	48
DAJCM907M-2432	1-7/8"-12	2"-11	33.32	46.00	71.40	76.20	65
DAJCM907M-3224	2-1/2"-12	1-1/2"-11	45.24	33.30	77.70	75.40	63.5
DAJCM907M-3232	2-1/2"-12	2"-11	45.24	45.00	77.70	76.10	65



DAJCM907F

90° Elbow Connector JIC Male – BSPT Female

D

A

JC

M

9

07

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

90° Elbow

BSPT

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM907F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


90° Elbow

Connection Type:

Male × Female

Thread Types:

UNF × BSPT

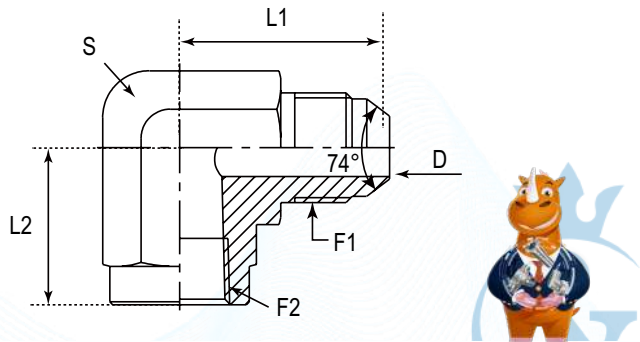

PART NUMBER	F1 (Thread)	F2 (Thread)	D	L1	L2	S
#	UNF	BSPT	mm	mm	mm	mm
DAJCM907F-0402	7/16"-20	1/8"-28	4.37	27.4	16.8	14
DAJCM907F-0604	9/16"-18	1/4"-19	7.54	31.2	22.4	19
DAJCM907F-0806	3/4"-16	3/8"-19	9.93	36.1	25.9	22.22
DAJCM907F-0808	3/4"-16	1/2"-14	9.93	38.61	31.24	27
DAJCM907F-1008	7/8"-14	1/2"-14	12.3	41.7	31.2	27
DAJCM907F-1212	1-1/16"-12	3/4"-14	15.47	48	34.5	33
DAJCM907F-1616	1-5/16"-12	1"-11	21.44	55.1	41.1	41

Certificate:



DAJCM900B

90° Elbow Connector JIC Male – Buttweld Tube

D

A

JC

M

9

00

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Sealing Type

Welding Type

DME

Adaptor

JIC UNF

Male

90° Elbow

Welding

Socket

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM900B

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

90° Elbow

Connection Type:


Male

Thread Types:

UNF

Sealing Method:

Welding

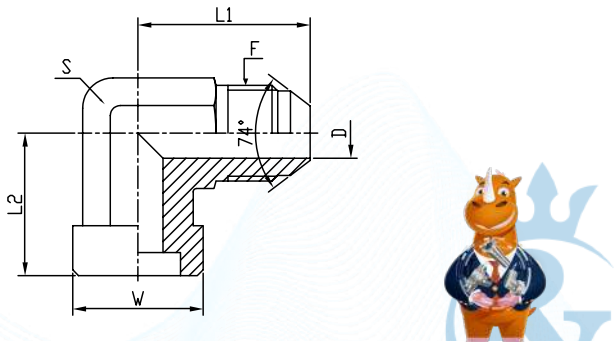

PART NUMBER	F (Thread)	D	W	L1	L2	S	Hex
#	UNF	mm	mm	mm	mm	-	-
DAJCM900B-0406	7/16"-20	4.37	6.00	22.50	10.50	11 mm	Metric
DAJCM900B-0406IN	7/16"-20	4.37	6.00	22.50	10.50	7/16"	Imperial
DAJCM900B-0510	1/2"-20	5.94	10.00	27.00	16.00	14 mm	Metric
DAJCM900B-0510IN	1/2"-20	5.94	10.00	27.00	16.00	9/16"	Imperial
DAJCM900B-0610	9/16"-18	7.54	10.00	27.00	16.00	14 mm	Metric
DAJCM900B-0612	9/16"-18	7.54	12.00	29.00	18.00	19 mm	Metric
DAJCM900B-0610IN	9/16"-18	7.54	10.00	27.00	16.00	9/16"	Imperial
DAJCM900B-0612IN	9/16"-18	7.54	12.00	29.00	18.00	3/4"	Imperial
DAJCM900B-0812	3/4"-16	9.93	12.00	31.50	18.00	19 mm	Metric
DAJCM900B-0816	3/4"-16	9.93	16.00	34.00	20.00	22 mm	Metric
DAJCM900B-0812IN	3/4"-16	9.93	12.00	31.50	18.00	3/4"	Imperial
DAJCM900B-0816IN	3/4"-16	9.93	16.00	34.00	20.00	7/8"	Imperial
DAJCM900B-1014	7/8"-14	12.29	14.00	36.50	20.00	22 mm	Metric
DAJCM900B-1016	7/8"-14	12.29	16.00	36.50	20.00	22 mm	Metric
DAJCM900B-1018	7/8"-14	12.29	18.00	40.00	23.00	27 mm	Metric
DAJCM900B-1022	7/8"-14	12.29	22.00	40.00	23.00	27 mm	Metric
DAJCM900B-1014IN	7/8"-14	12.29	14.00	36.50	20.00	7/8"	Imperial
DAJCM900B-1016IN	7/8"-14	12.29	16.00	36.50	20.00	7/8"	Imperial
DAJCM900B-1018IN	7/8"-14	12.29	18.00	40.00	23.00	1-1/8"	Imperial
DAJCM900B-1022IN	7/8"-14	12.29	22.00	40.00	23.00	1-1/8"	Imperial
DAJCM900B-1218	1-1/16"-12	15.47	18.00	42.00	23.00	27 mm	Metric
DAJCM900B-1220	1-1/16"-12	15.47	20.00	42.00	23.00	27 mm	Metric
DAJCM900B-1225	1-1/16"-12	15.47	25.00	46.00	26.00	33 mm	Metric
DAJCM900B-1218IN	1-1/16"-12	15.47	18.00	42.00	23.00	1-1/8"	Imperial
DAJCM900B-1220IN	1-1/16"-12	15.47	20.00	42.00	23.00	1-1/8"	Imperial
DAJCM900B-1225IN	1-1/16"-12	15.47	25.00	46.00	26.00	1-5/16"	Imperial
DAJCM900B-1625	1-5/16"-12	21.44	25.00	46.00	26.00	33 mm	Metric
DAJCM900B-1632	1-5/16"-12	21.44	32.00	51.00	33.00	41 mm	Metric
DAJCM900B-1625IN	1-5/16"-12	21.44	25.00	46.00	26.00	1-5/16"	Imperial
DAJCM900B-1632IN	1-5/16"-12	21.44	32.00	51.00	33.00	1-1/2"	Imperial
DAJCM900B-2030	1-5/8"-12	27.38	30.00	52.00	33.00	41 mm	Metric
DAJCM900B-2032	1-5/8"-12	27.38	32.00	52.00	33.00	41 mm	Metric
DAJCM900B-2038	1-5/8"-12	27.38	38.00	56.00	35.00	48 mm	Metric
DAJCM900B-2030IN	1-5/8"-12	27.38	30.00	52.00	33.00	1-1/2"	Imperial
DAJCM900B-2032IN	1-5/8"-12	27.38	32.00	52.00	33.00	1-1/2"	Imperial
DAJCM900B-2038IN	1-5/8"-12	27.38	38.00	56.00	35.00	1-7/8"	Imperial
DAJCM900B-2438	1-7/8"-12	33.32	38.00	59.00	35.00	48 mm	Metric
DAJCM900B-2438IN	1-7/8"-12	33.32	38.00	59.00	35.00	1-7/8"	Imperial

Certificate:



DAJCM900S

90° Elbow Connector JIC Male – Braze Female

D

A

JC

M

9

00

S

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Sealing Type

Welding Type

DME

Adaptor

JIC UNF

Male

90° Elbow

Welding

Butt Welding

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM900S

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

90° Elbow

Connection Type:


Male × Female

Thread Types:

UNF

Sealing Method:

Welding



PART NUMBER	F (Thread)	D1	D2	L1	L2	S	Hex
#	UNF	mm	mm	mm	mm	-	-
DAJCM900S-0415	7/16"-20	4.37	15.00	31.00	22.50	Metric	19 mm
DAJCM900S-0515	1/2"-20	5.94	15.00	31.00	22.50	Metric	19 mm
DAJCM900S-0610	9/16"-18	7.54	10.00	26.90	22.50	Metric	14 mm
DAJCM900S-0615	9/16"-18	7.54	15.00	31.00	22.50	Metric	19 mm
DAJCM900S-0812	3/4"-16	9.93	12.00	32.00	26.00	Metric	19 mm
DAJCM900S-0816	3/4"-16	9.93	16.00	37.00	31.00	Metric	19 mm
DAJCM900S-0820	3/4"-16	9.93	20.00	36.00	26.00	Metric	22 mm
DAJCM900S-1012	7/8"-14	12.30	12.00	36.80	26.00	Metric	22 mm
DAJCM900S-1022	7/8"-14	12.29	23.00	41.50	31.00	Metric	22 mm
DAJCM900S-1228	1-1/16"-12	15.47	28.00	48.00	34.50	Metric	30 mm
DAJCM900S-1434	1-3/16"-12	18.26	34.00	48.00	36.00	Metric	36 mm
DAJCM900S-1635	1-5/16"-12	21.44	35.00	55.00	41.00	Metric	36 mm
DAJCM900S-2042	1-5/8"-12	27.38	42.00	59.00	43.00	Metric	41 mm
DAJCM900S-2450	1-7/8"-12	33.32	50.00	73.50	53.00	Metric	50 mm



DAJCM9081

90° Elbow Connector JIC Male – BSPP Swivel Female 60°

D

A

JC

M

9

081

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

JIC UNF

Male

90° Elbow

BSPP Swivel Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM9081

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


90° Elbow

Connection Type:

Male × Swivel Female

Thread Types:

UNF × BSPP 60°

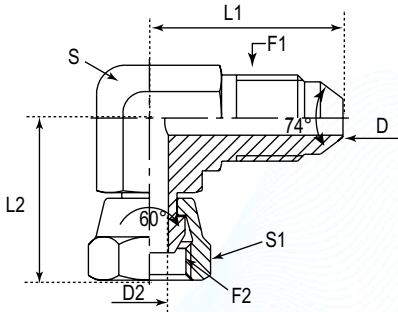

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJCM9081-0404	7/16"-20	1/4"-19	4.37	4.37	22.60	22.60	11.00	19.00
DAJCM9081-0606	9/16"-18	3/8"-19	7.54	7.54	26.90	26.90	19.00	22.00
DAJCM9081-0806	3/4"-16	3/8"-19	9.93	7.54	31.50	28.00	19.00	22.00
DAJCM9081-0808	3/4"-16	1/2"-14	9.90	11.10	31.80	31.80	19.00	27.00
DAJCM9081-1010	7/8"-14	5/8"-14	12.29	14.30	36.80	35.00	22	30.00
DAJCM9081-1212	1-1/16"-12	3/4"-14	15.47	16.70	42.20	42.20	27.00	32.00
DAJCM9081-1616	1-5/16"-12	1"-11	21.44	21.44	46.00	46.00	33.00	41.00



DAJCM9251

90° Elbow Connector JIC Male – JIC Swivel Female

D

A

JC

M

9

251

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Adaptor

JIC UNF


Male

90° Elbow

JIC Swivel Female

German Technology Equipment

New-Standard

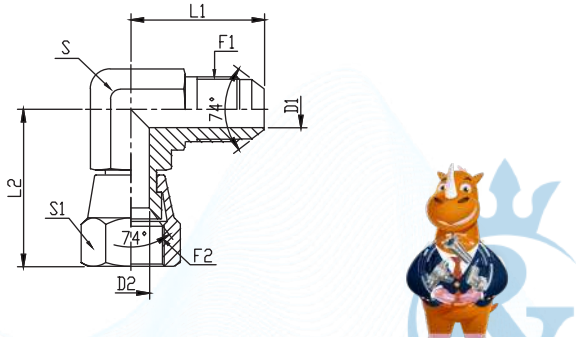

DME&JDE Code:

DAJCM9251

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

90° Elbow

Connection Type:

Male × Swivel Female

Thread Types:

UNF × UNF

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAJCM9251-0202	5/16"-24	5/16"-24	19.60	17.00	1.57	1.57	11 mm	11 mm	Metric
DAJCM9251-0202IN	5/16"-24	5/16"-24	19.60	17.00	1.57	1.57	7/16"	7/16"	Imperial
DAJCM9251-0303	3/8"-24	3/8"-24	21.08	17.07	3.18	3.18	11 mm	12 mm	Metric
DAJCM9251-0303IN	3/8"-24	3/8"-24	21.08	17.07	3.18	3.18	7/16"	1/2"	Imperial
DAJCM9251-0404	7/16"-20	7/16"-20	22.61	16.66	4.37	4.37	11 mm	14 mm	Metric
DAJCM9251-0406	7/16"-20	9/16"-18	26.67	22.22	4.37	7.54	14 mm	19 mm	Metric
DAJCM9251-0404IN	7/16"-20	7/16"-20	22.61	16.66	4.37	4.37	7/16"	9/16"	Imperial
DAJCM9251-0406IN	7/16"-20	9/16"-18	26.67	22.22	4.37	7.54	9/16"	11/16"	Imperial
DAJCM9251-0505	1/2"-20	1/2"-20	24.13	17.40	5.94	5.94	14 mm	17 mm	Metric
DAJCM9251-0506	1/2"-20	9/16"-18	26.67	22.23	5.94	7.54	14 mm	19 mm	Metric
DAJCM9251-0505IN	1/2"-20	1/2"-20	24.13	17.40	5.94	5.94	9/16"	5/8"	Imperial
DAJCM9251-0506IN	1/2"-20	9/16"-18	26.67	22.23	5.94	7.54	9/16"	11/16"	Imperial
DAJCM9251-0604	9/16"-18	7/16"-20	26.90	22.22	7.54	4.37	14 mm	14 mm	Metric
DAJCM9251-0605	9/16"-18	1/2"-20	26.90	17.40	7.54	5.94	14 mm	17 mm	Metric
DAJCM9251-0606	9/16"-18	9/16"-18	26.92	22.22	7.54	7.54	14 mm	19 mm	Metric
DAJCM9251-0608	9/16"-18	3/4"-16	29.00	24.33	7.54	9.93	19 mm	22 mm	Metric
DAJCM9251-0604IN	9/16"-18	7/16"-20	26.90	22.22	7.54	4.37	9/16"	9/16"	Imperial
DAJCM9251-0605IN	9/16"-18	1/2"-20	26.90	17.40	7.54	5.94	9/16"	5/8"	Imperial
DAJCM9251-0606IN	9/16"-18	9/16"-18	26.92	22.22	7.54	7.54	9/16"	11/16"	Imperial
DAJCM9251-0608IN	9/16"-18	3/4"-16	29.00	24.33	7.54	9.93	3/4"	7/8"	Imperial
DAJCM9251-0707	5/8"-18	5/8"-18	31.75	24.33	7.14	7.14	19 mm	22 mm	Metric
DAJCM9251-0707IN	5/8"-18	5/8"-18	31.75	24.33	7.14	7.14	3/4"	7/8"	Imperial
DAJCM9251-0806	3/4"-16	9/16"-18	31.80	23.10	9.93	7.54	19 mm	19 mm	Metric

Certificate:

DAJCM9251-0808	3/4"-16	3/4"-16	31.75	24.33	9.93	9.93	19 mm	22 mm	Metric
DAJCM9251-0810	3/4"-16	7/8"-14	33.80	28.45	9.93	12.29	22 mm	27 mm	Metric
DAJCM9251-0812	3/4"-16	1-1/16"-12	36.10	30.20	9.93	15.47	27 mm	32 mm	Metric
DAJCM9251-0806IN	3/4"-16	9/16"-18	31.80	23.10	9.93	7.54	3/4"	11/16"	Imperial
DAJCM9251-0808IN	3/4"-16	3/4"-16	31.75	24.33	9.93	9.93	3/4"	7/8"	Imperial
DAJCM9251-0810IN	3/4"-16	7/8"-14	33.80	28.45	9.93	12.29	7/8"	1"	Imperial
DAJCM9251-0812IN	3/4"-16	1-1/16"-12	36.10	30.20	9.93	15.47	1-1/16"	1-1/4"	Imperial
DAJCM9251-1008	7/8"-14	3/4"-16	36.80	26.16	12.29	9.93	22 mm	22 mm	Metric
DAJCM9251-1010	7/8"-14	7/8"-14	36.83	28.45	12.29	12.29	22 mm	27 mm	Metric
DAJCM9251-1012	7/8"-14	1-1/16"-12	39.20	30.20	12.29	15.47	27 mm	32 mm	Metric
DAJCM9251-1008IN	7/8"-14	3/4"-16	36.80	26.16	12.29	9.93	7/8"	7/8"	Imperial
DAJCM9251-1010IN	7/8"-14	7/8"-14	36.83	28.45	12.29	12.29	7/8"	1"	Imperial
DAJCM9251-1012IN	7/8"-14	1-1/16"-12	39.20	30.20	12.29	15.47	1-1/16"	1-1/4"	Imperial
DAJCM9251-1206	1-1/16"-12	9/16"-18	42.20	27.24	15.47	7.54	27 mm	19 mm	Metric
DAJCM9251-1208	1-1/16"-12	3/4"-16	42.20	28.53	15.47	9.93	27 mm	22 mm	Metric
DAJCM9251-1210	1-1/16"-12	7/8"-14	42.20	29.46	15.47	12.29	27 mm	27 mm	Metric
DAJCM9251-1212	1-1/16"-12	1-1/16"-12	42.16	30.18	15.47	15.47	27 mm	32 mm	Metric
DAJCM9251-1216	1-1/16"-12	1-5/16"-12	44.70	35.71	15.47	21.44	33 mm	41 mm	Metric
DAJCM9251-1206IN	1-1/16"-12	9/16"-18	42.20	27.24	15.47	7.54	1-1/16"	11/16"	Imperial
DAJCM9251-1208IN	1-1/16"-12	3/4"-16	42.20	28.53	15.47	9.93	1-1/16"	7/8"	Imperial
DAJCM9251-1210IN	1-1/16"-12	7/8"-14	42.20	29.46	15.47	12.29	1-1/16"	1"	Imperial
DAJCM9251-1212IN	1-1/16"-12	1-1/16"-12	42.16	30.18	15.47	15.47	1-1/16"	1-1/4"	Imperial
DAJCM9251-1216IN	1-1/16"-12	1-5/16"-12	44.70	35.71	15.47	21.44	1-5/16"	1-1/2"	Imperial
DAJCM9251-1414	1-3/16"-12	1-3/16"-12	45.70	30.53	18.26	18.26	33 mm	36 mm	Metric
DAJCM9251-1414IN	1-3/16"-12	1-3/16"-12	45.70	30.53	18.26	18.26	1-5/16"	1-3/8"	Imperial
DAJCM9251-1612	1-5/16"-12	1-1/16"-12	45.97	35.26	21.44	15.50	33 mm	32 mm	Metric
DAJCM9251-1616	1-5/16"-12	1-5/16"-12	45.97	35.71	21.44	21.44	33 mm	41 mm	Metric
DAJCM9251-1620	1-5/16"-12	1-5/8"-12	51.10	42.80	21.44	27.42	41 mm	50 mm	Metric
DAJCM9251-1612IN	1-5/16"-12	1-1/16"-12	45.97	35.26	21.44	15.50	1-5/16"	1-1/4"	Imperial
DAJCM9251-1616IN	1-5/16"-12	1-5/16"-12	45.97	35.71	21.44	21.44	1-5/16"	1-1/2"	Imperial
DAJCM9251-1620IN	1-5/16"-12	1-5/8"-12	51.10	42.80	21.44	27.42	1-5/8"	2"	Imperial
DAJCM9251-2016	1-5/8"-12	1-5/16"-12	52.30	41.40	27.38	21.44	41 mm	41 mm	Metric
DAJCM9251-2020	1-5/8"-12	1-5/8"-12	52.30	42.80	27.38	27.42	41 mm	50 mm	Metric
DAJCM9251-2024	1-5/8"-12	1-7/8"-12	56.00	47.14	27.38	33.32	48 mm	55 mm	Metric
DAJCM9251-2016IN	1-5/8"-12	1-5/16"-12	52.30	41.40	27.38	21.44	1-5/8"	1-1/2"	Imperial
DAJCM9251-2020IN	1-5/8"-12	1-5/8"-12	52.30	42.80	27.38	27.42	1-5/8"	2"	Imperial
DAJCM9251-2024IN	1-5/8"-12	1-7/8"-12	56.00	47.14	27.38	33.32	1-7/8"	2-1/4"	Imperial
DAJCM9251-2424	1-7/8"-12	1-7/8"-12	59.18	47.14	33.32	33.32	48 mm	55 mm	Metric
DAJCM9251-2424IN	1-7/8"-12	1-7/8"-12	59.18	47.14	33.32	33.32	1-7/8"	2-1/4"	Imperial
DAJCM9251-3232	2-1/2"-12	2-1/2"-12	77.70	61.98	45.24	45.24	65 mm	75 mm	Metric
DAJCM9251-3232IN	2-1/2"-12	2-1/2"-12	77.70	61.98	45.24	45.24	2-1/2"	2-7/8"	Imperial

Certificate:

DAJC19305

90° Adjustable Elbow JIC Swivel Female – SAE Male O Ring

D

A

JC

1

9

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Swivel Female

90° Elbow

SAE UNF

Male O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJC19305

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

90° Elbow

Connection Type:


Swivel Female × Male

Thread Types:

UNF × UNF

Sealing Method:

O Ring

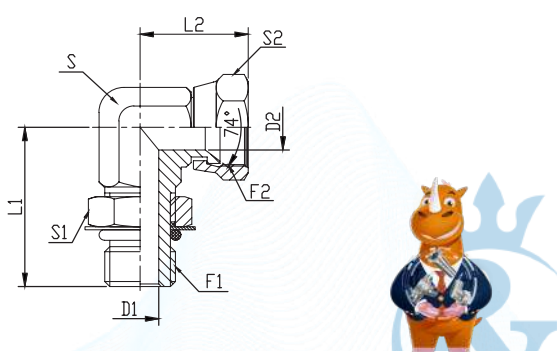

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	S2	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-	-
DAJC19305-0404	7/16"-20	7/16"-20	4.37	4.37	16.66	26.20	11 mm	14 mm	14 mm	Metric
DAJC19305-0406	7/16"-20	9/16"-18	4.37	7.54	20.50	31.80	14 mm	14 mm	14 mm	Metric
DAJC19305-0404IN	7/16"-20	7/16"-20	4.37	4.37	16.66	26.20	7/16"	9/16"	9/16"	Imperial
DAJC19305-0406IN	7/16"-20	9/16"-18	4.37	7.54	20.50	31.80	9/16"	9/16"	9/16"	Imperial
DAJC19305-0604	9/16"-18	7/16"-20	7.54	4.37	22.22	30.20	14 mm	17 mm	14 mm	Metric
DAJC19305-0606	9/16"-18	9/16"-18	7.54	7.54	22.22	31.80	14 mm	17 mm	17 mm	Metric
DAJC19305-0608	9/16"-18	3/4"-16	7.54	9.93	27.18	36.80	19 mm	17 mm	22 mm	Metric
DAJC19305-0604IN	9/16"-18	7/16"-20	7.54	4.37	22.22	30.20	9/16"	11/16"	9/16"	Imperial
DAJC19305-0606IN	9/16"-18	9/16"-18	7.54	7.54	22.22	31.80	9/16"	11/16"	11/16"	Imperial
DAJC19305-0608IN	9/16"-18	3/4"-16	7.54	9.93	27.18	36.80	3/4"	11/16"	7/8"	Imperial
DAJC19305-0806	3/4"-16	9/16"-18	9.93	7.54	24.13	33.50	19 mm	22 mm	17 mm	Metric
DAJC19305-0808	3/4"-16	3/4"-16	9.93	9.93	24.33	36.80	19 mm	22 mm	22 mm	Metric
DAJC19305-0810	3/4"-16	7/8"-14	9.93	12.29	26.70	43.20	22 mm	22 mm	27 mm	Metric
DAJC19305-0812	3/4"-16	1-1/16"-12	9.93	15.47	28.50	49.30	27 mm	22 mm	32 mm	Metric
DAJC19305-0806IN	3/4"-16	9/16"-18	9.93	7.54	24.13	33.50	3/4"	7/8"	11/16"	Imperial
DAJC19305-0808IN	3/4"-16	3/4"-16	9.93	9.93	24.33	36.80	3/4"	7/8"	7/8"	Imperial
DAJC19305-0810IN	3/4"-16	7/8"-14	9.93	12.29	26.70	43.20	7/8"	7/8"	1"	Imperial
DAJC19305-0812IN	3/4"-16	1-1/16"-12	9.93	15.47	28.50	49.30	1-1/16"	7/8"	1-1/4"	Imperial
DAJC19305-1008	7/8"-14	3/4"-16	12.29	9.93	28.45	39.10	22 mm	27 mm	22 mm	Metric
DAJC19305-1010	7/8"-14	7/8"-14	12.29	12.29	28.45	43.20	22 mm	27 mm	27 mm	Metric
DAJC19305-1012	7/8"-14	1-1/16"-12	12.29	15.47	29.30	49.30	27 mm	27 mm	32 mm	Metric
DAJC19305-1008IN	7/8"-14	3/4"-16	12.29	9.93	28.45	39.10	7/8"	1"	7/8"	Imperial
DAJC19305-1010IN	7/8"-14	7/8"-14	12.29	12.29	28.45	43.20	7/8"	1"	1"	Imperial
DAJC19305-1012IN	7/8"-14	1-1/16"-12	12.29	15.47	29.30	49.30	1-1/16"	1"	1-1/4"	Imperial
DAJC19305-1212	1-1/16"-12	1-1/16"-12	15.47	15.47	30.18	49.30	27 mm	32 mm	32 mm	Metric
DAJC19305-1216	1-5/16"-12	1-1/16"-12	21.44	15.47	51.10	35.26	33 mm	41 mm	32 mm	Metric
DAJC19305-1212IN	1-1/16"-12	1-1/16"-12	15.47	15.47	30.18	49.30	1-1/16"	1-1/4"	1-1/4"	Imperial
DAJC19305-1216IN	1-5/16"-12	1-1/16"-12	21.44	15.47	51.10	35.26	1-5/16"	1-1/2"	1-1/4"	Imperial
DAJC19305-1616	1-5/16"-12	1-5/16"-12	21.44	21.44	35.71	51.10	33 mm	41 mm	41 mm	Metric
DAJC19305-1616IN	1-5/16"-12	1-5/16"-12	21.44	21.44	35.71	51.10	1-5/16"	1-1/2"	1-1/2"	Imperial
DAJC19305-2020	1-5/8"-12	1-5/8"-12	27.38	27.38	42.80	57.20	41 mm	50 mm	50 mm	Metric
DAJC19305-2020IN	1-5/8"-12	1-5/8"-12	27.38	27.38	42.80	57.20	1-5/8"	2"	1-7/8"	Imperial
DAJC19305-2424	1-7/8"-12	1-7/8"-12	33.32	33.32	47.14	60.70	50 mm	58 mm	55 mm	Metric
DAJC19305-2424IN	1-7/8"-12	1-7/8"-12	33.32	33.32	47.14	60.70	1-7/8"	2-1/4"	2-1/8"	Imperial

Certificate:                

DAJC1928M

90° Elbow Connector JIC Swivel Female – NPTF Male 60°

D

A

JC

1

9

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Swivel Female

90° Elbow

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJC1928M

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


90° Elbow

Connection Type:

Swivel Female × Male

Thread Types:

UNF × NPTF 60°

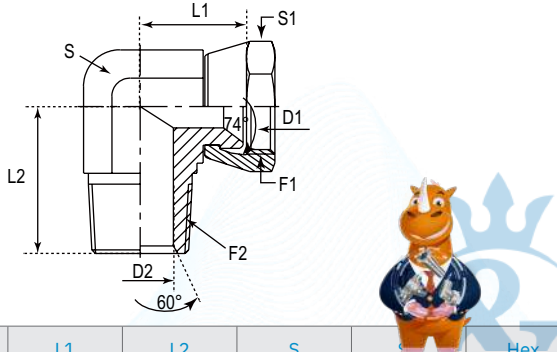

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	S2	Hex
#	UNF	NPTF	mm	mm	mm	mm	-	-	-	-
DAJC1928M-0202	5/16"-24	1/8"-27	1.57	4.78	16.66	19.81	11 mm	11 mm	11 mm	Metric
DAJC1928M-0202IN	5/16"-24	1/8"-27	1.57	4.78	16.66	19.81	7/16"	7/16"	7/16"	Imperial
DAJC1928M-0402	7/16"-20	1/8"-27	4.37	4.78	16.66	19.81	11 mm	14 mm	14 mm	Metric
DAJC1928M-0404	7/16"-20	1/4"-18	4.37	7.14	18.79	26.30	14 mm	14 mm	14 mm	Metric
DAJC1928M-0406	7/16"-20	3/8"-18	4.37	10.31	22.00	29.80	19 mm	14 mm	14 mm	Metric
DAJC1928M-0402IN	7/16"-20	1/8"-27	4.37	4.78	16.66	19.81	7/16"	9/16"	9/16"	Imperial
DAJC1928M-0404IN	7/16"-20	1/4"-18	4.37	7.14	18.79	26.30	9/16"	9/16"	9/16"	Imperial
DAJC1928M-0406IN	7/16"-20	3/8"-18	4.37	10.31	22.00	29.80	3/4"	9/16"	9/16"	Imperial
DAJC1928M-0502	1/2"-20	1/8"-27	5.94	4.78	17.40	27.10	14 mm	17 mm	17 mm	Metric
DAJC1928M-0504	1/2"-20	1/4"-18	5.94	7.14	17.40	27.10	14 mm	17 mm	17 mm	Metric
DAJC1928M-0502IN	1/2"-20	1/8"-27	5.94	4.78	17.40	27.10	9/16"	5/8"	5/8"	Imperial
DAJC1928M-0504IN	1/2"-20	1/4"-18	5.94	7.14	17.40	27.10	9/16"	5/8"	5/8"	Imperial
DAJC1928M-0604	9/16"-18	1/4"-18	7.54	7.14	22.22	27.70	14 mm	17 mm	17 mm	Metric
DAJC1928M-0606	9/16"-18	3/8"-18	7.54	10.31	22.22	31.80	19 mm	17 mm	17 mm	Metric
DAJC1928M-0608	9/16"-18	1/2"-14	7.54	13.49	26.54	37.30	22 mm	17 mm	17 mm	Metric
DAJC1928M-0604IN	9/16"-18	1/4"-18	7.54	7.14	22.22	27.70	9/16"	11/16"	11/16"	Imperial
DAJC1928M-0606IN	9/16"-18	3/8"-18	7.54	10.31	22.22	31.80	3/4"	11/16"	11/16"	Imperial
DAJC1928M-0608IN	9/16"-18	1/2"-14	7.54	13.49	26.54	37.30	7/8"	11/16"	11/16"	Imperial
DAJC1928M-0806	3/4"-16	3/8"-18	9.93	10.31	24.33	31.00	19 mm	22 mm	22 mm	Metric
DAJC1928M-0808	3/4"-16	1/2"-14	9.93	13.49	27.19	37.30	22 mm	22 mm	22 mm	Metric
DAJC1928M-0812	3/4"-16	3/4"-14	9.93	18.26	28.45	40.40	27 mm	22 mm	22 mm	Metric
DAJC1928M-0806IN	3/4"-16	3/8"-18	9.93	10.31	24.33	31.00	3/4"	7/8"	7/8"	Imperial
DAJC1928M-0808IN	3/4"-16	1/2"-14	9.93	13.49	27.19	37.30	7/8"	7/8"	7/8"	Imperial
DAJC1928M-0812IN	3/4"-16	3/4"-14	9.93	18.26	28.45	40.40	1-1/16"	7/8"	7/8"	Imperial
DAJC1928M-1008	7/8"-14	1/2"-14	12.29	13.49	28.45	37.30	22 mm	27 mm	27 mm	Metric
DAJC1928M-1008IN	7/8"-14	1/2"-14	12.29	13.49	28.45	37.30	7/8"	1"	1"	Imperial
DAJC1928M-1208	1-1/16"-12	1/2"-14	15.47	13.49	30.10	40.40	27 mm	32 mm	32 mm	Metric
DAJC1928M-1212	1-1/16"-12	3/4"-14	15.47	18.26	30.18	40.40	27 mm	32 mm	32 mm	Metric
DAJC1928M-1208IN	1-1/16"-12	1/2"-14	15.47	13.49	30.10	40.40	1-1/16"	1-1/4"	1-1/4"	Imperial
DAJC1928M-1212IN	1-1/16"-12	3/4"-14	15.47	18.26	30.18	40.40	1-1/16"	1-1/4"	1-1/4"	Imperial
DAJC1928M-1412	1-3/16"-12	3/4"-14	18.26	18.26	35.70	51.00	33 mm	36 mm	36 mm	Metric
DAJC1928M-1412IN	1-3/16"-12	3/4"-14	18.26	18.26	35.70	51.00	1-5/16"	1-3/8"	1-3/8"	Imperial
DAJC1928M-1612	1-5/16"-12	3/4"-14	21.44	18.26	35.71	50.00	33 mm	41 mm	41 mm	Metric
DAJC1928M-1616	1-5/16"-12	1"-11-1/2	21.44	23.83	35.71	50.00	33 mm	41 mm	41 mm	Metric
DAJC1928M-1612IN	1-5/16"-12	3/4"-14	21.44	18.26	35.71	50.00	1-5/16"	1-1/2"	1-1/2"	Imperial
DAJC1928M-1616IN	1-5/16"-12	1"-11-1/2	21.44	23.83	35.71	50.00	1-5/16"	1-1/2"	1-1/2"	Imperial
DAJC1928M-2020	1-5/8"-12	1-1/4"-11-1/2	27.38	31.75	58.90	60.50	41 mm	50 mm	50 mm	Metric
DAJC1928M-2024	1-5/8"-12	1-1/2"-11-1/2	27.42	38.10	48.77	63.91	50 mm	50 mm	50 mm	Metric
DAJC1928M-2020IN	1-5/8"-12	1-1/4"-11-1/2	27.38	31.75	58.90	60.50	1-5/8"	2"	2"	Imperial
DAJC1928M-2024IN	1-5/8"-12	1-1/2"-11-1/2	27.42	38.10	48.77	63.91	1-7/8"	2"	2"	Imperial
DAJC1928M-2424	1-7/8"-12	1-1/2"-11-1/2	33.32	38.10	48.77	65.78	50 mm	58 mm	58 mm	Metric
DAJC1928M-2424IN	1-7/8"-12	1-1/2"-11-1/2	33.32	38.10	48.77	65.78	1-7/8"	2-1/4"	2-1/4"	Imperial
DAJC1928M-3232	2-1/2"-12	2"-11-1/2	45.24	49.23	61.98	76.20	60 mm	73 mm	73 mm	Metric
DAJC1928M-3232IN	2-1/2"-12	2"-11-1/2	45.24	49.23	61.98	76.20	2-1/2"	2-7/8"	2-7/8"	Imperial

Certificate:                

DAJC1928F

90° Elbow Connector JIC Swivel Female – NPTF Female

D

A

JC

1

9

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Swivel Female

90° Elbow

NPTF

Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJC1928F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


90° Elbow

Connection Type:

Swivel Female × Female

Thread Types:

UNF × NPTF

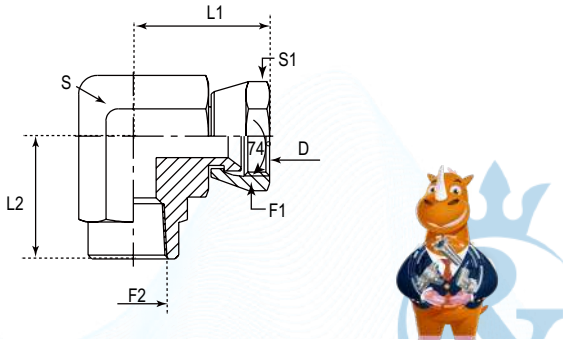

PART NUMBER	F1 (Thread)	F2 (Thread)	D	L1	L2	S	S1	Hex
#	UNF	NPTF	mm	mm	mm	-	-	-
DAJC1928F-0404	7/16"-20	1/4"-18	4.37	30.00	22.40	19 mm	14 mm	Metric
DAJC1928F-0406	7/16"-20	3/8"-18	4.37	33.30	25.90	22 mm	14 mm	Metric
DAJC1928F-0404IN	7/16"-20	1/4"-18	4.37	30.00	22.40	3/4"	9/16"	Imperial
DAJC1928F-0406IN	7/16"-20	3/8"-18	4.37	33.30	25.90	7/8"	9/16"	Imperial
DAJC1928F-0604	9/16"-18	1/4"-18	7.54	32.70	22.40	19 mm	17 mm	Metric
DAJC1928F-0606	9/16"-18	3/8"-18	7.54	37.80	25.90	22 mm	17 mm	Metric
DAJC1928F-0608	9/16"-18	1/2"-14	7.54	37.80	31.20	27 mm	17 mm	Metric
DAJC1928F-0604IN	9/16"-18	1/4"-18	7.54	32.70	22.40	3/4"	11/16"	Imperial
DAJC1928F-0606IN	9/16"-18	3/8"-18	7.54	37.80	25.90	7/8"	11/16"	Imperial
DAJC1928F-0608IN	9/16"-18	1/2"-14	7.54	37.80	31.20	1-1/16"	11/16"	Imperial
DAJC1928F-0806	3/4"-16	3/8"-18	9.93	38.90	25.90	22 mm	22 mm	Metric
DAJC1928F-0808	3/4"-16	1/2"-14	9.93	39.50	31.20	27 mm	22 mm	Metric
DAJC1928F-0806IN	3/4"-16	3/8"-18	9.93	38.90	25.90	7/8"	7/8"	Imperial
DAJC1928F-0808IN	3/4"-16	1/2"-14	9.93	39.50	31.20	1-1/16"	7/8"	Imperial
DAJC1928F-1008	7/8"-14	1/2"-14	12.29	41.30	31.20	27 mm	27 mm	Metric
DAJC1928F-1008IN	7/8"-14	1/2"-14	12.29	41.30	31.20	1-1/16"	1"	Imperial
DAJC1928F-1212	1-1/16"-12	3/4"-14	15.47	47.40	34.50	33 mm	32 mm	Metric
DAJC1928F-1212IN	1-1/16"-12	3/4"-14	15.47	47.40	34.50	1-5/16"	1-1/4"	Imperial
DAJC1928F-1616	1-5/16"-12	1"-11-1/2	21.44	57.10	41.20	41 mm	41 mm	Metric
DAJC1928F-1616IN	1-5/16"-12	1"-11-1/2	21.44	57.10	41.20	1-5/8"	1-1/2"	Imperial

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

CE

UK CA

DAJC1907M

90° Elbow JIC Swivel Female – BSPT Male 60°

D

A

JC

1

9

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Swivel Female

90° Elbow

BSPT

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJC1907M

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


90° Elbow

Connection Type:

Swivel Female × Male

Thread Types:

UNF × BSPT 60°

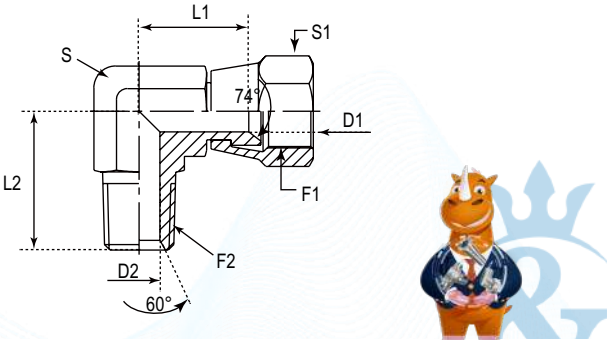

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	UNF	BSPT	mm	mm	mm	mm	mm	mm
DAJC1907M-0402	7/16"-20	1/8"-28	4.37	4.5	18	19.8	11	14
DAJC1907M-0404	7/16"-20	1/4"-19	4.37	6.00	18.80	26.50	14	14
DAJC1907M-0604	9/16"-18	1/4"-19	7.54	6.00	22.22	27.70	14	19
DAJC1907M-0606	9/16"-18	3/8"-19	7.54	9.00	23.10	31.00	19	19
DAJC1907M-0612	9/16"-18	3/4"-14	7.54	16.70	26.80	39.30	27	17.45
DAJC1907M-0806	3/4"-16	3/8"-19	9.93	9.00	24.33	31.00	19	22.23
DAJC1907M-0808	3/4"-16	1/2"-14	9.93	12.00	27.20	37.50	22	22.23
DAJC1907M-1006	7/8"-14	3/8"-19	9.93	9.00	26.16	32.50	22	22
DAJC1907M-1008	7/8"-14	1/2"-14	12.29	12.00	28.45	37.34	22	27
DAJC1907M-1212	1-1/16"-12	3/4"-14	15.47	16.70	30.18	40.50	27	31.75
DAJC1907M-1616	1-5/16"-12	1"-11	21.44	22.20	35.71	50.00	33	38.1

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

CE

UK CA


DAJC19251

90° Elbow Connector JIC Swivel Female – JIC Swivel Female

D	A	JC	1	9	251
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	JIC UNF	Swivel Female	90° Elbow	JIC Swivel Female



DME&JDE Code:	DAJC19251
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Swivel Female × Swivel Female
Thread Types:	UNF × UNF



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	S2	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-	-
DAJC19251-0404	7/16"-20	7/16"-20	4.37	4.37	24.50	24.50	11 mm	14 mm	14 mm	Metric
DAJC19251-0404IN	7/16"-20	7/16"-20	4.37	4.37	24.50	24.50	7/16"	9/16"	9/16"	Imperial
DAJC19251-0505	1/2"-20	1/2"-20	5.94	5.94	27.00	27.00	14 mm	17 mm	17 mm	Metric
DAJC19251-0505IN	1/2"-20	1/2"-20	5.94	5.94	27.00	27.00	9/16"	5/8"	5/8"	Imperial
DAJC19251-0606	9/16"-18	9/16"-18	7.54	7.54	32.00	32.00	14 mm	19 mm	19 mm	Metric
DAJC19251-0606IN	9/16"-18	9/16"-18	7.54	7.54	32.00	32.00	9/16"	11/16"	11/16"	Imperial
DAJC19251-0808	3/4"-16	3/4"-16	9.93	9.93	35.10	35.10	19 mm	22 mm	22 mm	Metric
DAJC19251-0808IN	3/4"-16	3/4"-16	9.93	9.93	35.10	35.10	3/4"	7/8"	7/8"	Imperial
DAJC19251-1010	7/8"-14	7/8"-14	12.29	12.29	41.30	41.30	22 mm	27 mm	27 mm	Metric
DAJC19251-1010IN	7/8"-14	7/8"-14	12.29	12.29	41.30	41.30	7/8"	1"	1"	Imperial
DAJC19251-1212	1-1/16"-12	1-1/16"-12	15.47	15.47	45.00	45.00	27 mm	32 mm	32 mm	Metric
DAJC19251-1212IN	1-1/16"-12	1-1/16"-12	15.47	15.47	45.00	45.00	1-1/16"	1-1/4"	1-1/4"	Imperial
DAJC19251-1616	1-5/16"-12	1-5/16"-12	21.44	21.44	51.40	51.40	33 mm	41 mm	41 mm	Metric
DAJC19251-1616IN	1-5/16"-12	1-5/16"-12	21.44	21.44	51.40	51.40	1-5/16"	1-1/2"	1-1/2"	Imperial

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, DEKRA, DIN, SAE, MA, CE, UKCA


DAJCM906Y

90° Adjustable Long Elbow JIC Male – BSPP Male + O Ring + Retaining Ring

D	A	JC	M	9	06	Y
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	90° Elbow	BSPP	Male + Long O Ring + Retaining Ring



DME&JDE Code:	DAJCM906Y
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Adjustable Male × Male
Thread Types:	UNF × BSPP
Sealing Method:	Long O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJCM906Y-0402	7/16"-20	1/8"-28	4.37	4.37	22.50	46.00	11	14
DAJCM906Y-0404	7/16"-20	1/4"-19	4.37	7.50	27.00	56.50	14	19
DAJCM906Y-0406	7/16"-20	3/8"-19	4.37	9.90	28.50	67.00	19	22
DAJCM906Y-0408	7/16"-20	1/2"-14	4.37	12.30	31.00	78.00	22	27
DAJCM906Y-0502	1/2"-20	1/8"-28	5.94	4.40	24.00	49.50	14	14
DAJCM906Y-0504	1/2"-20	1/4"-19	5.94	7.50	27.00	56.50	14	19
DAJCM906Y-0506	1/2"-20	3/8"-19	5.94	9.90	28.50	67.00	19	22
DAJCM906Y-0604	9/16"-18	1/4"-19	7.54	7.50	27.00	56.50	14	19
DAJCM906Y-0606	9/16"-18	3/8"-19	7.54	9.90	28.50	67.00	19	22
DAJCM906Y-0608	9/16"-18	1/2"-14	7.54	12.30	31.00	78.00	22	27
DAJCM906Y-0804	3/4"-16	1/4"-19	9.93	7.50	31.50	64.00	19	19
DAJCM906Y-0806	3/4"-16	3/8"-19	9.93	9.90	31.50	67.00	19	22
DAJCM906Y-0808	3/4"-16	1/2"-14	9.93	12.30	34.00	78.00	22	27
DAJCM906Y-0812	3/4"-16	3/4"-14	9.93	15.50	37.00	92.00	27	32
DAJCM906Y-1006	7/8"-14	3/8"-19	12.29	9.90	36.50	75.00	22	22
DAJCM906Y-1008	7/8"-14	1/2"-14	12.29	12.30	36.50	78.00	22	27
DAJCM906Y-1012	7/8"-14	3/4"-14	12.29	15.50	39.50	92.00	27	32
DAJCM906Y-1208	1-1/16"-12	1/2"-14	15.47	12.30	42.00	88.00	27	27
DAJCM906Y-1212	1-1/16"-12	3/4"-14	15.47	15.50	42.00	92.00	27	32
DAJCM906Y-1216	1-1/16"-12	1"-11	15.47	21.50	44.50	105.00	33	41
DAJCM906Y-1412	1-3/16"-12	3/4"-14	18.26	15.50	44.00	99.00	33	32
DAJCM906Y-1612	1-5/16"-12	3/4"-14	21.44	15.50	46.00	105.00	33	32
DAJCM906Y-1616	1-5/16"-12	1"-11	21.44	21.50	46.00	105.00	33	41
DAJCM906Y-1620	1-5/16"-12	1-1/4"-11	21.44	27.50	51.00	124.00	41	50
DAJCM906Y-2016	1-5/8"-12	1"-11	27.38	21.50	52.00	124.00	41	41
DAJCM906Y-2020	1-5/8"-12	1-1/4"-11	27.38	27.50	52.00	124.00	41	50
DAJCM906Y-2420	1-7/8"-12	1-1/4"-11	33.32	27.50	59.00	135.00	48	50
DAJCM906Y-2424	1-7/8"-12	1-1/2"-11	33.32	33.00	59.00	135.00	48	55

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, DEKRA, DIN, SAE, MA, CE, UKCA

DAJCM906J

90° Adjustable Long Elbow JIC Male – BSPP Male + O Ring

D

A

JC

M

9

06

J

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

90° Elbow

BSPP


Male + Long O Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DAJCM906J
- Product Type Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: 90° Elbow
- Connection Type: Adjustable Male × Male
- Thread Types: UNF × BSPP
- Sealing Method: Long O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJCM906J-0402	7/16"-20	1/8"-28	4.37	4.37	22.50	46.00	11	14
DAJCM906J-0404	7/16"-20	1/4"-19	4.37	7.50	27.00	56.50	14	19
DAJCM906J-0406	7/16"-20	3/8"-19	4.37	9.90	28.50	67.00	19	22
DAJCM906J-0408	7/16"-20	1/2"-14	4.37	12.30	31.00	78.00	22	27
DAJCM906J-0502	1/2"-20	1/8"-28	5.94	4.40	24.00	49.50	14	14
DAJCM906J-0504	1/2"-20	1/4"-19	5.94	7.50	27.00	56.50	14	19
DAJCM906J-0506	1/2"-20	3/8"-19	5.94	9.90	28.50	67.00	19	22
DAJCM906J-0604	9/16"-18	1/4"-19	7.54	7.50	27.00	56.50	14	19
DAJCM906J-0606	9/16"-18	3/8"-19	7.54	9.90	28.50	67.00	19	22
DAJCM906J-0608	9/16"-18	1/2"-14	7.54	12.30	31.00	78.00	22	27
DAJCM906J-0804	3/4"-16	1/4"-19	9.93	7.50	31.50	64.00	19	19
DAJCM906J-0806	3/4"-16	3/8"-19	9.93	9.90	31.50	67.00	19	22
DAJCM906J-0808	3/4"-16	1/2"-14	9.93	12.30	34.00	78.00	22	27
DAJCM906J-0812	3/4"-16	3/4"-14	9.93	15.50	37.00	92.00	27	32
DAJCM906J-1006	7/8"-14	3/8"-19	12.29	9.90	36.50	75.00	22	22
DAJCM906J-1008	7/8"-14	1/2"-14	12.29	12.30	36.50	78.00	22	27
DAJCM906J-1012	7/8"-14	3/4"-14	12.29	15.50	39.50	92.00	27	32
DAJCM906J-1208	1-1/16"-12	1/2"-14	15.47	12.30	42.00	88.00	27	27
DAJCM906J-1212	1-1/16"-12	3/4"-14	15.47	15.50	42.00	92.00	27	32
DAJCM906J-1216	1-1/16"-12	1"-11	15.47	21.50	44.50	105.00	33	41
DAJCM906J-1412	1-3/16"-12	3/4"-14	18.26	15.50	44.00	99.00	33	32
DAJCM906J-1612	1-5/16"-12	3/4"-14	21.44	15.50	46.00	105.00	33	32
DAJCM906J-1616	1-5/16"-12	1"-11	21.44	21.50	46.00	105.00	33	41
DAJCM906J-1620	1-5/16"-12	1-1/4"-11	21.44	27.50	51.00	124.00	41	50
DAJCM906J-2016	1-5/8"-12	1"-11	27.38	21.50	52.00	124.00	41	41
DAJCM906J-2020	1-5/8"-12	1-1/4"-11	27.38	27.50	52.00	124.00	41	50
DAJCM906J-2420	1-7/8"-12	1-1/4"-11	33.32	27.50	59.00	135.00	48	50
DAJCM906J-2424	1-7/8"-12	1-1/2"-11	33.32	33.00	59.00	135.00	48	55

Certificate:         

DAJCM952Y

90° Adjustable Long Elbow JIC Male – Metric Male + O Ring + Retaining Ring

D

A

JC

M

9

52

Y

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

90° Elbow

Metric


Male + Long O Ring + Retaining Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DAJCM952Y
- Product Type Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: 90° Elbow
- Connection Type: Male × Male
- Thread Types: UNF × Metric
- Sealing Method: Long O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAJCM952Y-0410	7/16"-20	M10X1	4.37	3.00	22.50	46.00	11	14
DAJCM952Y-0412	7/16"-20	M12X1.5	4.37	4.00	27.00	53.50	14	17
DAJCM952Y-0510	1/2"-20	M10X1	5.94	4.50	24.00	49.50	14	14
DAJCM952Y-0512	1/2"-20	M12X1.5	5.94	4.00	27.00	53.50	14	17
DAJCM952Y-0514	1/2"-20	M14X1.5	5.94	7.50	27.00	56.50	14	19
DAJCM952Y-0614	9/16"-18	M14X1.5	7.54	6.00	27.00	56.50	14	19
DAJCM952Y-0616	9/16"-18	M16X1.5	7.54	7.00	28.50	67.00	19	22
DAJCM952Y-0816	3/4"-16	M16X1.5	9.93	7.00	31.50	67.00	19	22
DAJCM952Y-0818	3/4"-16	M18X1.5	9.93	9.00	31.50	67.00	19	24
DAJCM952Y-1018	7/8"-14	M18X1.5	12.29	9.00	36.50	75.00	22	24
DAJCM952Y-1020	7/8"-14	M20X1.5	12.29	10.00	36.50	78.00	22	27
DAJCM952Y-1022	7/8"-14	M22X1.5	12.29	12.00	36.50	78.00	22	27
DAJCM952Y-1222	1-1/16"-12	M22X1.5	15.47	12.00	42.00	88.00	27	27
DAJCM952Y-1226	1-1/16"-12	M26X1.5	15.47	15.00	42.00	95.00	27	32
DAJCM952Y-1227	1-1/16"-12	M27X2	15.47	15.00	42.00	95.00	27	32
DAJCM952Y-1627	1-5/16"-12	M27X2	21.44	15.00	46.00	105.00	33	32
DAJCM952Y-1633	1-5/16"-12	M33X2	21.44	20.00	46.00	105.00	33	41
DAJCM952Y-2042	1-5/8"-12	M42X2	27.38	26.00	52.00	124.00	41	50
DAJCM952Y-2448	1-7/8"-12	M48X2	33.32	32.00	59.00	141.00	48	55

Certificate:         


DAJCM952J

90° Adjustable Long Elbow JIC Male – Metric Male + O Ring

D	A	JC	M	9	52	J
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	90° Elbow	Metric	Male + Long O Ring



DME&JDE Code:	DAJCM952J
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Adjustable Male × Male
Thread Types:	UNF × Metric
Sealing Method:	Long O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAJCM952J-0410	7/16"-20	M10X1	4.37	3.00	22.50	46.00	11	14
DAJCM952J-0412	7/16"-20	M12X1.5	4.37	4.00	27.00	53.50	14	17
DAJCM952J-0510	1/2"-20	M10X1	5.94	4.50	24.00	49.50	14	14
DAJCM952J-0512	1/2"-20	M12X1.5	5.94	4.00	27.00	53.50	14	17
DAJCM952J-0514	1/2"-20	M14X1.5	5.94	7.50	27.00	56.50	14	19
DAJCM952J-0614	9/16"-18	M14X1.5	7.54	6.00	27.00	56.50	14	19
DAJCM952J-0616	9/16"-18	M16X1.5	7.54	7.00	28.50	67.00	19	22
DAJCM952J-0816	3/4"-16	M16X1.5	9.93	7.00	31.50	67.00	19	22
DAJCM952J-0818	3/4"-16	M18X1.5	9.93	9.00	31.50	67.00	19	24
DAJCM952J-1018	7/8"-14	M18X1.5	12.29	9.00	36.50	75.00	22	24
DAJCM952J-1020	7/8"-14	M20X1.5	12.29	10.00	36.50	78.00	22	27
DAJCM952J-1022	7/8"-14	M22X1.5	12.29	12.00	36.50	78.00	22	27
DAJCM952J-1222	1-1/16"-12	M22X1.5	15.47	12.00	42.00	88.00	27	27
DAJCM952J-1226	1-1/16"-12	M26X1.5	15.47	15.00	42.00	95.00	27	32
DAJCM952J-1227	1-1/16"-12	M27X2	15.47	15.00	42.00	95.00	27	32
DAJCM952J-1627	1-5/16"-12	M27X2	21.44	15.00	46.00	105.00	33	32
DAJCM952J-1633	1-5/16"-12	M33X2	21.44	20.00	46.00	105.00	33	41
DAJCM952J-2042	1-5/8"-12	M42X2	27.38	26.00	52.00	124.00	41	50
DAJCM952J-2448	1-7/8"-12	M48X2	33.32	32.00	59.00	141.00	48	55




DAJCM928P

90° Long Elbow Connector JIC Male – NPTF Male

D	A	JC	M	9	28	P
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Elbow Type
DME	Adaptor	JIC UNF	Male	90° Elbow	NPTF	Long Elbow



DME&JDE Code:	DAJCM928P
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Male × Male
Thread Types:	UNF × NPTF



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	Hex
#	UNF	NPTF	mm	mm	mm	mm	-	-
DAJCM928P-0402	7/16"-20	1/8"-27	4.37	4.78	22.60	29.70	11 mm	Metric
DAJCM928P-0404	7/16"-20	1/4"-18	4.37	7.14	26.70	36.60	14 mm	Metric
DAJCM928P-0402IN	7/16"-20	1/8"-27	4.37	4.78	22.60	29.70	7/16"	Imperial
DAJCM928P-0404IN	7/16"-20	1/4"-18	4.37	7.14	26.70	36.60	9/16"	Imperial
DAJCM928P-0502	1/2"-20	1/8"-27	5.94	4.78	26.90	29.70	14 mm	Metric
DAJCM928P-0504	1/2"-20	1/4"-18	5.94	7.14	26.70	37.60	14 mm	Metric
DAJCM928P-0502IN	1/2"-20	1/8"-27	5.94	4.78	26.90	29.70	9/16"	Imperial
DAJCM928P-0504IN	1/2"-20	1/4"-18	5.94	7.14	26.70	37.60	9/16"	Imperial
DAJCM928P-0602	9/16"-18	1/8"-27	7.54	4.78	26.90	31.20	14 mm	Metric
DAJCM928P-0604	9/16"-18	1/4"-18	7.54	7.14	26.90	39.60	14 mm	Metric
DAJCM928P-0606	9/16"-18	3/8"-18	7.54	10.31	29.00	46.20	19 mm	Metric
DAJCM928P-0608	9/16"-18	1/2"-14	7.54	13.49	31.00	55.70	22 mm	Metric
DAJCM928P-0602IN	9/16"-18	1/8"-27	7.54	4.78	26.90	31.20	9/16"	Imperial
DAJCM928P-0604IN	9/16"-18	1/4"-18	7.54	7.14	26.90	39.60	9/16"	Imperial
DAJCM928P-0606IN	9/16"-18	3/8"-18	7.54	10.31	29.00	46.20	3/4"	Imperial
DAJCM928P-0608IN	9/16"-18	1/2"-14	7.54	13.49	31.00	55.70	7/8"	Imperial
DAJCM928P-0804	3/4"-16	1/4"-18	9.93	7.14	31.80	46.20	19 mm	Metric
DAJCM928P-0806	3/4"-16	3/8"-18	9.93	10.31	31.80	45.20	19 mm	Metric
DAJCM928P-0808	3/4"-16	1/2"-14	9.93	13.49	33.80	55.12	22 mm	Metric
DAJCM928P-0812	3/4"-16	3/4"-14	9.93	18.26	36.10	61.90	27 mm	Metric
DAJCM928P-0804IN	3/4"-16	1/4"-18	9.93	7.14	31.80	46.20	3/4"	Imperial
DAJCM928P-0806IN	3/4"-16	3/8"-18	9.93	10.31	31.80	45.20	3/4"	Imperial
DAJCM928P-0808IN	3/4"-16	1/2"-14	9.93	13.49	33.80	55.12	7/8"	Imperial
DAJCM928P-0812IN	3/4"-16	3/4"-14	9.93	18.26	36.10	61.90	1-1/16"	Imperial
DAJCM928P-1008	7/8"-14	1/2"-14	12.29	13.49	36.80	54.90	22 mm	Metric
DAJCM928P-1012	7/8"-14	3/4"-14	12.29	18.26	39.10	63.00	27 mm	Metric
DAJCM928P-1008IN	7/8"-14	1/2"-14	12.29	13.49	36.80	54.90	7/8"	Imperial
DAJCM928P-1012IN	7/8"-14	3/4"-14	12.29	18.26	39.10	63.00	1-1/16"	Imperial
DAJCM928P-1208	1-1/16"-12	1/2"-14	15.47	13.49	42.20	62.00	27 mm	Metric
DAJCM928P-1212	1-1/16"-12	3/4"-14	15.47	18.26	42.20	61.90	27 mm	Metric
DAJCM928P-1216	1-1/16"-12	1"-11-1/2	15.47	23.83	44.70	76.50	33 mm	Metric
DAJCM928P-1208IN	1-1/16"-12	1/2"-14	15.47	13.49	42.20	62.00	1-1/16"	Imperial
DAJCM928P-1212IN	1-1/16"-12	3/4"-14	15.47	18.26	42.20	61.90	1-1/16"	Imperial
DAJCM928P-1216IN	1-1/16"-12	1"-11-1/2	15.47	23.83	44.70	76.50	1-5/16"	Imperial
DAJCM928P-1412	1-3/16"-12	3/4"-14	18.26	18.26	45.70	65.80	33 mm	Metric
DAJCM928P-1412IN	1-3/16"-12	3/4"-14	18.26	18.26	45.70	65.80	1-5/16"	Imperial
DAJCM928P-1612	1-5/16"-12	3/4"-14	21.44	18.26	46.00	66.80	33 mm	Metric
DAJCM928P-1616	1-5/16"-12	1"-11-1/2	21.44	23.83	46.00	76.60	33 mm	Metric
DAJCM928P-1612IN	1-5/16"-12	3/4"-14	21.44	18.26	46.00	66.80	1-5/16"	Imperial
DAJCM928P-1616IN	1-5/16"-12	1"-11-1/2	21.44	23.83	46.00	76.60	1-5/16"	Imperial
DAJCM928P-2020	1-5/8"-12	1-1/4"-11-1/2	27.38	31.75	52.30	93.70	41 mm	Metric
DAJCM928P-2020IN	1-5/8"-12	1-1/4"-11-1/2	27.38	31.75	52.30	93.70	1-5/8"	Imperial
DAJCM928P-2424	1-7/8"-12	1-1/2"-11-1/2	33.32	38.10	59.20	104.40	48 mm	Metric
DAJCM928P-2424IN	1-7/8"-12	1-1/2"-11-1/2	33.32	38.10	59.20	104.40	1-7/8"	Imperial



DAJCM9289

90° Extra Long Elbow Connector JIC Male – NPTF Male

D

Company

DME

A

Product Range

Adaptor

JC

Thread Types

JIC UNF

M

Connection Type

Male

9

Adaptor Structure

90° Elbow

28

Thread Types

NPTF

9

Elbow Type

Extra Long Elbow

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM9289

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


90° Extra Elbow

Connection Type:

Male × Male

Thread Types:

UNF × NPTF



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	Hex
#	UNF	NPTF	mm	mm	mm	mm	-	-
DAJCM9289-0402	7/16"-20	1/8"-27	4.37	4.78	22.60	39.60	11 mm	Metric
DAJCM9289-0404	7/16"-20	1/4"-18	4.37	7.14	26.70	52.58	14 mm	Metric
DAJCM9289-0402IN	7/16"-20	1/8"-27	4.37	4.78	22.60	39.60	7/16"	Imperial
DAJCM9289-0404IN	7/16"-20	1/4"-18	4.37	7.14	26.70	52.58	9/16"	Imperial
DAJCM9289-0502	1/2"-20	1/8"-27	5.94	4.78	24.10	41.40	14 mm	Metric
DAJCM9289-0504	1/2"-20	1/4"-18	5.94	7.14	26.70	52.30	14 mm	Metric
DAJCM9289-0502IN	1/2"-20	1/8"-27	5.94	4.78	24.10	41.40	9/16"	Imperial
DAJCM9289-0504IN	1/2"-20	1/4"-18	5.94	7.14	26.70	52.30	9/16"	Imperial
DAJCM9289-0602	9/16"-18	1/8"-27	7.54	4.78	26.90	41.40	14 mm	Metric
DAJCM9289-0604	9/16"-18	1/4"-18	7.54	7.14	26.90	52.60	14 mm	Metric
DAJCM9289-0606	9/16"-18	3/8"-18	7.54	10.31	29.00	61.47	19 mm	Metric
DAJCM9289-0608	9/16"-18	1/2"-14	7.54	13.49	31.00	72.90	22 mm	Metric
DAJCM9289-0602IN	9/16"-18	1/8"-27	7.54	4.78	26.90	41.40	9/16"	Imperial
DAJCM9289-0604IN	9/16"-18	1/4"-18	7.54	7.14	26.90	52.60	9/16"	Imperial
DAJCM9289-0606IN	9/16"-18	3/8"-18	7.54	10.31	29.00	61.47	3/4"	Imperial
DAJCM9289-0608IN	9/16"-18	1/2"-14	7.54	13.49	31.00	72.90	7/8"	Imperial
DAJCM9289-0804	3/4"-16	1/4"-18	9.93	7.14	31.80	61.47	19 mm	Metric
DAJCM9289-0806	3/4"-16	3/8"-18	9.93	10.31	31.80	59.40	19 mm	Metric
DAJCM9289-0808	3/4"-16	1/2"-14	9.93	13.49	33.80	72.90	22 mm	Metric
DAJCM9289-0812	3/4"-16	3/4"-14	9.93	18.26	36.10	83.30	27 mm	Metric
DAJCM9289-0804IN	3/4"-16	1/4"-18	9.93	7.14	31.80	61.47	3/4"	Imperial
DAJCM9289-0808IN	3/4"-16	1/2"-14	9.93	13.49	33.80	72.90	7/8"	Imperial
DAJCM9289-0812IN	3/4"-16	3/4"-14	9.93	18.26	36.10	83.30	1-1/16"	Imperial
DAJCM9289-1006	7/8"-14	3/8"-18	12.29	10.31	36.80	59.40	22 mm	Metric
DAJCM9289-1008	7/8"-14	1/2"-14	12.29	13.49	36.80	72.90	22 mm	Metric
DAJCM9289-1012	7/8"-14	3/4"-14	12.29	18.26	39.12	83.30	27 mm	Metric
DAJCM9289-1006IN	7/8"-14	3/8"-18	12.29	10.31	36.80	59.40	7/8"	Imperial
DAJCM9289-1008IN	7/8"-14	1/2"-14	12.29	13.49	36.80	72.90	7/8"	Imperial
DAJCM9289-1012IN	7/8"-14	3/4"-14	12.29	18.26	39.12	83.30	1-1/16"	Imperial
DAJCM9289-1208	1-1/16"-12	1/2"-14	15.47	13.49	42.20	83.30	27 mm	Metric
DAJCM9289-1212	1-1/16"-12	3/4"-14	15.47	18.26	42.20	83.30	27 mm	Metric
DAJCM9289-1208IN	1-1/16"-12	1/2"-14	15.47	13.49	42.20	83.30	1-1/16"	Imperial
DAJCM9289-1212IN	1-1/16"-12	3/4"-14	15.47	18.26	42.20	83.30	1-1/16"	Imperial
DAJCM9289-1412	1-3/16"-12	3/4"-14	18.26	18.26	45.70	88.90	33 mm	Metric
DAJCM9289-1412IN	1-3/16"-12	3/4"-14	18.26	18.26	45.70	88.90	1-5/16"	Imperial
DAJCM9289-1612	1-5/16"-12	3/4"-14	21.44	18.26	46.00	98.00	33 mm	Metric
DAJCM9289-1616	1-5/16"-12	1"-11-1/2	21.44	23.83	46.00	102.90	33 mm	Metric
DAJCM9289-1612IN	1-5/16"-12	3/4"-14	21.44	18.26	46.00	98.00	1-5/16"	Imperial
DAJCM9289-1616IN	1-5/16"-12	1"-11-1/2	21.44	23.83	46.00	102.90	1-5/16"	Imperial
DAJCM9289-2016	1-5/8"-12	1"-11-1/2	27.38	23.83	52.30	102.90	41 mm	Metric
DAJCM9289-2020	1-5/8"-12	1-1/4"-11-1/2	27.38	31.75	52.30	127.00	41 mm	Metric
DAJCM9289-2016IN	1-5/8"-12	1"-11-1/2	27.38	23.83	52.30	102.90	1-5/8"	Imperial
DAJCM9289-2020IN	1-5/8"-12	1-1/4"-11-1/2	27.38	31.75	52.30	127.00	1-5/8"	Imperial
DAJCM9289-2424	1-7/8"-12	1-1/2"-11-1/2	33.32	38.10	59.20	141.00	48 mm	Metric
DAJCM9289-2424IN	1-7/8"-12	1-1/2"-11-1/2	33.32	38.10	59.20	141.00	1-7/8"	Imperial
DAJCM9289-3232	2-1/2"-12	2"-11-1/2	45.24	49.23	77.70	160.00	65 mm	Metric
DAJCM9289-3232IN	2-1/2"-12	2"-11-1/2	45.24	49.23	77.70	160.00	2-1/2"	Imperial

Certificate:         

DAJCM906P

90° Adjustable Long Elbow JIC Male – SAE Male + O Ring + Retaining Ring

D

Company

DME

A

Product Range

Adaptor

JC

Thread Types

JIC UNF

M

Connection Type

Male

9

Adaptor Structure

90° Elbow

06

Thread Types

SAE UNF

P

Connection Type

Male + Long O Ring + Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM906P

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

UNF × UNF

Sealing Method:

Long O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S		S1	
#	UNF	UNF	mm	mm	mm	mm	mm	Inch	mm	Inch
DAJCM906P-0404	7/16"-20	7/16"-20	4.37	4.37	22.60	30.20	11	7/16"	14	9/16"
DAJCM906P-0406	7/16"-20	9/16"-18	4.37	7.54	26.70	42.30	14	9/16"	19	11/16"
DAJCM906P-0606	9/16"-18	9/16"-18	7.54	7.54	26.90	42.30	14	9/16"	19	11/16"
DAJCM906P-0608	9/16"-18	3/4"-16	7.54	9.93	29.00	46.00	19	3/4"	22	7/8"
DAJCM906P-0806	3/4"-16	9/16"-18	9.93	7.54	31.80	44.50	19	3/4"	19	11/16"
DAJCM906P-0808	3/4"-16	3/4"-16	9.93	9.93	31.80	46.00	19	3/4"	22	7/8"
DAJCM906P-0810	3/4"-16	7/8"-14	9.93	12.29	33.80	54.10	22	7/8"	27	1"
DAJCM906P-1008	7/8"-14	3/4"-16	12.29	9.93	36.80	53.34	22	7/8"	22	7/8"
DAJCM906P-1010	7/8"-14	7/8"-14	12.29	12.29	36.80	54.90	22	7/8"	27	1"
DAJCM906P-1012	7/8"-14	1-1/16"-12	12.29	15.47	39.10	66.55	27	1-1/16"	32	1-1/4"
DAJCM906P-1210	1-1/16"-12	7/8"-14	15.47	12.29	42.20	62.74	27	1-1/16"	27	1"
DAJCM906P-1212	1-1/16"-12	1-1/16"-12	15.47	15.47	39.10	57.20	27	1- 1/16"	32	1-1/4"
DAJCM906P-1612	1-5/16"-12	1-1/16"-12	21.44	15.47	42.20	62.70	33	1-5/16"	32	1-1/4"
DAJCM906P-1616	1-5/16"-12	1-5/16"-12	21.44	21.44	46.00	77.70	33	1-5/16"	41	1-1/2"
DAJCM906P-2020	1-5/8"-12	1-5/8"-12	27.38	27.38	52.30	88.30	41	1-5/8"	50	1-7/8"

Certificate:         




DAJCM930J

90° Adjustable X-Long Elbow JIC Male – SAE Male + O Ring

D	A	JC	M	9	30	J
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	90° Elbow	SAE UNF	Male + Long O Ring



DME&JDE Code:	DAJCM930J
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Adjustable Male × Male
Thread Types:	UNF × UNF
Sealing Method:	X-Long O Ring

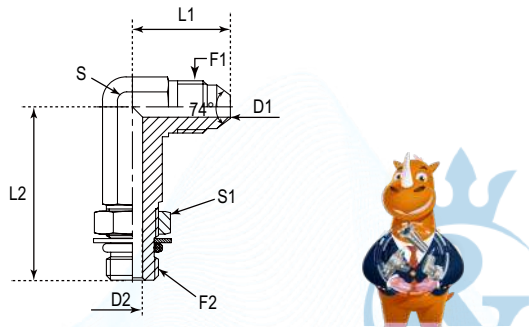

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAJCM930J-0404	7/16"-20	7/16"-20	22.60	43.90	4.37	4.37	11 mm	14 mm	Metric
DAJCM930J-0405	7/16"-20	1/2"-20	24.10	52.00	4.37	5.94	14 mm	19 mm	Metric
DAJCM930J-0406	7/16"-20	9/16"-18	26.70	52.60	4.37	7.54	14 mm	19 mm	Metric
DAJCM930J-0404IN	7/16"-20	7/16"-20	22.60	43.90	4.37	4.37	7/16"	9/16"	Imperial
DAJCM930J-0405IN	7/16"-20	1/2"-20	24.10	52.00	4.37	5.94	9/16"	11/16"	Imperial
DAJCM930J-0406IN	7/16"-20	9/16"-18	26.70	52.60	4.37	7.54	9/16"	11/16"	Imperial
DAJCM930J-0505	1/2"-20	1/2"-20	24.13	52.00	5.94	5.94	14 mm	19 mm	Metric
DAJCM930J-0505IN	1/2"-20	1/2"-20	24.13	52.00	5.94	5.94	9/16"	11/16"	Imperial
DAJCM930J-0606	9/16"-18	9/16"-18	26.90	52.80	7.54	7.54	14 mm	19 mm	Metric
DAJCM930J-0608	9/16"-18	3/4"-16	29.00	63.30	7.54	9.93	19 mm	22 mm	Metric
DAJCM930J-0610	9/16"-18	7/8"-14	33.00	73.40	7.54	12.29	22 mm	27 mm	Metric
DAJCM930J-0606IN	9/16"-18	9/16"-18	26.90	52.80	7.54	7.54	9/16"	11/16"	Imperial
DAJCM930J-0608IN	9/16"-18	3/4"-16	29.00	63.30	7.54	9.93	3/4"	7/8"	Imperial
DAJCM930J-0610IN	9/16"-18	7/8"-14	33.00	73.40	7.54	12.29	7/8"	1"	Imperial
DAJCM930J-0806	3/4"-16	9/16"-18	31.80	55.40	9.93	7.54	19 mm	19 mm	Metric
DAJCM930J-0808	3/4"-16	3/4"-16	31.80	63.30	9.93	9.93	19 mm	22 mm	Metric
DAJCM930J-0810	3/4"-16	7/8"-14	33.80	73.40	9.93	12.29	22 mm	27 mm	Metric
DAJCM930J-0812	3/4"-16	1-1/16"-12	36.10	84.80	9.93	15.47	27 mm	32 mm	Metric
DAJCM930J-0806IN	3/4"-16	9/16"-18	31.80	55.40	9.93	7.54	3/4"	11/16"	Imperial
DAJCM930J-0808IN	3/4"-16	3/4"-16	31.80	63.30	9.93	9.93	3/4"	7/8"	Imperial
DAJCM930J-0810IN	3/4"-16	7/8"-14	33.80	73.40	9.93	12.29	7/8"	1"	Imperial
DAJCM930J-0812IN	3/4"-16	1-1/16"-12	36.10	84.80	9.93	15.47	1-1/16"	1-1/4"	Imperial
DAJCM930J-1008	7/8"-14	3/4"-16	36.80	69.34	12.29	9.93	22 mm	22 mm	Metric
DAJCM930J-1010	7/8"-14	7/8"-14	36.80	73.40	12.29	12.29	22 mm	27 mm	Metric
DAJCM930J-1012	7/8"-14	1-1/16"-12	39.10	84.80	12.29	15.47	27 mm	32 mm	Metric
DAJCM930J-1008IN	7/8"-14	3/4"-16	36.80	69.34	12.29	9.93	7/8"	7/8"	Imperial
DAJCM930J-1010IN	7/8"-14	7/8"-14	36.80	73.40	12.29	12.29	7/8"	1"	Imperial
DAJCM930J-1012IN	7/8"-14	1-1/16"-12	39.10	84.80	12.29	15.47	1-1/16"	1-1/4"	Imperial
DAJCM930J-1208	1-1/16"-12	3/4"-16	42.20	69.34	15.47	9.93	27 mm	22 mm	Metric
DAJCM930J-1210	1-1/16"-12	7/8"-14	42.20	84.80	15.47	12.29	27 mm	27 mm	Metric
DAJCM930J-1212	1-1/16"-12	1-1/16"-12	42.20	84.80	15.47	15.47	27 mm	32 mm	Metric
DAJCM930J-1216	1-1/16"-12	1-5/16"-12	44.70	94.50	15.47	21.44	33 mm	41 mm	Metric
DAJCM930J-1208IN	1-1/16"-12	3/4"-16	42.20	69.34	15.47	9.93	1-1/16"	7/8"	Imperial
DAJCM930J-1210IN	1-1/16"-12	7/8"-14	42.20	84.80	15.47	12.29	1-1/16"	1"	Imperial
DAJCM930J-1212IN	1-1/16"-12	1-1/16"-12	42.20	84.80	15.47	15.47	1-1/16"	1-1/4"	Imperial
DAJCM930J-1216IN	1-1/16"-12	1-5/16"-12	44.70	94.50	15.47	21.44	1-5/16"	1-1/2"	Imperial
DAJCM930J-1612	1-5/16"-12	1-1/16"-12	46.00	94.49	21.44	15.47	33 mm	32 mm	Metric
DAJCM930J-1616	1-5/16"-12	1-5/16"-12	46.00	94.20	21.44	21.44	33 mm	41 mm	Metric
DAJCM930J-1620	1-5/16"-12	1-5/8"-12	51.10	111.80	21.44	27.38	41 mm	50 mm	Metric
DAJCM930J-1612IN	1-5/16"-12	1-1/16"-12	46.00	94.49	21.44	15.47	1-5/16"	1-1/4"	Imperial
DAJCM930J-1616IN	1-5/16"-12	1-5/16"-12	46.00	94.20	21.44	21.44	1-5/16"	1-1/2"	Imperial
DAJCM930J-1620IN	1-5/16"-12	1-5/8"-12	51.10	111.80	21.44	27.38	1-5/8"	1-7/8"	Imperial
DAJCM930J-2020	1-5/8"-12	1-5/8"-12	52.30	111.80	27.38	27.38	41 mm	50 mm	Metric
DAJCM930J-2020IN	1-5/8"-12	1-5/8"-12	52.30	111.80	27.38	27.38	1-5/8"	1-7/8"	Imperial
DAJCM930J-2424	1-7/8"-12	1-7/8"-12	59.20	135.00	33.32	33.32	48 mm	55 mm	Metric
DAJCM930J-2424IN	1-7/8"-12	1-7/8"-12	59.20	135.00	33.32	33.32	1-7/8"	2-1/8"	Imperial




DAJCM925T

90° Bulkhead Elbow Connector JIC Male – JIC Male

D	A	JC	M	9	25	T
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	90° Elbow	JIC UNF	Bulkhead Male



DME&JDE Code:	DAJCM925T
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Male × Male
Thread Types:	UNF × UNF
Other Features:	Bulkhead

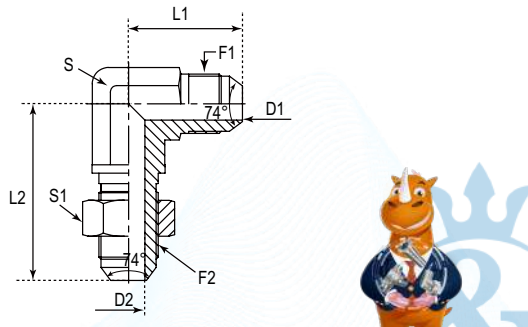

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAJCM925T-0303	3/8"-24	3/8"-24	23.88	38.10	3.18	3.18	11 mm	16 mm	Metric
DAJCM925T-0303IN	3/8"-24	3/8"-24	23.88	38.10	3.18	3.18	7/16"	7/16"	Imperial
DAJCM925T-0404	7/16"-20	7/16"-20	24.60	40.40	4.37	4.37	11 mm	17 mm	Metric
DAJCM925T-0404IN	7/16"-20	7/16"-20	24.60	40.40	4.37	4.37	7/16"	11/16"	Imperial
DAJCM925T-0505	1/2"-20	1/2"-20	26.90	43.70	5.94	5.94	14 mm	19 mm	Metric
DAJCM925T-0505IN	1/2"-20	1/2"-20	26.90	43.70	5.94	5.94	9/16"	3/4"	Imperial
DAJCM925T-0606	9/16"-18	9/16"-18	26.90	46.00	7.54	7.54	14 mm	22 mm	Metric
DAJCM925T-0606IN	9/16"-18	9/16"-18	26.90	46.00	7.54	7.54	9/16"	13/16"	Imperial
DAJCM925T-0808	3/4"-16	3/4"-16	34.50	53.60	9.93	9.93	19 mm	24 mm	Metric
DAJCM925T-0808IN	3/4"-16	3/4"-16	34.50	53.60	9.93	9.93	3/4"	1"	Imperial
DAJCM925T-1010	7/8"-14	7/8"-14	39.60	60.70	12.29	12.29	22 mm	30 mm	Metric
DAJCM925T-1010IN	7/8"-14	7/8"-14	39.60	60.70	12.29	12.29	7/8"	1-1/8"	Imperial
DAJCM925T-1212	1-1/16"-12	1-1/16"-12	45.20	67.80	15.47	15.47	27 mm	36 mm	Metric
DAJCM925T-1212IN	1-1/16"-12	1-1/16"-12	45.20	67.80	15.47	15.47	1-1/16"	1-3/8"	Imperial
DAJCM925T-1414	1-3/16"-12	1-3/16"-12	48.80	71.10	18.26	18.26	33 mm	41 mm	Metric
DAJCM925T-1414IN	1-3/16"-12	1-3/16"-12	48.80	71.10	18.26	18.26	1-5/16"	1-1/2"	Imperial
DAJCM925T-1616	1-5/16"-12	1-5/16"-12	49.30	71.10	21.44	21.44	33 mm	41 mm	Metric
DAJCM925T-1616IN	1-5/16"-12	1-5/16"-12	49.30	71.10	21.44	21.44	1-5/16"	1-5/8"	Imperial
DAJCM925T-2020	1-5/8"-12	1-5/8"-12	55.10	79.30	27.38	27.38	41 mm	50 mm	Metric
DAJCM925T-2020IN	1-5/8"-12	1-5/8"-12	55.10	79.30	27.38	27.38	1-5/8"	1-7/8"	Imperial
DAJCM925T-2424	1-7/8"-12	1-7/8"-12	59.40	86.90	33.32	33.32	48 mm	55 mm	Metric
DAJCM925T-2424IN	1-7/8"-12	1-7/8"-12	59.40	86.90	33.32	33.32	1-7/8"	2-1/8"	Imperial
DAJCM925T-3232	2-1/2"-12	2-1/2"-12	73.40	104.40	45.24	45.24	65 mm	70 mm	Metric
DAJCM925T-3232IN	2-1/2"-12	2-1/2"-12	73.40	104.40	45.24	45.24	2-1/2"	2-3/4"	Imperial




DAJCM9251-B

90° Swept Elbow JIC Male – JIC Swivel Female

D	A	JC	M	9	251	B
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type	Elbow Type
DME	Adaptor	JIC UNF	Male	90° Elbow	JIC Swivel Female	Swept



DME&JDE Code:	DAJCM9251-B
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Male × Swivel Female
Thread Types:	UNF × UNF

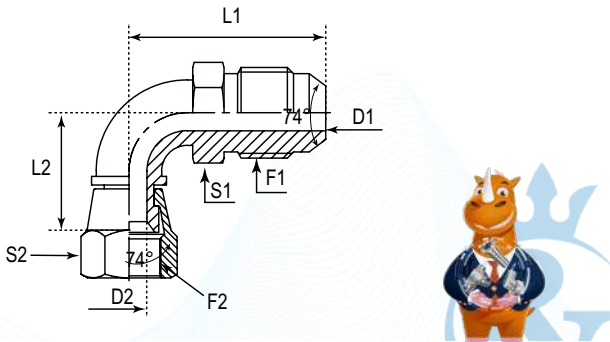

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAJCM9251-0404-B	7/16"-20	7/16"-20	4	4	41.5	31.5	12 mm	14 mm	Metric
DAJCM9251-0404-BIN	7/16"-20	7/16"-20	4	4	41.5	31.5	1/2"	9/16"	Imperial
DAJCM9251-0606-B	9/16"-18	9/16"-18	7.00	7.00	40.00	47.00	17 mm	17 mm	Metric
DAJCM9251-0606-BIN	9/16"-18	9/16"-18	7.00	7.00	40.00	47.00	5/8"	11/16"	Imperial
DAJCM9251-0808-B	3/4"-16	3/4"-16	9.30	9.30	45.00	45.00	22 mm	22 mm	Metric
DAJCM9251-0808-BIN	3/4"-16	3/4"-16	9.30	9.30	45.00	45.00	7/8"	13/16"	Imperial
DAJCM9251-1010-B	7/8"-14	7/8"-14	12.00	12.00	65.80	49.50	27 mm	27 mm	Metric
DAJCM9251-1010-BIN	7/8"-14	7/8"-14	12.00	12.00	65.80	49.50	15/16"	1"	Imperial
DAJCM9251-1212-B	1-1/16"-12	1-1/16"-12	15.00	15.00	69.50	61.00	27 mm	32 mm	Metric
DAJCM9251-1212-BIN	1-1/16"-12	1-1/16"-12	15.00	15.00	69.50	61.00	1-1/8"	1-1/4"	Imperial
DAJCM9251-1616-B	1-5/16"-12	1-5/16"-12	20.00	20.00	78.70	80.00	36 mm	41 mm	Metric
DAJCM9251-1616-BIN	1-5/16"-12	1-5/16"-12	20.00	20.00	78.70	80.00	1-3/8"	1-1/2"	Imperial
DAJCM9251-2020-B	1-5/8"-12	1-5/8"-12	26.00	26.00	99.00	95.00	41 mm	50 mm	Metric
DAJCM9251-2020-BIN	1-5/8"-12	1-5/8"-12	26.00	26.00	99.00	95.00	1-11/16"	2"	Imperial
DAJCM9251-2424-B	1-7/8"-12	1-7/8"-12	32.00	32.00	135.50	98.30	50 mm	58 mm	Metric
DAJCM9251-2424-BIN	1-7/8"-12	1-7/8"-12	32.00	32.00	135.50	98.30	2"	2-1/4"	Imperial




DAJCM9251-L-B

90° Swept Elbow JIC Male – Long JIC Swivel Female

D	A	JC	M	9	251	L	B
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type	Elbow Length	Elbow Type
DME	Adaptor	JIC UNF	Male	90° Elbow	JIC Swivel Female	Long	Swept



DME&JDE Code:	DAJCM9251-L-B
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Male × Long Swivel Female
Thread Types:	UNF × UNF

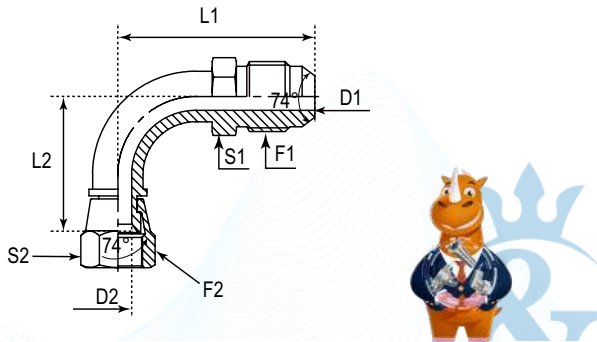

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S1	S2	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	mm	-
DAJCM9251-L-0404-B	7/16"-20	7/16"-20	4.00	4.00	39.50	70.80	12 mm	14 mm	Metric
DAJCM9251-L-0404-BIN	7/16"-20	7/16"-20	4.00	4.00	39.50	70.80	1/2"	9/16"	Imperial
DAJCM9251-L-0606-B	9/16"-18	9/16"-18	7.00	7.00	49.60	60.70	17 mm	17 mm	Metric
DAJCM9251-L-0606-BIN	9/16"-18	9/16"-18	7.00	7.00	49.60	60.70	5/8"	11/16"	Imperial
DAJCM9251-L-0808-B	3/4"-16	3/4"-16	9.30	9.30	58.00	75.00	22 mm	22 mm	Metric
DAJCM9251-L-0808-BIN	3/4"-16	3/4"-16	9.30	9.30	58.00	75.00	7/8"	13/16"	Imperial
DAJCM9251-L-1010-B	7/8"-14	7/8"-14	12.00	12.00	67.80	85.60	24 mm	27 mm	Metric
DAJCM9251-L-1010-BIN	7/8"-14	7/8"-14	12.00	12.00	67.80	85.60	15/16"	1"	Imperial
DAJCM9251-L-1212-B	1-1/16"-12	1-1/16"-12	15.00	15.00	69.50	92.90	27 mm	32 mm	Metric
DAJCM9251-L-1212-BIN	1-1/16"-12	1-1/16"-12	15.00	15.00	69.50	92.90	1-1/8"	1-1/4"	Imperial
DAJCM9251-L-1616-B	1-5/16"-12	1-5/16"-12	20.00	20.00	88.40	125.20	36 mm	41 mm	Metric
DAJCM9251-L-1616-BIN	1-5/16"-12	1-5/16"-12	20.00	20.00	88.40	125.20	1-3/8"	1-1/2"	Imperial
DAJCM9251-L-2020-B	1-5/8"-12	1-5/8"-12	26.00	26.00	104.70	145.50	41 mm	50 mm	Metric
DAJCM9251-L-2020-BIN	1-5/8"-12	1-5/8"-12	26.00	26.00	104.70	145.50	1-11/16"	2"	Imperial
DAJCM9251-L-2424-B	1-7/8"-12	1-7/8"-12	32.00	32.00	135.50	150.00	50 mm	58 mm	Metric
DAJCM9251-L-2424-BIN	1-7/8"-12	1-7/8"-12	32.00	32.00	135.50	150.00	2"	2-1/4"	Imperial



DAJCMT25M

Branch Tee Connector JIC Male – JIC Male

D

Company

DME

A

Product Range

Adaptor

JC

Thread Types

JIC UNF

M

Connection Type

Male

T

Adaptor Structure

Branch Tee

25

Thread Types

JIC UNF

M

Connection Type

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCMT25M

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Branch Tee

Connection Type:

Male x Male x Male

Thread Types:

UNF x UNF x UNF

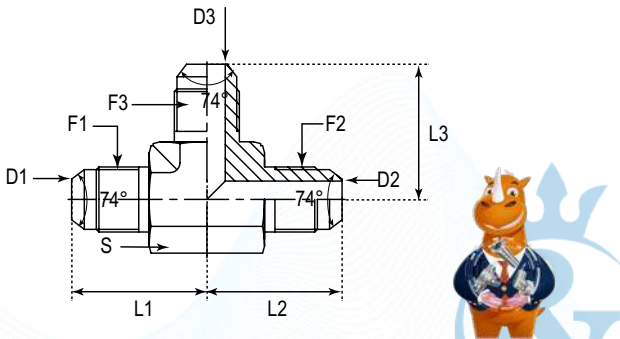

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-
DAJCMT25M-0202	5/16"-24	5/16"-24	5/16"-24	1.57	1.57	1.57	19.60	19.60	19.60	11 mm	Metric
DAJCMT25M-0202IN	5/16"-24	5/16"-24	5/16"-24	1.57	1.57	1.57	19.60	19.60	19.60	7/16"	Imperial
DAJCMT25M-0303	3/8"-24	3/8"-24	3/8"-24	3.18	3.18	3.18	21.10	21.10	21.10	11 mm	Metric
DAJCMT25M-0303IN	3/8"-24	3/8"-24	3/8"-24	3.18	3.18	3.18	21.10	21.10	21.10	7/16"	Imperial
DAJCMT25M-0404	7/16"-20	7/16"-20	7/16"-20	4.37	4.37	4.37	22.60	22.60	22.60	11 mm	Metric
DAJCMT25M-0406	7/16"-20	7/16"-20	9/16"-18	4.37	4.37	7.54	26.70	26.70	7.54	14 mm	Metric
DAJCMT25M-0404IN	7/16"-20	7/16"-20	7/16"-20	4.37	4.37	4.37	22.60	22.60	22.60	7/16"	Imperial
DAJCMT25M-0406IN	7/16"-20	7/16"-20	9/16"-18	4.37	4.37	7.54	26.70	26.70	7.54	9/16"	Imperial
DAJCMT25M-0505	1/2"-20	1/2"-20	1/2"-20	5.94	5.94	5.94	24.10	24.10	24.10	14 mm	Metric
DAJCMT25M-0505IN	1/2"-20	1/2"-20	1/2"-20	5.94	5.94	5.94	24.10	24.10	24.10	9/16"	Imperial
DAJCMT25M-0604	9/16"-18	9/16"-18	7/16"-20	7.54	7.54	4.37	26.90	26.90	26.70	14 mm	Metric
DAJCMT25M-0606	9/16"-18	9/16"-18	9/16"-18	7.54	7.54	7.54	26.90	26.90	26.90	14 mm	Metric
DAJCMT25M-0608	9/16"-18	9/16"-18	3/4"-16	7.54	7.54	9.93	29.00	29.00	31.80	19 mm	Metric
DAJCMT25M-0610	9/16"-18	9/16"-18	7/8"-14	7.54	7.54	12.29	31.00	31.00	36.80	22 mm	Metric
DAJCMT25M-0604IN	9/16"-18	9/16"-18	7/16"-20	7.54	7.54	4.37	26.90	26.90	26.70	9/16"	Imperial
DAJCMT25M-0606IN	9/16"-18	9/16"-18	9/16"-18	7.54	7.54	7.54	26.90	26.90	26.90	9/16"	Imperial
DAJCMT25M-0608IN	9/16"-18	9/16"-18	3/4"-16	7.54	7.54	9.93	29.00	29.00	31.80	3/4"	Imperial
DAJCMT25M-0610IN	9/16"-18	9/16"-18	7/8"-14	7.54	7.54	12.29	31.00	31.00	36.80	7/8"	Imperial
DAJCMT25M-080606	3/4"-16	9/16"-18	9/16"-18	9.93	7.54	7.54	31.80	29.00	29.00	19 mm	Metric
DAJCMT25M-080608	3/4"-16	9/16"-18	3/4"-16	9.93	7.54	9.93	31.80	29.00	31.80	19 mm	Metric
DAJCMT25M-0806	3/4"-16	3/4"-16	9/16"-18	9.93	9.93	7.54	31.80	31.80	29.00	19 mm	Metric
DAJCMT25M-0808	3/4"-16	3/4"-16	3/4"-16	9.93	9.93	9.93	31.80	31.80	31.80	19 mm	Metric
DAJCMT25M-0810	3/4"-16	3/4"-16	7/8"-14	9.93	9.93	12.29	33.80	33.80	36.80	22 mm	Metric
DAJCMT25M-0812	3/4"-16	3/4"-16	1-1/16"-12	9.93	9.93	15.47	36.80	36.80	42.20	27 mm	Metric

Certificate:



DAJCMT25M-080606IN	3/4"-16	9/16"-18	9/16"-18	9.93	7.54	7.54	31.80	29.00	29.00	3/4"	Imperial
DAJCMT25M-080608IN	3/4"-16	9/16"-18	3/4"-16	9.93	7.54	9.93	31.80	29.00	31.80	3/4"	Imperial
DAJCMT25M-0806IN	3/4"-16	3/4"-16	9/16"-18	9.93	9.93	7.54	31.80	31.80	29.00	3/4"	Imperial
DAJCMT25M-0808IN	3/4"-16	3/4"-16	3/4"-16	9.93	9.93	9.93	31.80	31.80	31.80	3/4"	Imperial
DAJCMT25M-0810IN	3/4"-16	3/4"-16	7/8"-14	9.93	9.93	12.29	33.80	33.80	36.80	7/8"	Imperial
DAJCMT25M-0812IN	3/4"-16	3/4"-16	1-1/16"-12	9.93	9.93	15.47	36.80	36.80	42.20	1-1/16"	Imperial
DAJCMT25M-100606	7/8"-14	9/16"-18	9/16"-18	12.29	7.54	7.54	36.80	31.00	31.00	22 mm	Metric
DAJCMT25M-100808	7/8"-14	3/4"-16	3/4"-16	12.29	9.93	9.93	36.80	3.80	33.80	22 mm	Metric
DAJCMT25M-1008	7/8"-14	7/8"-14	3/4"-16	12.29	12.29	9.93	36.80	36.80	33.80	22 mm	Metric
DAJCMT25M-1010	7/8"-14	7/8"-14	7/8"-14	12.29	12.29	12.29	36.80	36.80	36.80	22 mm	Metric
DAJCMT25M-1012	7/8"-14	7/8"-14	1-1/16"-12	12.29	12.29	15.47	40.00	40.00	42.20	27 mm	Metric
DAJCMT25M-100606IN	7/8"-14	9/16"-18	9/16"-18	12.29	7.54	7.54	36.80	31.00	31.00	7/8"	Imperial
DAJCMT25M-100808IN	7/8"-14	3/4"-16	3/4"-16	12.29	9.93	9.93	36.80	3.80	33.80	7/8"	Imperial
DAJCMT25M-1008IN	7/8"-14	7/8"-14	3/4"-16	12.29	12.29	9.93	36.80	36.80	33.80	7/8"	Imperial
DAJCMT25M-1010IN	7/8"-14	7/8"-14	7/8"-14	12.29	12.29	12.29	36.80	36.80	36.80	7/8"	Imperial
DAJCMT25M-1012IN	7/8"-14	7/8"-14	1-1/16"-12	12.29	12.29	15.47	40.00	40.00	42.20	1-1/16"	Imperial
DAJCMT25M-1208	1-1/16"-12	1-1/16"-12	3/4"-16	15.47	15.47	9.93	42.20	42.20	36.10	27 mm	Metric
DAJCMT25M-1210	1-1/16"-12	1-1/16"-12	7/8"-14	15.47	15.47	12.29	42.20	42.20	39.12	27 mm	Metric
DAJCMT25M-1212	1-1/16"-12	1-1/16"-12	1-1/16"-12	15.47	15.47	15.47	42.20	42.20	42.20	27 mm	Metric
DAJCMT25M-1216	1-1/16"-12	1-1/16"-12	1-5/16"-12	15.47	15.47	21.44	44.70	44.70	46.00	33 mm	Metric
DAJCMT25M-1208IN	1-1/16"-12	1-1/16"-12	3/4"-16	15.47	15.47	9.93	42.20	42.20	36.10	1-1/16"	Imperial
DAJCMT25M-1210IN	1-1/16"-12	1-1/16"-12	7/8"-14	15.47	15.47	12.29	42.20	42.20	39.12	1-1/16"	Imperial
DAJCMT25M-1212IN	1-1/16"-12	1-1/16"-12	1-1/16"-12	15.47	15.47	15.47	42.20	42.20	42.20	1-1/16"	Imperial
DAJCMT25M-1216IN	1-1/16"-12	1-1/16"-12	1-5/16"-12	15.47	15.47	21.44	44.70	44.70	46.00	1-5/16"	Imperial
DAJCMT25M-1414	1-3/16"-12	1-3/16"-12	1-3/16"-12	18.26	18.26	18.26	45.70	45.70	45.70	33 mm	Metric
DAJCMT25M-1414IN	1-3/16"-12	1-3/16"-12	1-3/16"-12	18.26	18.26	18.26	45.70	45.70	45.70	1-5/16"	Imperial
DAJCMT25M-161212	1-5/16"-12	1-1/16"-12	1-1/16"-12	21.44	15.47	15.47	46.00	44.70	44.70	33 mm	Metric
DAJCMT25M-161220	1-5/16"-12	1-1/16"-12	1-5/8"-12	21.44	15.47	27.38	51.00	51.00	52.30	41 mm	Metric
DAJCMT25M-1612	1-5/16"-12	1-5/16"-12	1-1/16"-12	21.44	21.44	15.47	46.00	46.00	44.70	33 mm	Metric
DAJCMT25M-1616	1-5/16"-12	1-5/16"-12	1-5/16"-12	21.44	21.44	21.44	46.00	46.00	46.00	33 mm	Metric
DAJCMT25M-1620	1-5/16"-12	1-5/16"-12	1-5/8"-12	21.44	27.38	27.38	51.10	51.10	52.30	41 mm	Metric
DAJCMT25M-161212IN	1-5/16"-12	1-1/16"-12	1-1/16"-12	21.44	15.47	15.47	46.00	44.70	44.70	1-5/16"	Imperial
DAJCMT25M-161220IN	1-5/16"-12	1-1/16"-12	1-5/8"-12	21.44	15.47	27.38	51.00	51.00	52.30	1-5/8"	Imperial
DAJCMT25M-1612IN	1-5/16"-12	1-5/16"-12	1-1/16"-12	21.44	21.44	15.47	46.00	46.00	44.70	1-5/16"	Imperial
DAJCMT25M-1616IN	1-5/16"-12	1-5/16"-12	1-5/16"-12	21.44	21.44	21.44	46.00	46.00	46.00	1-5/16"	Imperial
DAJCMT25M-1620IN	1-5/16"-12	1-5/16"-12	1-5/8"-12	21.44	27.38	27.38	51.10	51.10	52.30	1-5/8"	Imperial
DAJCMT25M-2016	1-5/8"-12	1-5/8"-12	1-5/16"-12	27.38	27.38	21.44	52.30	52.30	51.10	41 mm	Metric
DAJCMT25M-2020	1-5/8"-12	1-5/8"-12	1-5/8"-12	27.38	27.38	27.38	52.30	52.30	52.30	41 mm	Metric
DAJCMT25M-2016IN	1-5/8"-12	1-5/8"-12	1-5/16"-12	27.38	27.38	21.44	52.30	52.30	51.10	1-5/8"	Imperial
DAJCMT25M-2020IN	1-5/8"-12	1-5/8"-12	1-5/8"-12	27.38	27.38	27.38	52.30	52.30	52.30	1-5/8"	Imperial
DAJCMT25M-2424	1-7/8"-12	1-7/8"-12	1-7/8"-12	33.32	33.32	33.32	59.20	59.20	59.20	48 mm	Metric
DAJCMT25M-2424IN	1-7/8"-12	1-7/8"-12	1-7/8"-12	33.32	33.32	33.32	59.20	59.20	59.20	1-7/8"	Imperial
DAJCMT25M-3232	2-1/2"-12	2-1/2"-12	2-1/2"-12	45.24	45.24	45.24	77.70	77.70	77.70	65 mm	Metric
DAJCMT25M-3232IN	2-1/2"-12	2-1/2"-12	2-1/2"-12	45.24	45.24	45.24	77.70	77.70	77.70	2-1/2"	Imperial

Certificate:




DAJCMT251

Branch Tee Connector JIC Male – JIC Swivel Female

D	A	JC	M	T	251
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	JIC UNF	Male	Branch Tee	JIC Swivel Female



DME&JDE Code:	DAJCMT251
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Branch Tee
Connection Type:	Male x Male x Male
Thread Types:	UNF x UNF x UNF

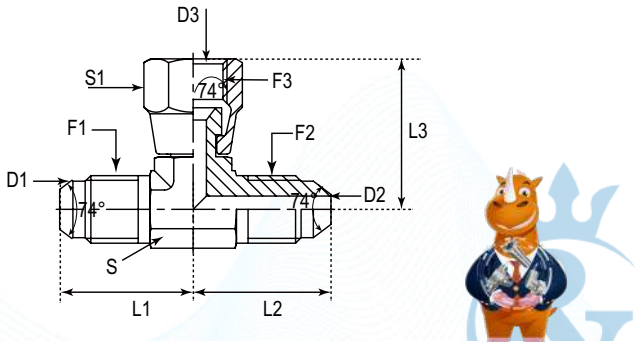

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-
DAJCMT251-0303	3/8"-24	3/8"-24	3/8"-24	21.08	21.08	17.07	3.18	3.18	3.18	11 mm	12 mm	Metric
DAJCMT251-0303IN	3/8"-24	3/8"-24	3/8"-24	21.08	21.08	17.07	3.18	3.18	3.18	7/16"	1/2"	Imperial
DAJCMT251-0404	7/16"-20	7/16"-20	7/16"-20	22.61	22.61	16.70	4.37	4.37	4.37	11 mm	14 mm	Metric
DAJCMT251-0404IN	7/16"-20	7/16"-20	7/16"-20	22.61	22.61	16.70	4.37	4.37	4.37	7/16"	9/16"	Imperial
DAJCMT251-0505	1/2"-20	1/2"-20	1/2"-20	24.10	24.10	17.40	5.94	5.94	5.94	14 mm	17 mm	Metric
DAJCMT251-0505IN	1/2"-20	1/2"-20	1/2"-20	24.10	24.10	17.40	5.94	5.94	5.94	9/16"	5/8"	Imperial
DAJCMT251-0606	9/16"-18	9/16"-18	9/16"-18	26.92	26.92	22.22	7.54	7.54	7.54	14 mm	19 mm	Metric
DAJCMT251-0608	9/16"-18	9/16"-18	3/4"-16	28.90	28.90	24.33	7.54	7.54	9.93	19 mm	22 mm	Metric
DAJCMT251-0606IN	9/16"-18	9/16"-18	9/16"-18	26.92	26.92	22.22	7.54	7.54	7.54	9/16"	11/16"	Imperial
DAJCMT251-0608IN	9/16"-18	9/16"-18	3/4"-16	28.90	28.90	24.33	7.54	7.54	9.93	3/4"	7/8"	Imperial
DAJCMT251-0806	3/4"-16	3/4"-16	9/16"-18	31.75	31.75	23.04	9.93	9.93	7.54	19 mm	19 mm	Metric
DAJCMT251-0808	3/4"-16	3/4"-16	3/4"-16	31.75	31.75	24.33	9.93	9.93	9.93	19 mm	22 mm	Metric
DAJCMT251-0806IN	3/4"-16	3/4"-16	9/16"-18	31.75	31.75	23.04	9.93	9.93	7.54	3/4"	11/16"	Imperial
DAJCMT251-0808IN	3/4"-16	3/4"-16	3/4"-16	31.75	31.75	24.33	9.93	9.93	9.93	3/4"	7/8"	Imperial
DAJCMT251-1010	7/8"-14	7/8"-14	7/8"-14	36.80	36.80	28.50	12.29	12.29	12.29	22 mm	27 mm	Metric
DAJCMT251-1010IN	7/8"-14	7/8"-14	7/8"-14	36.80	36.80	28.50	12.29	12.29	12.29	7/8"	1"	Imperial
DAJCMT251-1210	1-1/16"-12	1-1/16"-12	7/8"-14	42.20	42.20	28.70	15.47	15.47	12.29	27 mm	27 mm	Metric
DAJCMT251-1212	1-1/16"-12	1-1/16"-12	1-1/16"-12	42.20	42.20	30.20	15.47	15.47	15.47	27 mm	32 mm	Metric
DAJCMT251-1210IN	1-1/16"-12	1-1/16"-12	7/8"-14	42.20	42.20	28.70	15.47	15.47	12.29	1-1/16"	1"	Imperial
DAJCMT251-1212IN	1-1/16"-12	1-1/16"-12	1-1/16"-12	42.20	42.20	30.20	15.47	15.47	15.47	1-1/16"	1-1/4"	Imperial
DAJCMT251-1414	1-3/16"-12	1-3/16"-12	1-3/16"-12	45.70	45.70	35.70	18.26	18.26	18.26	33 mm	36 mm	Metric
DAJCMT251-1414IN	1-3/16"-12	1-3/16"-12	1-3/16"-12	45.70	45.70	35.70	18.26	18.26	18.26	1-5/16"	1-3/8"	Imperial
DAJCMT251-1616	1-5/16"-12	1-5/16"-12	1-5/16"-12	46.00	46.00	35.71	21.44	21.44	21.44	33 mm	41 mm	Metric
DAJCMT251-1616IN	1-5/16"-12	1-5/16"-12	1-5/16"-12	46.00	46.00	35.71	21.44	21.44	21.44	1-5/16"	1-1/2"	Imperial
DAJCMT251-2020	1-5/8"-12	1-5/8"-12	1-5/8"-12	52.30	52.30	42.80	27.38	27.38	27.42	41 mm	50 mm	Metric
DAJCMT251-2020IN	1-5/8"-12	1-5/8"-12	1-5/8"-12	52.30	52.30	42.80	27.38	27.38	27.42	1-5/8"	2"	Imperial
DAJCMT251-2424	1-7/8"-12	1-7/8"-12	1-7/8"-12	59.20	59.20	47.14	33.32	33.32	33.32	48 mm	60 mm	Metric
DAJCMT251-2424IN	1-7/8"-12	1-7/8"-12	1-7/8"-12	59.20	59.20	47.14	33.32	33.32	33.32	1-7/8"	2-1/4"	Imperial
DAJCMT251-3232	2-1/2"-12	2-1/2"-12	2-1/2"-12	77.70	77.70	61.98	45.24	45.24	45.24	65 mm	75 mm	Metric
DAJCMT251-3232IN	2-1/2"-12	2-1/2"-12	2-1/2"-12	77.70	77.70	61.98	45.24	45.24	45.24	2-1/2"	2-7/8"	Imperial




DAJCMT305

Branch Adjustable Tee JIC Male – SAE Male O Ring

D	A	JC	M	T	30	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	Branch Tee	SAE UNF	Male O Ring



DME&JDE Code:	DAJCMT305
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Branch Tee
Connection Type:	Male x Male x Male
Thread Types:	UNF x UNF x UNF
Sealing Method:	O Ring

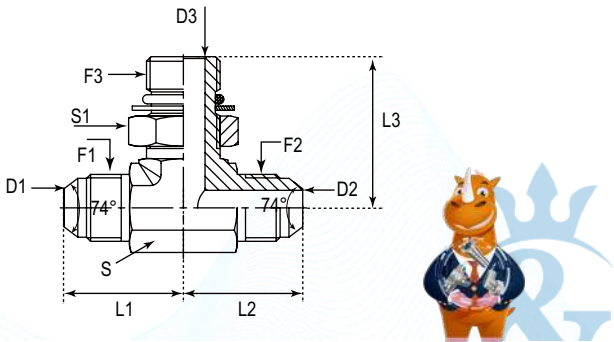

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-
DAJCMT305-0202	5/16"-24	5/16"-24	5/16"-24	19.6	19.6	23.9	1.57	1.57	1.57	11 mm	11 mm	Metric
DAJCMT305-0202IN	5/16"-24	5/16"-24	5/16"-24	19.6	19.6	23.9	1.57	1.57	1.57	7/16"	7/16"	Imperial
DAJCMT305-0402	7/16"-20	7/16"-20	5/16"-24	22.60	22.60	23.40	4.37	4.37	1.57	11 mm	11 mm	Metric
DAJCMT305-0404	7/16"-20	7/16"-20	7/16"-20	22.60	22.60	26.20	4.37	4.37	4.37	11 mm	14 mm	Metric
DAJCMT305-0405	7/16"-20	7/16"-20	1/2"-20	24.10	24.10	28.70	4.37	4.37	5.94	14 mm	17 mm	Metric
DAJCMT305-0406	7/16"-20	7/16"-20	9/16"-18	26.70	26.70	31.80	4.37	4.37	7.54	14 mm	19 mm	Metric
DAJCMT305-0402IN	7/16"-20	7/16"-20	5/16"-24	22.60	22.60	23.40	4.37	4.37	1.57	7/16"	7/16"	Imperial
DAJCMT305-0404IN	7/16"-20	7/16"-20	7/16"-20	22.60	22.60	26.20	4.37	4.37	4.37	7/16"	9/16"	Imperial
DAJCMT305-0405IN	7/16"-20	7/16"-20	1/2"-20	24.10	24.10	28.70	4.37	4.37	5.94	9/16"	5/8"	Imperial
DAJCMT305-0406IN	7/16"-20	7/16"-20	9/16"-18	26.70	26.70	31.80	4.37	4.37	7.54	9/16"	11/16"	Imperial
DAJCMT305-0505	1/2"-20	1/2"-20	1/2"-20	24.10	24.10	28.70	5.94	5.94	5.94	14 mm	17 mm	Metric
DAJCMT305-0505IN	1/2"-20	1/2"-20	1/2"-20	24.10	24.10	28.70	5.94	5.94	5.94	9/16"	5/8"	Imperial
DAJCMT305-0604	9/16"-18	9/16"-18	7/16"-20	26.90	26.90	30.20	7.54	7.54	4.37	14 mm	14 mm	Metric
DAJCMT305-0606	9/16"-18	9/16"-18	9/16"-18	26.90	26.90	31.80	7.54	7.54	7.54	14 mm	19 mm	Metric
DAJCMT305-0608	9/16"-18	9/16"-18	3/4"-16	29.00	29.00	36.80	7.54	7.54	9.93	19 mm	22 mm	Metric
DAJCMT305-0604IN	9/16"-18	9/16"-18	7/16"-20	26.90	26.90	30.20	7.54	7.54	4.37	9/16"	9/16"	Imperial
DAJCMT305-0606IN	9/16"-18	9/16"-18	9/16"-18	26.90	26.90	31.80	7.54	7.54	7.54	9/16"	11/16"	Imperial
DAJCMT305-0608IN	9/16"-18	9/16"-18	3/4"-16	29.00	29.00	36.80	7.54	7.54	9.93	3/4"	7/8"	Imperial
DAJCMT305-0806	3/4"-16	3/4"-16	9/16"-18	31.80	31.80	33.50	9.93	9.93	7.54	19 mm	19 mm	Metric
DAJCMT305-0808	3/4"-16	3/4"-16	3/4"-16	31.80	31.80	36.80	9.93	9.93	9.93	19 mm	22 mm	Metric



DAJCMT305-0810	3/4"-16	3/4"-16	7/8"-14	33.80	33.80	43.20	9.93	9.93	12.29	22 mm	27 mm	Metric
DAJCMT305-0812	3/4"-16	3/4"-16	1-1/16"-12	36.20	36.20	49.30	9.93	9.93	15.47	27 mm	32 mm	Metric
DAJCMT305-0806IN	3/4"-16	3/4"-16	9/16"-18	31.80	31.80	33.50	9.93	9.93	7.54	3/4"	11/16"	Imperial
DAJCMT305-0808IN	3/4"-16	3/4"-16	3/4"-16	31.80	31.80	36.80	9.93	9.93	9.93	3/4"	7/8"	Imperial
DAJCMT305-0810IN	3/4"-16	3/4"-16	7/8"-14	33.80	33.80	43.20	9.93	9.93	12.29	7/8"	1"	Imperial
DAJCMT305-0812IN	3/4"-16	3/4"-16	1-1/16"-12	36.20	36.20	49.30	9.93	9.93	15.47	1-1/16"	1-1/4"	Imperial
DAJCMT305-1008	7/8"-14	7/8"-14	3/4"-16	36.80	36.80	39.10	12.29	12.29	9.93	22 mm	22 mm	Metric
DAJCMT305-1010	7/8"-14	7/8"-14	7/8"-14	36.80	36.80	43.10	12.29	12.29	12.29	22 mm	27 mm	Metric
DAJCMT305-1012	7/8"-14	7/8"-14	1-1/16"-12	39.10	39.10	49.30	12.29	12.29	15.47	27 mm	32 mm	Imperial
DAJCMT305-1008IN	7/8"-14	7/8"-14	3/4"-16	36.80	36.80	39.10	12.29	12.29	9.93	7/8"	7/8"	Imperial
DAJCMT305-1010IN	7/8"-14	7/8"-14	7/8"-14	36.80	36.80	43.10	12.29	12.29	12.29	7/8"	1"	Imperial
DAJCMT305-1012IN	7/8"-14	7/8"-14	1-1/16"-12	39.10	39.10	49.30	12.29	12.29	15.47	1-1/16"	1-1/4"	Imperial
DAJCMT305-1206	1-1/16"-12	1-1/16"-12	9/16"-18	42.16	42.16	37.85	15.47	15.47	7.54	27 mm	19 mm	Imperial
DAJCMT305-1208	1-1/16"-12	1-1/16"-12	3/4"-16	42.20	42.20	42.00	15.47	15.47	9.93	27 mm	22 mm	Metric
DAJCMT305-1210	1-1/16"-12	1-1/16"-12	7/8"-14	42.20	42.20	45.20	15.47	15.47	12.29	27 mm	27 mm	Metric
DAJCMT305-1212	1-1/16"-12	1-1/16"-12	1-1/16"-12	42.20	42.20	49.30	15.47	15.47	15.47	27 mm	32 mm	Metric
DAJCMT305-1216	1-1/16"-12	1-1/16"-12	1-5/16"-12	44.70	44.70	52.10	15.47	15.47	21.44	33 mm	41 mm	Metric
DAJCMT305-1206IN	1-1/16"-12	1-1/16"-12	9/16"-18	42.16	42.16	37.85	15.47	15.47	7.54	1-1/16"	11/16"	Imperial
DAJCMT305-1208IN	1-1/16"-12	1-1/16"-12	3/4"-16	42.20	42.20	42.00	15.47	15.47	9.93	1-1/16"	7/8"	Imperial
DAJCMT305-1210IN	1-1/16"-12	1-1/16"-12	7/8"-14	42.20	42.20	45.20	15.47	15.47	12.29	1-1/16"	1"	Imperial
DAJCMT305-1212IN	1-1/16"-12	1-1/16"-12	1-1/16"-12	42.20	42.20	49.30	15.47	15.47	15.47	1-1/16"	1-1/4"	Imperial
DAJCMT305-1216IN	1-1/16"-12	1-1/16"-12	1-5/16"-12	44.70	44.70	52.10	15.47	15.47	21.44	1-5/16"	1-1/2"	Imperial
DAJCMT305-1414	1-3/16"-12	1-3/16"-12	1-3/16"-12	45.70	45.70	50.80	18.26	18.26	18.26	33 mm	36 mm	Metric
DAJCMT305-1414IN	1-3/16"-12	1-3/16"-12	1-3/16"-12	45.70	45.70	50.80	18.26	18.26	18.26	1-5/16"	1-3/8"	Imperial
DAJCMT305-1612	1-5/16"-12	1-5/16"-12	1-1/16"-12	46.00	46.00	52.10	21.44	21.44	15.47	33 mm	32 mm	Metric
DAJCMT305-1616	1-5/16"-12	1-5/16"-12	1-5/16"-12	46.00	46.00	52.10	21.44	21.44	21.44	33 mm	41 mm	Metric
DAJCMT305-1620	1-5/16"-12	1-5/16"-12	1-5/8"-12	51.10	51.10	57.20	21.44	21.44	27.38	41 mm	50 mm	Metric
DAJCMT305-1612IN	1-5/16"-12	1-5/16"-12	1-1/16"-12	46.00	46.00	52.10	21.44	21.44	15.47	1-5/16"	1-1/4"	Imperial
DAJCMT305-1616IN	1-5/16"-12	1-5/16"-12	1-5/16"-12	46.00	46.00	52.10	21.44	21.44	21.44	1-5/16"	1-1/2"	Imperial
DAJCMT305-1620IN	1-5/16"-12	1-5/16"-12	1-5/8"-12	51.10	51.10	57.20	21.44	21.44	27.38	1-5/8"	1-7/8"	Imperial
DAJCMT305-2020	1-5/8"-12	1-5/8"-12	1-5/8"-12	52.30	52.30	57.20	27.38	27.38	27.38	41 mm	50 mm	Metric
DAJCMT305-2020IN	1-5/8"-12	1-5/8"-12	1-5/8"-12	52.30	52.30	57.20	27.38	27.38	27.38	1-5/8"	1-7/8"	Imperial
DAJCMT305-2424	1-7/8"-12	1-7/8"-12	1-7/8"-12	59.20	59.20	60.70	33.32	33.32	33.32	48 mm	55 mm	Metric
DAJCMT305-2424IN	1-7/8"-12	1-7/8"-12	1-7/8"-12	59.20	59.20	60.70	33.32	33.32	33.32	1-7/8"	2-1/8"	Imperial
DAJCMT305-3232	2-1/2"-12	2-1/2"-12	2-1/2"-12	77.70	77.70	73.40	45.24	45.24	45.24	65 mm	70 mm	Metric
DAJCMT305-3232IN	2-1/2"-12	2-1/2"-12	2-1/2"-12	77.70	77.70	73.40	45.24	45.24	45.24	2-1/2"	2-3/4"	Imperial

DAJCMT06Q

Branch Adjustable Tee JIC Male – BSPP Male + O Ring + Retaining Ring

D

A

JC

M

T

06

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type



Adaptor

JIC UNF

Male

Branch Tee

BSPP

Male + O Ring + Retaining Ring

DME&JDE Code: DAJCMT06Q

Product Type Hydraulic adaptor

Standard: JIC and SAE-ORB

Structure: Branch Tee

Connection Type: Adjustable Male × Male


Thread Types: UNF × BSPP × UNF

Other Features: O Ring + Retaining Ring

 German Technology Equipment



New-Standard

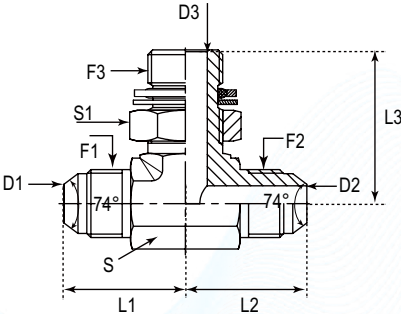

PART NUMBER	F1(Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	UNF	UNF	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DAJCMT06Q-0402	7/16"-20	7/16"-20	1/8"-28	4.37	4.37	4.40	22.50	22.50	26.00	11	14
DAJCMT06Q-0404	7/16"-20	7/16"-20	1/4"-19	4.37	4.37	7.50	27.00	27.00	31.80	14	19
DAJCMT06Q-0406	7/16"-20	7/16"-20	3/8"-19	4.37	4.37	9.90	28.50	28.50	36.50	19	22
DAJCMT06Q-0408	7/16"-20	7/16"-20	1/2"-14	4.37	4.37	12.30	31.00	31.00	43.00	22	27
DAJCMT06Q-0502	1/2"-20	1/2"-20	1/8"-28	5.94	5.94	4.40	24.00	24.00	28.00	14	14
DAJCMT06Q-0504	1/2"-20	1/2"-20	1/4"-19	5.94	5.94	7.50	27.00	27.00	31.00	14	19
DAJCMT06Q-0506	1/2"-20	1/2"-20	3/8"-19	5.94	5.94	9.90	28.50	28.50	36.50	19	22
DAJCMT06Q-0604	9/16"-18	9/16"-18	1/4"-19	7.54	7.54	7.50	27.00	27.00	31.80	14	19
DAJCMT06Q-0606	9/16"-18	9/16"-18	3/8"-19	7.54	7.54	9.90	28.50	28.50	36.50	19	22
DAJCMT06Q-0608	9/16"-18	9/16"-18	1/2"-14	7.54	7.54	12.30	31.00	31.00	43.00	22	27
DAJCMT06Q-0804	3/4"-16	3/4"-16	1/4"-19	9.93	9.93	7.50	31.50	31.50	33.50	19	19
DAJCMT06Q-0806	3/4"-16	3/4"-16	3/8"-19	9.93	9.93	9.90	31.50	31.50	36.50	19	22
DAJCMT06Q-0808	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	12.30	34.00	34.00	43.00	22	27
DAJCMT06Q-0812	3/4"-16	3/4"-16	3/4"-14	9.93	9.93	15.50	37.00	37.00	49.00	27	36
DAJCMT06Q-1006	7/8"-14	7/8"-14	3/8"-19	12.29	12.29	9.90	36.50	36.50	39.50	22	22
DAJCMT06Q-1008	7/8"-14	7/8"-14	1/2"-14	12.29	12.29	12.30	36.50	36.50	43.00	22	27
DAJCMT06Q-1012	7/8"-14	7/8"-14	3/4"-14	12.29	12.29	15.50	39.50	39.50	49.00	27	36
DAJCMT06Q-1208	1-1/16"-12	1-1/16"-12	1/2"-14	15.47	15.47	12.30	42.00	42.00	45.50	27	27
DAJCMT06Q-1212	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	15.50	42.00	42.00	49.00	27	36
DAJCMT06Q-1216	1-1/16"-12	1-1/16"-12	1"-11	15.47	15.47	21.50	44.70	44.70	52.00	33	41
DAJCMT06Q-1220	1-1/16"-12	1-1/16"-12	1-1/4"-11	15.47	15.47	27.50	50.00	50.00	57.00	41	50
DAJCMT06Q-1612	1-5/16"-12	1-5/16"-12	3/4"-14	21.44	21.44	15.50	46.00	46.00	52.00	33	36
DAJCMT06Q-1616	1-5/16"-12	1-5/16"-12	1"-11	21.44	21.44	21.50	46.00	46.00	52.00	33	41
DAJCMT06Q-1620	1-5/16"-12	1-5/16"-12	1-1/4"-11	21.44	21.44	27.50	51.00	51.00	57.00	41	50
DAJCMT06Q-2016	1-5/8"-12	1-5/8"-12	1"-11	27.38	27.38	21.50	52.00	52.00	57.00	41	41
DAJCMT06Q-2020	1-5/8"-12	1-5/8"-12	1-1/4"-11	27.38	27.38	27.50	52.00	52.00	57.00	41	50
DAJCMT06Q-2420	1-7/8"-12	1-7/8"-12	1-1/4"-11	33.32	33.32	27.50	59.00	59.00	61.00	48	50
DAJCMT06Q-2424	1-7/8"-12	1-7/8"-12	1-1/2"-11	33.32	33.32	33.00	59.00	59.00	61.00	48	55




DAJCMT065

Branch Adjustable Tee JIC Male – BSPP Male + O Ring

D	A	JC	M	T	06	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	Branch Tee	BSPP	Male + O Ring



DME&JDE Code:	DAJCMT065
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Branch Tee
Connection Type:	Adjustable Male × Male × Male
Thread Types:	UNF × UNF × BSPP
Sealing Method:	O Ring

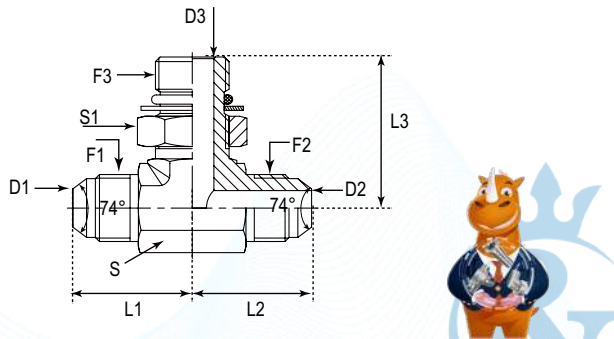

PART NUMBER	F1(Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	UNF	UNF	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DAJCMT065-0402	7/16"-20	7/16"-20	1/8"-28	4.37	4.37	4.40	22.50	22.50	26.00	11	14
DAJCMT065-0404	7/16"-20	7/16"-20	1/4"-19	4.37	4.37	7.50	27.00	27.00	31.80	14	19
DAJCMT065-0406	7/16"-20	7/16"-20	3/8"-19	4.37	4.37	9.90	28.50	28.50	36.50	19	22
DAJCMT065-0502	1/2"-20	1/2"-20	1/8"-28	5.94	5.94	4.40	24.00	24.00	28.00	14	14
DAJCMT065-0504	1/2"-20	1/2"-20	1/4"-19	5.94	5.94	7.50	27.00	27.00	31.00	14	19
DAJCMT065-0506	1/2"-20	1/2"-20	3/8"-19	5.94	5.94	9.90	28.50	28.50	36.50	19	22
DAJCMT065-0604	9/16"-18	9/16"-18	1/4"-19	7.54	7.54	7.50	27.00	27.00	31.80	14	19
DAJCMT065-0606	9/16"-18	9/16"-18	3/8"-19	7.54	7.54	9.90	28.50	28.50	36.50	19	22
DAJCMT065-0608	9/16"-18	9/16"-18	1/2"-14	7.54	7.54	12.30	31.00	31.00	43.00	22	27
DAJCMT065-0804	3/4"-16	3/4"-16	1/4"-19	9.93	9.93	7.50	31.50	31.50	33.50	19	19
DAJCMT065-0806	3/4"-16	3/4"-16	3/8"-19	9.93	9.93	9.90	31.50	31.50	36.50	19	22
DAJCMT065-0808	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	12.30	34.00	34.00	43.00	22	27
DAJCMT065-0812	3/4"-16	3/4"-16	3/4"-14	9.93	9.93	15.50	37.00	37.00	49.00	27	36
DAJCMT065-1006	7/8"-14	7/8"-14	3/8"-19	12.29	12.29	9.90	36.50	36.50	39.50	22	22
DAJCMT065-1008	7/8"-14	7/8"-14	1/2"-14	12.29	12.29	12.30	36.50	36.50	43.00	22	27
DAJCMT065-1012	7/8"-14	7/8"-14	3/4"-14	12.29	12.29	15.50	39.50	39.50	49.00	27	36
DAJCMT065-1208	1-1/16"-12	1-1/16"-12	1/2"-14	15.47	15.47	12.30	42.00	42.00	45.50	27	27
DAJCMT065-1212	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	15.50	42.00	42.00	49.00	27	36
DAJCMT065-1216	1-1/16"-12	1-1/16"-12	1"-11	15.47	15.47	21.50	44.70	44.70	52.00	33	41
DAJCMT065-1220	1-1/16"-12	1-1/16"-12	1-1/4"-11	15.47	15.47	27.50	50.00	50.00	57.00	41	50
DAJCMT065-1612	1-5/16"-12	1-5/16"-12	3/4"-14	21.44	21.44	15.50	46.00	46.00	52.00	33	36
DAJCMT065-1616	1-5/16"-12	1-5/16"-12	1"-11	21.44	21.44	21.50	46.00	46.00	52.00	33	41
DAJCMT065-1620	1-5/16"-12	1-5/16"-12	1-1/4"-11	21.44	21.44	27.50	51.00	51.00	57.00	41	50
DAJCMT065-2016	1-5/8"-12	1-5/8"-12	1"-11	27.38	27.38	21.50	52.00	52.00	57.00	41	41
DAJCMT065-2020	1-5/8"-12	1-5/8"-12	1-1/4"-11	27.38	27.38	27.50	52.00	52.00	57.00	41	50
DAJCMT065-2420	1-7/8"-12	1-7/8"-12	1-1/4"-11	33.32	33.32	27.50	59.00	59.00	61.00	48	50
DAJCMT065-2424	1-7/8"-12	1-7/8"-12	1-1/2"-11	33.32	33.32	33.00	59.00	59.00	61.00	48	55

Certificate:


DAJCMT52Q

Branch Adjustable Tee JIC Male – Metric Male + O Ring + Retaining Ring

D	A	JC	M	T	52	0
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	Branch Tee	Metric	Male + O Ring + Retaining Ring



DME&JDE Code:	DAJCMT52Q
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Branch
Connection Type:	Adjustable Male × Male × Male
Thread Types:	UNF × UNF × Metric
Sealing Method:	O Ring + Retaining Ring

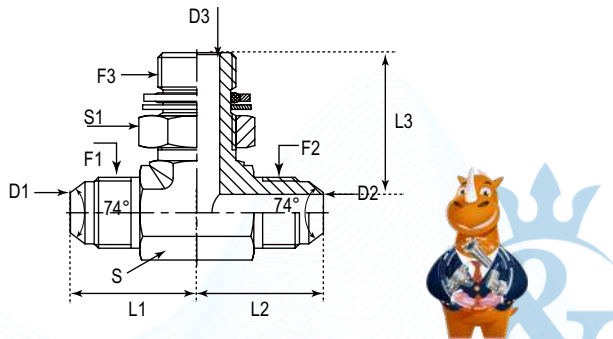

PART NUMBER	F1(Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	UNF	UNF	METRIC	mm	mm	mm	mm	mm	mm	mm	mm
DAJCMT52Q-0410	7/16"-20	7/16"-20	M10X1	4.37	4.37	4.00	22.50	22.50	27.50	11	14
DAJCMT52Q-0412	7/16"-20	7/16"-20	M12X1.5	4.37	4.37	5.00	27.00	27.00	31.50	14	17
DAJCMT52Q-0414	7/16"-20	7/16"-20	M14X1.5	4.37	4.37	6.00	27.00	27.00	32.50	14	19
DAJCMT52Q-0510	1/2"-20	1/2"-20	M10X1	5.94	5.94	4.00	27.00	27.00	28.50	14	14
DAJCMT52Q-0512	1/2"-20	1/2"-20	M12X1.5	5.94	5.94	4.00	27.00	27.00	31.50	14	17
DAJCMT52Q-0514	1/2"-20	1/2"-20	M14X1.5	5.94	5.94	6.00	27.00	27.00	32.50	14	19
DAJCMT52Q-0612	9/16"-18	9/16"-18	M12X1.5	7.54	7.54	4.00	27.00	27.00	31.50	14	17
DAJCMT52Q-0614	9/16"-18	9/16"-18	M14X1.5	7.54	7.54	6.00	27.00	27.00	32.50	14	19
DAJCMT52Q-0616	9/16"-18	9/16"-18	M16X1.5	7.54	7.54	7.00	28.50	28.50	36.50	19	22
DAJCMT52Q-0618	9/16"-18	9/16"-18	M18X1.5	7.54	7.54	9.00	29.00	29.00	39.50	19	24
DAJCMT52Q-0816	3/4"-16	3/4"-16	M16X1.5	9.93	9.93	9.00	31.50	31.50	36.50	19	22
DAJCMT52Q-0818	3/4"-16	3/4"-16	M18X1.5	9.93	9.93	9.00	31.50	31.50	37.60	19	24
DAJCMT52Q-0822	3/4"-16	3/4"-16	M22X1.5	9.93	9.93	12.00	33.80	33.80	43.00	22	27
DAJCMT52Q-1018	7/8"-14	7/8"-14	M18X1.5	12.29	12.29	9.00	36.50	36.50	41.50	22	24
DAJCMT52Q-1020	7/8"-14	7/8"-14	M20X1.5	12.29	12.29	12.00	36.50	36.50	43.00	22	27
DAJCMT52Q-1022	7/8"-14	7/8"-14	M22X1.5	12.29	12.29	12.00	36.50	36.50	43.00	22	27
DAJCMT52Q-1026	7/8"-14	7/8"-14	M26X1.5	12.29	12.29	15.00	40.00	40.00	52.00	27	32
DAJCMT52Q-1222	1-1/16"-12	1-1/16"-12	M22X1.5	15.47	15.47	14.00	42.00	42.00	45.50	27	27
DAJCMT52Q-1226	1-1/16"-12	1-1/16"-12	M26X1.5	15.47	15.47	15.00	42.00	42.00	51.50	27	32
DAJCMT52Q-1227	1-1/16"-12	1-1/16"-12	M27X2	15.47	15.47	15.00	42.00	42.00	51.50	27	32
DAJCMT52Q-1627	1-5/16"-12	1-5/16"-12	M27X2	21.44	21.44	15.00	46.00	46.00	55.00	33	32
DAJCMT52Q-1633	1-5/16"-12	1-5/16"-12	M33X2	21.44	21.44	20.00	46.00	46.00	55.00	33	41
DAJCMT52Q-2042	1-5/8"-12	1-5/8"-12	M42X2	27.38	27.38	26.00	52.00	52.00	60.00	41	50
DAJCMT52Q-2448	1-7/8"-12	1-7/8"-12	M48X2	33.32	33.32	32.00	59.00	59.00	67.00	48	55

Certificate:




DAJCMT525

Branch Adjustable Tee JIC Male – Metric Male + O Ring

D	A	JC	M	T	52	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	Branch Tee	Metric	Male + O Ring



DME&JDE Code:	DAJCMT525
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Branch
Connection Type:	Adjustable Male x Male
Thread Types:	UNF x Metric
Sealing Method:	O Ring

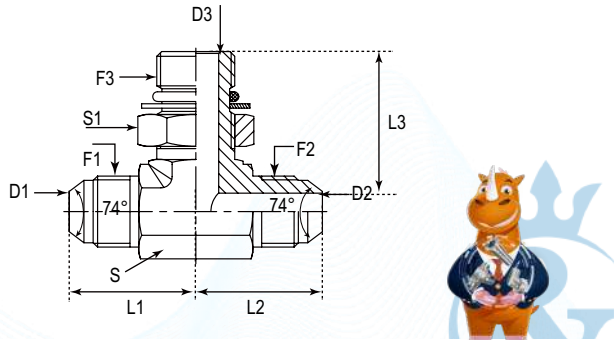

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	UNF	UNF	METRIC	mm	mm	mm	mm	mm	mm	mm	mm
DAJCMT525-0410	7/16"-20	7/16"-20	M10X1	4.37	4.37	4.00	22.50	22.50	27.50	11	14
DAJCMT525-0412	7/16"-20	7/16"-20	M12X1.5	4.37	4.37	5.00	27.00	27.00	31.50	14	17
DAJCMT525-0414	7/16"-20	7/16"-20	M14X1.5	4.37	4.37	6.00	27.00	27.00	32.50	14	19
DAJCMT525-0510	1/2"-20	1/2"-20	M10X1	5.94	5.94	4.00	27.00	27.00	28.50	14	14
DAJCMT525-0512	1/2"-20	1/2"-20	M12X1.5	5.94	5.94	4.00	27.00	27.00	31.50	14	17
DAJCMT525-0514	1/2"-20	1/2"-20	M14X1.5	5.94	5.94	6.00	27.00	27.00	32.50	14	19
DAJCMT525-0612	9/16"-18	9/16"-18	M12X1.5	7.54	7.54	4.00	27.00	27.00	31.50	14	17
DAJCMT525-0614	9/16"-18	9/16"-18	M14X1.5	7.54	7.54	6.00	27.00	27.00	32.50	14	19
DAJCMT525-0616	9/16"-18	9/16"-18	M16X1.5	7.54	7.54	7.00	28.50	28.50	36.50	19	22
DAJCMT525-0618	9/16"-18	9/16"-18	M18X1.5	7.54	7.54	9.00	29.00	29.00	39.50	19	24
DAJCMT525-0816	3/4"-16	3/4"-16	M16X1.5	9.93	9.93	9.00	31.50	31.50	36.50	19	22
DAJCMT525-0818	3/4"-16	3/4"-16	M18X1.5	9.93	9.93	9.00	31.50	31.50	37.60	19	24
DAJCMT525-0822	3/4"-16	3/4"-16	M22X1.5	9.93	9.93	12.00	33.80	33.80	43.00	22	27
DAJCMT525-1018	7/8"-14	7/8"-14	M18X1.5	12.29	12.29	9.00	36.50	36.50	41.50	22	24
DAJCMT525-1022	7/8"-14	7/8"-14	M22X1.5	12.29	12.29	12.00	36.50	36.50	43.00	22	27
DAJCMT525-1026	7/8"-14	7/8"-14	M26X1.5	12.29	12.29	15.00	40.00	40.00	52.00	27	32
DAJCMT525-1222	1-1/16"-12	1-1/16"-12	M22X1.5	15.47	15.47	14.00	42.00	42.00	45.50	27	27
DAJCMT525-1226	1-1/16"-12	1-1/16"-12	M26X1.5	15.47	15.47	15.00	42.00	42.00	51.50	27	32
DAJCMT525-1227	1-1/16"-12	1-1/16"-12	M27X2	15.47	15.47	15.00	42.00	42.00	51.50	27	32
DAJCMT525-1627	1-5/16"-12	1-5/16"-12	M27X2	21.44	21.44	15.00	46.00	46.00	55.00	33	32
DAJCMT525-1633	1-5/16"-12	1-5/16"-12	M33X2	21.44	21.44	20.00	46.00	46.00	55.00	33	41
DAJCMT525-2042	1-5/8"-12	1-5/8"-12	M42X2	27.38	27.38	26.00	52.00	52.00	60.00	41	50
DAJCMT525-2448	1-7/8"-12	1-7/8"-12	M48X2	33.32	33.32	32.00	59.00	59.00	67.00	48	55


DAJCMT28M

Branch Tee Connector JIC Male – NPTF Male

D	A	JC	M	T	28	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	Branch Tee	NPTF	Male



DME&JDE Code:	DAJCMT28M
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Branch Tee
Adaptor Connection Type:	Male x Male x Male
Thread Types:	UNF x UNF x NPTF

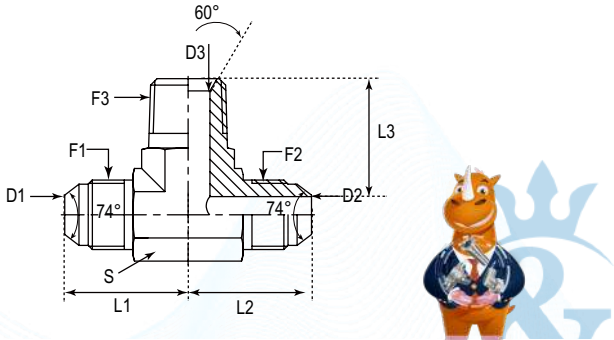

PART NUMBER	F1(Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	Hex
#	UNF	UNF	NPTF	mm	mm	mm	mm	mm	mm	-	-
DAJCMT28M-0202	5/16"-24	5/16"-24	1/8"-27	1.57	1.57	4.78	19.56	19.56	18.29	11 mm	Metric
DAJCMT28M-0202IN	5/16"-24	5/16"-24	1/8"-27	1.57	1.57	4.78	19.56	19.56	18.29	7/16"	Imperial
DAJCMT28M-0302	3/8"-24	3/8"-24	1/8"-27	3.18	3.18	4.78	21.10	21.10	18.30	11 mm	Metric
DAJCMT28M-0302IN	3/8"-24	3/8"-24	1/8"-27	3.18	3.18	4.78	21.10	21.10	18.30	7/16"	Imperial
DAJCMT28M-0402	7/16"-20	7/16"-20	1/8"-27	4.37	4.37	4.78	22.60	22.60	19.80	11 mm	Metric
DAJCMT28M-0404	7/16"-20	7/16"-20	1/4"-18	4.37	4.37	7.14	26.70	26.70	27.70	14 mm	Metric
DAJCMT28M-0406	7/16"-20	7/16"-20	3/8"-18	4.37	4.37	10.31	28.50	28.50	31.00	19 mm	Metric
DAJCMT28M-0402IN	7/16"-20	7/16"-20	1/8"-27	4.37	4.37	4.78	22.60	22.60	19.80	7/16"	Imperial
DAJCMT28M-0404IN	7/16"-20	7/16"-20	1/4"-18	4.37	4.37	7.14	26.70	26.70	27.70	9/16"	Imperial
DAJCMT28M-0406IN	7/16"-20	7/16"-20	3/8"-18	4.37	4.37	10.31	28.50	28.50	31.00	3/4"	Imperial
DAJCMT28M-0502	1/2"-20	1/2"-20	1/8"-27	5.94	5.94	4.78	24.10	24.10	19.80	14 mm	Metric
DAJCMT28M-0504	1/2"-20	1/2"-20	1/4"-18	5.94	5.94	7.14	26.70	26.70	27.70	14 mm	Metric
DAJCMT28M-0506	1/2"-20	1/2"-20	3/8"-18	5.94	5.94	10.31	28.50	28.50	31.00	19 mm	Metric
DAJCMT28M-0502IN	1/2"-20	1/2"-20	1/8"-27	5.94	5.94	4.78	24.10	24.10	19.80	9/16"	Imperial
DAJCMT28M-0504IN	1/2"-20	1/2"-20	1/4"-18	5.94	5.94	7.14	26.70	26.70	27.70	9/16"	Imperial
DAJCMT28M-0506IN	1/2"-20	1/2"-20	3/8"-18	5.94	5.94	10.31	28.50	28.50	31.00	3/4"	Imperial
DAJCMT28M-0602	9/16"-18	9/16"-18	1/8"-27	7.54	7.54	4.78	26.90	26.90	22.90	14 mm	Metric
DAJCMT28M-0604	9/16"-18	9/16"-18	1/4"-18	7.54	7.54	7.14	26.90	26.90	27.70	14 mm	Metric
DAJCMT28M-0606	9/16"-18	9/16"-18	3/8"-18	7.54	7.54	10.31	29.00	29.00	31.00	19 mm	Metric
DAJCMT28M-0608	9/16"-18	9/16"-18	1/2"-14	7.54	7.54	13.49	31.00	31.00	37.30	22 mm	Metric
DAJCMT28M-0602IN	9/16"-18	9/16"-18	1/8"-27	7.54	7.54	4.78	26.90	26.90	22.90	9/16"	Imperial
DAJCMT28M-0604IN	9/16"-18	9/16"-18	1/4"-18	7.54	7.54	7.14	26.90	26.90	27.70	9/16"	Imperial



DAJCMT28M-0606IN	9/16"-18	9/16"-18	3/8"-18	7.54	7.54	10.31	29.00	29.00	31.00	3/4"	Imperial
DAJCMT28M-0608IN	9/16"-18	9/16"-18	1/2"-14	7.54	7.54	13.49	31.00	31.00	37.30	7/8"	Imperial
DAJCMT28M-0804	3/4"-16	3/4"-16	1/4"-18	9.93	9.93	7.14	31.80	31.80	31.00	19 mm	Metric
DAJCMT28M-0806	3/4"-16	3/4"-16	3/8"-18	9.93	9.93	10.31	31.80	31.80	31.00	19 mm	Metric
DAJCMT28M-0808	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	13.49	33.80	33.80	37.30	22 mm	Metric
DAJCMT28M-0812	3/4"-16	3/4"-16	3/4"-14	9.93	9.93	18.26	36.10	36.10	40.40	27 mm	Metric
DAJCMT28M-0804IN	3/4"-16	3/4"-16	1/4"-18	9.93	9.93	7.14	31.80	31.80	31.00	3/4"	Imperial
DAJCMT28M-0806IN	3/4"-16	3/4"-16	3/8"-18	9.93	9.93	10.31	31.80	31.80	31.00	3/4"	Imperial
DAJCMT28M-0808IN	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	13.49	33.80	33.80	37.30	7/8"	Imperial
DAJCMT28M-0812IN	3/4"-16	3/4"-16	3/4"-14	9.93	9.93	18.26	36.10	36.10	40.40	1-1/16"	Imperial
DAJCMT28M-1006	7/8"-14	7/8"-14	3/8"-18	12.29	12.29	10.31	36.80	36.80	32.50	22 mm	Metric
DAJCMT28M-1008	7/8"-14	7/8"-14	1/2"-14	12.29	12.29	13.49	36.80	36.80	37.30	22 mm	Metric
DAJCMT28M-1012	7/8"-14	7/8"-14	3/4"-14	12.29	12.29	18.26	39.10	39.10	40.40	27 mm	Metric
DAJCMT28M-1006IN	7/8"-14	7/8"-14	3/8"-18	12.29	12.29	10.31	36.80	36.80	32.50	7/8"	Imperial
DAJCMT28M-1008IN	7/8"-14	7/8"-14	1/2"-14	12.29	12.29	13.49	36.80	36.80	37.30	7/8"	Imperial
DAJCMT28M-1012IN	7/8"-14	7/8"-14	3/4"-14	12.29	12.29	18.26	39.10	39.10	40.40	1-1/16"	Imperial
DAJCMT28M-1208	1-1/16"-12	1-1/16"-12	1/2"-14	15.47	15.47	13.49	42.20	42.20	40.40	27 mm	Metric
DAJCMT28M-1212	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	18.26	42.20	42.20	40.40	27 mm	Metric
DAJCMT28M-1208IN	1-1/16"-12	1-1/16"-12	1/2"-14	15.47	15.47	13.49	42.20	42.20	40.40	1-1/16"	Imperial
DAJCMT28M-1212IN	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	18.26	42.20	42.20	40.40	1-1/16"	Imperial
DAJCMT28M-1408	1-3/16"-12	1-3/16"-12	1/2"-14	18.26	18.26	13.49	45.70	45.70	42.90	33 mm	Metric
DAJCMT28M-1412	1-3/16"-12	1-3/16"-12	3/4"-14	18.26	18.26	18.26	45.70	45.70	42.90	33 mm	Metric
DAJCMT28M-1416	1-3/16"-12	1-3/16"-12	1"-11-1/2	18.26	18.26	23.83	45.70	45.70	50.00	33 mm	Metric
DAJCMT28M-1408IN	1-3/16"-12	1-3/16"-12	1/2"-14	18.26	18.26	13.49	45.70	45.70	42.90	1-5/16"	Imperial
DAJCMT28M-1412IN	1-3/16"-12	1-3/16"-12	3/4"-14	18.26	18.26	18.26	45.70	45.70	42.90	1-5/16"	Imperial
DAJCMT28M-1416IN	1-3/16"-12	1-3/16"-12	1"-11-1/2	18.26	18.26	23.83	45.70	45.70	50.00	1-5/16"	Imperial
DAJCMT28M-1612	1-5/16"-12	1-5/16"-12	3/4"-14	21.44	21.44	18.26	46.00	46.00	45.20	33 mm	Metric
DAJCMT28M-1616	1-5/16"-12	1-5/16"-12	1"-11-1/2	21.44	21.44	23.83	46.00	46.00	50.00	33 mm	Metric
DAJCMT28M-1612IN	1-5/16"-12	1-5/16"-12	3/4"-14	21.44	21.44	18.26	46.00	46.00	45.20	1-5/16"	Imperial
DAJCMT28M-1616IN	1-5/16"-12	1-5/16"-12	1"-11-1/2	21.44	21.44	23.83	46.00	46.00	50.00	1-5/16"	Imperial
DAJCMT28M-2016	1-5/8"-12	1-5/8"-12	1"-11-1/2	27.38	27.38	23.83	52.30	52.30	59.70	41 mm	Metric
DAJCMT28M-2020	1-5/8"-12	1-5/8"-12	1-1/4"-11-1/2	27.38	27.38	31.75	52.30	52.30	60.50	41 mm	Metric
DAJCMT28M-2016IN	1-5/8"-12	1-5/8"-12	1"-11-1/2	27.38	27.38	23.83	52.30	52.30	59.70	1-5/8"	Imperial
DAJCMT28M-2020IN	1-5/8"-12	1-5/8"-12	1-1/4"-11-1/2	27.38	27.38	31.75	52.30	52.30	60.50	1-5/8"	Imperial
DAJCMT28M-2424	1-7/8"-12	1-7/8"-12	1-1/2"-11-1/2	33.32	33.32	38.10	59.20	59.20	67.10	48 mm	Metric
DAJCMT28M-2424IN	1-7/8"-12	1-7/8"-12	1-1/2"-11-1/2	33.32	33.32	38.10	59.20	59.20	67.10	1-7/8"	Imperial
DAJCMT28M-3232	2-1/2"-12	2-1/2"-12	2"-11-1/2	45.24	45.24	49.23	77.70	77.70	76.20	65 mm	Metric
DAJCMT28M-3232IN	2-1/2"-12	2-1/2"-12	2"-11-1/2	45.24	45.24	49.23	77.70	77.70	76.20	2-1/2"	Imperial


Certificate:

DAJCMT07M

Branch Tee Connector JIC Male – BSPT Male

D	A	JC	M	T	07	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	Branch Tee	BSPT	Male

DME&JDE Code:	DAJCMT07M
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Branch Tee
Connection Type:	Male × Male × Male
Thread Types:	UNF × UNF × NPTF

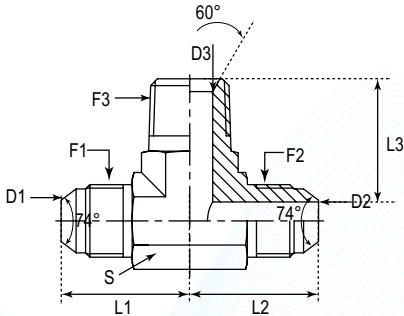

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S
#	UNF	UNF	BSPT	mm	mm	mm	mm	mm	mm	mm
DAJCMT07M-0402	7/16"-20	7/16"-20	1/8"-28	4.37	4.37	4.50	22.60	22.60	19.80	11
DAJCMT07M-0404	7/16"-20	7/16"-20	1/4"-19	4.37	4.37	6.00	26.70	26.70	27.70	14
DAJCMT07M-0406	7/16"-20	7/16"-20	3/8"-19	4.37	4.37	9.00	28.50	28.50	31.00	19
DAJCMT07M-0502	1/2"-20	1/2"-20	1/8"-28	5.94	5.94	4.50	24.10	24.10	19.80	14
DAJCMT07M-0504	1/2"-20	1/2"-20	1/4"-19	5.94	5.94	6.00	26.70	26.70	27.70	14
DAJCMT07M-0602	9/16"-18	9/16"-18	1/8"-28	7.54	7.54	4.50	26.90	26.90	22.90	14
DAJCMT07M-0604	9/16"-18	9/16"-18	1/4"-19	7.54	7.54	6.00	26.90	26.90	27.70	14
DAJCMT07M-0606	9/16"-18	9/16"-18	3/8"-19	7.54	7.54	9.00	29.00	29.00	31.00	19
DAJCMT07M-0608	9/16"-18	9/16"-18	1/2"-14	7.54	7.54	12.00	31.00	31.00	37.30	22
DAJCMT07M-0806	3/4"-16	3/4"-16	3/8"-19	9.93	9.93	9.00	31.80	31.80	31.00	19
DAJCMT07M-0808	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	12.00	36.80	36.80	37.30	22
DAJCMT07M-0812	3/4"-16	3/4"-16	3/4"-14	9.93	9.93	16.70	36.10	36.10	40.40	27
DAJCMT07M-0816	3/4"-16	3/4"-16	1"-11	9.93	9.93	22.20	38.80	38.80	50.00	33
DAJCMT07M-1006	7/8"-14	7/8"-14	3/8"-19	12.29	12.29	9.00	36.80	36.80	32.50	22
DAJCMT07M-1008	7/8"-14	7/8"-14	1/2"-14	12.29	12.29	12.00	36.80	36.80	37.30	22
DAJCMT07M-1012	7/8"-14	7/8"-14	3/4"-14	12.29	12.29	16.70	39.12	39.12	40.39	27
DAJCMT07M-1016	7/8"-14	7/8"-14	1"-11	12.29	12.29	22.20	41.70	41.70	50.00	33
DAJCMT07M-1208	1-1/16"-12	1-1/16"-12	1/2"-14	15.47	15.47	12.00	42.20	42.20	40.40	27
DAJCMT07M-1212	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	16.70	42.20	42.20	40.40	27
DAJCMT07M-1220	1-1/16"-12	1-1/16"-12	1-1/4"-11	15.47	15.47	28.60	50.00	50.00	60.50	41
DAJCMT07M-1608	1-5/16"-12	1-5/16"-12	1/2"-14	21.44	21.44	12.00	46.00	46.00	45.00	33
DAJCMT07M-1612	1-5/16"-12	1-5/16"-12	3/4"-14	21.44	21.44	16.70	46.00	46.00	45.20	33
DAJCMT07M-1616	1-5/16"-12	1-5/16"-12	1"-11	21.44	21.44	22.20	46.00	46.00	50.00	33
DAJCMT07M-1620	1-5/16"-12	1-5/16"-12	1-1/4"-11	21.44	21.44	28.60	51.10	51.10	60.50	41
DAJCMT07M-2016	1-5/8"-12	1-5/8"-12	1"-11	27.38	27.38	22.20	52.30	52.30	59.70	41
DAJCMT07M-2020	1-5/8"-12	1-5/8"-12	1-1/4"-11	27.38	27.38	28.60	52.30	52.30	60.50	41
DAJCMT07M-2024	1-5/8"-12	1-5/8"-12	1-1/2"-11	27.38	27.38	33.30	56.00	56.00	67.10	48
DAJCMT07M-2424	1-7/8"-12	1-7/8"-12	1-1/2"-11	33.32	33.32	33.30	59.20	59.20	67.10	48
DAJCMT07M-3224	2-1/2"-12	2-1/2"-12	-1/2"-11	45.24	45.24	33.30	77.70	77.70	75.40	63.5
DAJCMT07M-3232	2-1/2"-12	2-1/2"-12	2"-11	45.24	45.24	45.00	77.70	77.70	76.20	65

Certificate:



DAJCMT28F

Branch Tee Connector JIC Male – NPTF Female

D

Company

DME

A

Product Range

Adaptor

JC

Thread Types

JIC UNF

M

Connection Type

Male

T

Adaptor Structure

Branch Tee

28

Thread Types

NPTF

F

Connection Type

Female

 German Technology Equipment



New-Standard

DME&JDE Code: DAJCMT28F


Product Type Hydraulic adaptor

Standard: JIC and SAE-ORB

Structure: Branch Tee

Connection Type: Male x Male x Female

Thread Types: UNF x UNF x NPTF

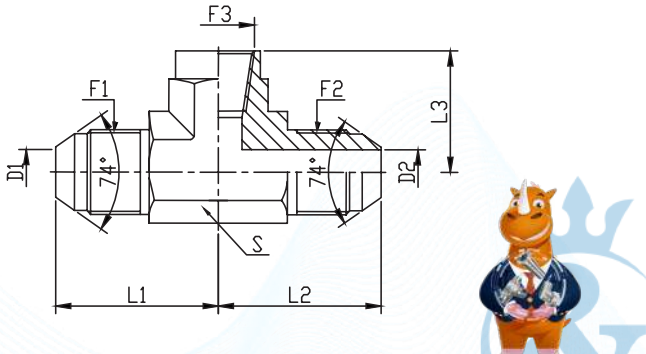

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	L1	L2	L3	S	Hex
#	UNF	UNF	NPTF	mm	mm	mm	mm	mm	-	-
DAJCMT28F-0202	5/16"-24	5/16"-24	1/8"-27	1.57	1.57	25.4	25.4	16.8	14 mm	Metric
DAJCMT28F-0202IN	5/16"-24	5/16"-24	1/8"-27	1.57	1.57	25.4	25.4	16.8	9/16"	Imperial
DAJCMT28F-0402	7/16"-20	7/16"-20	1/8"-27	4.37	4.37	27.40	27.40	16.80	14 mm	Metric
DAJCMT28F-0404	7/16"-20	7/16"-20	1/4"-18	4.37	4.37	31.00	31.00	22.40	19 mm	Metric
DAJCMT28F-0402IN	7/16"-20	7/16"-20	1/8"-27	4.37	4.37	27.40	27.40	16.80	9/16"	Imperial
DAJCMT28F-0404IN	7/16"-20	7/16"-20	1/4"-18	4.37	4.37	31.00	31.00	22.40	3/4"	Imperial
DAJCMT28F-0502	1/2"-20	1/2"-20	1/8"-27	5.94	5.94	27.40	27.40	16.80	14 mm	Metric
DAJCMT28F-0504	1/2"-20	1/2"-20	1/4"-18	5.94	5.94	31.00	31.00	22.40	19 mm	Metric
DAJCMT28F-0502IN	1/2"-20	1/2"-20	1/8"-27	5.94	5.94	27.40	27.40	16.80	9/16"	Imperial
DAJCMT28F-0504IN	1/2"-20	1/2"-20	1/4"-18	5.94	5.94	31.00	31.00	22.40	3/4"	Imperial
DAJCMT28F-0602	9/16"-18	9/16"-18	1/8"-27	7.54	7.54	31.20	31.20	17.00	14 mm	Metric
DAJCMT28F-0604	9/16"-18	9/16"-18	1/4"-18	7.54	7.54	31.20	31.20	22.40	19 mm	Metric
DAJCMT28F-0606	9/16"-18	9/16"-18	3/8"-18	7.54	7.54	33.30	33.30	25.90	22 mm	Metric
DAJCMT28F-0608	9/16"-18	9/16"-18	1/2"-14	7.54	7.54	35.80	35.80	31.20	27 mm	Metric
DAJCMT28F-0602IN	9/16"-18	9/16"-18	1/8"-27	7.54	7.54	31.20	31.20	17.00	9/16"	Imperial
DAJCMT28F-0604IN	9/16"-18	9/16"-18	1/4"-18	7.54	7.54	31.20	31.20	22.40	3/4"	Imperial
DAJCMT28F-0606IN	9/16"-18	9/16"-18	3/8"-18	7.54	7.54	33.30	33.30	25.90	7/8"	Imperial
DAJCMT28F-0608IN	9/16"-18	9/16"-18	1/2"-14	7.54	7.54	35.80	35.80	31.20	1-1/16"	Imperial

Certificate:



DAJCMT28F-0804	3/4"-16	3/4"-16	1/4"-18	9.93	9.93	36.10	36.10	25.90	22 mm	Metric
DAJCMT28F-0806	3/4"-16	3/4"-16	3/8"-18	9.93	9.93	36.10	36.10	25.90	22 mm	Metric
DAJCMT28F-0808	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	38.60	38.60	31.20	27 mm	Metric
DAJCMT28F-0812	3/4"-16	3/4"-16	3/4"-14	9.93	9.93	41.90	41.90	34.50	33 mm	Metric
DAJCMT28F-0804IN	3/4"-16	3/4"-16	1/4"-18	9.93	9.93	36.10	36.10	25.90	7/8"	Imperial
DAJCMT28F-0806IN	3/4"-16	3/4"-16	3/8"-18	9.93	9.93	36.10	36.10	25.90	7/8"	Imperial
DAJCMT28F-0808IN	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	38.60	38.60	31.20	1-1/16"	Imperial
DAJCMT28F-0812IN	3/4"-16	3/4"-16	3/4"-14	9.93	9.93	41.90	41.90	34.50	1-5/16"	Imperial
DAJCMT28F-1008	7/8"-14	7/8"-14	1/2"-14	12.29	12.29	41.70	41.70	31.20	27 mm	Metric
DAJCMT28F-1012	7/8"-14	7/8"-14	3/4"-14	12.29	12.29	44.80	44.80	34.50	33 mm	Metric
DAJCMT28F-1008IN	7/8"-14	7/8"-14	1/2"-14	12.29	12.29	41.70	41.70	31.20	1-1/16"	Imperial
DAJCMT28F-1012IN	7/8"-14	7/8"-14	3/4"-14	12.29	12.29	44.80	44.80	34.50	1-5/16"	Imperial
DAJCMT28F-1208	1-1/16"-12	1-1/16"-12	1/2"-14	15.47	15.47	42.20	42.20	31.20	27 mm	Metric
DAJCMT28F-1212	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	48.00	48.00	34.50	33 mm	Metric
DAJCMT28F-1216	1-1/16"-12	1-1/16"-12	1"-11-1/2	15.47	15.47	53.90	53.90	41.20	41 mm	Metric
DAJCMT28F-1208IN	1-1/16"-12	1-1/16"-12	1/2"-14	15.47	15.47	42.20	42.20	31.20	1-1/16"	Imperial
DAJCMT28F-1212IN	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	48.00	48.00	34.50	1-5/16"	Imperial
DAJCMT28F-1216IN	1-1/16"-12	1-1/16"-12	1"-11-1/2	15.47	15.47	53.90	53.90	41.20	1-5/8"	Imperial
DAJCMT28F-1412	1-3/16"-12	1-3/16"-12	3/4"-14	18.26	18.26	47.20	47.20	36.00	33 mm	Metric
DAJCMT28F-1412IN	1-3/16"-12	1-3/16"-12	3/4"-14	18.26	18.26	47.20	47.20	36.00	1-5/16"	Imperial
DAJCMT28F-1612	1-5/16"-12	1-5/16"-12	3/4"-14	21.44	21.44	55.10	55.10	35.40	33 mm	Metric
DAJCMT28F-1616	1-5/16"-12	1-5/16"-12	1"-11-1/2	21.44	21.44	55.10	55.10	41.20	41 mm	Metric
DAJCMT28F-1612IN	1-5/16"-12	1-5/16"-12	3/4"-14	21.44	21.44	55.10	55.10	35.40	1-5/16"	Imperial
DAJCMT28F-1616IN	1-5/16"-12	1-5/16"-12	1"-11-1/2	21.44	21.44	55.10	55.10	41.20	1-5/8"	Imperial
DAJCMT28F-2020	1-5/8"-12	1-5/8"-12	1-1/4"-11-1/2	27.38	27.38	59.20	59.20	43.20	48 mm	Metric
DAJCMT28F-2020IN	1-5/8"-12	1-5/8"-12	1-1/4"-11-1/2	27.38	27.38	59.20	59.20	43.20	1-7/8"	Imperial
DAJCMT28F-2424	1-7/8"-12	1-7/8"-12	1-1/2"-11-1/2	33.32	33.32	73.10	73.10	52.80	65 mm	Metric
DAJCMT28F-2424IN	1-7/8"-12	1-7/8"-12	1-1/2"-11-1/2	33.32	33.32	73.10	73.10	52.80	2-9/16"	Imperial
DAJCMT28F-3232	2-1/2"-12	2-1/2"-12	2"-11-1/2	45.24	45.24	83.80	83.80	60.70	70 mm	Metric
DAJCMT28F-3232IN	2-1/2"-12	2-1/2"-12	2"-11-1/2	45.24	45.24	83.80	83.80	60.70	2-13/16"	Imperial

Certificate:





DAJCMT05F

Branch Tee Connector JIC Male – BSPP Fixed Female

D

A

JC

M

T

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Branch Tee

BSPP


Female

 German Technology Equipment



New-Standard

- DME&JDE Code: DAJCMT05F
- Product Type Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: Branch Tee
- Connection Type: Male x Male x Fixed Female
- Thread Types: UNF x UNF x BSPP

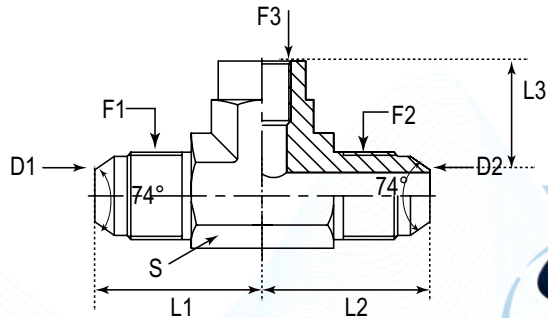

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	L1	L2	L3	S
#	UNF	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJCMT05F-0402	7/16"-20	7/16"-20	1/8"-28	4.37	4.37	27.40	27.40	16.80	14
DAJCMT05F-0404	7/16"-20	7/16"-20	1/4"-19	4.37	4.37	31.00	31.00	22.40	19
DAJCMT05F-0502	1/2"-20	1/2"-20	1/8"-28	5.94	5.94	27.40	27.40	16.80	14
DAJCMT05F-0504	1/2"-20	1/2"-20	1/4"-19	5.94	5.94	31.00	31.00	22.40	19
DAJCMT05F-0602	9/16"-18	9/16"-18	1/8"-28	7.54	7.54	31.20	31.20	17.00	14
DAJCMT05F-0604	9/16"-18	9/16"-18	1/4"-19	7.54	7.54	31.20	31.20	22.40	19
DAJCMT05F-0606	9/16"-18	9/16"-18	3/8"-19	7.54	7.54	33.30	33.30	25.90	22
DAJCMT05F-0608	9/16"-18	9/16"-18	1/2"-14	7.54	7.54	35.80	35.80	31.20	27
DAJCMT05F-0804	3/4"-16	3/4"-16	1/4"-19	9.93	9.93	36.10	36.10	25.70	19
DAJCMT05F-0806	3/4"-16	3/4"-16	3/8"-19	9.93	9.93	36.10	36.10	25.90	22
DAJCMT05F-0808	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	38.60	38.60	31.20	27
DAJCMT05F-0812	3/4"-16	3/4"-16	3/4"-14	9.93	9.93	41.90	41.90	34.50	33
DAJCMT05F-1008	7/8"-14	7/8"-14	1/2"-14	12.29	12.29	41.70	41.70	31.20	27
DAJCMT05F-1208	1-1/16"-12	1-1/16"-12	1/2"-14	15.47	15.47	48.00	48.00	34.30	27
DAJCMT05F-1212	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	48.00	48.00	34.50	33
DAJCMT05F-1612	1-5/16"-12	1-5/16"-12	3/4"-14	21.44	21.44	55.10	55.10	35.30	33
DAJCMT05F-1616	1-5/16"-12	1-5/16"-12	1"-11	21.44	21.44	55.10	55.10	41.20	41
DAJCMT05F-2016	1-5/8"-12	1-5/8"-12	1"-11	27.38	27.38	52.30	52.30	42.00	41
DAJCMT05F-2020	1-5/8"-12	1-5/8"-12	1-1/4"-11	27.38	27.38	59.20	59.20	43.20	48
DAJCMT05F-2420	1-7/8"-12	1-7/8"-12	1-1/4"-11	33.32	33.32	59.20	59.20	43.00	48
DAJCMT05F-2424	1-7/8"-12	1-7/8"-12	1-1/2"-11	33.32	33.32	73.40	73.40	52.80	65
DAJCMT05F-3232	2-1/2"-12	2-1/2"-12	2"-11	45.24	45.24	83.80	83.80	60.70	70

Certificate:



DAJCMT25T

Branch Bulkhead Tee Connector JIC Male – JIC Male

D

A

JC

M

T

25

T

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Branch Tee

Metric


Bulkhead Male

 German Technology Equipment



New-Standard

- DME&JDE Code: DAJCMT25T
- Product Type Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: Branch Tee
- Connection Type: Male x Male x Male
- Thread Types: UNF x UNF x UNF
- Other Features: Bulkhead

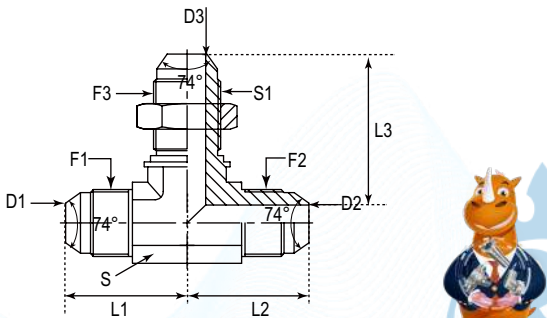

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-
DAJCMT25T-0303	3/8"-24	3/8"-24	3/8"-24	23.88	23.88	38.10	3.18	3.18	3.18	11 mm	16 mm	Metric
DAJCMT25T-0303IN	3/8"-24	3/8"-24	3/8"-24	23.88	23.88	38.10	3.18	3.18	3.18	7/16"	9/16"	Imperial
DAJCMT25T-0404	7/16"-20	7/16"-20	7/16"-20	24.60	24.60	40.40	4.37	4.37	4.37	11 mm	17 mm	Metric
DAJCMT25T-0404IN	7/16"-20	7/16"-20	7/16"-20	24.60	24.60	40.40	4.37	4.37	4.37	7/16"	11/16"	Imperial
DAJCMT25T-0505	1/2"-20	1/2"-20	1/2"-20	26.90	26.90	43.70	5.94	5.94	5.94	14 mm	19 mm	Metric
DAJCMT25T-0505IN	1/2"-20	1/2"-20	1/2"-20	26.90	26.90	43.70	5.94	5.94	5.94	9/16"	3/4"	Imperial
DAJCMT25T-0606	9/16"-18	9/16"-18	9/16"-18	27.70	27.70	46.00	7.54	7.54	7.54	14 mm	22 mm	Metric
DAJCMT25T-0606IN	9/16"-18	9/16"-18	9/16"-18	27.70	27.70	46.00	7.54	7.54	7.54	9/16"	13/16"	Imperial
DAJCMT25T-0808	3/4"-16	3/4"-16	3/4"-16	34.50	34.50	53.60	9.93	9.93	9.93	19 mm	24 mm	Metric
DAJCMT25T-0808IN	3/4"-16	3/4"-16	3/4"-16	34.50	34.50	53.60	9.93	9.93	9.93	3/4"	1"	Imperial
DAJCMT25T-1010	7/8"-14	7/8"-14	7/8"-14	39.60	39.60	60.70	12.29	12.29	12.29	22 mm	30 mm	Metric
DAJCMT25T-1010IN	7/8"-14	7/8"-14	7/8"-14	39.60	39.60	60.70	12.29	12.29	12.29	7/8"	1-1/8"	Imperial
DAJCMT25T-1212	1-1/16"-12	1-1/16"-12	1-1/16"-12	45.20	45.20	67.80	15.47	15.47	15.47	27 mm	36 mm	Metric
DAJCMT25T-1212IN	1-1/16"-12	1-1/16"-12	1-1/16"-12	45.20	45.20	67.80	15.47	15.47	15.47	1-1/16"	1-3/8"	Imperial
DAJCMT25T-1414	1-3/16"-12	1-3/16"-12	1-3/16"-12	48.80	48.80	71.10	18.26	18.26	18.26	33 mm	41 mm	Metric
DAJCMT25T-1414IN	1-3/16"-12	1-3/16"-12	1-3/16"-12	48.80	48.80	71.10	18.26	18.26	18.26	1-5/16"	1-1/2"	Imperial
DAJCMT25T-1616	1-5/16"-12	1-5/16"-12	1-5/16"-12	49.30	49.30	71.10	21.44	21.44	21.44	33 mm	41 mm	Metric
DAJCMT25T-1616IN	1-5/16"-12	1-5/16"-12	1-5/16"-12	49.30	49.30	71.10	21.44	21.44	21.44	1-5/16"	1-5/8"	Imperial
DAJCMT25T-2020	1-5/8"-12	1-5/8"-12	1-5/8"-12	55.10	55.10	79.30	27.38	27.38	27.38	41 mm	50 mm	Metric
DAJCMT25T-2020IN	1-5/8"-12	1-5/8"-12	1-5/8"-12	55.10	55.10	79.30	27.38	27.38	27.38	1-5/8"	1-7/8"	Imperial
DAJCMT25T-2424	1-7/8"-12	1-7/8"-12	1-7/8"-12	59.40	59.40	86.90	33.32	33.32	33.32	48 mm	55 mm	Metric
DAJCMT25T-2424IN	1-7/8"-12	1-7/8"-12	1-7/8"-12	59.40	59.40	86.90	33.32	33.32	33.32	1-7/8"	2-1/8"	Imperial
DAJCMT25T-3232	2-1/2"-12	2-1/2"-12	2-1/2"-12	73.40	73.40	104.40	45.24	45.24	45.24	65 mm	70 mm	Metric
DAJCMT25T-3232IN	2-1/2"-12	2-1/2"-12	2-1/2"-12	73.40	73.40	104.40	45.24	45.24	45.24	2-1/2"	2-3/4"	Imperial

Certificate:





DAJC1T25M

Branch Tee Connector JIC Swivel Female – JIC Male

D

A

JC

1

T

25

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Swivel Female

Branch Tee

JIC UNF


Male

 German Technology Equipment



New-Standard

- DME&JDE Code: DAJC1T25M
- Product Type Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: Branch Tee
- Connection Type: Swivel Female × Swivel Female × Male
- Thread Types: UNF × UNF × UNF

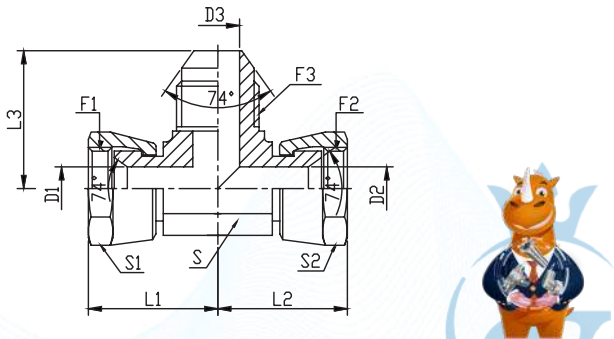

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1	S2	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-	-
DAJC1T25M-0404	7/16"-20	7/16"-20	7/16"-20	4.37	4.37	4.37	16.66	16.66	22.61	11 mm	14 mm	14 mm	Metric
DAJC1T25M-0404IN	7/16"-20	7/16"-20	7/16"-20	4.37	4.37	4.37	16.66	16.66	22.61	7/16"	9/16"	9/16"	Imperial
DAJC1T25M-0505	1/2"-20	1/2"-20	1/2"-20	5.94	5.94	5.94	17.40	17.40	24.13	14 mm	17 mm	17 mm	Metric
DAJC1T25M-0505IN	1/2"-20	1/2"-20	1/2"-20	5.94	5.94	5.94	17.40	17.40	24.13	9/16"	5/8"	5/8"	Imperial
DAJC1T25M-0606	9/16"-18	9/16"-18	9/16"-18	7.54	7.54	7.54	22.22	22.22	26.92	14 mm	17 mm	17 mm	Metric
DAJC1T25M-0606IN	9/16"-18	9/16"-18	9/16"-18	7.54	7.54	7.54	22.22	22.22	26.92	9/16"	11/16"	11/16"	Imperial
DAJC1T25M-0808	3/4"-16	3/4"-16	3/4"-16	9.93	9.93	9.93	24.33	24.33	31.75	19 mm	22 mm	22 mm	Metric
DAJC1T25M-0808IN	3/4"-16	3/4"-16	3/4"-16	9.93	9.93	9.93	24.33	24.33	31.75	3/4"	7/8"	7/8"	Imperial
DAJC1T25M-1010	7/8"-14	7/8"-14	7/8"-14	12.29	12.29	12.29	28.45	28.45	36.83	22 mm	27 mm	27 mm	Metric
DAJC1T25M-1010IN	7/8"-14	7/8"-14	7/8"-14	12.29	12.29	12.29	28.45	28.45	36.83	7/8"	1"	1"	Imperial
DAJC1T25M-1212	1-1/16"-12	1-1/16"-12	1-1/16"-12	15.47	15.47	15.47	30.18	30.18	42.16	27 mm	32 mm	32 mm	Metric
DAJC1T25M-1212IN	1-1/16"-12	1-1/16"-12	1-1/16"-12	15.47	15.47	15.47	30.18	30.18	42.16	1-1/16"	1-1/4"	1-1/4"	Imperial
DAJC1T25M-1616	1-5/16"-12	1-5/16"-12	1-5/16"-12	21.44	21.44	21.44	35.71	35.71	45.97	33 mm	41 mm	41 mm	Metric
DAJC1T25M-1616IN	1-5/16"-12	1-5/16"-12	1-5/16"-12	21.44	21.44	21.44	35.71	35.71	45.97	1-5/16"	1-1/2"	1-1/2"	Imperial
DAJC1T25M-2020	1-5/8"-12	1-5/8"-12	1-5/8"-12	27.38	27.38	27.38	42.80	42.80	52.30	41 mm	50 mm	50 mm	Metric
DAJC1T25M-2020IN	1-5/8"-12	1-5/8"-12	1-5/8"-12	27.38	27.38	27.38	42.80	42.80	52.30	1-5/8"	2"	2"	Imperial
DAJC1T25M-2424	1-7/8"-12	1-7/8"-12	1-7/8"-12	33.32	33.32	33.32	47.14	47.14	59.18	50 mm	58 mm	58 mm	Metric
DAJC1T25M-2424IN	1-7/8"-12	1-7/8"-12	1-7/8"-12	33.32	33.32	33.32	47.14	47.14	59.18	1-7/8"	2-1/4"	2-1/4"	Imperial



Certificate:



DAJC1T28M

Branch Tee Connector JIC Swivel Female – NPTF Male

D

A

JC

1

T

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Swivel Female

Branch Tee

NPTF


Male

 German Technology Equipment



New-Standard

- DME&JDE Code: DAJC1T28M
- Product Type Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: Branch Tee
- Connection Type: Swivel Female × Swivel Female × Male
- Thread Types: UNF × UNF × NPTF

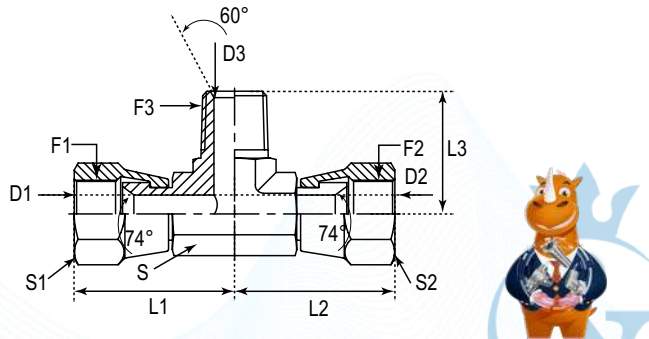

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1	S2	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-	-
DAJC1T28M-0404	7/16"-20	7/16"-20	1/4"-18	4.37	4.37	7.14	20.06	20.06	27.70	14 mm	14 mm	14 mm	Metric
DAJC1T28M-0404IN	7/16"-20	7/16"-20	1/4"-18	4.37	4.37	7.14	20.06	20.06	27.70	9/16"	9/16"	9/16"	Imperial
DAJC1T28M-0606	9/16"-18	9/16"-18	3/8"-18	7.54	7.54	10.31	22.22	22.22	31.80	19 mm	19 mm	19 mm	Metric
DAJC1T28M-0606IN	9/16"-18	9/16"-18	3/8"-18	7.54	7.54	10.31	22.22	22.22	31.80	3/4"	11/16"	11/16"	Imperial
DAJC1T28M-0808	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	13.49	27.43	27.43	37.30	22 mm	22 mm	22 mm	Metric
DAJC1T28M-0808IN	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	13.49	27.43	27.43	37.30	7/8"	7/8"	7/8"	Imperial
DAJC1T28M-1212	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	18.26	29.97	29.97	40.40	27 mm	32 mm	32 mm	Metric
DAJC1T28M-1212IN	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	18.26	29.97	29.97	40.40	1-1/8"	1-1/4"	1-1/4"	Imperial
DAJC1T28M-1616	1-5/16"-12	1-5/16"-12	1"-11-1/2	21.44	21.44	23.83	35.71	35.71	50.04	33 mm	41 mm	41 mm	Metric
DAJC1T28M-1616IN	1-5/16"-12	1-5/16"-12	1"-11-1/2	21.44	21.44	23.83	35.71	35.71	50.04	1-5/16"	1-1/2"	1-1/2"	Imperial



Certificate:






DAJC1T251

Branch Tee Connector JIC Swivel Female – JIC Swivel Female

D	A	JC	1	T	251
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	JIC UNF	Swivel Female	Branch Tee	JIC Swivel Female



DME&JDE Code:	DAJC1T251
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Branch Tee
Connection Type:	Swivel Female × Swivel Female × Swivel Female
Thread Types:	UNF × UNF × UNF

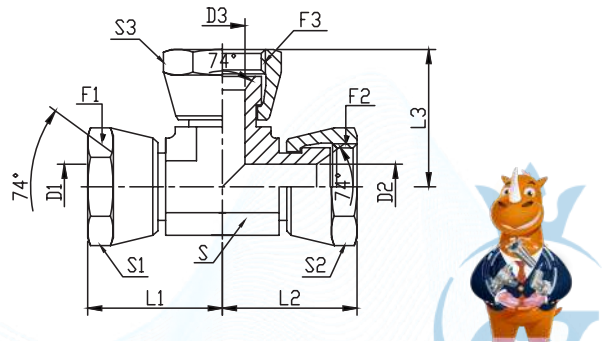

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L	L2	L3	S	S1	S2	S3	Hex
#	UNF	UNF	NPTF	mm	mm	mm	mm	mm	mm	-	-	-	-	-
DAJC1T251-0404	7/16"-20	7/16"-20	7/16"-20	4.37	4.37	4.37	16.66	16.66	16.66	11 mm	14 mm	14 mm	14 mm	Metric
DAJC1T251-0404IN	7/16"-20	7/16"-20	7/16"-20	4.37	4.37	4.37	16.66	16.66	16.66	7/16"	9/16"	9/16"	9/16"	Imperial
DAJC1T251-0505	1/2"-20	1/2"-20	1/2"-20	5.94	5.94	5.94	17.40	17.40	17.40	14 mm	17 mm	17 mm	17 mm	Metric
DAJC1T251-0505IN	1/2"-20	1/2"-20	1/2"-20	5.94	5.94	5.94	17.40	17.40	17.40	9/16"	5/8"	5/8"	5/8"	Imperial
DAJC1T251-0606	9/16"-18	9/16"-18	9/16"-18	7.54	7.54	7.54	22.22	22.22	22.22	14 mm	19 mm	19 mm	19 mm	Metric
DAJC1T251-0606IN	9/16"-18	9/16"-18	9/16"-18	7.54	7.54	7.54	22.22	22.22	22.22	9/16"	11/16"	11/16"	11/16"	Imperial
DAJC1T251-0808	3/4"-16	3/4"-16	3/4"-16	9.93	9.93	9.93	24.33	24.33	24.33	19 mm	22 mm	22 mm	22 mm	Metric
DAJC1T251-0808IN	3/4"-16	3/4"-16	3/4"-16	9.93	9.93	9.93	24.33	24.33	24.33	3/4"	7/8"	7/8"	7/8"	Imperial
DAJC1T251-1010	7/8"-14	7/8"-14	7/8"-14	12.29	12.29	12.29	28.45	28.45	28.45	22 mm	27 mm	27 mm	27 mm	Metric
DAJC1T251-1010IN	7/8"-14	7/8"-14	7/8"-14	12.29	12.29	12.29	28.45	28.45	28.45	7/8"	1"	1"	1"	Imperial
DAJC1T251-1212	1-1/16"-12	1-1/16"-12	1-1/16"-12	15.47	15.47	15.47	30.18	30.18	30.18	27 mm	32 mm	32 mm	32 mm	Metric
DAJC1T251-1212IN	1-1/16"-12	1-1/16"-12	1-1/16"-12	15.47	15.47	15.47	30.18	30.18	30.18	1-1/16"	1-1/4"	1-1/4"	1-1/4"	Imperial
DAJC1T251-1616	1-5/16"-12	1-5/16"-12	1-5/16"-12	21.44	21.44	21.44	35.71	35.71	35.71	33 mm	41 mm	41 mm	41 mm	Metric
DAJC1T251-1616IN	1-5/16"-12	1-5/16"-12	1-5/16"-12	21.44	21.44	21.44	35.71	35.71	35.71	1-5/16"	1-1/2"	1-1/2"	1-1/2"	Imperial
DAJC1T251-2020	1-5/8"-12	1-5/8"-12	1-5/8"-12	27.42	27.42	27.42	42.80	42.80	42.80	41 mm	50 mm	50 mm	50 mm	Metric
DAJC1T251-2020IN	1-5/8"-12	1-5/8"-12	1-5/8"-12	27.42	27.42	27.42	42.80	42.80	42.80	1-5/8"	2"	2"	2"	Imperial




DAJCML251

Run Tee Connector JIC Male – JIC Swivel Female

D	A	JC	M	L	251
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	JIC UNF	Male	Run Tee	JIC Swivel Female



DME&JDE Code:	DAJCML251
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	Run Tee
Connection Type:	Male × Swivel Female
Thread Types:	UNF × UNF × UNF

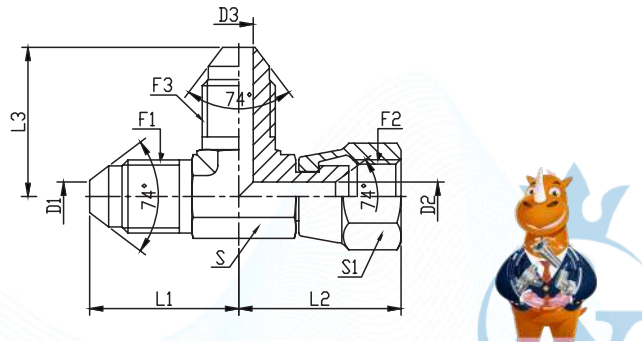

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1	Hex	Revision History
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-	2024/6/4,Mark dimension of item series with prefix "6602" has been generally updated; Dimension L3 has been changed to L1,Dimension L1 has been changed to L2,Dimension L2 has been changed to L3;
DAJCML251-0303	3/8"-24	3/8"-24	3/8"-24	21.08	17.07	21.08	3.18	3.18	3.18	11 mm	12 mm	Metric	
DAJCML251-0303IN	3/8"-24	3/8"-24	3/8"-24	21.08	17.07	21.08	3.18	3.18	3.18	7/16"	1/2"	Imperial	
DAJCML251-0404	7/16"-20	7/16"-20	7/16"-20	22.61	26.66	22.61	4.37	4.37	4.37	11 mm	14 mm	Metric	
DAJCML251-0404IN	7/16"-20	7/16"-20	7/16"-20	22.61	16.66	22.61	4.37	4.37	4.37	7/16"	9/16"	Imperial	2024/6/4,Dimension L2 of item AR09525(6602-040404) has been changed from 26.66±0.8mm to 16.66±0.76mm;
DAJCML251-0505	1/2"-20	1/2"-20	1/2"-20	24.10	17.40	24.10	5.94	5.94	5.94	14 mm	17 mm	Metric	
DAJCML251-0505IN	1/2"-20	1/2"-20	1/2"-20	24.10	17.40	24.10	5.94	5.94	5.94	9/16"	5/8"	Imperial	
DAJCML251-060604	9/16"-18	9/16"-18	7/16"-20	26.92	22.23	26.67	7.54	7.54	4.37	14 mm	19 mm	Metric	
DAJCML251-0606	9/16"-18	9/16"-18	9/16"-18	26.92	22.23	26.92	7.54	7.54	7.54	14 mm	19 mm	Metric	
DAJCML251-0608	9/16"-18	3/4"-16	9/16"-18	29.00	24.33	29.00	7.54	9.93	7.54	19 mm	22 mm	Metric	
DAJCML251-060604IN	9/16"-18	9/16"-18	7/16"-20	26.92	22.23	26.67	7.54	7.54	4.37	9/16"	11/16"	Imperial	
DAJCML251-0606IN	9/16"-18	9/16"-18	9/16"-18	26.92	22.23	26.92	7.54	7.54	7.54	9/16"	11/16"	Imperial	
DAJCML251-0608IN	9/16"-18	3/4"-16	9/16"-18	29.00	24.33	29.00	7.54	9.93	7.54	3/4"	7/8"	Imperial	
DAJCML251-080804	3/4"-16	3/4"-16	7/16"-20	31.75	24.33	28.45	9.93	9.93	4.37	19 mm	22 mm	Metric	
DAJCML251-080806	3/4"-16	3/4"-16	9/16"-18	31.75	24.33	29.00	9.93	9.93	7.54	19 mm	22 mm	Metric	
DAJCML251-0808	3/4"-16	3/4"-16	3/4"-16	31.75	24.33	31.75	9.93	9.93	9.93	19 mm	22 mm	Metric	
DAJCML251-080812	3/4"-16	3/4"-16	1-1/16"-12	36.10	28.70	42.20	9.93	9.93	15.47	27 mm	22 mm	Metric	
DAJCML251-0812	3/4"-16	1-1/16"-12	3/4"-16	36.10	30.20	36.10	9.93	15.47	9.93	27 mm	32 mm	Metric	



DAJCML251-080804IN	3/4"-16	3/4"-16	7/16"-20	31.75	24.33	28.45	9.93	9.93	4.37	3/4"	7/8"	Imperial	
DAJCML251-080806IN	3/4"-16	3/4"-16	9/16"-18	31.75	24.33	29.00	9.93	9.93	7.54	3/4"	7/8"	Imperial	
DAJCML251-0808IN	3/4"-16	3/4"-16	3/4"-16	31.75	24.33	31.75	9.93	9.93	9.93	3/4"	7/8"	Imperial	
DAJCML251-080812IN	3/4"-16	3/4"-16	1-1/16"-12	36.10	28.70	42.20	9.93	9.93	15.47	1-1/16"	7/8"	Imperial	
DAJCML251-0812IN	3/4"-16	1-1/16"-12	3/4"-16	36.10	30.20	36.10	9.93	15.47	9.93	1-1/16"	1-1/4"	Imperial	
DAJCML251-1006	7/8"-14	9/16"-18	7/8"-14	36.80	25.50	36.80	12.29	7.54	12.29	22 mm	19 mm	Metric	
DAJCML251-101008	7/8"-14	7/8"-14	3/4"-16	36.83	28.45	33.80	12.29	12.29	9.93	22 mm	27 mm	Metric	
DAJCML251-1010	7/8"-14	7/8"-14	7/8"-14	36.80	28.45	36.80	12.29	12.29	12.29	22 mm	27 mm	Metric	
DAJCML251-101012	7/8"-14	7/8"-14	1 1/16"-12	39.30	29.30	42.20	12.29	12.29	15.47	27 mm	27 mm	Metric	
DAJCML251-1006IN	7/8"-14	9/16"-18	7/8"-14	36.80	25.50	36.80	12.29	7.54	12.29	7/8"	11/16"	Imperial	
DAJCML251-101008IN	7/8"-14	7/8"-14	3/4"-16	36.83	28.45	33.80	12.29	12.29	9.93	7/8"	1"	Imperial	
DAJCML251-1010IN	7/8"-14	7/8"-14	7/8"-14	36.80	28.45	36.80	12.29	12.29	12.29	7/8"	1"	Imperial	
DAJCML251-101012IN	7/8"-14	7/8"-14	1 1/16"-12	39.30	29.30	42.20	12.29	12.29	15.47	1-1/16"	1"	Imperial	
DAJCML251-120808	1-1/16"-12	3/4"-16	3/4"-16	42.20	28.70	36.20	15.47	9.93	9.93	27 mm	22 mm	Metric	
DAJCML251-1208	1-1/16"-12	3/4"-16	1-1/16"-12	42.20	28.53	42.20	15.47	9.93	15.47	27 mm	22 mm	Metric	
DAJCML251-1212	1-1/16"-12	1-1/16"-12	1-1/16"-12	42.20	30.18	42.20	15.47	15.47	15.47	27 mm	32 mm	Metric	
DAJCML251-120808IN	1-1/16"-12	3/4"-16	3/4"-16	42.20	28.70	36.20	15.47	9.93	9.93	1-1/16"	7/8"	Imperial	
DAJCML251-1208IN	1-1/16"-12	3/4"-16	1-1/16"-12	42.20	28.53	42.20	15.47	9.93	15.47	1-1/16"	7/8"	Imperial	
DAJCML251-1212IN	1-1/16"-12	1-1/16"-12	1-1/16"-12	42.20	30.18	42.20	15.47	15.47	15.47	1-1/16"	1-1/4"	Imperial	
DAJCML251-1414	1-3/16"-12	1-3/16"-12	1-3/16"-12	45.70	35.70	45.70	18.26	18.26	18.26	33 mm	36 mm	Metric	
DAJCML251-1414IN	1-3/16"-12	1-3/16"-12	1-3/16"-12	45.70	35.70	45.70	18.26	18.26	18.26	1-5/16"	1-3/8"	Imperial	
DAJCML251-161608	1-5/16"-12	1-5/16"-12	3/4"-16	45.97	35.71	40.70	21.44	21.44	9.93	33 mm	41 mm	Metric	
DAJCML251-161612	1-5/16"-12	1-5/16"-12	1-1/16"-12	45.97	35.71	44.70	21.44	21.44	15.47	33 mm	41 mm	Metric	
DAJCML251-1616	1-5/16"-12	1-5/16"-12	1-5/16"-12	45.97	35.71	45.97	21.44	21.44	21.44	33 mm	41 mm	Metric	
DAJCML251-161608IN	1-5/16"-12	1-5/16"-12	3/4"-16	45.97	35.71	40.70	21.44	21.44	9.93	1-5/16"	1-1/2"	Imperial	
DAJCML251-161612IN	1-5/16"-12	1-5/16"-12	1-1/16"-12	45.97	35.71	44.70	21.44	21.44	15.47	1-5/16"	1-1/2"	Imperial	
DAJCML251-1616IN	1-5/16"-12	1-5/16"-12	1-5/16"-12	45.97	35.71	45.97	21.44	21.44	21.44	1-5/16"	1-1/2"	Imperial	
DAJCML251-2020	1-5/8"-12	1-5/8"-12	1-5/8"-12	52.30	42.80	52.30	27.38	27.42	27.38	41 mm	50 mm	Metric	
DAJCML251-2020IN	1-5/8"-12	1-5/8"-12	1-5/8"-12	52.30	42.80	52.30	27.38	27.42	27.38	1-5/8"	2"	Imperial	
DAJCML251-2424	1-7/8"-12	1-7/8"-12	1-7/8"-12	59.20	65.60	59.20	33.32	33.32	33.32	48 mm	55 mm	Metric	
DAJCML251-2424IN	1-7/8"-12	1-7/8"-12	1-7/8"-12	59.20	47.14	59.20	33.32	33.32	33.32	1-7/8"	2-1/4"	Imperial	2024/6/4,Dimension L2 of item AR09570(6602-242424) has been changed from 59.2±0.8mm to 47.14±0.76mm.
DAJCML251-3232	2-1/2"-12	2-1/2"-12	2-1/2"-12	77.70	61.98	77.70	45.24	45.24	45.24	65 mm	75 mm	Metric	
DAJCML251-3232IN	2-1/2"-12	2-1/2"-12	2-1/2"-12	77.70	61.98	77.70	45.24	45.24	45.24	2-1/2"	2-7/8"	Imperial	

DAJCML305

Run Adjustable Tee JIC Male – SAE Male O Ring

D	A	JC	M	L	30	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC UNF	Male	Run Tee	SAE UNF	Male O Ring

German Technology Equipment

New-Standard

DME&JDE Code: DAJCML305

Product Type	Hydraulic adaptor


Standard: JIC and SAE-ORB

Structure: Run Tee

Connection Type: Adjustable Male x Male x Male

Thread Types: UNF x UNF x UNF

Sealing Method: O Ring

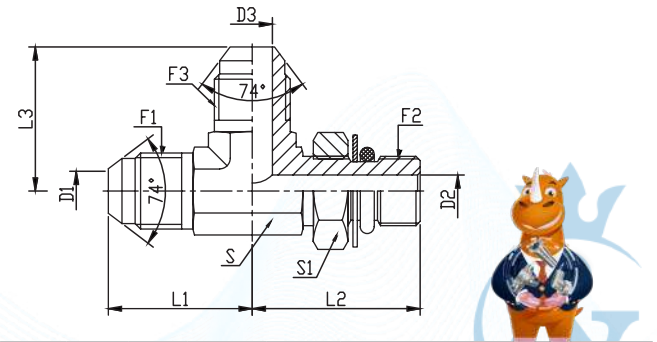

Part Number	F1 (Thread)	F3 (Thread)	F2 (Thread)	L1	L2	L3	D1	D2	D3	S	S1	Hex	Revision History
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-	2024/6/4,Mark dimension of item series with prefix "6804" has been generally updated; Dimension L3 has been changed to L2,Dimension L2 has been changed to L3
DAJCML305-0402	7/16"-20	5/16"-24	7/16"-20	22.61	23.37	22.61	4.37	1.57	4.37	11 mm	11 mm	Metric	
DAJCML305-0404	7/16"-20	7/16"-20	7/16"-20	22.60	26.2	22.60	4.37	4.37	4.37	11 mm	14 mm	Metric	
DAJCML305-0405	7/16"-20	1/2"-20	7/16"-20	24.10	28.7	24.10	4.37	5.94	4.37	14 mm	17 mm	Metric	
DAJCML305-0406	7/16"-20	9/16"-18	7/16"-20	26.70	31.8	26.70	4.37	7.54	4.37	14 mm	19 mm	Metric	
DAJCML305-0402IN	7/16"-20	5/16"-24	7/16"-20	22.61	23.37	22.61	4.37	1.57	4.37	7/16"	7/16"	Imperial	
DAJCML305-0404IN	7/16"-20	7/16"-20	7/16"-20	22.60	26.2	22.60	4.37	4.37	4.37	7/16"	9/16"	Imperial	
DAJCML305-0405IN	7/16"-20	1/2"-20	7/16"-20	24.10	28.7	24.10	4.37	5.94	4.37	9/16"	5/8"	Imperial	
DAJCML305-0406IN	7/16"-20	9/16"-18	7/16"-20	26.70	31.8	26.70	4.37	7.54	4.37	9/16"	11/16"	Imperial	
DAJCML305-0505	1/2"-20	1/2"-20	1/2"-20	24.10	28.7	24.10	5.94	5.94	5.94	14 mm	17 mm	Metric	
DAJCML305-0505IN	1/2"-20	1/2"-20	1/2"-20	24.10	28.7	24.10	5.94	5.94	5.94	9/16"	5/8"	Imperial	
DAJCML305-0604	9/16"-18	7/16"-20	9/16"-18	26.90	30.2	26.90	7.54	4.37	7.54	14 mm	14 mm	Metric	
DAJCML305-0606	9/16"-18	9/16"-18	9/16"-18	26.90	31.8	26.90	7.54	7.54	7.54	14 mm	19 mm	Metric	
DAJCML305-0608	9/16"-18	3/4"-16	9/16"-18	29.00	36.8	29.00	7.54	9.93	7.54	19 mm	22 mm	Metric	
DAJCML305-0604IN	9/16"-18	7/16"-20	9/16"-18	26.90	30.2	26.90	7.54	4.37	7.54	9/16"	9/16"	Imperial	
DAJCML305-0606IN	9/16"-18	9/16"-18	9/16"-18	26.90	31.8	26.90	7.54	7.54	7.54	9/16"	11/16"	Imperial	
DAJCML305-0608IN	9/16"-18	3/4"-16	9/16"-18	29.00	36.8	29.00	7.54	9.93	7.54	3/4"	7/8"	Imperial	
DAJCML305-0806	3/4"-16	9/16"-18	3/4"-16	31.80	33.5	31.80	9.93	7.54	9.93	19 mm	19 mm	Metric	
DAJCML305-0808	3/4"-16	3/4"-16	3/4"-16	31.80	36.8	31.80	9.93	9.93	9.93	19 mm	22 mm	Metric	
DAJCML305-0810	3/4"-16	7/8"-14	3/4"-16	33.80	43.2	33.80	9.93	12.29	9.93	22 mm	27 mm	Metric	
DAJCML305-0812	3/4"-16	1-1/16"-12	3/4"-16	36.80	49.3	36.80	9.93	15.47	9.93	27 mm	32 mm	Metric	

DAJCML305-0806IN	3/4"-16	9/16"-18	3/4"-16	31.80	33.5	31.80	9.93	7.54	9.93	3/4"	11/16"	Imperial	
DAJCML305-0808IN	3/4"-16	3/4"-16	3/4"-16	31.80	36.8	31.80	9.93	9.93	9.93	3/4"	7/8"	Imperial	
DAJCML305-0810IN	3/4"-16	7/8"-14	3/4"-16	33.80	43.2	33.80	9.93	12.29	9.93	7/8"	1"	Imperial	
DAJCML305-0812IN	3/4"-16	1-1/16"-12	3/4"-16	36.80	49.3	36.80	9.93	15.47	9.93	1-1/16"	1-1/4"	Imperial	
DAJCML305-1008	7/8"-14	3/4"-16	7/8"-14	36.80	39.1	36.80	12.29	9.93	12.29	22 mm	22 mm	Metric	
DAJCML305-1010	7/8"-14	7/8"-14	7/8"-14	36.80	43.2	36.80	12.29	12.29	12.29	22 mm	27 mm	Metric	
DAJCML305-1012	7/8"-14	1-1/16"-12	7/8"-14	39.10	49.3	39.10	12.29	15.47	12.29	27 mm	32 mm	Metric	
DAJCML305-1008IN	7/8"-14	3/4"-16	7/8"-14	36.80	39.1	36.80	12.29	9.93	12.29	7/8"	7/8"	Imperial	
DAJCML305-1010IN	7/8"-14	7/8"-14	7/8"-14	36.80	43.2	36.80	12.29	12.29	12.29	7/8"	1"	Imperial	
DAJCML305-1012IN	7/8"-14	1-1/16"-12	7/8"-14	39.10	49.3	39.10	12.29	15.47	12.29	1-1/16"	1-1/4"	Imperial	
DAJCML305-1208	1-1/16"-12	3/4"-16	1-1/16"-12	42.20	41.2	42.20	15.47	9.93	15.47	27 mm	22 mm	Metric	
DAJCML305-1210	1-1/16"-12	7/8"-14	1-1/16"-12	42.20	45.2	42.20	15.47	12.29	15.47	27 mm	27 mm	Metric	
DAJCML305-1212	1-1/16"-12	1-1/16"-12	1-1/16"-12	42.20	49.3	42.20	15.47	15.47	15.47	27 mm	32 mm	Metric	
DAJCML305-1216	1-1/16"-12	1-5/16"-12	1-1/16"-12	44.70	52.1	44.70	15.47	21.44	15.47	33 mm	41 mm	Metric	
DAJCML305-1208IN	1-1/16"-12	3/4"-16	1-1/16"-12	42.20	41.2	42.20	15.47	9.93	15.47	1-1/16"	7/8"	Imperial	
DAJCML305-1210IN	1-1/16"-12	7/8"-14	1-1/16"-12	42.20	45.2	42.20	15.47	12.29	15.47	1-1/16"	1"	Imperial	
DAJCML305-1212IN	1-1/16"-12	1-1/16"-12	1-1/16"-12	42.20	49.3	42.20	15.47	15.47	15.47	1-1/16"	1-1/4"	Imperial	
DAJCML305-1216IN	1-1/16"-12	1-5/16"-12	1-1/16"-12	44.70	52.1	44.70	15.47	21.44	15.47	1-5/16"	1-1/2"	Imperial	
DAJCML305-1414	1-3/16"-12	1-3/16"-12	1-3/16"-12	45.70	50.8	45.70	18.26	18.26	18.26	33 mm	36 mm	Metric	
DAJCML305-1414IN	1-3/16"-12	1-3/16"-12	1-3/16"-12	45.70	50.8	45.70	18.26	18.26	18.26	1-5/16"	1-3/8"	Imperial	
DAJCML305-1612	1-5/16"-12	1-1/16"-12	1-5/16"-12	46.00	52.1	46.00	21.44	15.47	21.44	33 mm	32 mm	Metric	
DAJCML305-1616	1-5/16"-12	1-5/16"-12	1-5/16"-12	46.00	52.1	46.00	21.44	21.5	21.44	33 mm	41 mm	Metric	
DAJCML305-1620	1-5/16"-12	1-5/8"-12	1-5/16"-12	51.10	57.2	51.10	21.44	27.38	21.44	41 mm	50 mm	Metric	
DAJCML305-1612IN	1-5/16"-12	1-1/16"-12	1-5/16"-12	46.00	52.1	46.00	21.44	15.47	21.44	1-5/16"	1-1/4"	Imperial	
DAJCML305-1616IN	1-5/16"-12	1-5/16"-12	1-5/16"-12	46.00	52.1	46.00	21.44	21.5	21.44	1-5/16"	1-1/2"	Imperial	
DAJCML305-1620IN	1-5/16"-12	1-5/8"-12	1-5/16"-12	51.10	57.2	51.10	21.44	27.38	21.44	1-5/8"	1-7/8"	Imperial	
DAJCML305-2016	1-5/8"-12	1-5/16"-12	1-5/8"-12	52.30	57.2	52.30	27.38	21.44	27.38	41 mm	41 mm	Metric	
DAJCML305-2020	1-5/8"-12	1-5/8"-12	1-5/8"-12	52.30	57.2	52.30	27.38	27.38	27.38	41 mm	50 mm	Metric	
DAJCML305-2016IN	1-5/8"-12	1-5/16"-12	1-5/8"-12	52.30	57.2	52.30	27.38	21.44	27.38	1-5/8"	1-1/2"	Imperial	
DAJCML305-2020IN	1-5/8"-12	1-5/8"-12	1-5/8"-12	52.30	57.2	52.30	27.38	27.38	27.38	1-5/8"	1-7/8"	Imperial	
DAJCML305-2424	1-7/8"-12	1-7/8"-12	1-7/8"-12	59.20	60.7	59.20	33.32	33.32	33.32	48 mm	55 mm	Metric	
DAJCML305-2424IN	1-7/8"-12	1-7/8"-12	1-7/8"-12	59.20	60.7	59.20	33.32	33.32	33.32	1-7/8"	2-1/8"	Imperial	
DAJCML305-3232	2-1/2"-12	2-1/2"-12	2-1/2"-12	77.70	73.4	77.70	45.24	45.24	45.24	65 mm	70 mm	Metric	
DAJCML305-3232IN	2-1/2"-12	2-1/2"-12	2-1/2"-12	77.70	73.4	77.70	45.24	45.24	45.24	2-1/2"	2-3/4"	Imperial	

DAJCML06Q

Run Adjustable Tee JIC Male – BSPP Male + O Ring + Retaining Ring

D	A	JC	M	L	06	0
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DAE	Adaptor	JIC UNF	Male	Run Tee	BSPP	Male + O Ring + Retaining Ring

German Technology Equipment



New-Standard

DME&JDE Code: DAJCML06Q

Product Type Hydraulic adaptor


Standard: JIC and SAE-ORB

Structure: Run Tee

Connection Type: Adjustable Male × Male × Male

Thread Types: UNF × BSPP × UNF

Sealing Method: O Ring + Retaining Ring

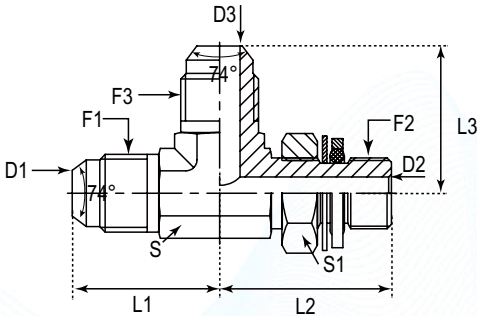

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	UNF	BSPP	UNF	mm	mm	mm	mm	mm	mm	mm	mm
DAJCML06Q-0402	7/16"-20	1/8"-28	7/16"-20	4.37	4.40	4.37	22.50	26.00	22.50	11	14
DAJCML06Q-0404	7/16"-20	1/4"-19	7/16"-20	4.37	7.50	4.37	27.00	31.50	27.00	14	19
DAJCML06Q-0406	7/16"-20	3/8"-19	7/16"-20	4.37	9.90	4.37	28.50	36.50	28.50	19	22
DAJCML06Q-0408	7/16"-20	1/2"-14	7/16"-20	4.37	12.30	4.37	31.00	43.00	31.00	22	27
DAJCML06Q-0502	1/2"-20	1/8"-28	1/2"-20	5.94	4.40	5.94	24.00	28.00	24.00	14	14
DAJCML06Q-0504	1/2"-20	1/4"-19	1/2"-20	5.94	7.50	5.94	27.00	31.00	27.00	14	19
DAJCML06Q-0506	1/2"-20	3/8"-19	1/2"-20	5.94	9.90	5.94	28.50	36.50	28.50	19	22
DAJCML06Q-0604	9/16"-18	1/4"-19	9/16"-18	7.54	7.50	7.54	27.00	31.50	27.00	14	19
DAJCML06Q-0606	9/16"-18	3/8"-19	9/16"-18	7.54	9.90	7.54	28.50	36.50	28.50	19	22
DAJCML06Q-0608	9/16"-18	1/2"-14	9/16"-18	7.54	12.30	7.54	31.00	43.00	31.00	22	27
DAJCML06Q-0804	3/4"-16	1/4"-19	3/4"-16	9.93	7.50	9.93	31.50	33.50	31.50	19	19
DAJCML06Q-0806	3/4"-16	3/8"-19	3/4"-16	9.93	9.90	9.93	31.50	36.50	31.50	19	22
DAJCML06Q-0808	3/4"-16	1/2"-14	3/4"-16	9.93	12.30	9.93	34.00	43.00	34.00	22	27
DAJCML06Q-0812	3/4"-16	3/4"-14	3/4"-16	9.93	15.50	9.93	37.00	49.00	37.00	27	36
DAJCML06Q-1006	7/8"-14	3/8"-19	7/8"-14	12.29	9.90	12.29	36.50	39.50	36.50	22	22
DAJCML06Q-1008	7/8"-14	1/2"-14	7/8"-14	12.29	12.30	12.29	36.50	43.00	36.50	22	27
DAJCML06Q-1012	7/8"-14	3/4"-14	7/8"-14	12.29	15.50	12.29	39.50	49.00	39.50	27	36
DAJCML06Q-1208	1-1/16"-12	1/2"-14	1-1/16"-12	15.47	12.30	15.47	42.00	45.50	42.00	27	27
DAJCML06Q-1212	1-1/16"-12	3/4"-14	1-1/16"-12	15.47	15.50	15.47	42.00	49.00	42.00	27	36
DAJCML06Q-1216	1-1/16"-12	1"-11	1-1/16"-12	15.47	21.50	15.47	44.70	52.00	44.70	33	41
DAJCML06Q-1612	1-5/16"-12	3/4"-14	1-5/16"-12	21.44	15.50	21.44	46.00	52.00	46.00	33	36
DAJCML06Q-1616	1-5/16"-12	1"-11	1-5/16"-12	21.44	21.50	21.44	46.00	52.00	46.00	33	41
DAJCML06Q-1620	1-5/16"-12	1-1/4"-11	1-5/16"-12	21.44	27.50	21.44	51.00	57.00	51.00	41	50
DAJCML06Q-2016	1-5/8"-12	1"-11	1-5/8"-12	27.38	21.50	27.38	52.00	57.00	52.00	41	41
DAJCML06Q-2020	1-5/8"-12	1-1/4"-11	1-5/8"-12	27.38	27.50	27.38	52.00	58.00	52.00	41	50
DAJCML06Q-2420	1-7/8"-12	1-1/4"-11	1-7/8"-12	33.32	27.50	33.32	59.00	61.00	59.00	48	50
DAJCML06Q-2424	1-7/8"-12	1-1/2"-11	1-7/8"-12	33.32	33.00	33.32	59.00	61.00	59.00	48	55

DAJCML065

Run Adjustable Tee JIC Male – BSPP Male + O Ring

D

A

JC

M

L

06

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Run Tee

BSPP

Male + O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAJCML065

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Run Tee

Connection Type:


Adjustable Male × Female × Male

Thread Types:

UNF × BSPP × UNF

Sealing Method:

O Ring

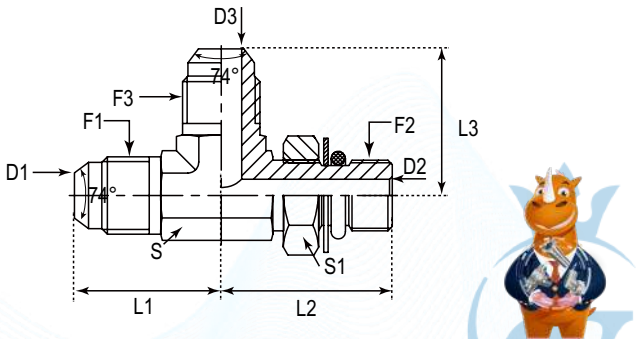

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	UNF	BSPP	UNF	mm	mm	mm	mm	mm	mm	mm	mm
DAJCML065-0402	7/16"-20	1/8"-28	7/16"-20	4.37	4.40	4.37	22.50	26.00	22.50	11	14
DAJCML065-0404	7/16"-20	1/4"-19	7/16"-20	4.37	7.50	4.37	27.00	31.50	27.00	14	19
DAJCML065-0406	7/16"-20	3/8"-19	7/16"-20	4.37	9.90	4.37	28.50	36.50	28.50	19	22
DAJCML065-0502	1/2"-20	1/8"-28	1/2"-20	5.94	4.40	5.94	24.00	28.00	24.00	14	14
DAJCML065-0504	1/2"-20	1/4"-19	1/2"-20	5.94	7.50	5.94	27.00	31.00	27.00	14	19
DAJCML065-0506	1/2"-20	3/8"-19	1/2"-20	5.94	9.90	5.94	28.50	36.50	28.50	19	22
DAJCML065-0604	9/16"-18	1/4"-19	9/16"-18	7.54	7.50	7.54	27.00	31.50	27.00	14	19
DAJCML065-0606	9/16"-18	3/8"-19	9/16"-18	7.54	9.90	7.54	28.50	36.50	28.50	19	22
DAJCML065-0608	9/16"-18	1/2"-14	9/16"-18	7.54	12.30	7.54	31.00	43.00	31.00	22	27
DAJCML065-0804	3/4"-16	1/4"-19	3/4"-16	9.93	7.50	9.93	31.50	33.50	31.50	19	19
DAJCML065-0806	3/4"-16	3/8"-19	3/4"-16	9.93	9.90	9.93	31.50	36.50	31.50	19	22
DAJCML065-0808	3/4"-16	1/2"-14	3/4"-16	9.93	12.30	9.93	34.00	43.00	34.00	22	27
DAJCML065-0812	3/4"-16	3/4"-14	3/4"-16	9.93	15.50	9.93	37.00	49.00	37.00	27	36
DAJCML065-1006	7/8"-14	3/8"-19	7/8"-14	12.29	9.90	12.29	36.50	39.50	36.50	22	22
DAJCML065-1008	7/8"-14	1/2"-14	7/8"-14	12.29	12.30	12.29	36.50	43.00	36.50	22	27
DAJCML065-1012	7/8"-14	3/4"-14	7/8"-14	12.29	15.50	12.29	39.50	49.00	39.50	27	36
DAJCML065-1208	1-1/16"-12	1/2"-14	1-1/16"-12	15.47	12.30	15.47	42.00	45.50	42.00	27	27
DAJCML065-1212	1-1/16"-12	3/4"-14	1-1/16"-12	15.47	15.50	15.47	42.00	49.00	42.00	27	36
DAJCML065-1216	1-1/16"-12	1"-11	1-1/16"-12	15.47	21.50	15.47	44.70	52.00	44.70	33	41
DAJCML065-1612	1-5/16"-12	3/4"-14	1-5/16"-12	21.44	15.50	21.44	46.00	52.00	46.00	33	36
DAJCML065-1616	1-5/16"-12	1"-11	1-5/16"-12	21.44	21.50	21.44	46.00	52.00	46.00	33	41
DAJCML065-1620	1-5/16"-12	1-1/4"-11	1-5/16"-12	21.44	27.50	21.44	51.00	57.00	51.00	41	50
DAJCML065-2016	1-5/8"-12	1"-11	1-5/8"-12	27.38	21.50	27.38	52.00	57.00	52.00	41	41
DAJCML065-2020	1-5/8"-12	1-1/4"-11	1-5/8"-12	27.38	27.50	27.38	52.00	58.00	52.00	41	50
DAJCML065-2420	1-7/8"-12	1-1/4"-11	1-7/8"-12	33.32	27.50	33.32	59.00	61.00	59.00	48	50
DAJCML065-2424	1-7/8"-12	1-1/2"-11	1-7/8"-12	33.32	33.00	33.32	59.00	61.00	59.00	48	55

Certificate:

DAJCML52Q

Run Adjustable Tee JIC Male – Metric Male + O Ring + Retaining Ring

D

A

JC

M

L

52

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Run Tee

Metric

Male + O Ring + Retaining Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAJCML52Q

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Run Tee

Connection Type:


Adjustable Male × Female × Male

Thread Types:

UNF × Metric × UNF

Sealing Method:

O Ring + Retaining Ring

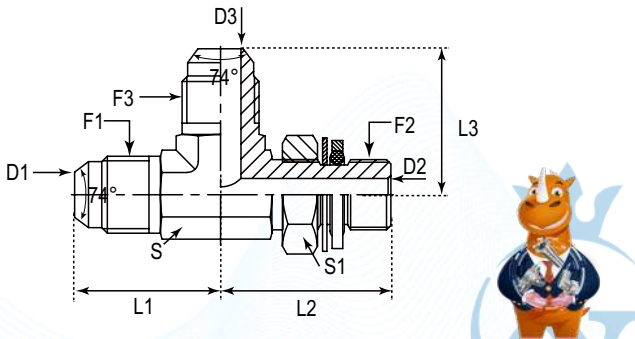

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	UNF	Metric	UNF	mm	mm	mm	mm	mm	mm	mm	mm
DAJCML52Q-0410	7/16"-20	M10X1	7/16"-20	4.37	3.00	4.37	22.50	27.50	22.50	11	14
DAJCML52Q-0412	7/16"-20	M12X1.5	7/16"-20	4.37	4.00	4.37	27.00	31.50	27.00	14	17
DAJCML52Q-0414	7/16"-20	M14X1.5	7/16"-20	4.37	6.00	4.37	27.00	32.50	27.00	14	19
DAJCML52Q-0510	1/2"-20	M10X1	1/2"-20	5.94	4.00	5.94	27.00	28.50	27.00	14	14
DAJCML52Q-0512	1/2"-20	M12X1.5	1/2"-20	5.94	4.00	5.94	27.00	31.50	27.00	14	17
DAJCML52Q-0514	1/2"-20	M14X1.5	1/2"-20	5.94	6.00	5.94	27.00	32.50	27.00	14	19
DAJCML52Q-0612	9/16"-18	M12X1.5	9/16"-18	7.54	4.00	7.54	27.00	31.50	27.00	14	17
DAJCML52Q-0614	9/16"-18	M14X1.5	9/16"-18	7.54	6.00	7.54	27.00	32.50	27.00	14	19
DAJCML52Q-0616	9/16"-18	M16X1.5	9/16"-18	7.54	7.00	7.54	28.50	36.50	28.50	19	22
DAJCML52Q-0618	9/16"-18	M18X1.5	9/16"-18	7.54	9.00	7.54	29.00	39.50	29.00	19	24
DAJCML52Q-0816	3/4"-16	M16X1.5	3/4"-16	9.93	7.00	9.93	31.50	36.50	31.50	19	22
DAJCML52Q-0818	3/4"-16	M18X1.5	3/4"-16	9.93	9.00	9.93	31.50	39.50	31.50	19	24
DAJCML52Q-0822	3/4"-16	M22X1.5	3/4"-16	9.93	12.00	9.93	33.80	43.00	33.80	22	27
DAJCML52Q-1018	7/8"-14	M18X1.5	7/8"-14	12.29	9.00	12.29	36.80	41.50	36.80	22	24
DAJCML52Q-1022	7/8"-14	M22X1.5	7/8"-14	12.29	12.00	12.29	36.50	43.00	36.50	22	27
DAJCML52Q-1026	7/8"-14	M26X1.5	7/8"-14	12.29	15.00	12.29	40.00	52.00	40.00	27	32
DAJCML52Q-1222	1-1/16"-12	M22X1.5	1-1/16"-12	15.47	14.00	15.47	42.00	45.50	42.00	27	27
DAJCML52Q-1226	1-1/16"-12	M26X1.5	1-1/16"-12	15.47	15.00	15.47	42.00	51.50	42.00	27	32
DAJCML52Q-1227	1-1/16"-12	M27X2	1-1/16"-12	15.47	15.00	15.47	42.00	50.00	42.00	27	32
DAJCML52Q-1627	1-5/16"-12	M27X2	1-5/16"-12	21.44	15.00	21.44	46.00	55.00	46.00	33	32
DAJCML52Q-1633	1-5/16"-12	M33X2	1-5/16"-12	21.44	21.50	21.44	46.00	55.00	46.00	33	41
DAJCML52Q-2042	1-5/8"-12	M42X2	1-5/8"-12	27.38	26.00	27.38	52.00	60.00	52.00	41	50
DAJCML52Q-2448	1-7/8"-12	M48X2	1-7/8"-12	33.32	32.00	33.32	59.00	67.00	59.00	48	55

Certificate:

DAJCML525

Run Adjustable Tee JIC Male – Metric Male + O Ring

D

A

JC

M

L

52

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Run Tee

Metric

Male + O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAJCML525

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Run Tee

Connection Type:


Adjustable Male × Male × Male

Thread Types:

UNF × Metric × UNF

Sealing Method:

O Ring

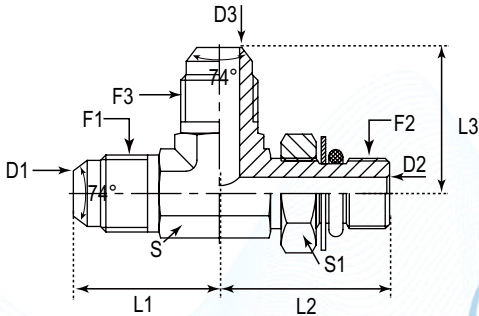

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	UNF	Metric	UNF	mm	mm	mm	mm	mm	mm	mm	mm
DAJCML525-0410	7/16"-20	M10X1	7/16"-20	4.37	3.00	4.37	22.50	27.50	22.50	11	14
DAJCML525-0412	7/16"-20	M12X1.5	7/16"-20	4.37	4.00	4.37	27.00	31.50	27.00	14	17
DAJCML525-0414	7/16"-20	M14X1.5	7/16"-20	4.37	6.00	4.37	27.00	32.50	27.00	14	19
DAJCML525-0510	1/2"-20	M10X1	1/2"-20	5.94	4.00	5.94	27.00	28.50	27.00	14	14
DAJCML525-0512	1/2"-20	M12X1.5	1/2"-20	5.94	4.00	5.94	27.00	31.50	27.00	14	17
DAJCML525-0514	1/2"-20	M14X1.5	1/2"-20	5.94	6.00	5.94	27.00	32.50	27.00	14	19
DAJCML525-0612	9/16"-18	M12X1.5	9/16"-18	7.54	4.00	7.54	27.00	31.50	27.00	14	17
DAJCML525-0614	9/16"-18	M14X1.5	9/16"-18	7.54	6.00	7.54	27.00	32.50	27.00	14	19
DAJCML525-0616	9/16"-18	M16X1.5	9/16"-18	7.54	7.00	7.54	28.50	36.50	28.50	19	22
DAJCML525-0618	9/16"-18	M18X1.5	9/16"-18	7.54	9.00	7.54	29.00	39.50	29.00	19	24
DAJCML525-0816	3/4"-16	M16X1.5	3/4"-16	9.93	7.00	9.93	31.50	36.50	31.50	19	22
DAJCML525-0818	3/4"-16	M18X1.5	3/4"-16	9.93	9.00	9.93	31.50	39.50	31.50	19	24
DAJCML525-0822	3/4"-16	M22X1.5	3/4"-16	9.93	12.00	9.93	33.80	43.00	33.80	22	27
DAJCML525-1018	7/8"-14	M18X1.5	7/8"-14	12.29	9.00	12.29	36.80	41.50	36.80	22	24
DAJCML525-1022	7/8"-14	M22X1.5	7/8"-14	12.29	12.00	12.29	36.50	43.00	36.50	22	27
DAJCML525-1026	7/8"-14	M26X1.5	7/8"-14	12.29	15.00	12.29	40.00	52.00	40.00	27	32
DAJCML525-1222	1-1/16"-12	M22X1.5	1-1/16"-12	15.47	14.00	15.47	42.00	45.50	42.00	27	27
DAJCML525-1226	1-1/16"-12	M26X1.5	1-1/16"-12	15.47	15.00	15.47	42.00	51.50	42.00	27	32
DAJCML525-1227	1-1/16"-12	M27X2	1-1/16"-12	15.47	15.00	15.47	42.00	50.00	42.00	27	32
DAJCML525-1627	1-5/16"-12	M27X2	1-5/16"-12	21.44	15.00	21.44	46.00	55.00	46.00	33	32
DAJCML525-1633	1-5/16"-12	M33X2	1-5/16"-12	21.44	21.50	21.44	46.00	55.00	46.00	33	41
DAJCML525-2042	1-5/8"-12	M42X2	1-5/8"-12	27.38	26.00	27.38	52.00	60.00	52.00	41	50
DAJCML525-2448	1-7/8"-12	M48X2	1-7/8"-12	33.32	32.00	33.32	59.00	67.00	59.00	48	55

Certificate:

DAJCML28M

Run Tee Connector JIC Male – NPTF Male

D

A

JC

M

L

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Run Tee

NPTF

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DAJCML28M

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Run Tee

Connection Type:

Adjustable Male × Male × Male

Thread Types:

UNF × UNF × NPTF

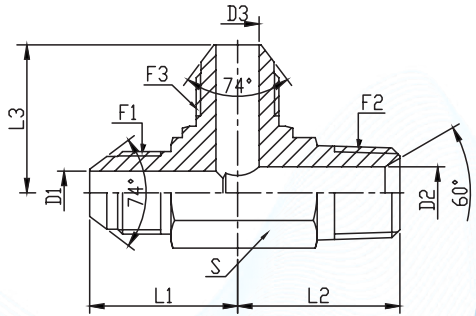

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	Hex	Revision History
#	UNF	NPTF	UNF	mm	mm	mm	mm	mm	mm	-	-	
DAJCML28M-0202	5/16"-24	5/16"-24	1/8"-27	1.57	1.57	4.78	19.6	18.3	19.6	11 mm	Metric	
DAJCML28M-0202IN	5/16"-24	5/16"-24	1/8"-27	1.57	1.57	4.78	19.6	18.3	19.6	7/16"	Imperial	
DAJCML28M-0302	3/8"-24	3/8"-24	1/8"-27	3.18	3.18	4.78	21.10	18.30	21.10	11 mm	Metric	
DAJCML28M-0302IN	3/8"-24	3/8"-24	1/8"-27	3.18	3.18	4.78	21.10	18.30	21.10	7/16"	Imperial	
DAJCML28M-0402	7/16"-20	7/16"-20	1/8"-27	4.37	4.37	4.78	22.60	19.80	22.60	11 mm	Metric	
DAJCML28M-0404	7/16"-20	7/16"-20	1/4"-18	4.37	4.37	7.14	26.70	27.70	26.70	14 mm	Metric	
DAJCML28M-0406	7/16"-20	7/16"-20	3/8"-18	4.37	4.37	10.31	28.50	31.00	28.50	19 mm	Metric	
DAJCML28M-0402IN	7/16"-20	7/16"-20	1/8"-27	4.37	4.37	4.78	22.60	19.80	22.60	7/16"	Imperial	
DAJCML28M-0404IN	7/16"-20	7/16"-20	1/4"-18	4.37	4.37	7.14	26.70	27.70	26.70	9/16"	Imperial	
DAJCML28M-0406IN	7/16"-20	7/16"-20	3/8"-18	4.37	4.37	10.31	28.50	31.00	28.50	3/4"	Imperial	
DAJCML28M-0502	1/2"-20	1/2"-20	1/8"-27	5.94	5.94	4.78	24.10	19.80	24.10	14 mm	Metric	
DAJCML28M-0504	1/2"-20	1/2"-20	1/4"-18	5.94	5.94	7.14	26.70	27.70	26.70	14 mm	Metric	
DAJCML28M-0502IN	1/2"-20	1/2"-20	1/8"-27	5.94	5.94	4.78	24.10	19.80	24.10	9/16"	Imperial	
DAJCML28M-0504IN	1/2"-20	1/2"-20	1/4"-18	5.94	5.94	7.14	26.70	27.70	26.70	9/16"	Imperial	
DAJCML28M-0602	9/16"-18	9/16"-18	1/8"-27	7.54	7.54	4.78	26.90	22.90	26.90	14 mm	Metric	
DAJCML28M-0604	9/16"-18	9/16"-18	1/4"-18	7.54	7.54	7.14	26.90	27.70	26.90	14 mm	Metric	
DAJCML28M-0606	9/16"-18	9/16"-18	3/8"-18	7.54	7.54	10.31	29.00	31.00	29.00	19 mm	Metric	
DAJCML28M-0608	9/16"-18	9/16"-18	1/2"-14	7.54	7.54	13.49	29.50	37.30	29.50	22 mm	Metric	
DAJCML28M-0602IN	9/16"-18	9/16"-18	1/8"-27	7.54	7.54	4.78	26.90	22.90	26.90	9/16"	Imperial	
DAJCML28M-0604IN	9/16"-18	9/16"-18	1/4"-18	7.54	7.54	7.14	26.90	27.70	26.90	9/16"	Imperial	
DAJCML28M-0606IN	9/16"-18	9/16"-18	3/8"-18	7.54	7.54	10.31	29.00	31.00	29.00	3/4"	Imperial	
DAJCML28M-0608IN	9/16"-18	9/16"-18	1/2"-14	7.54	7.54	13.49	29.50	37.30	29.50	7/8"	Imperial	

Certificate:

DME&JDE

GROUP

YOUR CONNECTORS & HOSES OEM SOLUTIONS

DAJCML28M-0804	3/4"-16	3/4"-16	1/4"-18	9.93	9.93	7.14	31.80	31.00	31.80	19 mm	Metric	
DAJCML28M-0806	3/4"-16	3/4"-16	3/8"-18	9.93	9.93	10.31	31.80	31.00	31.80	19 mm	Metric	
DAJCML28M-0808	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	13.49	33.80	37.30	33.80	22 mm	Metric	
DAJCML28M-0812	3/4"-16	3/4"-16	3/4"-14	9.93	9.93	18.26	36.10	40.40	36.10	27 mm	Metric	
DAJCML28M-0804IN	3/4"-16	3/4"-16	1/4"-18	9.93	9.93	7.14	31.80	31.00	31.80	3/4"	Imperial	
DAJCML28M-0806IN	3/4"-16	3/4"-16	3/8"-18	9.93	9.93	10.31	31.80	31.00	31.80	3/4"	Imperial	
DAJCML28M-0808IN	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	13.49	33.80	37.30	33.80	7/8"	Imperial	
DAJCML28M-0812IN	3/4"-16	3/4"-16	3/4"-14	9.93	9.93	18.26	36.10	40.40	36.10	1-1/16"	Imperial	
DAJCML28M-1006	7/8"-14	7/8"-14	3/8"-18	12.29	12.29	10.31	36.80	32.50	36.80	22 mm	Metric	
DAJCML28M-1008	7/8"-14	7/8"-14	1/2"-14	12.29	12.29	13.49	36.80	37.30	36.80	22 mm	Metric	
DAJCML28M-1012	7/8"-14	7/8"-14	3/4"-14	12.29	12.29	18.26	39.10	40.40	39.10	27 mm	Metric	
DAJCML28M-1006IN	7/8"-14	7/8"-14	3/8"-18	12.29	12.29	10.31	36.80	32.50	36.80	7/8"	Imperial	
DAJCML28M-1008IN	7/8"-14	7/8"-14	1/2"-14	12.29	12.29	13.49	36.80	37.30	36.80	7/8"	Imperial	
DAJCML28M-1012IN	7/8"-14	7/8"-14	3/4"-14	12.29	12.29	18.26	39.10	40.40	39.10	1-1/16"	Imperial	
DAJCML28M-1208	1-1/16"-12	1-1/16"-12	1/2"-14	15.47	15.47	13.49	42.20	40.40	42.20	27 mm	Metric	
DAJCML28M-1212	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	18.26	42.20	40.40	42.20	27 mm	Metric	
DAJCML28M-1208IN	1-1/16"-12	1-1/16"-12	1/2"-14	15.47	15.47	13.49	42.20	40.40	42.20	1-1/16"	Imperial	
DAJCML28M-1212IN	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	18.26	42.20	40.40	42.20	1-1/16"	Imperial	2024/6/4,Mark dimension L2&L3 of item series with prefix "2605" has been generally updated: Dimension L2 has been changed to L3,Dimension L3 has been changed to L2
DAJCML28M-1412	1-3/16"-12	1-3/16"-12	3/4"-14	18.26	18.26	18.26	45.70	42.90	45.70	33 mm	Metric	
DAJCML28M-1412IN	1-3/16"-12	1-3/16"-12	3/4"-14	18.26	18.26	18.26	45.70	42.90	45.70	1-5/16"	Imperial	
DAJCML28M-1612	1-5/16"-12	1-5/16"-12	3/4"-14	21.44	21.44	18.26	46.00	45.20	46.00	33 mm	Metric	
DAJCML28M-1616	1-5/16"-12	1-5/16"-12	1"-11-1/2	21.44	21.44	23.83	46.00	50.00	46.00	33 mm	Metric	
DAJCML28M-1612IN	1-5/16"-12	1-5/16"-12	3/4"-14	21.44	21.44	18.26	46.00	45.20	46.00	1-5/16"	Imperial	
DAJCML28M-1616IN	1-5/16"-12	1-5/16"-12	1"-11-1/2	21.44	21.44	23.83	46.00	50.00	46.00	1-5/16"	Imperial	
DAJCML28M-2016	1-5/8"-12	1-5/8"-12	1"-11-1/2	27.38	27.38	23.83	52.30	59.70	52.30	41 mm	Metric	
DAJCML28M-2020	1-5/8"-12	1-5/8"-12	1-1/4"-11-1/2	27.38	27.38	31.75	52.30	60.50	52.30	41 mm	Metric	
DAJCML28M-2016IN	1-5/8"-12	1-5/8"-12	1"-11-1/2	27.38	27.38	23.83	52.30	59.70	52.30	1-5/8"	Imperial	
DAJCML28M-2020IN	1-5/8"-12	1-5/8"-12	1-1/4"-11-1/2	27.38	27.38	31.75	52.30	60.50	52.30	1-5/8"	Imperial	
DAJCML28M-2424	1-7/8"-12	1-7/8"-12	1-1/2"-11-1/2	33.32	33.32	38.10	59.20	67.10	59.20	48 mm	Metric	
DAJCML28M-2424IN	1-7/8"-12	1-7/8"-12	1-1/2"-11-1/2	33.32	33.32	38.10	59.20	67.10	59.20	1-7/8"	Imperial	
DAJCML28M-3232	2-1/2"-12	2-1/2"-12	2"-11-1/2	45.24	45.24	49.23	77.70	76.20	77.70	65 mm	Metric	
DAJCML28M-3232IN	2-1/2"-12	2-1/2"-12	2"-11-1/2	45.24	45.24	49.23	77.70	76.20	77.70	2-1/2"	Imperial	

DME

GROUP

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com

DME

GROUP

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com

DME&JDE

GROUP

YOUR CONNECTORS & HOSES OEM SOLUTIONS

DME&JDE

GROUP

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com

DME

GROUP

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com

DAJCML07M

Run Tee Connector JIC Male – BSPT Male

D

A

JC

M

L

07

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Run Tee

BSPT

Female

German Technology Equipment

SHIELD FLEX

New-Standard

DAJCML07M

Hydraulic adaptor

JIC and SAE-ORB

Run Tee

Male × Male × Male

UNF × BSPT × UNF

D3

F3

74°

F2

60°

F1

D1

D2

L1

L2

L3

S

60°

PART NUMBER	F1 (Thread)	F3 (Thread)	F2 (Thread)	D1	D2	D3	L1	L2	L3	S
#	UNF	UNF	BSPT	mm	mm	mm	mm	mm	mm	mm
DAJCML07M-0402	7/16"-20	1/8"-28	7/16"-20	4.37	4.50	4.37	22.60	19.80	22.60	11
DAJCML07M-0404	7/16"-20	1/4"-19	7/16"-20	4.37	6.00	4.37	26.70	27.70	26.70	14
DAJCML07M-0406	7/16"-20	3/8"-19	7/16"-20	4.37	9.00	4.37	28.50	31.00	28.50	19
DAJCML07M-0502	1/2"-20	1/8"-28	1/2"-20	5.94	4.50	5.94	24.13	19.81	24.13	14
DAJCML07M-0504	1/2"-20	1/4"-19	1/2"-20	5.94	6.00	5.94	26.70	27.70	26.70	14
DAJCML07M-0602	9/16"-18	1/8"-28	9/16"-18	7.54	4.50	7.54	26.90	22.90	26.90	14
DAJCML07M-0604	9/16"-18	1/4"-19	9/16"-18	7.54	6.00	7.54	26.90	27.70	26.90	14
DAJCML07M-0606	9/16"-18	3/8"-19	9/16"-18	7.54	9.00	7.54	29.00	31.00	29.00	19
DAJCML07M-0608	9/16"-18	1/2"-14	9/16"-18	7.54	12.00	7.54	31.00	37.50	31.00	22
DAJCML07M-0806	3/4"-16	3/8"-19	3/4"-16	9.93	9.00	9.93	31.80	31.00	31.80	19
DAJCML07M-0808	3/4"-16	1/2"-14	3/4"-16	9.93	12.00	9.93	33.80	37.30	33.80	22
DAJCML07M-0812	3/4"-16	3/4"-14	3/4"-16	9.93	16.70	9.93	36.10	40.40	36.10	27
DAJCML07M-1006	7/8"-14	3/8"-19	7/8"-14	12.29	12.00	12.29	36.80	32.50	36.80	22
DAJCML07M-1008	7/8"-14	1/2"-14	7/8"-14	12.29	12.00	12.29	36.80	37.30	36.80	22
DAJCML07M-1010	7/8"-14	5/8"-14	7/8"-14	12.29	14.00	12.29	39.00	39.00	39.00	27
DAJCML07M-1012	7/8"-14	3/4"-14	7/8"-14	12.29	16.70	12.29	39.12	40.39	39.12	27
DAJCML07M-1016	7/8"-14	1"-11	7/8"-14	12.29	22.20	12.29	41.70	50.00	41.70	33
DAJCML07M-1206	1-1/16"-12	3/8"-19	1-1/16"-12	15.47	9.00	15.47	42.20	36.00	42.20	27
DAJCML07M-1208	1-1/16"-12	1/2"-14	1-1/16"-12	15.47	12.00	15.47	42.20	40.40	42.20	27
DAJCML07M-1212	1-1/16"-12	3/4"-14	1-1/16"-12	15.47	16.70	15.47	42.20	40.40	42.20	27
DAJCML07M-1220	1-1/16"-12	1-1/4"-11	1-1/16"-12	15.47	28.60	15.47	50.00	60.50	50.00	41
DAJCML07M-1608	1-5/16"-12	1/2"-14	1-5/16"-12	21.44	12.00	21.44	46.00	45.00	46.00	33
DAJCML07M-1612	1-5/16"-12	3/4"-14	1-5/16"-12	21.44	16.70	21.44	46.00	45.20	46.00	33
DAJCML07M-1616	1-5/16"-12	1"-11	1-5/16"-12	21.44	22.20	21.44	46.00	50.00	46.00	33
DAJCML07M-1620	1-5/16"-12	1-1/4"-11	1-5/16"-12	21.44	28.60	21.44	51.10	60.50	51.10	41
DAJCML07M-2016	1-5/8"-12	1"-11	1-5/8"-12	27.38	22.20	27.38	52.30	59.70	52.30	41
DAJCML07M-2020	1-5/8"-12	1-1/4"-11	1-5/8"-12	27.38	28.60	27.38	52.30	60.00	52.30	41
DAJCML07M-2024	1-5/8"-12	1-1/2"-11	1-5/8"-12	27.38	33.30	27.38	56.00	67.10	56.00	48
DAJCML07M-2424	1-7/8"-12	1-1/2"-11	1-7/8"-12	33.32	33.30	33.32	59.20	67.10	59.20	48
DAJCML07M-2432	1-7/8"-12	2"-11	1-7/8"-12	33.32	46.00	33.32	71.40	76.20	71.40	65
DAJCML07M-3224	2-1/2"-12	1-1/2"-11	2-1/2"-12	45.24	33.30	45.24	77.70	75.40	77.70	63.5
DAJCML07M-3232	2-1/2"-12	2"-11	2-1/2"-12	45.24	46.00	45.24	77.70	76.20	77.70	65

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

Powered by DME&JDE Group

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

Powered by DME&JDE Group

361

362

DAJCML28F

Run Tee Connector JIC Male – NPTF Female

D

A

JC

M

L

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Run Tee

NPTF

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCML28F

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Run Tee

Adaptor Connection Type:

Male × Female × Male

Thread Types:

UNF × NPTF × UNF

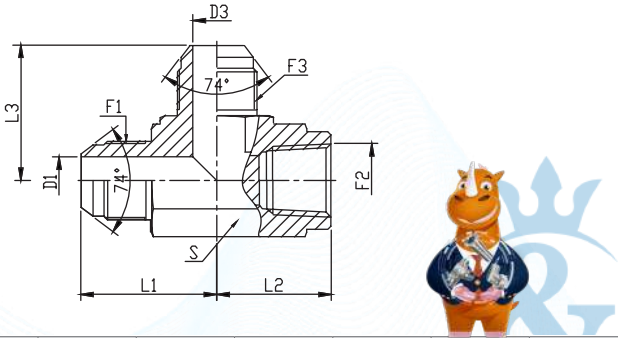

PART NUMBER	F1 (Thread)	F3 (Thread)	F2 (Thread)	D1	D3	L1	L2	L3	S	Hex
#	UNF	UNF	NPTF	mm	mm	mm	mm	mm	-	-
DAJCML28F-0402	7/16"-20	7/16"-20	1/8"-27	4.37	4.37	27.40	16.80	27.40	14 mm	Metric
DAJCML28F-0404	7/16"-20	7/16"-20	1/4"-18	4.37	4.37	31.00	22.40	31.00	19 mm	Metric
DAJCML28F-0402IN	7/16"-20	7/16"-20	1/8"-27	4.37	4.37	27.40	16.80	27.40	9/16"	Imperial
DAJCML28F-0404IN	7/16"-20	7/16"-20	1/4"-18	4.37	4.37	31.00	22.40	31.00	3/4"	Imperial
DAJCML28F-0502	1/2"-20	1/2"-20	1/8"-27	5.94	5.94	27.40	16.80	27.40	14 mm	Metric
DAJCML28F-0504	1/2"-20	1/2"-20	1/4"-18	5.94	5.94	31.00	22.40	31.00	19 mm	Metric
DAJCML28F-0502IN	1/2"-20	1/2"-20	1/8"-27	5.94	5.94	27.40	16.80	27.40	9/16"	Imperial
DAJCML28F-0504IN	1/2"-20	1/2"-20	1/4"-18	5.94	5.94	31.00	22.40	31.00	3/4"	Imperial
DAJCML28F-0602	1/2"-20	1/2"-20	1/8"-27	7.54	7.54	31.20	17.00	31.20	14 mm	Metric
DAJCML28F-0604	9/16"-18	9/16"-18	1/4"-18	7.54	7.54	31.20	22.40	31.20	19 mm	Metric
DAJCML28F-0606	9/16"-18	9/16"-18	3/8"-18	7.54	7.54	33.30	25.90	33.30	22 mm	Metric
DAJCML28F-0608	9/16"-18	9/16"-18	1/2"-14	7.54	7.54	35.80	31.20	35.80	27 mm	Metric
DAJCML28F-0602IN	1/2"-20	1/2"-20	1/8"-27	7.54	7.54	31.20	17.00	31.20	9/16"	Imperial
DAJCML28F-0604IN	9/16"-18	9/16"-18	1/4"-18	7.54	7.54	31.20	22.40	31.20	3/4"	Imperial
DAJCML28F-0606IN	9/16"-18	9/16"-18	3/8"-18	7.54	7.54	33.30	25.90	33.30	7/8"	Imperial
DAJCML28F-0608IN	9/16"-18	9/16"-18	1/2"-14	7.54	7.54	35.80	31.20	35.80	1-1/16"	Imperial

Certificate:



DAJCML28F-0804	3/4"-16	3/4"-16	1/4"-18	9.93	9.93	36.10	25.90	36.10	22 mm	Metric
DAJCML28F-0806	3/4"-16	3/4"-16	3/8"-18	9.93	9.93	36.10	25.90	36.10	22 mm	Metric
DAJCML28F-0808	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	38.60	31.20	38.60	27 mm	Metric
DAJCML28F-0812	3/4"-16	3/4"-16	3/4"-14	9.93	9.93	41.90	34.50	41.90	33 mm	Metric
DAJCML28F-0804IN	3/4"-16	3/4"-16	1/4"-18	9.93	9.93	36.10	25.90	36.10	7/8"	Imperial
DAJCML28F-0806IN	3/4"-16	3/4"-16	3/8"-18	9.93	9.93	36.10	25.90	36.10	7/8"	Imperial
DAJCML28F-0808IN	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	38.60	31.20	38.60	1-1/16"	Imperial
DAJCML28F-0812IN	3/4"-16	3/4"-16	3/4"-14	9.93	9.93	41.90	34.50	41.90	1-5/16"	Imperial
DAJCML28F-1008	7/8"-14	7/8"-14	1/2"-14	12.29	12.29	41.70	31.20	41.70	27 mm	Metric
DAJCML28F-1012	7/8"-14	7/8"-14	3/4"-14	12.29	12.29	44.80	34.50	44.80	33 mm	Metric
DAJCML28F-1008IN	7/8"-14	7/8"-14	1/2"-14	12.29	12.29	41.70	31.20	41.70	1-1/16"	Imperial
DAJCML28F-1012IN	7/8"-14	7/8"-14	3/4"-14	12.29	12.29	44.80	34.50	44.80	1-5/16"	Imperial
DAJCML28F-1208	1-1/16"-12	1-1/16"-12	1/2"-14	15.47	15.47	42.20	31.20	42.20	27 mm	Metric
DAJCML28F-1212	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	48.00	34.50	48.00	33 mm	Metric
DAJCML28F-1216	1-1/16"-12	1-1/16"-12	1"-11-1/2	15.47	15.47	53.90	41.20	53.90	41 mm	Metric
DAJCML28F-1208IN	1-1/16"-12	1-1/16"-12	1/2"-14	15.47	15.47	42.20	31.20	42.20	1-1/16"	Imperial
DAJCML28F-1212IN	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	48.00	34.50	48.00	1-5/16"	Imperial
DAJCML28F-1216IN	1-1/16"-12	1-1/16"-12	1"-11-1/2	15.47	15.47	53.90	41.20	53.90	1-5/8"	Imperial
DAJCML28F-1412	1-3/16"-12	1-3/16"-12	3/4"-14	18.26	18.26	47.20	36.00	47.20	33 mm	Metric
DAJCML28F-1412IN	1-3/16"-12	1-3/16"-12	3/4"-14	18.26	18.26	47.20	36.00	47.20	1-5/16"	Imperial
DAJCML28F-1612	1-5/16"-12	1-5/16"-12	3/4"-14	21.44	21.44	55.10	35.40	55.10	33 mm	Metric
DAJCML28F-1616	1-5/16"-12	1-5/16"-12	1"-11-1/2	21.44	21.44	55.10	41.20	55.10	41 mm	Metric
DAJCML28F-1612IN	1-5/16"-12	1-5/16"-12	3/4"-14	21.44	21.44	55.10	35.40	55.10	1-5/16"	Imperial
DAJCML28F-1616IN	1-5/16"-12	1-5/16"-12	1"-11-1/2	21.44	21.44	55.10	41.20	55.10	1-5/8"	Imperial
DAJCML28F-2020	1-5/8"-12	1-5/8"-12	1-1/4"-11-1/2	27.38	27.38	59.20	43.20	59.20	48 mm	Metric
DAJCML28F-2020IN	1-5/8"-12	1-5/8"-12	1-1/4"-11-1/2	27.38	27.38	59.20	43.20	59.20	1-7/8"	Imperial
DAJCML28F-2424	1-7/8"-12	1-7/8"-12	1-1/2"-11-1/2	33.32	33.32	73.40	52.80	73.40	65 mm	Metric
DAJCML28F-2424IN	1-7/8"-12	1-7/8"-12	1-1/2"-11-1/2	33.32	33.32	73.40	52.80	73.40	2-9/16"	Imperial
DAJCML28F-3232	2-1/2"-12	2-1/2"-12	2"-11-1/2	45.24	45.24	83.80	60.70	83.80	70 mm	Metric
DAJCML28F-3232IN	2-1/2"-12	2-1/2"-12	2"-11-1/2	45.24	45.24	83.80	60.70	83.80	2-13/16"	Imperial

Certificate:



DAJCML05F

Run Tee Connector JIC Male – BSPP Fixed Female

D

A

JC

M

L

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

JIC UNF

Male

Run Tee


BSPP

Female

German Technology Equipment

New-Standard

- DME&JDE Code: DAJCML05F
- Product Type Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: Run Tee
- Connection Type: Male × Fixed Female
- Thread Types: UNF × UNF × BSPP

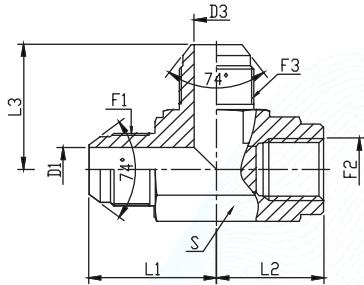

PART NUMBER	F1 (Thread)	F3 (Thread)	F2 (Thread)	D1	D3	L1	L2	L3	S
#	UNF	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAJCML05F-0402	7/16"-20	7/16"-20	1/8"-28	4.37	4.37	27.40	16.80	27.40	14
DAJCML05F-0404	7/16"-20	7/16"-20	1/4"-19	4.37	4.37	31.00	22.40	31.00	19
DAJCML05F-0502	1/2"-20	1/2"-20	1/8"-28	5.94	5.94	27.40	16.80	27.40	14
DAJCML05F-0504	1/2"-20	1/2"-20	1/4"-19	5.94	5.94	31.00	22.40	31.00	19
DAJCML05F-0602	1/2"-20	1/2"-20	1/8"-28	7.54	7.54	31.20	17.00	31.20	14
DAJCML05F-0604	9/16"-18	9/16"-18	1/4"-19	7.54	7.54	31.20	22.40	31.20	19
DAJCML05F-0606	9/16"-18	9/16"-18	3/8"-19	7.54	7.54	33.30	25.90	33.30	22
DAJCML05F-0608	9/16"-18	9/16"-18	1/2"-14	7.54	7.54	35.80	31.20	35.80	27
DAJCML05F-0804	3/4"-16	3/4"-16	1/4"-19	9.93	9.93	36.10	25.70	36.10	19
DAJCML05F-0806	3/4"-16	3/4"-16	3/8"-19	9.93	9.93	36.10	25.90	36.10	22
DAJCML05F-0808	3/4"-16	3/4"-16	1/2"-14	9.93	9.93	38.60	31.20	38.60	27
DAJCML05F-0812	3/4"-16	3/4"-16	3/4"-14	9.93	9.93	41.90	34.50	41.90	33
DAJCML05F-1008	7/8"-14	7/8"-14	1/2"-14	12.29	12.29	41.70	31.20	41.70	27
DAJCML05F-1208	1-1/16"-12	1-1/16"-12	1/2"-14	15.47	15.47	48.00	34.30	48.00	27
DAJCML05F-1212	1-1/16"-12	1-1/16"-12	3/4"-14	15.47	15.47	48.00	34.50	48.00	33
DAJCML05F-1612	1-5/16"-12	1-5/16"-12	3/4"-14	21.44	21.44	55.10	35.30	55.10	33
DAJCML05F-1616	1-5/16"-12	1-5/16"-12	1"-11	21.44	21.44	55.10	41.20	55.10	41
DAJCML05F-2020	1-5/8"-12	1-5/8"-12	1-1/4"-11	27.38	27.38	59.20	43.20	59.20	48
DAJCML05F-2424	1-7/8"-12	1-7/8"-12	1-1/2"-11	33.32	33.32	73.40	52.80	73.40	65
DAJCML05F-3232	2-1/2"-12	2-1/2"-12	2"-11	45.24	45.24	83.80	60.70	83.80	70

Certificate:

DAJCML25T

Run Bulkhead Tee Connector JIC Male – JIC Male

D

A

JC

M

L

25

T

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

JIC UNF

Male

Branch Tee


JIC UNF

Bulkhead Male

German Technology Equipment

New-Standard

- DME&JDE Code: DAJCML25T
- Product Type Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: Run Tee
- Connection Type: Adjustable Male × Male × Male
- Thread Types: UNF × UNF × UNF
- Other Features: Bulkhead

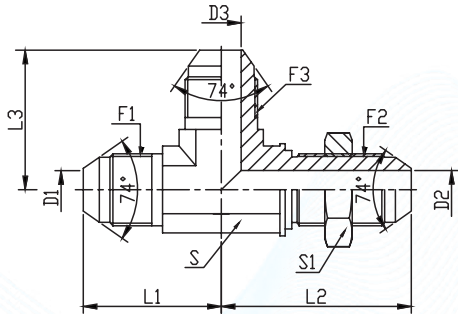

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L3	L2	D1	D2	D3	S	S1	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-
DAJCML25T-0303	3/8"-24	3/8"-24	3/8"-24	23.88	23.88	38.10	3.18	3.18	3.18	11 mm	16 mm	Metric
DAJCML25T-0303IN	3/8"-24	3/8"-24	3/8"-24	23.88	23.88	38.10	3.18	3.18	3.18	7/16"	5/8"	Imperial
DAJCML25T-0404	7/16"-20	7/16"-20	7/16"-20	24.60	24.60	40.40	4.37	4.37	4.37	11 mm	17 mm	Metric
DAJCML25T-0404IN	7/16"-20	7/16"-20	7/16"-20	24.60	24.60	40.40	4.37	4.37	4.37	7/16"	11/16"	Imperial
DAJCML25T-0505	1/2"-20	1/2"-20	1/2"-20	26.90	26.90	43.70	5.94	5.94	5.94	14 mm	19 mm	Metric
DAJCML25T-0505IN	1/2"-20	1/2"-20	1/2"-20	26.90	26.90	43.70	5.94	5.94	5.94	9/16"	3/4"	Imperial
DAJCML25T-0606	9/16"-18	9/16"-18	9/16"-18	27.70	27.70	46.00	7.54	7.54	7.54	14 mm	22 mm	Metric
DAJCML25T-0606IN	9/16"-18	9/16"-18	9/16"-18	27.70	27.70	46.00	7.54	7.54	7.54	9/16"	13/16"	Imperial
DAJCML25T-0808	3/4"-16	3/4"-16	3/4"-16	34.50	34.50	53.60	9.93	9.93	9.93	19 mm	24 mm	Metric
DAJCML25T-0808IN	3/4"-16	3/4"-16	3/4"-16	34.50	34.50	53.60	9.93	9.93	9.93	3/4"	1"	Imperial
DAJCML25T-1010	7/8"-14	7/8"-14	7/8"-14	39.60	39.60	60.70	12.29	12.29	12.29	22 mm	30 mm	Metric
DAJCML25T-1010IN	7/8"-14	7/8"-14	7/8"-14	39.60	39.60	60.70	12.29	12.29	12.29	7/8"	1-1/8"	Imperial
DAJCML25T-1212	1-1/16"-12	1-1/16"-12	1-1/16"-12	45.20	45.20	67.80	15.47	15.47	15.47	27 mm	36 mm	Metric
DAJCML25T-1212IN	1-1/16"-12	1-1/16"-12	1-1/16"-12	45.20	45.20	67.80	15.47	15.47	15.47	1-1/16"	1-3/8"	Imperial
DAJCML25T-1616	1-5/16"-12	1-5/16"-12	1-5/16"-12	49.30	49.30	71.10	21.44	21.44	21.44	33 mm	41 mm	Metric
DAJCML25T-1616IN	1-5/16"-12	1-5/16"-12	1-5/16"-12	49.30	49.30	71.10	21.44	21.44	21.44	1-5/16"	1-5/8"	Imperial
DAJCML25T-2020	1-5/8"-12	1-5/8"-12	1-5/8"-12	55.10	55.10	79.30	27.38	27.38	27.38	41 mm	50 mm	Metric
DAJCML25T-2020IN	1-5/8"-12	1-5/8"-12	1-5/8"-12	55.10	55.10	79.30	27.38	27.38	27.38	1-5/8"	1-7/8"	Imperial
DAJCML25T-2424	1-7/8"-12	1-7/8"-12	1-7/8"-12	59.40	59.40	86.90	33.32	33.32	33.32	48 mm	55 mm	Metric
DAJCML25T-2424IN	1-7/8"-12	1-7/8"-12	1-7/8"-12	59.40	59.40	86.90	33.32	33.32	33.32	1-7/8"	2-1/8"	Imperial
DAJCML25T-3232	2-1/2"-12	2-1/2"-12	2-1/2"-12	73.40	73.40	104.40	45.24	45.24	45.24	65 mm	70 mm	Metric
DAJCML25T-3232IN	2-1/2"-12	2-1/2"-12	2-1/2"-12	73.40	73.40	104.40	45.24	45.24	45.24	2-1/2"	2-3/4"	Imperial

Certificate:



DAJCMX25M

Cross Connector JIC Male – JIC Male

D

A

JC

M

X

25

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIC UNF

Male

Cross

JIC UNF

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJCMX25M

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:


Cross

Connection Type:

Male × Male × Male × Male

Thread Types:

UNF × UNF × UNF × UNF

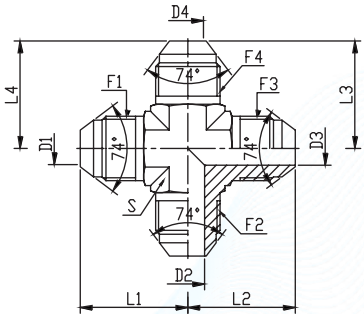

PART NUMBER	F1/F2/F3/F4 (Thread)	L1/L2/L3/L4	D1/D2/D3/D4	S	Hex
#	UNF	mm	mm	-	-
DAJCMX25M-0202	5/16"-24	19.60	1.57	11 mm	Metric
DAJCMX25M-0202IN	5/16"-24	19.60	1.57	7/16"	Imperial
DAJCMX25M-0404	7/16"-20	22.60	4.37	11 mm	Metric
DAJCMX25M-0404IN	7/16"-20	22.60	4.37	7/16"	Imperial
DAJCMX25M-0505	1/2"-20	24.10	5.94	14 mm	Metric
DAJCMX25M-0505IN	1/2"-20	24.10	5.94	9/16"	Imperial
DAJCMX25M-0606	9/16"-18	26.90	7.54	14 mm	Metric
DAJCMX25M-0606IN	9/16"-18	26.90	7.54	9/16"	Imperial
DAJCMX25M-0808	3/4"-16	31.80	9.93	19 mm	Metric
DAJCMX25M-0808IN	3/4"-16	31.80	9.93	3/4"	Imperial
DAJCMX25M-1010	7/8"-14	36.80	12.29	22 mm	Metric
DAJCMX25M-1010IN	7/8"-14	36.80	12.29	7/8"	Imperial
DAJCMX25M-1212	1-1/16"-12	42.20	15.47	27 mm	Metric
DAJCMX25M-1212IN	1-1/16"-12	42.20	15.47	1-1/16"	Imperial
DAJCMX25M-1414	1-3/16"-12	45.70	18.26	33 mm	Metric
DAJCMX25M-1414IN	1-3/16"-12	45.70	18.26	1-5/16"	Imperial
DAJCMX25M-1616	1-5/16"-12	46.00	21.44	33 mm	Metric
DAJCMX25M-1616IN	1-5/16"-12	46.00	21.44	1-5/16"	Imperial
DAJCMX25M-2020	1-5/8"-12	52.30	27.38	41 mm	Metric
DAJCMX25M-2020IN	1-5/8"-12	52.30	27.38	1-5/8"	Imperial
DAJCMX25M-2424	1-7/8"-12	59.20	33.32	48 mm	Metric
DAJCMX25M-2424IN	1-7/8"-12	59.20	33.32	1-7/8"	Imperial
DAJCMX25M-3232	2-1/2"-12	77.70	45.24	65 mm	Metric
DAJCMX25M-3232IN	2-1/2"-12	77.70	45.24	2-1/2"	Imperial

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DAUNM1305

Straight Connector SAE Male + O Ring – SAE Male + O Ring

D

A

UN

M

1

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

SAE UNF

Male

Straight

SAE UNF

Male + O Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAUNM1305

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

UNF × UNF

Sealing Method:

O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	-	-
DAUNM1305-0404IN	7/16"-20	7/16"-20	9.14	9.14	4.37	4.37	25.40	9/16"	Imperial

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DAUNM1000

Plug SAE Male O Ring

D

A

JC

M

9

251

L

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Elbow Length

Elbow Type

DME

Adaptor

JIC UNF

Male

90° Elbow

JIC Swivel Female

Long

Swept

DME&JDE Code:

DAUNM1000

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Connection Type:

Male

Thread Types:


UNF

Sealing Method:

O Ring

Other Features:

Nut/Plug

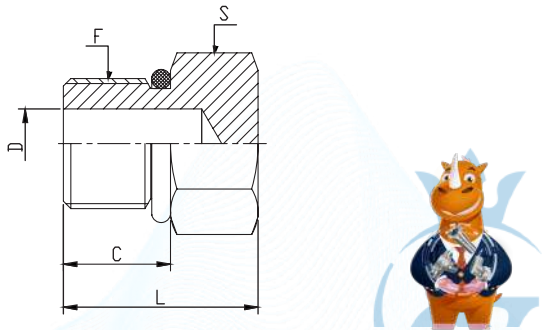

German Technology Equipment

SHIELD FLEX

New-Standard

PART NUMBER	F (Thread)	C	D	L	S	Hex	Revision History
#	UNF	mm	mm	mm	-	-	
DAUNM1000-0200	5/16"-24	7.54	2.40	15.20	11 mm	Metric	
DAUNM1000-0200IN	5/16"-24	7.54	2.40	15.20	7/16"	Imperial	
DAUNM1000-0200 Without Hole	5/16"-24	7.54	N/A	15.20	7/16"	Imperial	
DAUNM1000-0300	3/8"-24	7.54	3.18	15.20	12 mm	Metric	
DAUNM1000-0300IN	3/8"-24	7.54	3.18	15.20	1/2"	Imperial	
DAUNM1000-0300 Without Hole	3/8"-24	7.54	N/A	15.20	1/2"	Imperial	
DAUNM1000-0400	7/16"-20	9.14	4.37	17.00	14 mm	Metric	
DAUNM1000-0400IN	7/16"-20	9.14	5.20	17.00	9/16"	Imperial	2024/6/4,Dimension D of item AR10115(6408-04) has been changed from 4.37±0.2mm to 5.2±0.07mm
DAUNM1000-0400 Without Hole	7/16"-20	9.14	N/A	17.00	9/16"	Imperial	
DAUNM1000-0500	1/2"-20	9.14	5.94	17.00	17 mm	Metric	
DAUNM1000-0500IN	1/2"-20	9.14	5.94	17.00	5/8"	Imperial	
DAUNM1000-0500 Without Hole	1/2"-20	9.14	N/A	17.00	5/8"	Imperial	
DAUNM1000-0600	9/16"-18	9.93	7.54	18.50	17 mm	Metric	
DAUNM1000-0600IN	9/16"-18	9.93	7.54	18.50	11/16"	Imperial	
DAUNM1000-0600 Without Hole	9/16"-18	9.93	N/A	18.50	11/16"	Imperial	
DAUNM1000-0800	3/4"-16	11.13	9.93	20.30	22 mm	Metric	
DAUNM1000-0800IN	3/4"-16	11.13	9.93	20.30	7/8"	Imperial	
DAUNM1000-0800 Without Hole	3/4"-16	11.13	N/A	20.30	7/8"	Imperial	
DAUNM1000-1000	7/8"-14	12.70	12.29	23.60	27 mm	Metric	
DAUNM1000-1000IN	7/8"-14	12.70	12.29	23.60	1"	Imperial	
DAUNM1000-1000 Without Hole	7/8"-14	12.70	N/A	23.60	1"	Imperial	
DAUNM1000-1200	1-1/16"-12	15.09	16.66	27.70	32 mm	Metric	
DAUNM1000-1200IN	1-1/16"-12	15.09	16.66	27.70	1-1/4"	Imperial	
DAUNM1000-1200 Without Hole	1-1/16"-12	15.09	N/A	27.70	1-1/4"	Imperial	
DAUNM1000-1400	1-3/16"-12	15.09	18.26	27.70	36 mm	Metric	
DAUNM1000-1400IN	1-3/16"-12	15.09	18.26	27.70	1-3/8"	Imperial	
DAUNM1000-1400 Without Hole	1-3/16"-12	15.09	M/A	27.70	1-3/8"	Imperial	
DAUNM1000-1600	1-5/16"-12	15.09	21.44	28.40	41 mm	Metric	
DAUNM1000-1600IN	1-5/16"-12	15.09	21.44	28.40	1-1/2"	Imperial	
DAUNM1000-1600 Without Hole	1-5/16"-12	15.09	N/A	28.40	1-1/2"	Imperial	
DAUNM1000-2000	1-5/8"-12	15.09	27.38	30.50	50 mm	Metric	
DAUNM1000-2000IN	1-5/8"-12	15.09	27.38	30.50	1-7/8"	Imperial	
DAUNM1000-2000 Without Hole	1-5/8"-12	15.09	N/A	30.50	1-7/8"	Imperial	
DAUNM1000-2400	1-7/8"-12	15.09	34.14	32.30	55 mm	Metric	
DAUNM1000-2400IN	1-7/8"-12	15.09	34.14	32.30	2-1/8"	Imperial	
DAUNM1000-2400 Without Hole	1-7/8"-12	15.09	N/A	32.30	2-1/8"	Imperial	
DAUNM1000-3200	2-1/2"-12	15.09	45.25	36.30	70 mm	Metric	
DAUNM1000-3200IN	2-1/2"-12	15.09	45.25	36.30	2-3/4"	Imperial	
DAUNM1000-3200 Without Hole	2-1/2"-12	15.09	N/A	36.30	2-3/4"	Imperial	

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DVSTI-UN

Hexagon Socket SAE Male O Ring Plug

DME&JDE Code:

DVSTI-UN

Product Type

Hydraulic adaptor

Standard:

JIC and SAE-ORB

Structure:

Plug

Connection Type:

Male

Thread Types:


UNF

Sealing Method:

O Ring

Other Features:

Hexagon

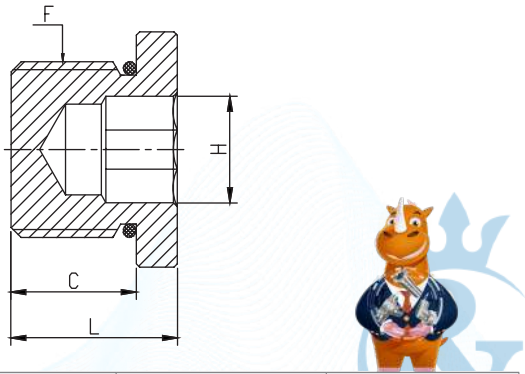

German Technology Equipment

SHIELD FLEX

New-Standard

PART NUMBER	F (Thread)	C	L	H
#	-	mm	mm	Inch
DVSTI-02UN	5/16"-24	7.54	10.20	1/8"
DVSTI-03UN	3/8"-24	7.54	10.20	1/8"
DVSTI-04UN	7/16"-20	9.14	11.90	3/16"
DVSTI-05UN	1/2"-20	9.14	12.06	3/16"
DVSTI-06UN	9/16"-18	9.93	12.70	1/4"
DVSTI-08UN	3/4"-16	11.13	14.70	5/16"
DVSTI-10UN	7/8"-14	12.70	16.50	3/8"
DVSTI-12UN	1-1/16"-12	15.09	19.50	9/16"
DVSTI-14UN	1-3/16"-12	15.09	19.60	9/16"
DVSTI-16UN	1-5/16"-12	15.09	19.50	5/8"
DVSTI-20UN	1-5/8"-12	15.09	19.50	3/4"
DVSTI-24UN	1-7/8"-12	15.09	19.50	3/4"
DVSTI-32UN	2-1/2"-12	15.09	19.69	3/4"

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DAUNM1305B

Straight Adjustable Connector SAE Male – SAE Male + O Ring

D

A

UN

M

1

30

5

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Sealing Type

Connection Type

DME

Adaptor

SAE UNF

Male

Straight

SAE

Male + O Ring

Adjustable

 German Technology Equipment



New-Standard

DME&JDE Code:

DAUNM1305B

Product Type

Hydraulic adaptor

Adaptor Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Adjustable Male × Male

Thread Types:

UNF × UNF

Sealing Method:

O Ring

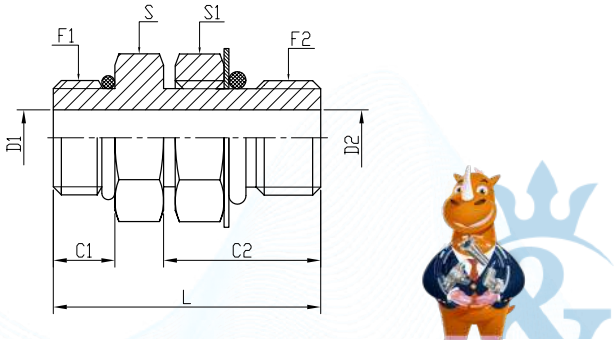

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	-	-	-
DAUNM1305B-0404	7/16"-20	7/16"-20	9.14	20.50	4.37	4.37	34.80	14 mm	14 mm	Metric
DAUNM1305B-0406	7/16"-20	9/16"-18	9.14	21.17	4.37	7.54	39.50	17 mm	17 mm	Metric
DAUNM1305B-0404IN	7/16"-20	7/16"-20	9.14	20.50	4.37	4.37	34.80	9/16"	9/16"	Imperial
DAUNM1305B-0406IN	7/16"-20	9/16"-18	9.14	21.17	4.37	7.54	39.50	11/16"	11/16"	Imperial
DAUNM1305B-0505	1/2"-20	1/2"-20	9.14	20.50	5.94	5.94	36.80	17 mm	17 mm	Metric
DAUNM1305B-0505IN	1/2"-20	1/2"-20	9.14	20.50	5.94	5.94	36.80	5/8"	5/8"	Imperial
DAUNM1305B-0604	9/16"-18	7/16"-20	9.93	18.50	7.54	4.37	37.00	17 mm	14 mm	Metric
DAUNM1305B-0606	9/16"-18	9/16"-18	9.93	19.05	7.54	7.54	39.62	17 mm	17 mm	Metric
DAUNM1305B-0608	9/16"-18	3/4"-16	9.93	24.30	7.54	9.93	43.70	22 mm	22 mm	Metric
DAUNM1305B-0604IN	9/16"-18	7/16"-20	9.93	18.50	7.54	4.37	37.00	11/16"	9/16"	Imperial
DAUNM1305B-0606IN	9/16"-18	9/16"-18	9.93	19.05	7.54	7.54	39.62	11/16"	11/16"	Imperial
DAUNM1305B-0608IN	9/16"-18	3/4"-16	9.93	24.30	7.54	9.93	43.70	7/8"	7/8"	Imperial
DAUNM1305B-0806	3/4"-16	9/16"-18	11.13	21.17	9.93	7.54	40.70	22 mm	17 mm	Metric
DAUNM1305B-0808	3/4"-16	3/4"-16	11.13	22.20	9.93	9.93	39.62	22 mm	22 mm	Metric
DAUNM1305B-0810	3/4"-16	7/8"-14	11.13	27.78	9.93	12.29	50.50	27 mm	27 mm	Metric
DAUNM1305B-0812	3/4"-16	1-1/16"-12	11.13	32.17	9.93	15.47	55.90	32 mm	32 mm	Metric
DAUNM1305B-0806IN	3/4"-16	9/16"-18	11.13	21.17	9.93	7.54	40.70	7/8"	11/16"	Imperial
DAUNM1305B-0808IN	3/4"-16	3/4"-16	11.13	22.20	9.93	9.93	39.62	7/8"	7/8"	Imperial



Certificate:



DAUNM1305B-0810IN	3/4"-16	7/8"-14	11.13	27.78	9.93	12.29	50.50	1"	1"	Imperial
DAUNM1305B-0812IN	3/4"-16	1-1/16"-12	11.13	32.17	9.93	15.47	55.90	1-1/4"	1-1/4"	Imperial
DAUNM1305B-1008	7/8"-14	3/4"-16	12.70	24.22	12.29	9.93	45.80	27 mm	22 mm	Metric
DAUNM1305B-1010	7/8"-14	7/8"-14	12.70	27.78	12.29	12.29	51.82	27 mm	27 mm	Metric
DAUNM1305B-1012	7/8"-14	1-1/16"-12	12.70	29.46	12.29	15.47	54.10	32 mm	32 mm	Metric
DAUNM1305B-1008IN	7/8"-14	3/4"-16	12.70	24.22	12.29	9.93	45.80	1"	7/8"	Imperial
DAUNM1305B-1010IN	7/8"-14	7/8"-14	12.70	27.78	12.29	12.29	51.82	1"	1"	Imperial
DAUNM1305B-1012IN	7/8"-14	1-1/16"-12	12.70	29.46	12.29	15.47	54.10	1-1/4"	1-1/4"	Imperial
DAUNM1305B-1208	1-1/16"-12	3/4"-16	15.09	24.22	15.47	9.93	52.00	32 mm	22 mm	Metric
DAUNM1305B-1210	1-1/16"-12	7/8"-14	15.09	27.78	15.47	12.29	54.10	32 mm	27 mm	Metric
DAUNM1305B-1212	1-1/16"-12	1-1/16"-12	15.09	32.17	15.47	15.47	59.18	32 mm	32 mm	Metric
DAUNM1305B-1216	1-1/16"-12	1-5/16"-12	15.09	32.17	15.47	21.44	59.94	36 mm	41 mm	Metric
DAUNM1305B-1208IN	1-1/16"-12	3/4"-16	15.09	24.22	15.47	9.93	52.00	1-1/4"	7/8"	Imperial
DAUNM1305B-1210IN	1-1/16"-12	7/8"-14	15.09	27.78	15.47	12.29	54.10	1-1/4"	1"	Imperial
DAUNM1305B-1212IN	1-1/16"-12	1-1/16"-12	15.09	32.17	15.47	15.47	59.18	1-1/4"	1-1/4"	Imperial
DAUNM1305B-1216IN	1-1/16"-12	1-5/16"-12	15.09	32.17	15.47	21.44	59.94	1-3/8"	1-1/2"	Imperial
DAUNM1305B-1612	1-5/16"-12	1-1/16"-12	15.09	29.00	21.44	15.47	57.00	41 mm	32 mm	Metric
DAUNM1305B-1616	1-5/16"-12	1-5/16"-12	15.09	32.17	21.44	21.44	59.94	41 mm	41 mm	Metric
DAUNM1305B-1612IN	1-5/16"-12	1-1/16"-12	15.09	29.00	21.44	15.47	57.00	1-1/2"	1-1/4"	Imperial
DAUNM1305B-1616IN	1-5/16"-12	1-5/16"-12	15.09	32.17	21.44	21.44	59.94	1-1/2"	1-1/2"	Imperial
DAUNM1305B-2016	1-5/8"-12	1-5/16"-12	15.09	32.17	27.38	21.44	58.60	50 mm	41 mm	Metric
DAUNM1305B-2020	1-5/8"-12	1-5/8"-12	15.09	29.46	27.38	27.38	58.67	50 mm	50 mm	Metric
DAUNM1305B-2024	1-5/8"-12	1-7/8"-12	15.09	28.96	27.38	33.32	61.00	50 mm	55 mm	Metric
DAUNM1305B-2016IN	1-5/8"-12	1-5/16"-12	15.09	32.17	27.38	21.44	58.60	1-7/8"	1-1/2"	Imperial
DAUNM1305B-2020IN	1-5/8"-12	1-5/8"-12	15.09	29.46	27.38	27.38	58.67	1-7/8"	1-7/8"	Imperial
DAUNM1305B-2024IN	1-5/8"-12	1-7/8"-12	15.09	28.96	27.38	33.32	61.00	2"	2-1/8"	Imperial
DAUNM1305B-2420	1-7/8"-12	1-5/8"-12	15.09	32.20	33.32	27.38	61.00	55 mm	50 mm	Metric
DAUNM1305B-2424	1-7/8"-12	1-7/8"-12	15.09	28.96	33.32	33.32	56.80	55 mm	55 mm	Metric
DAUNM1305B-2420IN	1-7/8"-12	1-5/8"-12	15.09	32.20	33.32	27.38	61.00	2-1/8"	1-7/8"	Imperial
DAUNM1305B-2424IN	1-7/8"-12	1-7/8"-12	15.09	28.96	33.32	33.32	56.80	2-1/8"	2-1/8"	Imperial
DAUNM1305B-3232	2-1/2"-12	2-1/2"-12	15.09	32.00	45.24	45.24	66.80	70 mm	70 mm	Metric
DAUNM1305B-3232IN	2-1/2"-12	2-1/2"-12	15.09	32.00	45.24	45.24	66.80	2-3/4"	2-3/4"	Imperial

Certificate:





DAUNF1305

Straight Connector SAE Female O Ring – SAE Male O Ring

D

A

UN

F

1

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

SAE UNF

Female

Straight

SAE UNF

Male + O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DAUNF1305

Product Type

Hydraulic adaptor

Adaptor Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Female × Male

Thread Types:

UNF × UNF

Sealing Method:

O Ring

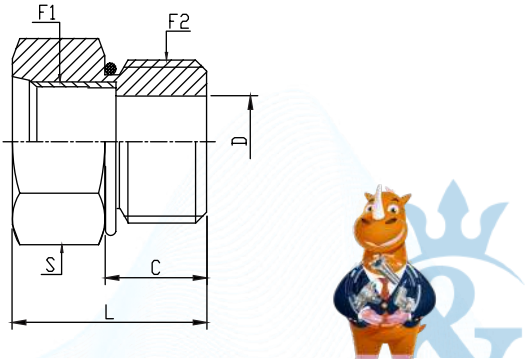

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S	Hex
#	UNF	UNF	mm	mm	mm	-	-
DAUNF1305-0304	3/8"-24	7/16"-20	9.14	4.37	27.90	17 mm	Metric
DAUNF1305-0308	3/8"-24	3/4"-16	11.13	7.92	20.32	22 mm	Metric
DAUNF1305-0304IN	3/8"-24	7/16"-20	9.14	4.37	27.90	5/8"	Imperial
DAUNF1305-0308IN	3/8"-24	3/4"-16	11.13	7.92	20.32	7/8"	Imperial
DAUNF1305-0402	7/16"-20	5/16"-24	7.54	1.60	28.70	17 mm	Metric
DAUNF1305-0403	7/16"-20	3/8"-24	7.54	3.18	28.70	17 mm	Metric
DAUNF1305-0404	7/16"-20	7/16"-20	9.14	4.37	28.10	17 mm	Metric
DAUNF1305-0405	7/16"-20	1/2"-20	9.14	5.94	27.40	17 mm	Metric
DAUNF1305-0406	7/16"-20	9/16"-18	9.93	7.54	28.40	17 mm	Metric
DAUNF1305-0408	7/16"-20	3/4"-16	11.13	9.80	27.94	22 mm	Metric
DAUNF1305-0410	7/16"-20	7/8"-14	12.70	12.29	23.90	27 mm	Metric
DAUNF1305-0412	7/16"-20	1-1/16"-12	15.09	15.47	27.70	32 mm	Metric
DAUNF1305-0416	7/16"-20	1-5/16"-12	15.09	9.25	25.40	41 mm	Metric
DAUNF1305-0402IN	7/16"-20	5/16"-24	7.54	1.60	28.70	11/16"	Imperial
DAUNF1305-0403IN	7/16"-20	3/8"-24	7.54	3.18	28.70	11/16"	Imperial
DAUNF1305-0404IN	7/16"-20	7/16"-20	9.14	4.37	28.10	11/16"	Imperial
DAUNF1305-0405IN	7/16"-20	1/2"-20	9.14	5.94	27.40	5/8"	Imperial
DAUNF1305-0406IN	7/16"-20	9/16"-18	9.93	7.54	28.40	11/16"	Imperial
DAUNF1305-0408IN	7/16"-20	3/4"-16	11.13	9.80	27.94	7/8"	Imperial
DAUNF1305-0410IN	7/16"-20	7/8"-14	12.70	12.29	23.90	1"	Imperial
DAUNF1305-0412IN	7/16"-20	1-1/16"-12	15.09	15.47	27.70	1-1/4"	Imperial
DAUNF1305-0416IN	7/16"-20	1-5/16"-12	15.09	9.25	25.40	1-1/2"	Imperial
DAUNF1305-0504	1/2"-20	7/16"-20	9.14	4.37	29.46	19 mm	Metric
DAUNF1305-0508	1/2"-20	3/4"-16	11.13	9.93	30.73	22 mm	Metric
DAUNF1305-0504IN	1/2"-20	7/16"-20	9.14	4.37	29.46	3/4"	Imperial
DAUNF1305-0508IN	1/2"-20	3/4"-16	11.13	9.93	30.73	7/8"	Imperial

Certificate:



DAUNF1305-0604	9/16"-18	7/16"-20	9.14	4.37	29.50	22 mm	Metric
DAUNF1305-0605	9/16"-18	1/2"-20	9.14	5.94	31.50	22 mm	Metric
DAUNF1305-0606	9/16"-18	9/16"-18	9.93	7.54	31.00	22 mm	Metric
DAUNF1305-0608	9/16"-18	3/4"-16	11.13	9.93	29.50	22 mm	Metric
DAUNF1305-0610	9/16"-18	7/8"-14	12.70	12.29	30.23	27 mm	Metric
DAUNF1305-0612	9/16"-18	1-1/16"-12	15.09	15.47	27.70	32 mm	Metric
DAUNF1305-0616	9/16"-18	1-5/16"-12	15.09	12.90	25.40	41 mm	Metric
DAUNF1305-0620	9/16"-18	1-5/8"-12	15.09	12.92	25.40	50 mm	Metric
DAUNF1305-0604IN	9/16"-18	7/16"-20	9.14	4.37	29.50	13/16"	Imperial
DAUNF1305-0605IN	9/16"-18	1/2"-20	9.14	5.94	31.50	13/16"	Imperial
DAUNF1305-0606IN	9/16"-18	9/16"-18	9.93	7.54	31.00	13/16"	Imperial
DAUNF1305-0608IN	9/16"-18	3/4"-16	11.13	9.93	29.50	7/8"	Imperial
DAUNF1305-0610IN	9/16"-18	7/8"-14	12.70	12.29	30.23	1"	Imperial
DAUNF1305-0612IN	9/16"-18	1-1/16"-12	15.09	15.47	27.70	1-1/4"	Imperial
DAUNF1305-0616IN	9/16"-18	1-5/16"-12	15.09	12.90	25.40	1-1/2"	Imperial
DAUNF1305-0620IN	9/16"-18	1-5/8"-12	15.09	12.92	25.40	1-7/8"	Imperial
DAUNF1305-0804	3/4"-16	7/16"-20	9.14	4.37	35.40	27 mm	Metric
DAUNF1305-0806	3/4"-16	9/16"-18	9.93	7.54	36.83	27 mm	Metric
DAUNF1305-0808	3/4"-16	3/4"-16	11.13	9.93	35.81	27 mm	Metric
DAUNF1305-0810	3/4"-16	7/8"-14	12.70	12.29	33.30	27 mm	Metric
DAUNF1305-0812	3/4"-16	1-1/16"-12	15.09	15.47	37.59	32 mm	Metric
DAUNF1305-0814	3/4"-16	1-3/16"-12	15.09	18.26	27.70	36 mm	Metric
DAUNF1305-0816	3/4"-16	1-5/16"-12	15.09	17.50	25.40	41 mm	Metric
DAUNF1305-0820	3/4"-16	1-5/8"-12	15.09	17.50	25.40	50 mm	Metric
DAUNF1305-0824	3/4"-16	1-7/8"-12	15.09	33.32	32.30	55 mm	Metric
DAUNF1305-0804IN	3/4"-16	7/16"-20	9.14	4.37	35.40	1"	Imperial
DAUNF1305-0806IN	3/4"-16	9/16"-18	9.93	7.54	36.83	1"	Imperial
DAUNF1305-0808IN	3/4"-16	3/4"-16	11.13	9.93	35.81	1"	Imperial
DAUNF1305-0810IN	3/4"-16	7/8"-14	12.70	12.29	33.30	1"	Imperial
DAUNF1305-0812IN	3/4"-16	1-1/16"-12	15.09	15.47	37.59	1-1/4"	Imperial
DAUNF1305-0814IN	3/4"-16	1-3/16"-12	15.09	18.26	27.70	1-3/8"	Imperial
DAUNF1305-0816IN	3/4"-16	1-5/16"-12	15.09	17.50	25.40	1-1/2"	Imperial
DAUNF1305-0820IN	3/4"-16	1-5/8"-12	15.09	17.50	25.40	1-7/8"	Imperial
DAUNF1305-0824IN	3/4"-16	1-7/8"-12	15.09	33.32	32.30	2-1/8"	Imperial
DAUNF1305-1008	7/8"-14	3/4"-16	11.13	9.93	38.10	30 mm	Metric
DAUNF1305-1010	7/8"-14	7/8"-14	12.70	12.50	38.00	30 mm	Metric
DAUNF1305-1012	7/8"-14	1-1/16"-12	15.09	15.47	39.60	32 mm	Metric
DAUNF1305-1016	7/8"-14	1-5/16"-12	15.09	21.44	28.50	41 mm	Metric
DAUNF1305-1020	7/8"-14	1-5/8"-12	15.09	20.47	25.40	50 mm	Metric
DAUNF1305-1024	7/8"-14	1-7/8"-12	15.09	33.32	32.30	55 mm	Metric
DAUNF1305-1008IN	7/8"-14	3/4"-16	11.13	9.93	38.10	1-1/8"	Imperial
DAUNF1305-1010IN	7/8"-14	7/8"-14	12.70	12.50	38.00	1-1/16"	Imperial
DAUNF1305-1012IN	7/8"-14	1-1/16"-12	15.09	15.47	39.60	1-1/4"	Imperial
DAUNF1305-1016IN	7/8"-14	1-5/16"-12	15.09	21.44	28.50	1-1/2"	Imperial
DAUNF1305-1020IN	7/8"-14	1-5/8"-12	15.09	20.47	25.40	1-7/8"	Imperial
DAUNF1305-1024IN	7/8"-14	1-7/8"-12	15.09	33.32	32.30	2-1/8"	Imperial

Certificate:



DAUNF1305-1206	1-1/16"-12	9/16"-18	9.93	7.54	39.70	36 mm	Metric
DAUNF1305-1208	1-1/16"-12	3/4"-16	11.13	9.93	41.90	36 mm	Metric
DAUNF1305-1210	1-1/16"-12	7/8"-14	12.70	12.29	45.50	36 mm	Metric
DAUNF1305-1212	1-1/16"-12	1-1/16"-12	15.09	15.47	46.50	36 mm	Metric
DAUNF1305-1216	1-1/16"-12	1-5/16"-12	15.09	21.44	43.69	41 mm	Metric
DAUNF1305-1220	1-1/16"-12	1-5/8"-12	15.09	24.92	25.40	50 mm	Metric
DAUNF1305-1224	1-1/16"-12	1-7/8"-12	15.09	33.32	32.30	55 mm	Metric
DAUNF1305-1232	1-1/16"-12	2-1/2"-12	15.09	44.50	36.30	45 mm	Metric
DAUNF1305-1206IN	1-1/16"-12	9/16"-18	9.93	7.54	39.70	1-3/8"	Imperial
DAUNF1305-1208IN	1-1/16"-12	3/4"-16	11.13	9.93	41.90	1-3/8"	Imperial
DAUNF1305-1210IN	1-1/16"-12	7/8"-14	12.70	12.29	45.50	1-3/8"	Imperial
DAUNF1305-1212IN	1-1/16"-12	1-1/16"-12	15.09	15.47	46.50	1-3/8"	Imperial
DAUNF1305-1216IN	1-1/16"-12	1-5/16"-12	15.09	21.44	43.69	1-1/2"	Imperial
DAUNF1305-1220IN	1-1/16"-12	1-5/8"-12	15.09	24.92	25.40	1-7/8"	Imperial
DAUNF1305-1224IN	1-1/16"-12	1-7/8"-12	15.09	33.32	32.30	2-1/8"	Imperial
DAUNF1305-1232IN	1-1/16"-12	2-1/2"-12	15.09	44.50	36.30	1-3/4"	Imperial
DAUNF1305-1412	1-3/16"-12	1-1/16"-12	15.09	15.47	43.50	41 mm	Metric
DAUNF1305-1416	1-3/16"-12	1-5/16"-12	15.09	21.44	43.70	41 mm	Metric
DAUNF1305-1412IN	1-3/16"-12	1-1/16"-12	15.09	15.47	43.50	1-1/2"	Imperial
DAUNF1305-1416IN	1-3/16"-12	1-5/16"-12	15.09	21.44	43.70	1-1/2"	Imperial
DAUNF1305-1612	1-5/16"-12	1-1/16"-12	15.09	15.47	46.00	41 mm	Metric
DAUNF1305-1616	1-5/16"-12	1-5/16"-12	15.09	21.44	45.97	41 mm	Metric
DAUNF1305-1620	1-5/16"-12	1-5/8"-12	15.09	31.25	25.40	50 mm	Metric
DAUNF1305-1624	1-5/16"-12	1-7/8"-12	15.09	31.27	25.40	55 mm	Metric
DAUNF1305-1632	1-5/16"-12	2-1/2"-12	15.09	31.26	25.40	70 mm	Metric
DAUNF1305-1612IN	1-5/16"-12	1-1/16"-12	15.09	15.47	46.00	1-5/8"	Imperial
DAUNF1305-1616IN	1-5/16"-12	1-5/16"-12	15.09	21.44	45.97	1-5/8"	Imperial
DAUNF1305-1620IN	1-5/16"-12	1-5/8"-12	15.09	31.25	25.40	1-7/8"	Imperial
DAUNF1305-1624IN	1-5/16"-12	1-7/8"-12	15.09	31.27	25.40	2-1/8"	Imperial
DAUNF1305-1632IN	1-5/16"-12	2-1/2"-12	15.09	31.26	25.40	2-3/4"	Imperial
DAUNF1305-2012	1-5/8"-12	1-1/16"-12	15.09	15.47	50.80	50 mm	Metric
DAUNF1305-2016	1-5/8"-12	1-5/16"-12	15.09	21.44	50.00	50 mm	Metric
DAUNF1305-2020	1-5/8"-12	1-5/8"-12	15.09	27.38	50.00	50 mm	Metric
DAUNF1305-2024	1-5/8"-12	1-7/8"-12	15.09	33.32	44.45	55 mm	Metric
DAUNF1305-2032	1-5/8"-12	2-1/2"-12	15.09	39.22	25.40	70 mm	Metric
DAUNF1305-2012IN	1-5/8"-12	1-1/16"-12	15.09	15.47	50.80	2"	Imperial
DAUNF1305-2016IN	1-5/8"-12	1-5/16"-12	15.09	21.44	50.00	2"	Imperial
DAUNF1305-2020IN	1-5/8"-12	1-5/8"-12	15.09	27.38	50.00	2"	Imperial
DAUNF1305-2024IN	1-5/8"-12	1-7/8"-12	15.09	33.32	44.45	2-1/8"	Imperial
DAUNF1305-2032IN	1-5/8"-12	2-1/2"-12	15.09	39.22	25.40	2-3/4"	Imperial
DAUNF1305-2416	1-7/8"-12	1-5/16"-12	15.09	21.44	48.50	60 mm	Metric
DAUNF1305-2420	1-7/8"-12	1-5/8"-12	15.09	27.38	47.80	60 mm	Metric
DAUNF1305-2424	1-7/8"-12	1-7/8"-12	15.09	33.32	50.80	60 mm	Metric
DAUNF1305-2432	1-7/8"-12	2-1/2"-12	15.09	44.50	36.60	70 mm	Metric
DAUNF1305-2416IN	1-7/8"-12	1-5/16"-12	15.09	21.44	48.50	2-1/4"	Imperial
DAUNF1305-2420IN	1-7/8"-12	1-5/8"-12	15.09	27.38	47.80	2-1/4"	Imperial
DAUNF1305-2424IN	1-7/8"-12	1-7/8"-12	15.09	33.32	50.80	2-1/4"	Imperial
DAUNF1305-2432IN	1-7/8"-12	2-1/2"-12	15.09	44.50	36.60	2-3/4"	Imperial
DAUNF1305-3224	2-1/2"-12	1-7/8"-12	15.09	33.32	56.50	73 mm	Metric
DAUNF1305-3224IN	2-1/2"-12	1-7/8"-12	15.09	33.32	56.50	2-7/8"	Imperial

DAUNF105M

Straight SAE Female O Ring – BSPP male 60° Cone

D	A	UN	F	1	05	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DAE	Adaptor	SAE UNF	Female	Straight	BSPP	Male



New-Standard

- DME&JDE Code:

DAUNF105M
- Product Type

Hydraulic adaptor
- Standard:


JIC and SAE-ORB
- Structure:

Straight
- Connection Type:

Female × Male
- Thread Types:

UNF × BSPP 60° Cone
- Sealing Method:

O Ring

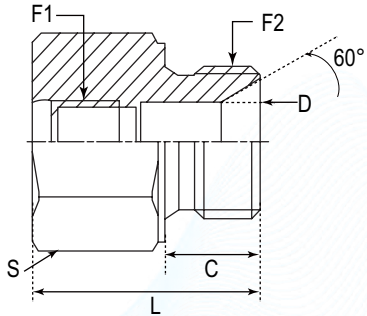

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	UNF	BSPP	mm	mm	mm	mm
DAUNF105M-0402	7/16"-20	1/8"-28	9.00	3.50	28.80	17.46
DAUNF105M-0404	7/16"-20	1/4"-19	11.00	4.70	32.00	19.00
DAUNF105M-0406	7/16"-20	3/8"-19	12.00	7.90	32.00	22.00
DAUNF105M-0408	7/16"-20	1/2"-14	14.00	11.10	34.00	27.00
DAUNF105M-0504	1/2"-20	1/4"-19	11.00	4.70	33.00	19.00
DAUNF105M-0506	1/2"-20	3/8"-19	12.00	7.90	35.00	22.00
DAUNF105M-0604	9/16"-18	1/4"-19	11.00	4.70	34.00	20.64
DAUNF105M-0606	9/16"-18	3/8"-19	12.00	7.90	34.50	22.00
DAUNF105M-0608	9/16"-18	1/2"-14	14.00	11.10	35.50	27.00
DAUNF105M-0612	9/16"-18	3/4"-14	16.00	16.70	40.00	32.00
DAUNF105M-0806	3/4"-16	3/8"-19	12.00	7.90	37.00	25.40
DAUNF105M-0808	3/4"-16	1/2"-14	14.00	11.10	40.00	27.00
DAUNF105M-1008	7/8"-14	1/2"-14	14.00	11.10	41.00	28.58
DAUNF105M-1010	7/8"-14	5/8"-14	16.00	14.00	44.00	30.00
DAUNF105M-1212	1-1/16"-12	3/4"-14	16.00	16.70	48.00	34.93
DAUNF105M-1216	1-1/16"-12	1"-11	19.00	22.20	50.00	41.00
DAUNF105M-1608	1-5/16"-12	1/2"-14	14.00	11.10	47.00	41.00
DAUNF105M-1612	1-5/16"-12	3/4"-14	16.00	16.70	50.00	41.28
DAUNF105M-1616	1-5/16"-12	1"-11	19.00	22.20	53.00	41.28
DAUNF105M-2020	1-5/8"-12	1-1/4"-11	20.00	28.60	55.00	53.98
DAUNF105M-2024	1-5/8"-12	1-1/2"-11	22.00	33.30	57.00	55.00
DAUNF105M-2424	1-7/8"-12	1-1/2"-11	22.00	33.30	58.00	57.15

DAUNF106Q

Straight Connector SAE Female O Ring – BSPP Male + O Ring + Retaining Ring

D

A

UN

F

1

06

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

SAE UNF

Female

Straight

BSPP


Male + O Ring + Retaining Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DAUNF106Q
- Product Type Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: Straight
- Connection Type: Female × Male
- Thread Types: UNF × BSPP
- Sealing Method: O Ring + Retaining Ring

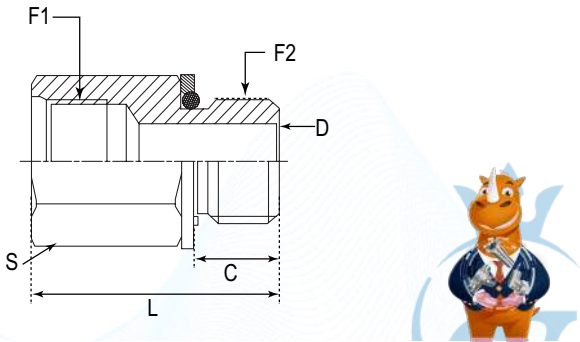

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	UNF	BSPP	mm	mm	mm	mm
DAUNF106Q-0404	7/16"-20	1/4"-19	11.20	7.50	30.50	19
DAUNF106Q-0604	9/16"-18	1/4"-19	11.20	7.50	32.00	22
DAUNF106Q-0606	9/16"-18	3/8"-19	11.20	7.50	31.50	22
DAUNF106Q-0808	3/4"-16	3/4"-16	11.13	9.93	35.60	30
DAUNF106Q-1008	7/8"-14	1/2"-14	14.50	12.30	41.50	30
DAUNF106Q-1208	1-1/16"-12	1/2"-14	14.50	12.30	45.00	36
DAUNF106Q-1212	1-1/16"-12	3/4"-14	14.50	15.50	46.50	36
DAUNF106Q-1616	1-5/16"-12	1"-11	18.60	21.40	50.50	46



DAUNF152Q

Straight Connector SAE Female O Ring – Metric Male + O Ring + Retaining Ring

D

A

UN

F

1

52

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

SAE UNF

Female

Straight

Metric


Male + O Ring + Retaining Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DAUNF152Q
- Product Type Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: Straight
- Connection Type: Female × Male
- Thread Types: UNF × Metric
- Sealing Method: Long O Ring + Retaining Ring

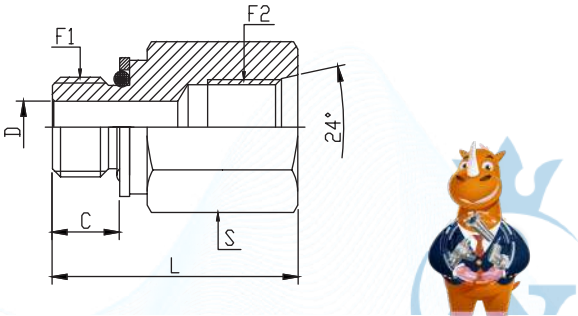

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	UNF	BSPP	mm	mm	mm	mm
DAUNF152Q-0410	7/16"-20	M10X1	7.54	3.18	28.70	19
DAUNF152Q-0614	9/16"-18	M14X1.5	11.00	7.00	31.60	22
DAUNF152Q-0814	3/4"-16	M14X1.5	11.00	6.00	33.50	24
DAUNF152Q-0818	3/4"-16	M18X1.5	12.50	10.00	36.80	27
DAUNF152Q-1018	7/8"-14	M18X1.5	12.50	10.00	38.10	30
DAUNF152Q-1022	7/8"-14	M22X1.5	13.00	12.00	38.00	30
DAUNF152Q-1227	1-1/16"-12	M27X2	18.50	15.00	47.00	36
DAUNF152Q-1233	1-1/16"-12	M33X2	18.50	21.44	43.70	41
DAUNF152Q-1633	1-5/16"-12	M33X2	18.00	13.00	46.00	41



DAUNF128M

Straight Connector SAE Female O Ring – NPTF 60° Male

D

A

UN

F

1

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DAE

Adaptor

SAE UNF

Female

Straight

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAUNF128M

Product Type

Hydraulic adaptor

Adaptor Standard:

JIC and SAE-ORB

Structure:

Straight

Connection Type:


Female × Male

Thread Types:

UNF × NPTF 60°

Sealing Method:

O Ring

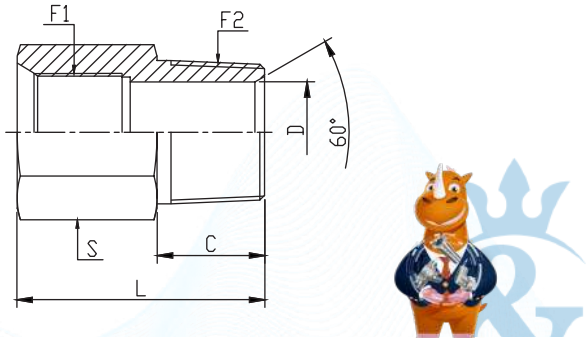

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S	Hex
#	UNF	NPTF	mm	mm	mm	-	-
DAUNF128M-0402IN	7/16"-20	1/8"-27	9.65	4.78	28.70	11/16"	Imperial
DAUNF128M-0404IN	7/16"-20	1/4"-18	14.22	7.14	33.50	11/16"	Imperial
DAUNF128M-0406IN	7/16"-20	3/8"-18	14.22	10.31	28.70	11/16"	Imperial
DAUNF128M-0502IN	1/2"-20	1/8"-27	9.65	4.78	34.80	3/4"	Imperial
DAUNF128M-0504IN	1/2"-20	1/4"-18	14.22	7.14	35.30	3/4"	Imperial
DAUNF128M-0604IN	9/16"-18	1/4"-18	14.22	7.14	40.39	7/8"	Imperial
DAUNF128M-0606IN	9/16"-18	3/8"-18	14.22	10.31	35.10	13/16"	Imperial
DAUNF128M-0608IN	9/16"-18	1/2"-14	19.05	13.49	40.13	7/8"	Imperial
DAUNF128M-0612IN	9/16"-18	3/4"-14	19.05	18.26	39.00	1-1/8"	Imperial

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S	Hex
#	UNF	NPTF	mm	mm	mm	-	-
DAUNF128M-0806IN	3/4"-16	3/8"-18	14.22	10.31	38.10	1"	Imperial
DAUNF128M-0808IN	3/4"-16	1/2"-14	19.05	13.49	41.90	1"	Imperial
DAUNF128M-0812IN	3/4"-16	3/4"-14	19.05	17.50	42.90	1-1/8"	Imperial
DAUNF128M-1006IN	7/8"-14	3/8"-18	14.22	10.31	41.70	1-1/8"	Imperial
DAUNF128M-1008IN	7/8"-14	1/2"-14	19.05	13.50	46.73	1-1/8"	Imperial
DAUNF128M-1012IN	7/8"-14	3/4"-14	19.05	18.26	43.70	1-1/8"	Imperial
DAUNF128M-1206IN	1-1/16"-12	3/8"-18	14.22	10.31	44.90	1-3/8"	Imperial
DAUNF128M-1208IN	1-1/16"-12	1/2"-14	19.05	13.50	50.28	1-3/8"	Imperial
DAUNF128M-1212IN	1-1/16"-12	3/4"-14	19.05	18.26	50.30	1-3/8"	Imperial
DAUNF128M-1216IN	1-1/16"-12	1"-11-1/2	23.88	23.83	54.10	1-3/8"	Imperial
DAUNF128M-1412IN	1-3/16"-12	3/4"-14	19.05	18.26	48.51	1-5/8"	Imperial
DAUNF128M-1612IN	1-5/16"-12	3/4"-14	19.05	18.26	51.60	1-5/8"	Imperial
DAUNF128M-1616IN	1-5/16"-12	1"-11-1/2	23.88	23.83	56.39	1-5/8"	Imperial
DAUNF128M-1620IN	1-5/16"-12	1-1/4"-11-1/2	24.64	31.75	56.00	1-3/4"	Imperial
DAUNF128M-1624IN	1-5/16"-12	1-1/2"-11-1/2	25.40	31.27	54.86	2"	Imperial
DAUNF128M-2016IN	1-5/8"-12	1"-11-1/2	23.88	23.83	56.40	2-1/8"	Imperial
DAUNF128M-2020IN	1-5/8"-12	1-1/4"-11-1/2	24.64	31.75	59.40	2-1/8"	Imperial
DAUNF128M-2032IN	1-5/8"-12	2"-11-1/2	26.16	49.23	60.00	2-1/2"	Imperial
DAUNF128M-2424IN	1-7/8"-12	1-1/2"-11-1/2	25.40	38.10	58.40	2-1/4"	Imperial
DAUNF128M-3232IN	2-1/2"-12	2"-11-1/2	26.16	49.23	67.60	2-7/8"	Imperial

Certificate:



Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



DAUNF130F

Straight Connector SAE Female O Ring – SAE Female O Ring

D

A

UN

F

1

30

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

SAE UNF

Female

Straight

NPTF

Female

German Technology Equipment

SHIELD FLEX

New-Standard

- DME&JDE Code:

DAUNF130F
- Product Type

Hydraulic adaptor
- Standard:


JIC and SAE-ORB
- Structure:

Straight
- Connection Type:

Female × Female
- Thread Types:

NPTF × NPTF
- Other Features:

Hexagon



PART NUMBER	F1 (Thread)	F2 (Thread)	L	S	Hex
#	UNF	UNF	mm	mm	-
DAUNF130F-0404	7/16"-20	7/16"-20	29.00	17 mm	Metric
DAUNF130F-0404IN	7/16"-20	7/16"-20	29.00	11/16"	Imperial
DAUNF130F-0606	9/16"-18	9/16"-18	32.00	22 mm	Metric
DAUNF130F-0606IN	9/16"-18	9/16"-18	32.00	13/16"	Imperial
DAUNF130F-0808	3/4"-16	3/4"-16	36.10	27 mm	Metric
DAUNF130F-0808IN	3/4"-16	3/4"-16	36.10	1-1/8"	Imperial
DAUNF130F-1010	7/8"-14	7/8"-14	41.50	32 mm	Metric
DAUNF130F-1010IN	7/8"-14	7/8"-14	41.50	1-1/4"	Imperial
DAUNF130F-1212	1-1/16"-12	1-1/16"-12	47.00	36 mm	Metric
DAUNF130F-1212IN	1-1/16"-12	1-1/16"-12	47.00	1-3/8"	Imperial
DAUNF130F-1616	1-5/16"-12	1-5/16"-12	49.50	41 mm	Metric
DAUNF130F-1616IN	1-5/16"-12	1-5/16"-12	49.50	1-5/8"	Imperial
DAUNF130F-2020	1-5/8"-12	1-5/8"-12	53.34	50 mm	Metric
DAUNF130F-2020IN	1-5/8"-12	1-5/8"-12	53.34	2"	Imperial

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAkkS

CE

UK CA

DEKRA

DIN

SAE

MA

DAUNF128F

Straight Connector SAE Female O Ring – NPTF Female

D

A

UN

F

1

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

SAE UNF

Female

Straight

NPTF

Female

German Technology Equipment

SHIELD FLEX

New-Standard

- DME&JDE Code:

DAUNF128F
- Product Type

Hydraulic adaptor
- Standard:


JIC and SAE-ORB
- Structure:

Straight
- Connection Type:

Female × Female
- Thread Types:

UNF × NPTF
- Sealing Method:

O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L	S	Hex
#	UNF	NPTF	mm	-	-
DAUNF128F-0404IN	7/16"-20	1/4"-18	28.60	3/4"	Imperial
DAUNF128F-0606IN	9/16"-18	3/8"-18	33.50	7/8"	Imperial
DAUNF128F-0806IN	3/4"-16	3/8"-18	38.50	1"	Imperial
DAUNF128F-0808IN	3/4"-16	1/2"-14	38.10	1"	Imperial
DAUNF128F-1008IN	7/8"-14	1/2"-14	43.70	1-1/8"	Imperial
DAUNF128F-1012IN	7/8"-14	3/4"-14	47.00	1-3/8"	Imperial
DAUNF128F-1212IN	1-1/16"-12	3/4"-14	47.00	1-3/8"	Imperial
DAUNF128F-1616IN	1-5/16"-12	1"-11-1/2	53.50	1-5/8"	Imperial

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAkkS

CE

UK CA

DEKRA

DIN

SAE

MA

DAUNF1251

Straight Connector SAE Female O Ring – JIC Swivel Female 74°

D

A

UN

F

1

251

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

SAE UNF

Female

Straight

JIC Swivel Female

 German Technology Equipment



New-Standard

- DME&JDE Code:

DAUNF1251
- Product Type

Hydraulic adaptor
- Standard:


JIC and SAE-ORB
- Structure:

Straight
- Connection Type:

Female × Swivel Female
- Thread Types:

UNF × UNF
- Sealing Method:

O Ring

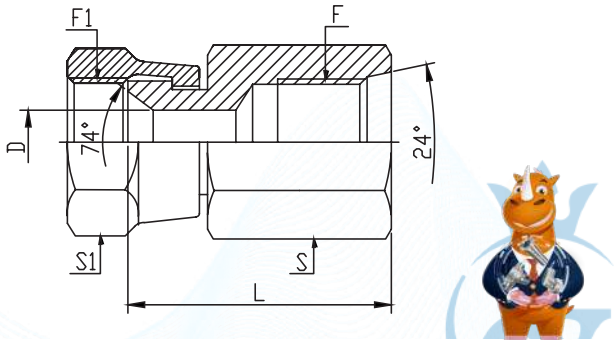

PART NUMBER	F (Thread)	F1 (Thread)	D	L	S	S1	Hex
#	UNF	UNF	mm	mm	-	-	-
DAUNF1251-0404	7/16"-20	7/16"-20	4.37	26.50	17 mm	14 mm	Metric
DAUNF1251-0404IN	7/16"-20	7/16"-20	4.37	26.50	11/16"	9/16"	Imperial
DAUNF1251-0606	9/16"-18	9/16"-18	7.54	30.50	22 mm	19 mm	Metric
DAUNF1251-0606IN	9/16"-18	9/16"-18	7.54	30.50	13/16"	11/16"	Imperial
DAUNF1251-0808	3/4"-16	3/4"-16	9.93	35.80	27 mm	22 mm	Metric
DAUNF1251-0808IN	3/4"-16	3/4"-16	9.93	35.80	1"	7/8"	Imperial
DAUNF1251-1010	7/8"-14	7/8"-14	12.29	35.50	27 mm	27 mm	Metric
DAUNF1251-1010IN	7/8"-14	7/8"-14	12.29	35.50	1-1/8"	1"	Imperial
DAUNF1251-1212	1-1/16"-12	1-1/16"-12	15.47	40.30	35 mm	32 mm	Metric
DAUNF1251-1212IN	1-1/16"-12	1-1/16"-12	15.47	40.30	1-3/8"	1-1/4"	Imperial
DAUNF1251-1616	1-5/16"-12	1-5/16"-12	21.44	42.00	41 mm	41 mm	Metric
DAUNF1251-1616IN	1-5/16"-12	1-5/16"-12	21.44	42.00	1-5/8"	1-3/8"	Imperial

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAUNF1241

Straight Connector SAE Female O Ring – ORFS Swivel Female

D

A

UN

F

1

241

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

SAE UNF

Female

Straight

ORFS Swivel Female

 German Technology Equipment



New-Standard

- DME&JDE Code:

DAUNF1241
- Product Type

Hydraulic adaptor
- Standard:


JIC and SAE-ORB
- Structure:

Straight
- Connection Type:

Female × Swivel Female
- Thread Types:

UNF × UNF
- Sealing Method:

O Ring

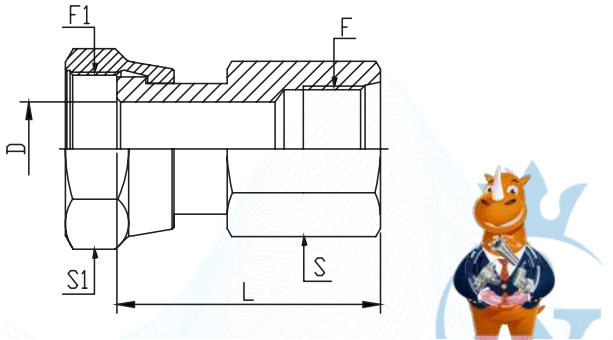

PART NUMBER	F (Thread)	F1 (Thread)	D	L	S	S1	Hex
#	UNF	UNF	mm	mm	-	-	-
DAUNF1241-0404	7/16"-20	9/16"-18	4.19	36.50	17 mm	17 mm	Metric
DAUNF1241-0406	7/16"-20	11/16"-16	6.71	38.50	19 mm	22 mm	Metric
DAUNF1241-0408	7/16"-20	13/16"-16	9.09	41.00	22 mm	24 mm	Metric
DAUNF1241-0404IN	7/16"-20	9/16"-18	4.19	36.50	11/16"	11/16"	Imperial
DAUNF1241-0406IN	7/16"-20	11/16"-16	6.71	38.50	3/4"	13/16"	Imperial
DAUNF1241-0408IN	7/16"-20	13/16"-16	9.09	41.00	7/8"	15/16"	Imperial
DAUNF1241-0606	9/16"-18	11/16"-16	6.71	40.00	19 mm	22 mm	Metric
DAUNF1241-0606IN	9/16"-18	11/16"-16	6.71	40.00	3/4"	13/16"	Imperial
DAUNF1241-0808	3/4"-16	3/4"-16	9.09	55.00	27 mm	24 mm	Metric
DAUNF1241-0808IN	3/4"-16	3/4"-16	9.09	55.00	1"	15/16"	Imperial
DAUNF1241-1212	1-1/16"-12	1-1/16"-12	13.89	72.50	36 mm	36 mm	Metric
DAUNF1241-1212IN	1-1/16"-12	1-1/16"-12	13.89	72.50	1-3/8"	1-3/8"	Imperial
DAUNF1241-1616	1-5/16"-12	1-5/16"-12	19.89	75.50	41 mm	41 mm	Metric
DAUNF1241-1616IN	1-5/16"-12	1-5/16"-12	19.89	75.50	1-5/8"	1-5/8"	Imperial

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:




DAUNM4305

45° Adjustable Elbow SAE Male O Ring – SAE Male O Ring

D	A	UN	F	4	30	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DAE	Adaptor	SAE UNF	Female	45° Elbow	SAE UNF	Male O Ring



DME&JDE Code:	DAUNM4305
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	45° Elbow
Connection Type:	Adjustable Male × Male
Thread Types:	UNF × UNF
Sealing Method:	O Ring

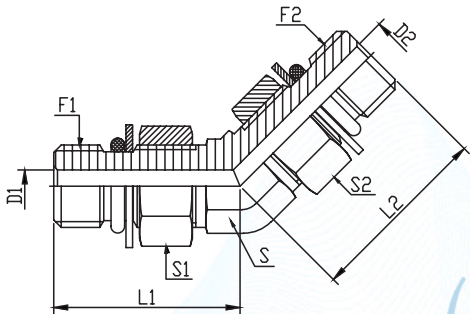

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	S2	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-	-
DAUNM4305-0404	7/16"-20	7/16"-20	4.37	4.37	26.70	26.70	11 mm	14 mm	14 mm	Metric
DAUNM4305-0404IN	7/16"-20	7/16"-20	4.37	4.37	26.70	26.70	7/16"	9/16"	9/16"	Imperial
DAUNM4305-0606	9/16"-18	9/16"-18	7.54	7.54	29.00	29.00	14 mm	17 mm	17 mm	Metric
DAUNM4305-0606IN	9/16"-18	9/16"-18	7.54	7.54	29.00	29.00	9/16"	11/16"	11/16"	Imperial
DAUNM4305-0808	3/4"-16	3/4"-16	9.93	9.93	33.00	33.00	19 mm	17 mm	17 mm	Metric
DAUNM4305-0808IN	3/4"-16	3/4"-16	9.93	9.93	33.00	33.00	3/4"	7/8"	7/8"	Imperial
DAUNM4305-1008	7/8"-14	3/4"-16	12.29	9.93	38.60	34.50	17 mm	24 mm	17 mm	Metric
DAUNM4305-1010	7/8"-14	7/8"-14	12.29	12.29	38.60	38.60	17 mm	24 mm	24 mm	Metric
DAUNM4305-1008IN	7/8"-14	3/4"-16	12.29	9.93	38.60	34.50	7/8"	1"	7/8"	Imperial
DAUNM4305-1010IN	7/8"-14	7/8"-14	12.29	12.29	38.60	38.60	7/8"	1"	1"	Imperial
DAUNM4305-1212	1-1/16"-12	1-1/16"-12	15.47	15.47	43.90	43.90	27 mm	32 mm	32 mm	Metric
DAUNM4305-1212IN	1-1/16"-12	1-1/16"-12	15.47	15.47	43.90	43.90	1-1/16"	1-1/4"	1-1/4"	Imperial
DAUNM4305-1616	1-5/16"-12	1-5/16"-12	21.44	21.44	47.20	47.20	35 mm	38 mm	38 mm	Metric
DAUNM4305-1616IN	1-5/16"-12	1-5/16"-12	21.44	21.44	47.20	47.20	1-5/16"	1-1/2"	1-1/2"	Imperial
DAUNM4305-2020	1-5/8"-12	1-5/8"-12	27.38	27.38	48.50	48.50	42 mm	50 mm	50 mm	Metric
DAUNM4305-2020IN	1-5/8"-12	1-5/8"-12	27.38	27.38	48.50	48.50	1-5/8"	1-7/8"	1-7/8"	Imperial


DAUNM9305

90° Adjustable Elbow SAE Male O Ring – SAE Male O Ring

D	A	UN	M	9	30	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DAE	Adaptor	SAE UNF	Male	90° Elbow	SAE UNF	Male O Ring



DME&JDE Code:	DAUNM9305
Product Type	Hydraulic adaptor
Standard:	JIC and SAE-ORB
Structure:	90° Elbow
Connection Type:	Adjustable Male × Male
Thread Types:	UNF × UNF
Sealing Method:	O Ring

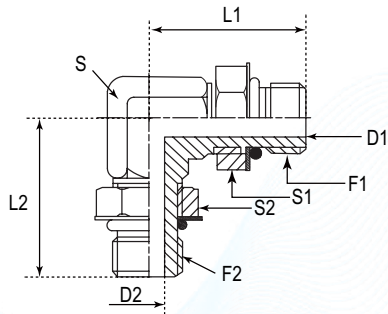

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S2	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-	-
DAUNM9305-0404IN	7/16"-20	7/16"-20	26.20	26.20	4.37	4.37	7/16"	9/16"	9/16"	Imperial
DAUNM9305-0604IN	9/16"-18	7/16"-20	31.80	31.00	7.54	4.37	9/16"	11/16"	9/16"	Imperial
DAUNM9305-0606IN	9/16"-18	9/16"-18	31.80	31.80	7.54	7.54	9/16"	11/16"	11/16"	Imperial
DAUNM9305-0806IN	3/4"-16	9/16"-18	36.80	34.04	9.93	7.54	3/4"	7/8"	11/16"	Imperial
DAUNM9305-0808IN	3/4"-16	3/4"-16	36.80	36.80	9.93	9.93	3/4"	7/8"	7/8"	Imperial
DAUNM9305-1008IN	7/8"-14	3/4"-16	43.20	39.10	12.29	9.93	7/8"	1"	7/8"	Imperial
DAUNM9305-1212IN	1-1/16"-12	1-1/16"-12	49.30	49.30	15.47	15.47	1-1/16"	1-1/4"	1-1/4"	Imperial
DAUNM9305-1616IN	1-5/16"-12	1-5/16"-12	52.10	52.10	21.44	21.44	1-5/16"	1-1/2"	1-1/2"	Imperial
DAUNM9305-2020IN	1-5/8"-12	1-5/8"-12	57.20	57.20	27.38	27.38	1-5/8"	1-7/8"	1-7/8"	Imperial
DAUNM9305-2424IN	1-7/8"-12	1-7/8"-12	60.70	60.70	33.32	33.32	1-7/8"	2-1/8"	2-1/8"	Imperial
DAUNM9305-3232IN	2-1/2"-12	2-1/2"-12	73.40	73.40	45.24	45.24	2-1/2"	2-3/4"	2-3/4"	Imperial

DAUNF9305

90° Adjustable Elbow SAE Solid Female – SAE Male + O Ring + Retaining Ring

D

A

UN

F

9

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

SAE UNF

Female

90° Elbow

SAE UNF


Male + O Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DAUNF9305
- Product Type Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: 90° Elbow
- Connection Type: Adjustable Solid Female × Male
- Thread Types: UNF × UNF
- Sealing Method: O Ring + Retaining Ring

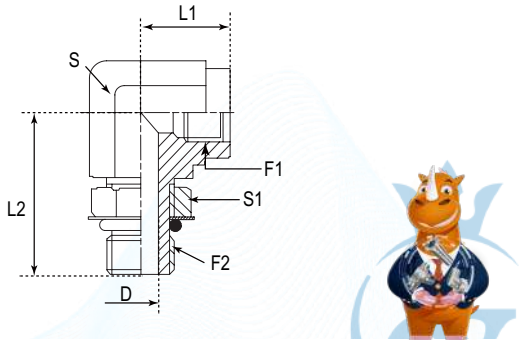

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	S	S1	Hex
#	UNF	UNF	mm	mm	mm	-	-	-
DAUNF9305-0404	7/16"-20	7/16"-20	21.10	32.00	4.37	19 mm	14 mm	Metric
DAUNF9305-0406	7/16"-20	9/16"-18	24.00	35.80	7.54	19 mm	17 mm	Metric
DAUNF9305-0404IN	7/16"-20	7/16"-20	21.10	32.00	4.37	3/4"	9/16"	Imperial
DAUNF9305-0406IN	7/16"-20	9/16"-18	24.00	35.80	7.54	3/4"	11/16"	Imperial
DAUNF9305-0604	9/16"-18	7/16"-20	25.90	35.00	4.37	22 mm	14 mm	Metric
DAUNF9305-0606	9/16"-18	9/16"-18	25.90	35.80	7.54	22 mm	17 mm	Metric
DAUNF9305-0608	9/16"-18	3/4"-16	25.90	40.39	9.93	22 mm	22 mm	Metric
DAUNF9305-0604IN	9/16"-18	7/16"-20	25.90	35.00	4.37	7/8"	9/16"	Imperial
DAUNF9305-0606IN	9/16"-18	9/16"-18	25.90	35.80	7.54	7/8"	11/16"	Imperial
DAUNF9305-0608IN	9/16"-18	3/4"-16	25.90	40.39	9.93	7/8"	7/8"	Imperial
DAUNF9305-0806	3/4"-16	9/16"-18	27.90	37.90	7.54	27 mm	17 mm	Metric
DAUNF9305-0808	3/4"-16	3/4"-16	22.35	40.39	9.93	27 mm	22 mm	Metric
DAUNF9305-0810	3/4"-16	7/8"-14	31.20	45.20	12.29	27 mm	25 mm	Metric
DAUNF9305-0806IN	3/4"-16	9/16"-18	27.90	37.90	7.54	1-1/16"	11/16"	Imperial
DAUNF9305-0808IN	3/4"-16	3/4"-16	22.35	40.39	9.93	1-1/16"	7/8"	Imperial
DAUNF9305-0810IN	3/4"-16	7/8"-14	31.20	45.20	12.29	1-1/16"	1"	Imperial
DAUNF9305-1010	7/8"-14	7/8"-14	31.20	45.20	12.29	27 mm	25 mm	Metric
DAUNF9305-1010IN	7/8"-14	7/8"-14	31.20	45.20	12.29	1-1/16"	1"	Imperial
DAUNF9305-1212	1-1/16"-12	1-1/16"-12	30.73	50.80	15.47	35 mm	32 mm	Metric
DAUNF9305-1212IN	1-1/16"-12	1-1/16"-12	30.73	50.80	15.47	1-5/16"	1-1/4"	Imperial
DAUNF9305-1616	1-5/16"-12	1-5/16"-12	41.20	57.20	21.44	42 mm	41 mm	Metric
DAUNF9305-1616IN	1-5/16"-12	1-5/16"-12	41.20	57.20	21.44	1-5/8"	1-1/2"	Imperial
DAUNF9305-2020	1-5/8"-12	1-5/8"-12	41.40	60.70	27.38	50 mm	50 mm	Metric
DAUNF9305-2020IN	1-5/8"-12	1-5/8"-12	41.40	60.70	27.38	1-7/8"	1-7/8"	Imperial

Certificate:



DAUNFT305

Branch Adjustable Tee SAE Female O Ring – SAE Male

D

A

UN

F

T

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

SAE UNF

Female

Branch Tee

SAE UNF


Male + O Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DAUNFT305
- Product Type Hydraulic adaptor
- Standard: JIC and SAE-ORB
- Structure: Branch Tee
- Connection Type: Adjustable Female × Male
- Thread Types: UNF × UNF × UNF
- Sealing Method: O Ring

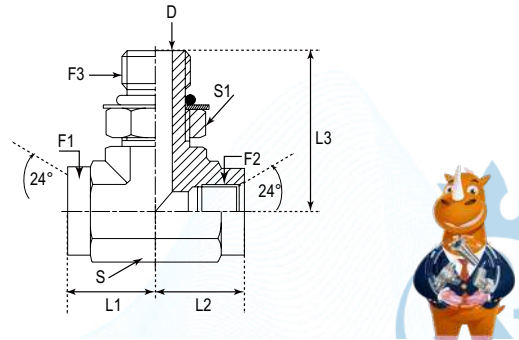

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D	L1	L2	L3	S1	S2	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	-	-	-
DAUNFT305-0404	7/16"-20	7/16"-20	7/16"-20	4.37	16.00	16.00	31.20	19 mm	14 mm	Metric
DAUNFT305-0404IN	7/16"-20	7/16"-20	7/16"-20	4.37	16.00	16.00	31.20	3/4"	9/16"	Imperial
DAUNFT305-0606	9/16"-18	9/16"-18	9/16"-18	7.54	19.05	19.05	35.05	22 mm	17 mm	Metric
DAUNFT305-0606IN	9/16"-18	9/16"-18	9/16"-18	7.54	19.05	19.05	35.05	7/8"	11/16"	Imperial
DAUNFT305-0808	3/4"-16	3/4"-16	3/4"-16	9.93	22.40	22.40	40.40	27 mm	22 mm	Metric
DAUNFT305-0808IN	3/4"-16	3/4"-16	3/4"-16	9.93	22.40	22.40	40.40	1-1/16"	7/8"	Imperial
DAUNFT305-1010	7/8"-14	7/8"-14	7/8"-14	12.29	25.90	25.90	46.00	27 mm	25 mm	Metric
DAUNFT305-1010IN	7/8"-14	7/8"-14	7/8"-14	12.29	25.90	25.90	46.00	1-1/16"	1"	Imperial
DAUNFT305-1212	1-1/16"-12	1-1/16"-12	1-1/16"-12	15.47	30.70	30.70	30.70	35 mm	32 mm	Metric
DAUNFT305-1212IN	1-1/16"-12	1-1/16"-12	1-1/16"-12	15.47	30.70	30.70	30.70	1-5/16"	1-1/4"	Imperial
DAUNFT305-1616	1-5/16"-12	1-5/16"-12	1-5/16"-12	21.44	33.80	33.80	57.40	42 mm	41 mm	Metric
DAUNFT305-1616IN	1-5/16"-12	1-5/16"-12	1-5/16"-12	21.44	33.80	33.80	57.40	1-5/8"	1-1/2"	Imperial
DAUNFT305-2020	1-5/8"-12	1-5/8"-12	1-5/8"-12	27.38	43.20	43.20	60.70	50 mm	50 mm	Metric
DAUNFT305-2020IN	1-5/8"-12	1-5/8"-12	1-5/8"-12	27.38	43.20	43.20	60.70	1-7/8"	1-7/8"	Imperial

Certificate:



DAUNFL305

Run Adjustable Tee SAE Female O Ring – SAE Male + O Ring

D

A

UN

F

L

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

SAE UNF

Female

Run Tee

SAE UNF

Male + O Ring

German Technology Equipment

SHIELD FLEX

New-Standard

- DME&JDE Code:

DAUNFL305
- Product Type

Hydraulic adaptor
- Standard:


JIC and SAE-ORB
- Structure:

Run Tee
- Connection Type:

Adjustable Female × Male
- Thread Types:

UNF × UNF × UNF
- Sealing Method:

O Ring

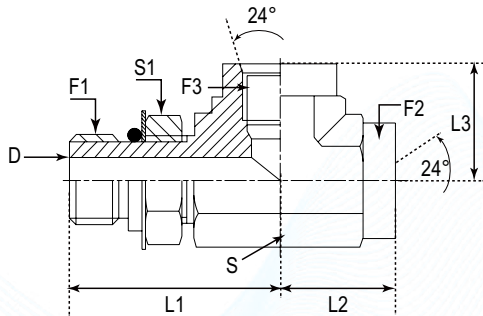

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D	L1	L2	L3	S	S1	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	-	-	-
DAUNFL305-0404	7/16"-20	7/16"-20	7/16"-20	4.37	31.80	18.80	18.80	19 mm	14 mm	Metric
DAUNFL305-0404IN	7/16"-20	7/16"-20	7/16"-20	4.37	31.80	18.80	18.80	3/4"	9/16"	Imperial
DAUNFL305-0606	9/16"-18	9/16"-18	9/16"-18	7.54	35.05	21.84	21.84	22 mm	17 mm	Metric
DAUNFL305-0606IN	9/16"-18	9/16"-18	9/16"-18	7.54	35.05	21.84	21.84	7/8"	11/16"	Imperial
DAUNFL305-0808	3/4"-16	3/4"-16	3/4"-16	9.93	40.39	22.35	22.35	27 mm	22 mm	Metric
DAUNFL305-0808IN	3/4"-16	3/4"-16	3/4"-16	9.93	40.39	22.35	22.35	1-1/16"	7/8"	Imperial
DAUNFL305-1010	7/8"-14	7/8"-14	7/8"-14	12.29	45.20	31.20	31.20	27 mm	25 mm	Metric
DAUNFL305-1010IN	7/8"-14	7/8"-14	7/8"-14	12.29	45.20	31.20	31.20	1-1/16"	1"	Imperial
DAUNFL305-1212	1-1/16"-12	1-1/16"-12	1-1/16"-12	15.47	51.40	35.30	35.30	35 mm	32 mm	Metric
DAUNFL305-1212IN	1-1/16"-12	1-1/16"-12	1-1/16"-12	15.47	51.40	35.30	35.30	1-5/16"	1-1/4"	Imperial
DAUNFL305-1616	1-5/16"-12	1-5/16"-12	1-5/16"-12	21.44	57.20	38.60	38.60	42 mm	41 mm	Metric
DAUNFL305-1616IN	1-5/16"-12	1-5/16"-12	1-5/16"-12	21.44	57.20	38.60	38.60	1-5/8"	1-1/2"	Imperial
DAUNFL305-2020	1-5/8"-12	1-5/8"-12	1-5/8"-12	27.38	60.70	43.20	43.20	50 mm	50 mm	Metric
DAUNFL305-2020IN	1-5/8"-12	1-5/8"-12	1-5/8"-12	27.38	60.70	43.20	43.20	1-7/8"	1-7/8"	Imperial

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DAUNFT30F

Branch Tee Connector SAE Female O Ring – SAE Female O Ring

D

A

UN

F

T

30

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

SAE UNF

Female

Branch Tee

SAE UNF

Female

German Technology Equipment

SHIELD FLEX

New-Standard

- DME&JDE Code:

DAUNFT30F
- Product Type

Hydraulic adaptor
- Standard:


JIC and SAE-ORB
- Structure:

Branch Tee
- Connection Type:

Female × Female × Female
- Thread Types:

UNF × UNF × UNF
- Sealing Method:

O Ring

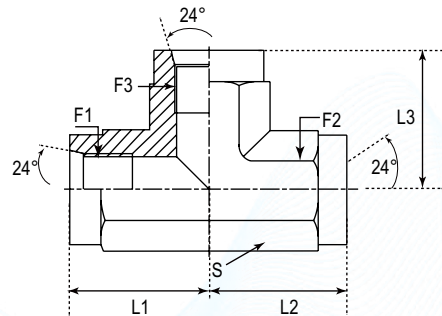

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	S	Hex
#	UNF	UNF	UNF	mm	mm	mm	-	-
DAUNFT30F-0404	7/16"-20	7/16"-20	7/16"-20	18.80	18.80	18.80	19 mm	Metric
DAUNFT30F-0404IN	7/16"-20	7/16"-20	7/16"-20	18.80	18.80	18.80	3/4"	Imperial
DAUNFT30F-0606	9/16"-18	9/16"-18	9/16"-18	21.84	21.84	21.84	22 mm	Metric
DAUNFT30F-0606IN	9/16"-18	9/16"-18	9/16"-18	21.84	21.84	21.84	7/8"	Imperial
DAUNFT30F-0808	3/4"-16	3/4"-16	3/4"-16	26.16	26.16	26.16	27 mm	Metric
DAUNFT30F-0808IN	3/4"-16	3/4"-16	3/4"-16	26.16	26.16	26.16	1-1/16"	Imperial
DAUNFT30F-1010	7/8"-14	7/8"-14	7/8"-14	29.97	29.97	29.97	27 mm	Metric
DAUNFT30F-1010IN	7/8"-14	7/8"-14	7/8"-14	29.97	29.97	29.97	1-1/16"	Imperial
DAUNFT30F-1212	1-1/16"-12	1-1/16"-12	1-1/16"-12	35.30	35.30	35.30	35 mm	Metric
DAUNFT30F-1212IN	1-1/16"-12	1-1/16"-12	1-1/16"-12	35.30	35.30	35.30	1-5/16"	Imperial
DAUNFT30F-1616	1-5/16"-12	1-5/16"-12	1-5/16"-12	38.60	38.60	38.60	42 mm	Metric
DAUNFT30F-1616IN	1-5/16"-12	1-5/16"-12	1-5/16"-12	38.60	38.60	38.60	1-5/8"	Imperial
DAUNFT30F-2020	1-5/8"-12	1-5/8"-12	1-5/8"-12	41.40	41.40	41.40	50 mm	Metric
DAUNFT30F-2020IN	1-5/8"-12	1-5/8"-12	1-5/8"-12	41.40	41.40	41.40	1-7/8"	Imperial

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA




Hydraulic Adaptors

ORFS »



Certificate:

DAOFD0000
P398



ORFS Tube Nut

DAOFR000B
P399




Brazed Sleeve Sleeve ORFS -
Socket Welding not galvanized

DAOFR0000
P400




Sleeve

DAOF51245
P401




Straight Connector ORFS Male -
ORFS Male

DAOF5105M
P402




Straight Connector ORFS Male -
BSPP 60° Male

DAOF5107M
P403




Straight Connector ORFS Male -
BSPT 60° Male

DAOF5128M
P404




Straight Connector ORFS Male -
NPTF 60° Male

DAOF5152M
P406




Straight Connector ORFS Male -
Metric 60° Male Cone

DAOF5125M
P407




Straight Connector ORFS Male -
JIC 74° Male

DAOF5105JM
P408




Straight Connector ORFS Male -
JIS BSPP Male 60° Cone

DAOF5105F
P409




Straight Connector ORFS Male -
BSPP Fixed Female

DAOF51305
P410




Straight Connector ORFS Male - SAE
Male + O Ring

DAOF5106Q
P412




Straight ORFS Male - BSPP Male
+ Retaining Ring + O Ring

DAOF51065
P413




Straight Connector ORFS Male - BSPP
Male + O Ring

DAOF5152Q
P414



Straight ORFS Male - Metric Male +
Retaining Ring + O Ring

DAOF51525
P415




Straight Connector ORFS Male -
Metric Male + O Ring



DAOF51061


P416



Straight Connector ORFS Male -
BSPP Male with ED Ring

DAOF51521


P417



Straight Connector ORFS Male -
Metric Male with ED Ring

DAOF5128F


P418



Straight Connector ORFS Male - NPTF
Fixed Female

DAOF51241


P419



Straight Connector ORFS Male -
ORFS Swivel Female

DAOF51251


P421



Straight Connector ORFS Male -
JIC 74° Swivel Female

DAOF5100B


P422



Straight Connector ORFS Male - Metric /
Imperial Tube - Socket Welding-SW

DAOF51000


P423



ORFS Male Plug

DAOF11305


P424



Straight Connector ORFS Swivel
Female - SAE Male O Ring

DAOF31245


P425



Straight Connector ORFS Swivel
Female - ORFS Male

DAOF1105M


P427



Straight Connector ORFS Female
Swivel - BSPP 60° Male Cone

DAOF1125M


P428



Straight Connector ORFS Swivel
Female - JIC 74° Male

DAOF1107M


P429



Straight Connector ORFS Swivel
Female - BSPT Male 60° Cone

DAOF1106Q


P430



Straight Connector ORFS Male - BSPT
Male + O Ring + Retaining Ring

DAOF11061


P431



Straight Connector ORFS Swivel
Female - BSPP Male with ED Ring

DAOF1128M


P432



Straight Connector ORFS Swivel
Female - NPTF 60° Male

DAOF31000


P433



ORFS Female Cap

DAOF11241


P434



Straight Connector Connector
ORFS Swivel Female

DAOF1128F


P435



Straight Connector ORFS Swivel
Female - NPTF Fixed Male

DAOF5124T


P436



Straight Connector Bulkhead ORFS
Male - ORFS Male

DAOFT1305


P437



Straight Connector Bulkhead
ORFS Male - SAE Male O Ring

DAOFT1061


P438



Straight Connector Bulkhead ORFS Male
- BSPP 60° Male 60° with ED Ring

DAOFT128M


P439



Straight Connector Bulkhead
ORFS Male - NPTF Male 60°

DAOF5130J


P440



Straight Long Connector ORFS
Male - SAE Male + O Ring

DAOFLN


P441



ORFS Bulkhead Nut

DAOF54245


P442



45° Adjustable Elbow ORFS Male
- ORFS Male

DAOF54241


P443



45° Elbow Connector ORFS Male
- ORFS Swivel Female

DAOF54305


P444



45° Adjustable Elbow ORFS Male
- SAE Male O Ring

DAOF5406Q


P446



45° Adjustable Elbow ORFS Male -
BSPP Male + O Ring + Retaining Ring

DAOF54065


P447



45° Adjustable Elbow ORFS Male
- BSPP Male + O Ring

DAOF5452Q


P448



45° Adjustable Elbow ORFS Male -
Metric Male + O Ring + Retaining Ring

DAOF54525


P449



45° Adjustable Elbow ORFS Male -
Metric Male + O Ring

DAOF5428M


P450



45° Elbow Connector ORFS Male -
NPTF Male

DAOF5424T


P451



45° Bulkhead Elbow ORFS Male -
ORFS Male

DAOF59245


P452



90° Elbow Connector ORFS Male -
ORFS Male

DAOF59241


P453



90° Elbow Connector ORFS Male -
ORFS Swivel Female

DAOF59305


P454



90° Adjustable Elbow ORFS Male -
SAE Male O Ring

DAOF5906Q


P456



90° Adjustable Elbow ORFS Male -
BSPP Male + O Ring + Retaining Ring

DAOF59065


P457



90° Adjustable Elbow ORFS Male -
BSPP Male + O Ring

DAOF5952Q


P458



90° Adjustable Elbow ORFS Male -
Metric Male + O Ring + Retaining Ring

DAOF59525


P459



90° Adjustable Elbow ORFS Male -
Metric Male + O Ring

DAOF5928M


P460



90° Elbow Connector ORFS Male -
NPTF Male 60°

DAOF5907M


P462



90° Elbow Connector ORFS Male -
BSPT Male

DAOF5924T


P463



90° Elbow Bulkhead Connector
ORFS Male - ORFS Male

DAOF19305


P464



90° Adjustable Elbow ORFS Female
Swivel - SAE Male O Ring

DAOF1906Q


P465



90° Adjustable Elbow ORFS Female
Swivel - BSPP Male + O Ring +
Retaining Ring

DAOF59251


P466



90° Elbow ORFS Male - JIC Swivel
Female 74°

DAOF5930J


P467



90° Adjustable Long Elbow ORFS Male -
SAE Male O Ring

DAOF59305-LL


P468



90° Adjustable X-Long Elbow ORFS
Male - SAE Male O Ring

DAOF5906Y


P469



90° Adjustable Long Elbow ORFS Male -
BSPP Male + O Ring + Retaining Ring

DAOF5906J


P470



90° Adjustable Long Elbow ORFS
Male - BSPP Male + O Ring

DAOF5952Y


P471



90° Adjustable Long Elbow ORFS Male -
Metric Male + O Ring + Retaining
Ring

DAOF5952J


P472



90° Adjustable Long Elbow ORFS
Male - Metric Male + O Ring

DAOF5T245


P473



Tee Connector ORFS Male

DAOF5T28M


P474



Branch Tee Connector ORFS
Male - NPTF Male

DAOF5T241


P475



Branch Tee Connector ORFS
Male - ORFS Swivel Female

DAOF5T24T


P476



Branch Tee Bulkhead Connector
ORFS Male - ORFS Male

DAOF5T305


P477



Branch Adjustable Tee ORFS
Male - SAE Male O Ring

DAOF5T06Q


P478



Branch Adjustable Tee ORFS
Male - BSPP Male + O Ring +
Retaining Ring

DAOF5T065


P479



Branch Adjustable Tee ORFS
Male - BSPP Male + O Ring

DAOF5T52Q


P480



Branch Adjustable Tee ORFS Male -
Metric Male + O Ring + Retaining Ring

DAOF5T525


P481



Branch Adjustable Tee ORFS
Male - Metric Male + O Ring

DAOF3T245


P482



Branch Tee ORFS Swivel Female -
ORFS Male

DAOF5L241


P483



Run Tee Connector ORFS Male - ORFS
Swivel Female


DAOF5L305

P484




Run Adjustable Tee ORFS Male - SAE
Male O Ring

DAOF5L06Q
P486




Run Adjustable Tee ORFS Male -
BSPP Male + O Ring + Retaining Ring

DAOF5L06S
P487




Run Adjustable Tee ORFS Male -
BSPP Male + O Ring

DAOF5L52Q
P488




Run Adjustable Tee ORFS Male -
Metric Male + O Ring + Retaining Ring

DAOF5L52S
P489




Run Adjustable Tee ORFS Male -
Metric Male + O Ring

DAOF5L24T
P490




Run Tee Bulkhead Connector ORFS
Male - ORFS Male

DAOF3L24S
P491



Run Tee ORFS Swivel Female - ORFS
Male

DAOF5X24S
P492



Cross Connector ORFS Male

DAOFD0000


ORFS Tube Nut

D	A	OF	D	O	000
Company	Product Range	Thread Types	Sealing Type	Compatible Type	Other Features
DME	Adaptor	ORFS UNF	Welding	Tube	Nut/Plug

DME&JDE Code:	DAOFD0000
Product Type	Hydraulic adaptor
Standard:	ORFS
Thread types:	UNF
Other Features:	Nut/Plug
Sealing Method:	Welding

German Technology Equipment

New-Standard



PART NUMBER	F1 (Thread)	L	S	Hex
#	UNF	mm	-	-
DAOFD0000-0400	9/16"-18	14.73	17 mm	Metric
DAOFD0000-0400IN	9/16"-18	14.73	11/16"	Imperial
DAOFD0000-0600	11/16"-16	17.02	22 mm	Metric
DAOFD0000-0600IN	11/16"-16	17.02	13/16"	Imperial
DAOFD0000-0800	13/16"-16	21.01	24 mm	Metric
DAOFD0000-0800IN	13/16"-16	21.01	15/16"	Imperial
DAOFD0000-1000	1"-14	23.50	30 mm	Metric
DAOFD0000-1000IN	1"-14	23.50	1-1/8"	Imperial
DAOFD0000-1200	1-3/16"-12	26.50	36 mm	Metric
DAOFD0000-1200IN	1-3/16"-12	26.50	1-3/8"	Imperial
DAOFD0000-1600	1-7/16"-12	27.81	41 mm	Metric
DAOFD0000-1600IN	1-7/16"-12	27.81	1-5/8"	Imperial
DAOFD0000-2000	1-11/16"-12	27.80	50 mm	Metric
DAOFD0000-2000IN	1-11/16"-12	27.80	1-7/8"	Imperial
DAOFD0000-2400	2"-12	27.80	60 mm	Metric
DAOFD0000-2400IN	2"-12	27.80	2-1/4"	Imperial

Certificate:

DAOFR000B

Brazed Sleeve Sleeve ORFS - Socket Welding not galvanized

D

A

OF

R

000

B

Company

Product Range

Thread Types

Nut Type

Other Features

Sleeve Type

Adaptor

ORFS UNF

Sleeve

Nut/Plug

Brazed

German Technology Equipment

New-Standard

DME&JDE Code:

DAOFR000B

Product Type


Hydraulic adaptor

Adaptor Standard:

ORFS

Other Features:

Nut/Plug



PART NUMBER	Tube OD	A	B	D	L
-	-	mm	mm	mm	mm
DAOFR0000-0605	5	12.75	10.21	5.10	7.50
DAOFR0000-0606	6	15.75	13.26	6.10	8.50
DAOFR0000-0604IN	1/4"	12.75	10.21	6.50	7.50
DAOFR0000-1010	10	23.44	20.75	10.10	10.50
DAOFR0000-1006IN	3/8"	15.75	13.26	9.68	8.50
DAOFR0000-1212	12	27.86	23.77	12.10	12.00
DAOFR0000-1208IN	1/2"	18.92	16.31	12.85	10.50
DAOFR0000-1616	16	34.21	28.70	16.10	13.50
DAOFR0000-1610IN	5/8"	23.44	20.75	16.03	10.50
DAOFR0000-2020	20	40.56	35.59	20.10	13.00
DAOFR0000-2012IN	3/4"	27.86	23.77	19.23	12.00
DAOFR0000-2424	24	48.51	43.54	24.10	12.50
DAOFR0000-2516IN	1"	34.21	28.70	25.58	13.50
DAOFR0000-3220IN	1-1/4"	40.56	35.59	31.93	13.00
DAOFR0000-3824IN	1-1/2"	48.51	43.54	38.28	12.50

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DAOFR0000

Sleeve

D

A

OF

R

O

000

Company

Product Range

Connection Type

Nut Type

Compatible Type

Other Features

Adaptor

ORFS UNF

Sleeve

Tube

Nut/Plug

German Technology Equipment

New-Standard

DME&JDE Code:

DAOFR0000

Product Type


Hydraulic adaptor

Standard:

ORFS

Other Features:

Nut/Plug



PART NUMBER	Tube OD	A	B	D	L
-	-	mm	mm	mm	mm
DAOFR0000-0604IN	1/4"	12.75	10.21	6.50	7.50
DAOFR0000-0605	5 mm	12.75	10.21	5.10	7.50
DAOFR0000-0606	6 mm	15.75	13.26	6.10	8.50
DAOFR0000-1006IN	3/8"	15.75	13.26	9.68	8.50
DAOFR0000-1010	10 mm	23.44	20.75	10.10	10.50
DAOFR0000-1208IN	1/2"	18.92	16.31	12.85	10.50
DAOFR0000-1212	12 mm	27.86	23.77	12.10	12.00
DAOFR0000-1610IN	5/8"	23.44	20.75	16.03	10.50
DAOFR0000-1616	16 mm	34.21	28.70	16.10	13.50
DAOFR0000-2012IN	3/4"	27.86	23.77	19.23	12.00
DAOFR0000-2020	20 mm	40.56	35.59	20.10	13.00
DAOFR0000-2424	24 mm	48.51	43.54	24.10	12.50
DAOFR0000-2516IN	1"	34.21	28.70	25.58	13.50
DAOFR0000-3220IN	1-1/4"	40.56	35.59	31.93	13.00
DAOFR0000-3824IN	1-1/2"	48.51	43.54	38.28	12.50

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAOF51245

Straight Connector ORFS Male - ORFS Male

D

A

OF

5

1

24

5

Company

Product Range

Thread Types

Sealing Type

Adaptor Structure

Thread Types

Sealing Type

Adaptor

ORFS UNF

Male+O Ring

Straight

ORFS

Male + O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF51245

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

UNF × UNF

Sealing Method:

O ring



PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	-	-
DAOF51245-0404	9/16"-18	9/16"-18	9.80	9.80	4.37	4.37	27.40	17 mm	Metric
DAOF51245-0404IN	9/16"-18	9/16"-18	9.80	9.80	4.37	4.37	27.40	5/8"	Imperial
DAOF51245-0604	11/16"-16	9/16"-18	11.20	9.80	6.71	4.37	29.70	19 mm	Metric
DAOF51245-0606	11/16"-16	11/16"-16	11.20	11.20	6.50	6.50	31.00	19 mm	Metric
DAOF51245-0604IN	11/16"-16	9/16"-18	11.20	9.80	6.71	4.37	29.70	3/4"	Imperial
DAOF51245-0606IN	11/16"-16	11/16"-16	11.20	11.20	6.50	6.50	31.00	3/4"	Imperial
DAOF51245-0806	13/16"-16	11/16"-16	12.80	11.20	6.71	6.71	33.80	22 mm	Metric
DAOF51245-0808	13/16"-16	13/16"-16	13.00	13.00	9.60	9.60	35.50	22 mm	Metric
DAOF51245-0806IN	13/16"-16	11/16"-16	12.80	11.20	6.71	6.71	33.80	7/8"	Imperial
DAOF51245-0808IN	13/16"-16	13/16"-16	13.00	13.00	9.60	9.60	35.50	7/8"	Imperial
DAOF51245-1008	13/16"-16	1"-14	15.49	12.80	12.29	9.60	39.90	27 mm	Metric
DAOF51245-1010	1"-14	1"-14	15.50	15.50	12.50	12.50	42.50	27 mm	Metric
DAOF51245-1008IN	13/16"-16	1"-14	15.49	12.80	12.29	9.60	39.90	1-1/16"	Imperial
DAOF51245-1010IN	1"-14	1"-14	15.50	15.50	12.50	12.50	42.50	1-1/16"	Imperial
DAOF51245-1206	1-3/16"-12	11/16"-16	17.02	11.20	15.47	6.71	41.40	32 mm	Metric
DAOF51245-1208	1-3/16"-12	13/16"-16	17.02	12.80	15.47	9.60	43.00	32 mm	Metric
DAOF51245-1210	1-3/16"-12	1"-14	17.02	15.49	15.50	12.50	45.70	32 mm	Metric
DAOF51245-1212	1-3/16"-12	1-3/16"-12	17.02	17.02	15.47	15.47	47.20	32 mm	Metric
DAOF51245-1206IN	1-3/16"-12	11/16"-16	17.02	11.20	15.47	6.71	41.40	1-1/4"	Imperial
DAOF51245-1208IN	1-3/16"-12	13/16"-16	17.02	12.80	15.47	9.60	43.00	1-1/4"	Imperial
DAOF51245-1210IN	1-3/16"-12	1"-14	17.02	15.49	15.50	12.50	45.70	1-1/4"	Imperial
DAOF51245-1212IN	1-3/16"-12	1-3/16"-12	17.02	17.02	15.47	15.47	47.20	1-1/4"	Imperial
DAOF51245-1612	1-7/16"-12	1-3/16"-12	17.50	17.02	20.60	15.47	48.80	41 mm	Metric
DAOF51245-1616	1-7/16"-12	1-7/16"-12	17.50	17.50	20.60	20.60	49.30	41 mm	Metric
DAOF51245-1612IN	1-7/16"-12	1-3/16"-12	17.50	17.02	20.60	15.47	48.80	1-1/2"	Imperial
DAOF51245-1616IN	1-7/16"-12	1-7/16"-12	17.50	17.50	20.60	20.60	49.30	1-1/2"	Imperial
DAOF51245-2016	1-11/16"-12	1-7/16"-12	17.50	17.50	26.00	20.60	51.30	46 mm	Metric
DAOF51245-2020	1-11/16"-12	1-11/16"-12	17.50	17.50	26.00	26.00	51.30	46 mm	Metric
DAOF51245-2016IN	1-11/16"-12	1-7/16"-12	17.50	17.50	26.00	20.60	51.30	1-3/4"	Imperial
DAOF51245-2020IN	1-11/16"-12	1-11/16"-12	17.50	17.50	26.00	26.00	51.30	1-3/4"	Imperial
DAOF51245-2424	2"-12	2"-12	17.50	17.50	32.00	32.00	53.00	55 mm	Metric
DAOF51245-2424IN	2"-12	2"-12	17.50	17.50	32.00	32.00	53.00	2-1/8"	Imperial
DAOF51245-3224	2-1/2"-12	2"-12	22.25	17.50	45.00	32.00	61.00	67 mm	Metric
DAOF51245-3232	2-1/2"-12	2-1/2"-12	22.25	22.25	45.00	45.00	66.00	67 mm	Metric
DAOF51245-3224IN	2-1/2"-12	2"-12	22.25	17.50	45.00	32.00	61.00	2-5/8"	Imperial
DAOF51245-3232IN	2-1/2"-12	2-1/2"-12	22.25	22.25	45.00	45.00	66.00	2-5/8"	Imperial

Certificate:

DAOF5105M

Straight Connector ORFS Male - BSPP 60° Male

D

A

OF

5

1

05

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

ORFS UNF

Male

Straight

BSPP

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF5105M

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

UNF × BSPP 60°

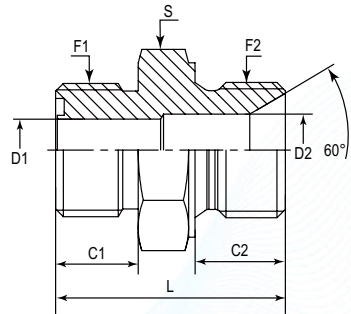

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAOF5105M-0402	9/16"-20	1/8"-28	9.80	9.00	3.50	3.50	24.50	17.00
DAOF5105M-0404	9/16"-18	1/4"-19	9.80	11.00	4.37	4.37	29.00	19.00
DAOF5105M-0406	9/16"-18	3/8"-19	9.80	12.00	4.37	7.90	29.50	22.00
DAOF5105M-0408	9/16"-18	1/2"-14	9.80	14.00	4.37	11.10	31.80	27.00
DAOF5105M-0602	11/16"-16	1/8"-28	11.20	8.00	6.71	3.50	28.00	19.00
DAOF5105M-0604	11/16"-16	1/4"-19	11.20	11.00	6.71	4.70	30.00	19.00
DAOF5105M-0606	11/16"-16	3/8"-19	11.20	12.00	6.71	6.71	32.00	22.00
DAOF5105M-0608	11/16"-16	1/2"-14	11.20	14.00	6.71	11.10	35.00	27.00
DAOF5105M-0804	13/16"-16	1/4"-19	12.80	11.00	9.60	4.70	32.50	22.00
DAOF5105M-0806	13/16"-16	3/8"-19	12.80	12.00	9.60	7.90	32.50	22.00
DAOF5105M-0808	13/16"-16	1/2"-14	12.80	14.00	9.60	9.60	36.50	27.00
DAOF5105M-0812	13/16"-16	3/4"-14	12.80	16.00	9.60	16.70	40.50	32.00
DAOF5105M-1006	1"-14	3/8"-19	15.50	12.00	12.30	7.90	36.00	27.00
DAOF5105M-1008	1"-14	1/2"-14	15.50	14.00	12.30	11.10	37.80	27.00
DAOF5105M-1010	1"-14	5/8"-14	15.50	16.00	12.30	12.30	43.50	30.00
DAOF5105M-1012	1"-14	3/4"-14	15.50	16.00	12.50	16.70	41.00	32.00
DAOF5105M-1208	1-3/16"-12	1/2"-14	17.02	14.00	11.10	11.10	44.00	32.00
DAOF5105M-1210	1-3/16"-12	5/8"-14	17.02	16.00	14.00	14.00	45.00	32.00
DAOF5105M-1212	1-3/16"-12	3/4"-14	17.02	16.00	15.47	16.70	45.00	32.00
DAOF5105M-1216	1-3/16"-12	1"-11	17.02	19.00	15.47	22.22	47.00	41.00
DAOF5105M-1612	1-7/16"-12	3/4"-14	17.50	16.00	20.60	16.70	44.50	41.00
DAOF5105M-1616	1-7/16"-12	1"-11	17.50	19.00	20.60	20.60	50.00	41.00
DAOF5105M-1620	1-7/16"-12	1-1/4"-11	17.50	20.00	20.60	20.60	54.00	50.00
DAOF5105M-2016	1-11/16"-12	1"-11	17.50	19.00	26.00	22.20	50.00	46.00
DAOF5105M-2020	1-11/16"-12	1-1/4"-11	17.50	20.00	26.00	28.60	52.00	50.00
DAOF5105M-2024	1-11/16"-12	1-1/2"-11	17.50	22.00	26.00	33.30	54.50	55.00

Certificate:



DAOF5107M

Straight Connector ORFS Male - BSPT 60° Male

D

A

OF

5

1

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type



Adaptor

ORFS UNF

Male

Straight

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF5107M

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

UNF × BSPT 60°

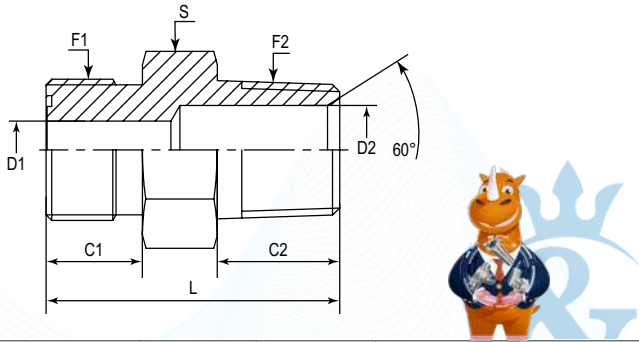

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSPT	mm	mm	mm	mm	mm	mm
DAOF5107M-0402	9/16"-18	1/8"-28	9.80	10.00	4.37	4.37	27.50	15.88
DAOF5107M-0404	9/16"-18	1/4"-19	9.80	14.00	4.37	6.00	32.00	17.00
DAOF5107M-0406	9/16"-18	3/8"-19	9.80	15.00	4.50	9.00	32.50	19.00
DAOF5107M-0408	9/16"-18	1/2"-14	9.80	19.00	4.50	12.00	38.60	22.00
DAOF5107M-0602	11/16"-16	1/8"-28	11.20	10.00	6.71	4.50	29.50	19.05
DAOF5107M-0604	11/16"-16	1/4"-19	11.20	14.00	6.00	6.00	34.00	19.00
DAOF5107M-0606	11/16"-16	3/8"-19	11.20	15.00	6.71	9.00	34.50	19.05
DAOF5107M-0608	11/16"-16	1/2"-14	11.20	19.00	6.71	12.00	40.00	22.00
DAOF5107M-0804	13/16"-16	1/4"-19	12.80	14.00	9.50	6.00	36.50	22.00
DAOF5107M-0806	13/16"-16	3/8"-19	12.80	15.00	9.50	9.50	36.50	22.00
DAOF5107M-0808	13/16"-16	1/2"-14	12.80	19.00	9.60	12.00	41.50	22.00
DAOF5107M-0812	13/16"-16	3/4"-14	12.80	20.00	9.50	16.70	43.50	30.00
DAOF5107M-1008	1"-14	1/2"-14	15.49	19.00	12.00	12.00	46.00	27.00
DAOF5107M-1012	1"-14	3/4"-14	15.49	20.00	12.50	16.70	47.00	32.00
DAOF5107M-1208	1-3/16"-12	1/2"-14	17.02	19.00	15.50	12.00	49.50	32.00
DAOF5107M-1212	1-3/16"-12	3/4"-14	17.02	20.00	15.47	15.47	49.50	32.00
DAOF5107M-1216	1-3/16"-12	1"-11	17.02	24.00	15.50	22.20	54.00	36.00
DAOF5107M-1612	1-7/16"-12	3/4"-14	17.50	20.00	20.60	16.70	51.00	38.10
DAOF5107M-1616	1-7/16"-12	1"-11	17.50	24.00	20.60	22.20	55.50	38.10

Certificate:              

DAOF5128M

Straight Connector ORFS Male - NPTF 60° Male

D

A

OF

5

1

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type



Adaptor

ORFS UNF

Male

Straight

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF5128M

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

UNF × NPTF 60°

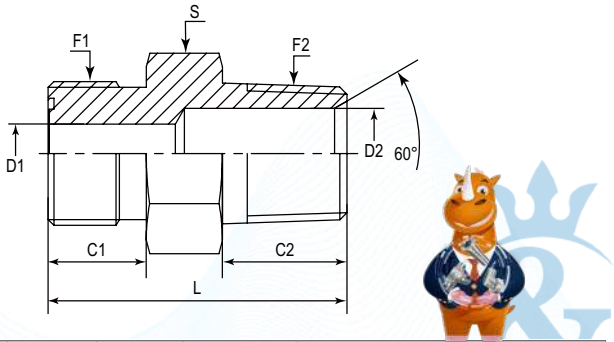

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Hex	Revision History
#	UNF	NPTF	mm	mm	mm	mm	mm	-	-	
DAOF5128M-0402	9/16"-18	1/8"-27	9.80	9.65	4.37	4.37	27.40	17 mm	Metric	
DAOF5128M-0404	9/16"-18	1/4"-18	9.80	14.22	4.37	4.37	32.00	17 mm	Metric	
DAOF5128M-0406	9/16"-18	3/8"-18	9.80	14.22	4.37	10.31	32.00	19 mm	Metric	
DAOF5128M-0408	9/16"-18	1/2"-14	9.80	19.05	4.37	13.49	38.60	22 mm	Metric	
DAOF5128M-0402IN	9/16"-18	1/8"-27	9.80	9.65	4.37	4.37	27.40	5/8"	Imperial	
DAOF5128M-0404IN	9/16"-18	1/4"-18	9.80	14.22	4.37	4.37	32.00	5/8"	Imperial	
DAOF5128M-0406IN	9/16"-18	3/8"-18	9.80	14.22	4.37	10.31	32.00	3/4"	Imperial	
DAOF5128M-0408IN	9/16"-18	1/2"-14	9.80	19.05	4.37	13.49	38.60	7/8"	Imperial	
DAOF5128M-0602	11/16"-16	1/8"-27	11.20	9.65	6.71	4.78	29.60	19 mm	Metric	
DAOF5128M-0604	11/16"-16	1/4"-18	11.20	14.22	6.71	7.14	34.04	19 mm	Metric	
DAOF5128M-0606	11/16"-16	3/8"-18	11.20	14.22	6.50	6.50	34.04	19 mm	Metric	
DAOF5128M-0608	11/16"-16	1/2"-14	11.20	19.05	6.71	13.49	40.05	22 mm	Metric	
DAOF5128M-0612	11/16"-16	3/4"-14	11.20	19.05	6.71	18.26	41.00	27 mm	Metric	
DAOF5128M-0602IN	11/16"-16	1/8"-27	11.20	9.65	6.71	4.78	29.60	3/4"	Imperial	
DAOF5128M-0604IN	11/16"-16	1/4"-18	11.20	14.22	6.71	7.14	34.04	3/4"	Imperial	
DAOF5128M-0606IN	11/16"-16	3/8"-18	11.20	14.22	6.50	6.50	34.04	3/4"	Imperial	
DAOF5128M-0608IN	11/16"-16	1/2"-14	11.20	19.05	6.71	13.49	40.05	7/8"	Imperial	
DAOF5128M-0612IN	11/16"-16	3/4"-14	11.20	19.05	6.71	18.26	41.00	1-1/16"	Imperial	
DAOF5128M-0804	13/16"-16	1/4"-18	12.80	14.22	9.60	7.14	36.80	22 mm	Metric	
DAOF5128M-0806	13/16"-16	3/8"-18	12.80	14.22	9.60	9.60	36.82	22 mm	Metric	

Certificate:              

DAOF5128M-0808	13/16"-16	1/2"-14	12.80	19.05	9.50	13.49	41.65	22 mm	Metric	
DAOF5128M-0812	13/16"-16	3/4"-14	12.80	19.05	9.60	18.26	42.90	27 mm	Metric	2024/6/4,Dimension S of item AR01931(DAOF5128M-0812) has been changed from 1 1/16"/26.98(-0.8,0)mm to 1 1/8"/28.58(-0.4,0)mm
DAOF5128M-0816	13/16"-16	1"-11-1/2	12.80	23.88	9.60	23.83	50.00	36 mm	Metric	
DAOF5128M-0804IN	13/16"-16	1/4"-18	12.80	14.22	9.60	7.14	36.80	7/8"	Imperial	
DAOF5128M-0806IN	13/16"-16	3/8"-18	12.80	14.22	9.60	9.60	36.82	7/8"	Imperial	
DAOF5128M-0808IN	13/16"-16	1/2"-14	12.80	19.05	9.50	13.49	41.65	7/8"	Imperial	
DAOF5128M-0812IN	13/16"-16	3/4"-14	12.80	19.05	9.60	18.26	42.90	1-1/16"	Imperial	
DAOF5128M-0816IN	13/16"-16	1"-11-1/2	12.80	23.88	9.60	23.83	50.00	1-3/8"	Imperial	
DAOF5128M-1008	1"-14	1/2"-14	15.49	19.05	12.29	12.29	46.23	27 mm	Metric	
DAOF5128M-1012	1"-14	3/4"-14	15.49	19.05	12.29	18.26	46.23	32 mm	Metric	
DAOF5128M-1016	1"-14	1"-11-1/2	15.49	23.88	12.29	23.83	50.50	36 mm	Metric	
DAOF5128M-1008IN	1"-14	1/2"-14	15.49	19.05	12.29	12.29	46.23	1-1/16"	Imperial	
DAOF5128M-1012IN	1"-14	3/4"-14	15.49	19.05	12.29	18.26	46.23	1-1/4"	Imperial	
DAOF5128M-1016IN	1"-14	1"-11-1/2	15.49	23.88	12.29	23.83	50.50	1-3/8"	Imperial	
DAOF5128M-1208	1-3/16"-12	1/2"-14	17.02	19.05	15.47	13.49	49.20	32 mm	Metric	
DAOF5128M-1212	1-3/16"-12	3/4"-14	17.02	19.05	15.47	15.47	49.17	32 mm	Metric	
DAOF5128M-1216	1-3/16"-12	1"-11-1/2	17.02	23.88	15.47	23.83	54.20	36 mm	Metric	
DAOF5128M-1208IN	1-3/16"-12	1/2"-14	17.02	19.05	15.47	13.49	49.20	1-1/4"	Imperial	
DAOF5128M-1212IN	1-3/16"-12	3/4"-14	17.02	19.05	15.47	15.47	49.17	1-1/4"	Imperial	
DAOF5128M-1216IN	1-3/16"-12	1"-11-1/2	17.02	23.88	15.47	23.83	54.20	1-3/8"	Imperial	
DAOF5128M-1612	1-7/16"-12	3/4"-14	17.50	19.05	20.60	18.26	50.90	41 mm	Metric	
DAOF5128M-1616	1-7/16"-12	1"-11-1/2	17.50	23.88	20.60	23.83	55.68	41 mm	Metric	
DAOF5128M-1620	1-7/16"-12	1-1/4"-11-1/2	17.50	24.64	20.60	31.75	58.40	46 mm	Metric	
DAOF5128M-1624	1-7/16"-12	1-1/2"-11-1/2	17.50	25.40	20.60	20.60	54.40	50 mm	Metric	
DAOF5128M-1612IN	1-7/16"-12	3/4"-14	17.50	19.05	20.60	18.26	50.90	1-1/2"	Imperial	
DAOF5128M-1616IN	1-7/16"-12	1"-11-1/2	17.50	23.88	20.60	23.83	55.68	1-1/2"	Imperial	
DAOF5128M-1620IN	1-7/16"-12	1-1/4"-11-1/2	17.50	24.64	20.60	31.75	58.40	1-11/16"	Imperial	
DAOF5128M-1624IN	1-7/16"-12	1-1/2"-11-1/2	17.50	25.40	20.60	20.60	54.40	2"	Imperial	
DAOF5128M-2016	1-11/16"-12	1"-11-1/2	17.50	23.88	26.00	23.83	57.70	46 mm	Metric	
DAOF5128M-2020	1-11/16"-12	1-1/4"-11-1/2	17.50	24.64	26.00	31.75	58.40	46 mm	Metric	
DAOF5128M-2024	1-11/16"-12	1-1/2"-11-1/2	17.50	25.40	26.00	38.10	56.00	50 mm	Metric	
DAOF5128M-2016IN	1-11/16"-12	1"-11-1/2	17.50	23.88	26.00	23.83	57.70	1-3/4"	Imperial	
DAOF5128M-2020IN	1-11/16"-12	1-1/4"-11-1/2	17.50	24.64	26.00	31.75	58.40	1-3/4"	Imperial	
DAOF5128M-2024IN	1-11/16"-12	1-1/2"-11-1/2	17.50	25.40	26.00	38.10	56.00	2"	Imperial	
DAOF5128M-2424	2"-12	1-1/2"-11-1/2	17.50	25.40	32.00	38.10	61.00	55 mm	Metric	
DAOF5128M-2424IN	2"-12	1-1/2"-11-1/2	17.50	25.40	32.00	38.10	61.00	2-1/8"	Imperial	

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DAOF5152M

Straight Connector ORFS Male - Metric 60° Male Cone

D

A

OF

5

1

52

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

ORFS UNF

Male + O Ring

Straight

Metric

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF5152M

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

UNF × Metric 60° Cone

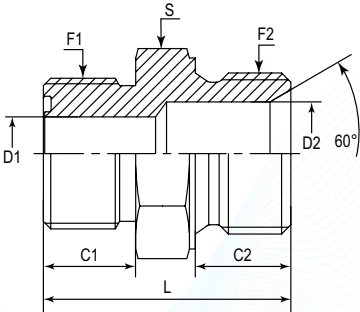

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DAOF5152M-0612	11/16"-16	M12X1.5	11.20	10.00	6.71	4.00	30.00	19.00
DAOF5152M-1027	1"-14	M27X2	15.49	16.00	12.29	18.00	41.50	32.00
DAOF5152M-1227	1-3/16"-12	M27X2	17.02	16.00	15.47	18.00	42.50	32.00
DAOF5152M-1233	1-3/16"-12	M33X2	17.02	19.00	15.47	23.00	48.00	41.00
DAOF5152M-1633	1-7/16"-12	M33X2	17.50	19.00	20.60	23.00	48.50	41.00
DAOF5152M-2042	1-11/16"-12	M42X2	17.50	20.00	26.00	30.00	51.00	50.00
DAOF5152M-2448	2"-12	M48X2	17.50	22.00	32.00	36.00	53.00	55.00

Certificate:

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



DAOF5125M

Straight Connector ORFS Male - JIC 74° Male

D

A

OF

5

1

25

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

Straight

JIC UNF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF5125M

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

UNF × UNF 74° Cone

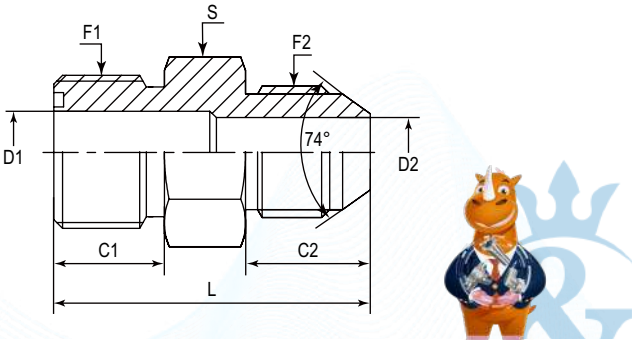

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAOF5125M-0404	9/16"-18	7/16"-20	9.80	13.97	4.37	4.37	31.70	17 mm	Metric
DAOF5125M-0404IN	9/16"-18	7/16"-20	9.80	13.97	4.37	4.37	31.70	5/8"	Imperial
DAOF5125M-0604	11/16"-16	7/16"-20	11.20	13.97	6.71	4.37	33.50	19 mm	Metric
DAOF5125M-0606	11/16"-16	9/16"-18	11.20	14.12	6.71	6.71	34.00	19 mm	Metric
DAOF5125M-0608	11/16"-16	3/4"-16	11.20	16.69	6.71	9.93	37.80	22 mm	Metric
DAOF5125M-0604IN	11/16"-16	7/16"-20	11.20	13.97	6.71	4.37	33.50	3/4"	Imperial
DAOF5125M-0606IN	11/16"-16	9/16"-18	11.20	14.12	6.71	6.71	34.00	3/4"	Imperial
DAOF5125M-0608IN	11/16"-16	3/4"-16	11.20	16.69	6.71	9.93	37.80	13/16"	Imperial
DAOF5125M-0808	13/16"-16	3/4"-16	12.80	16.69	9.60	9.60	39.40	22 mm	Metric
DAOF5125M-0808IN	13/16"-16	3/4"-16	12.80	16.69	9.60	9.60	39.40	7/8"	Imperial
DAOF5125M-1010	1"-14	7/8"-14	15.49	19.25	12.29	12.29	46.50	27 mm	Metric
DAOF5125M-1012	1"-14	1-1/16"-12	15.49	21.95	12.29	15.47	48.50	27 mm	Metric
DAOF5125M-1010IN	1"-14	7/8"-14	15.49	19.25	12.29	12.29	46.50	1-1/16"	Imperial
DAOF5125M-1012IN	1"-14	1-1/16"-12	15.49	21.95	12.29	15.47	48.50	1-1/16"	Imperial
DAOF5125M-1208	1-3/16"-12	3/4"-16	17.00	16.69	15.47	9.93	46.50	32 mm	Metric
DAOF5125M-1212	1-3/16"-12	1-1/16"-12	17.00	21.95	15.47	15.47	52.10	32 mm	Metric
DAOF5125M-1216	1-3/16"-12	1-5/16"-12	17.02	23.14	15.47	21.44	53.00	36 mm	Metric
DAOF5125M-1208IN	1-3/16"-12	3/4"-16	17.00	16.69	15.47	9.93	46.50	1-1/4"	Imperial
DAOF5125M-1212IN	1-3/16"-12	1-1/16"-12	17.00	21.95	15.47	15.47	52.10	1-1/4"	Imperial
DAOF5125M-1216IN	1-3/16"-12	1-5/16"-12	17.02	23.14	15.47	21.44	53.00	1-3/8"	Imperial
DAOF5125M-1616	1-7/16"-12	1-5/16"-12	17.50	23.14	20.60	21.44	54.90	41 mm	Metric
DAOF5125M-1616IN	1-7/16"-12	1-5/16"-12	17.50	23.14	20.60	21.44	54.90	1-1/2"	Imperial
DAOF5125M-2016	1-11/16"-12	1-5/16"-12	17.50	23.14	26.00	21.44	57.00	46 mm	Metric
DAOF5125M-2020	1-11/16"-12	1-5/8"-12	17.50	24.33	26.00	26.00	58.16	46 mm	Metric
DAOF5125M-2016IN	1-11/16"-12	1-5/16"-12	17.50	23.14	26.00	21.44	57.00	1-3/4"	Imperial
DAOF5125M-2020IN	1-11/16"-12	1-5/8"-12	17.50	24.33	26.00	26.00	58.16	1-3/4"	Imperial
DAOF5125M-2424	2"-12	1-7/8"-12	17.50	27.51	32.00	32.00	63.00	55 mm	Metric
DAOF5125M-2424IN	2"-12	1-7/8"-12	17.50	27.51	32.00	32.00	63.00	2-1/8"	Imperial

Certificate:



DAOF5105JM

Straight Connector ORFS Male - JIS BSPP Male 60° Cone

D

A

OF

5

1

05

J

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Connection Type

DME

Adaptor

ORFS UNF

Male + O Ring

Straight

BSPP

JIS

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF5105JM

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

UNF × JIS BSPP 60° Cone

Sealing Method:

O ring

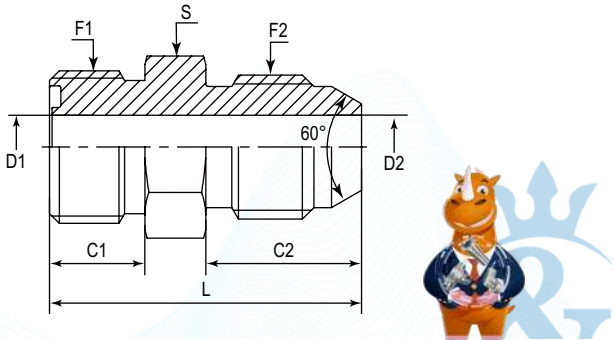

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAOF5105JM-0404	9/16"-19	1/4"-19	9.80	16.00	4.00	4.00	35.00	17.00
DAOF5105JM-0606	11/16"-16	3/8"-19	11.20	18.00	6.71	8.50	39.00	19.00
DAOF5105JM-0808	13/16"-16	1/2"-14	12.80	20.00	9.30	9.30	43.00	22.00
DAOF5105JM-1010	1"-14	5/8"-14	15.49	20.00	12.00	12.00	44.50	27.00
DAOF5105JM-1212	1-3/16"-12	3/4"-14	17.02	22.00	15.50	15.50	49.00	32.00

Certificate:



DAOF5105F

Straight Connector ORFS Male - BSPP Fixed Female

D

A

OF

5

1

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male + O Ring

Straight

BSPP

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAOF5105F

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

UNF × BSPP



PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D	S
#	UNF	BSPP	mm	mm	mm	mm
DAOF5105F-0402	9/16"-20	1/8"-28	9.80	26.50	4.37	17.00
DAOF5105F-0404	9/16"-20	1/4"-19	9.80	28.50	4.37	19.00
DAOF5105F-0604	11/16"-16	1/4"-19	11.20	29.50	6.71	19.00
DAOF5105F-0606	11/16"-16	3/8"-19	11.20	33.00	6.71	24.00
DAOF5105F-0806	13/16"-16	3/8"-19	12.80	33.00	9.60	22.00
DAOF5105F-0808	13/16"-16	1/2"-14	12.80	38.50	9.60	30.00
DAOF5105F-1006	1"-14	3/8"-19	15.50	24.00	12.30	27.00
DAOF5105F-1008	1"-14	1/2"-14	15.49	40.00	12.29	27.00
DAOF5105F-1208	1-3/16"-12	1/2"-14	17.02	27.00	15.47	32.00
DAOF5105F-1212	1-3/16"-12	3/4"-14	17.02	46.00	15.47	36.00
DAOF5105F-1616	1-7/16"-12	1"-11	17.50	49.00	20.60	41.00
DAOF5105F-2020	1-11/16"-12	1-1/4"-11	17.50	53.00	26.00	50.00
DAOF5105F-2424	2"-12	1-1/2"-11	17.50	57.00	32.00	55.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

PC

DEKRA

DIN

SAE

MA

CE

UK CA

DAOF51305

Straight Connector ORFS Male - SAE Male + O Ring

D

A

OF

5

1

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

BSPP

Male + O Ring

Straight

BSPP

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAOF51305

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

UNF × BSPP

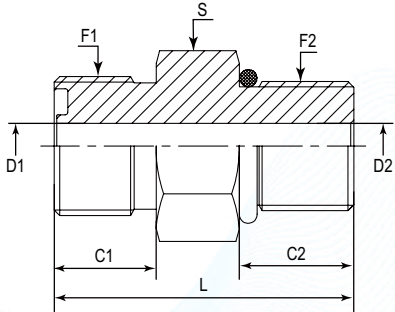

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	-	-
DAOF51305-0402	9/16"-18	5/16"-24	9.80	9.60	4.37	1.60	29.00	17 mm	Metric
DAOF51305-0403	9/16"-18	3/8"-24	9.80	9.60	3.18	3.18	27.40	17 mm	Metric
DAOF51305-0404	9/16"-18	7/16"-20	9.80	11.00	4.37	4.37	28.80	17 mm	Metric
DAOF51305-0405	9/16"-18	1/2"-20	9.80	11.00	4.37	5.49	29.00	17 mm	Metric
DAOF51305-0406	9/16"-18	9/16"-18	9.80	11.99	4.37	6.71	30.50	19 mm	Metric
DAOF51305-0408	9/16"-18	3/4"-16	10.00	14.00	4.50	10.00	33.50	22 mm	Metric
DAOF51305-0410	9/16"-18	7/8"-14	9.80	16.00	4.37	12.29	37.40	27 mm	Metric
DAOF51305-0402IN	9/16"-18	5/16"-24	9.80	9.60	4.37	1.60	29.00	5/8"	Imperial
DAOF51305-0403IN	9/16"-18	3/8"-24	9.80	9.60	3.18	3.18	27.40	5/8"	Imperial
DAOF51305-0404IN	9/16"-18	7/16"-20	9.80	11.00	4.37	4.37	28.80	5/8"	Imperial
DAOF51305-0405IN	9/16"-18	1/2"-20	9.80	11.00	4.37	5.49	29.00	5/8"	Imperial
DAOF51305-0406IN	9/16"-18	9/16"-18	9.80	11.99	4.37	6.71	30.50	3/4"	Imperial
DAOF51305-0408IN	9/16"-18	3/4"-16	10.00	14.00	4.50	10.00	33.50	7/8"	Imperial
DAOF51305-0410IN	9/16"-18	7/8"-14	9.80	16.00	4.37	12.29	37.40	1"	Imperial
DAOF51305-0603	11/16"-16	3/8"-24	11.20	9.50	6.71	3.00	32.61	19 mm	Metric
DAOF51305-0604	11/16"-16	7/16"-20	11.20	11.00	6.71	4.37	34.11	19 mm	Metric
DAOF51305-0605	11/16"-16	1/2"-20	11.20	11.00	6.00	6.00	30.80	19 mm	Metric
DAOF51305-0606	11/16"-16	9/16"-18	11.00	12.00	6.50	6.50	32.00	19 mm	Metric
DAOF51305-0608	11/16"-16	3/4"-16	11.20	14.00	6.71	9.60	35.11	22 mm	Metric
DAOF51305-0610	11/16"-16	7/8"-14	11.00	16.00	6.50	12.30	38.80	27 mm	Metric
DAOF51305-0612	11/16"-16	1-1/16"-12	11.20	18.49	6.71	15.47	42.80	32 mm	Metric
DAOF51305-0616	11/16"-16	1-5/16"-12	11.20	18.49	6.71	20.60	44.00	41 mm	Metric
DAOF51305-0603IN	11/16"-16	3/8"-24	11.20	9.50	6.71	3.00	32.61	3/4"	Imperial
DAOF51305-0604IN	11/16"-16	7/16"-20	11.20	11.00	6.71	4.37	34.11	3/4"	Imperial
DAOF51305-0605IN	11/16"-16	1/2"-20	11.20	11.00	6.00	6.00	30.80	3/4"	Imperial
DAOF51305-0606IN	11/16"-16	9/16"-18	11.00	12.00	6.50	6.50	32.00	3/4"	Imperial
DAOF51305-0608IN	11/16"-16	3/4"-16	11.20	14.00	6.71	9.60	35.11	7/8"	Imperial
DAOF51305-0610IN	11/16"-16	7/8"-14	11.00	16.00	6.50	12.30	38.80	1-1/16"	Imperial
DAOF51305-0612IN	11/16"-16	1-1/16"-12	11.20	18.49	6.71	15.47	42.80	1-1/4"	Imperial
DAOF51305-0616IN	11/16"-16	1-5/16"-12	11.20	18.49	6.71	20.60	44.00	1-1/2"	Imperial
DAOF51305-0804	13/16"-16	7/16"-20	12.80	11.00	9.50	4.50	36.40	22 mm	Metric
DAOF51305-0806	13/16"-16	9/16"-18	12.80	11.99	9.60	6.71	37.40	22 mm	Metric
DAOF51305-0808	13/16"-16	3/4"-16	12.80	14.00	9.60	9.60	36.60	22 mm	Metric
DAOF51305-0810	13/16"-16	7/8"-14	12.80	16.00	9.60	12.29	40.50	27 mm	Metric
DAOF51305-0812	13/16"-16	1-1/16"-12	13.00	18.49	9.50	15.47	44.50	32 mm	Metric

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

PC

DEKRA

DIN

SAE

MA

CE

UK CA

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



DAOF51305-0816	13/16"-16	1-5/16"-12	12.80	18.49	9.60	20.60	45.40	41 mm	Metric
DAOF51305-0804IN	13/16"-16	7/16"-20	12.80	11.00	9.50	4.50	36.40	7/8"	Imperial
DAOF51305-0806IN	13/16"-16	9/16"-18	12.80	11.99	9.60	6.71	37.40	7/8"	Imperial
DAOF51305-0808IN	13/16"-16	3/4"-16	12.80	14.00	9.60	9.60	36.60	7/8"	Imperial
DAOF51305-0810IN	13/16"-16	7/8"-14	12.80	16.00	9.60	12.29	40.50	1"	Imperial
DAOF51305-0812IN	13/16"-16	1-1/16"-12	13.00	18.49	9.50	15.47	44.50	1-1/4"	Imperial
DAOF51305-0816IN	13/16"-16	1-5/16"-12	12.80	18.49	9.60	20.60	45.40	1-1/2"	Imperial
DAOF51305-1006	1"-14	9/16"-18	15.49	11.99	12.29	6.71	41.70	27 mm	Metric
DAOF51305-1008	1"-14	3/4"-16	15.49	14.00	9.60	9.60	45.20	27 mm	Metric
DAOF51305-1010	1"-14	7/8"-14	15.50	16.00	12.29	12.29	43.00	27 mm	Metric
DAOF51305-1012	1"-14	1-1/16"-12	15.49	18.49	12.29	12.29	47.20	32 mm	Metric
DAOF51305-1014	1"-14	1-3/16"-12	15.49	18.49	12.29	18.26	47.19	36 mm	Metric
DAOF51305-1016	1"-14	1-5/16"-12	15.49	18.49	12.29	20.60	48.30	41 mm	Metric
DAOF51305-1006IN	1"-14	9/16"-18	15.49	11.99	12.29	6.71	41.70	1-1/16"	Imperial
DAOF51305-1008IN	1"-14	3/4"-16	15.49	14.00	9.60	9.60	45.20	1-1/16"	Imperial
DAOF51305-1010IN	1"-14	7/8"-14	15.50	16.00	12.29	12.29	43.00	1-1/16"	Imperial
DAOF51305-1012IN	1"-14	1-1/16"-12	15.49	18.49	12.29	12.29	47.20	1-1/4"	Imperial
DAOF51305-1014IN	1"-14	1-3/16"-12	15.49	18.49	12.29	18.26	47.19	1-3/8"	Imperial
DAOF51305-1016IN	1"-14	1-5/16"-12	15.49	18.49	12.29	20.60	48.30	1-1/2"	Imperial
DAOF51305-1206	1-3/16"-12	9/16"-18	17.02	11.99	15.47	6.71	45.00	32 mm	Metric
DAOF51305-1208	1-3/16"-12	3/4"-16	17.02	14.00	15.47	9.60	48.50	32 mm	Metric
DAOF51305-1210	1-3/16"-12	7/8"-14	17.02	16.00	15.50	12.50	50.60	32 mm	Metric
DAOF51305-1212	1-3/16"-12	1-1/16"-12	17.02	18.49	15.47	15.47	48.60	32 mm	Metric
DAOF51305-1214	1-3/16"-12	1-3/16"-12	17.02	18.49	15.47	18.26	48.70	36 mm	Metric
DAOF51305-1216	1-3/16"-12	1-5/16"-12	17.02	18.49	15.47	21.50	49.50	41 mm	Metric
DAOF51305-1220	1-3/16"-12	1-5/8"-12	17.02	18.49	15.47	26.00	51.80	50 mm	Metric
DAOF51305-1224	1-3/16"-12	1-7/8"-12	17.02	18.50	15.47	32.00	53.50	55 mm	Metric
DAOF51305-1206IN	1-3/16"-12	9/16"-18	17.02	11.99	15.47	6.71	45.00	1-1/4"	Imperial
DAOF51305-1208IN	1-3/16"-12	3/4"-16	17.02	14.00	15.47	9.60	48.50	1-1/4"	Imperial
DAOF51305-1210IN	1-3/16"-12	7/8"-14	17.02	16.00	15.50	12.50	50.60	1-1/4"	Imperial
DAOF51305-1212IN	1-3/16"-12	1-1/16"-12	17.02	18.49	15.47	15.47	48.60	1-1/4"	Imperial
DAOF51305-1214IN	1-3/16"-12	1-3/16"-12	17.02	18.49	15.47	18.26	48.70	1-3/8"	Imperial
DAOF51305-1216IN	1-3/16"-12	1-5/16"-12	17.02	18.49	15.47	21.50	49.50	1-1/2"	Imperial
DAOF51305-1220IN	1-3/16"-12	1-5/8"-12	17.02	18.49	15.47	26.00	51.80	1-7/8"	Imperial
DAOF51305-1608	1-7/16"-12	3/4"-16	17.50	14.00	20.60	9.60	49.81	41 mm	Metric
DAOF51305-1610	1-7/16"-12	7/8"-14	17.50	16.00	20.60	12.29	51.80	41 mm	Metric
DAOF51305-1612	1-7/16"-12	1-1/16"-12	17.50	18.49	20.60	15.47	54.40	41 mm	Metric
DAOF51305-1616	1-7/16"-12	1-5/16"-12	17.50	18.49	20.60	20.60	50.30	41 mm	Metric
DAOF51305-1620	1-7/16"-12	1-5/8"-12	17.50	18.49	20.50	27.50	52.50	50 mm	Metric
DAOF51305-1624	1-7/16"-12	1-7/8"-12	17.50	18.50	20.60	32.00	54.00	55 mm	Metric
DAOF51305-1608IN	1-7/16"-12	3/4"-16	17.50	14.00	20.60	9.60	49.81	1-1/2"	Imperial
DAOF51305-1610IN	1-7/16"-12	7/8"-14	17.50	16.00	20.60	12.29	51.80	1-1/2"	Imperial
DAOF51305-1612IN	1-7/16"-12	1-1/16"-12	17.50	18.49	20.60	15.47	54.40	1-1/2"	Imperial
DAOF51305-1616IN	1-7/16"-12	1-5/16"-12	17.50	18.49	20.60	20.60	50.30	1-1/2"	Imperial
DAOF51305-1620IN	1-7/16"-12	1-5/8"-12	17.50	18.49	20.50	27.50	52.50	1-7/8"	Imperial
DAOF51305-1624IN	1-7/16"-12	1-7/8"-12	17.50	18.50	20.60	32.00	54.00	2-1/8"	Imperial
DAOF51305-2012	1-11/16"-12	1-1/16"-12	17.50	18.49	26.00	15.47	56.40	46 mm	Metric
DAOF51305-2016	1-11/16"-12	1-5/16"-12	17.50	18.49	26.00	20.60	57.90	46 mm	Metric
DAOF51305-2020	1-11/16"-12	1-5/8"-12	17.50	18.49	26.00	26.00	52.50	50 mm	Metric
DAOF51305-2024	1-11/16"-12	1-7/8"-12	17.50	18.49	26.00	32.00	54.00	55 mm	Metric
DAOF51305-2012IN	1-11/16"-12	1-1/16"-12	17.50	18.49	26.00	15.47	56.40	1-3/4"	Imperial
DAOF51305-2016IN	1-11/16"-12	1-5/16"-12	17.50	18.49	26.00	20.60	57.90	1-3/4"	Imperial
DAOF51305-2020IN	1-11/16"-12	1-5/8"-12	17.50	18.49	26.00	26.00	52.50	1-7/8"	Imperial
DAOF51305-2024IN	1-11/16"-12	1-7/8"-12	17.50	18.49	26.00	32.00	54.00	2-1/8"	Imperial
DAOF51305-2416	2"-12	1-5/16"-12	17.50	18.49	32.00	20.60	59.60	55 mm	Metric
DAOF51305-2420	2"-12	1-5/8"-12	17.50	18.49	32.00	26.00	59.60	55 mm	Metric
DAOF51305-2424	2"-12	1-7/8"-12	17.50	18.49	32.00	32.00	54.10	55 mm	Metric
DAOF51305-2416IN	2"-12	1-5/16"-12	17.50	18.49	32.00	20.60	59.60	2-1/8"	Imperial
DAOF51305-2420IN	2"-12	1-5/8"-12	17.50	18.49	32.00	26.00	59.60	2-1/8"	Imperial
DAOF51305-2424IN	2"-12	1-7/8"-12	17.50	18.49	32.00	32.00	54.10	2-1/8"	Imperial
DAOF51305-3232	2-1/2"-12	2-1/2"-12	22.25	18.50	45.00	40.00	58.90	70 mm	Metric
DAOF51305-3232IN	2-1/2"-12	2-1/2"-12	22.25	18.50	45.00	40.00	58.90	2-3/4"	Imperial

DAOF5106Q

Straight ORFS Male - BSPP Male + Retaining Ring + O Ring

D

A

OF

5

1

06

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type



Adaptor

BSPP

Male + O Ring

Straight

BSPP

Male + Retaining Ring + O Ring

DME&JDE Code: DAOF5106Q

Product Type Hydraulic adaptor


Standard: ORFS

Structure: Straight

Connection Type: Male × Male

Thread Types: UNF × BSPP

Sealing Method: O Ring + Retaining Ring

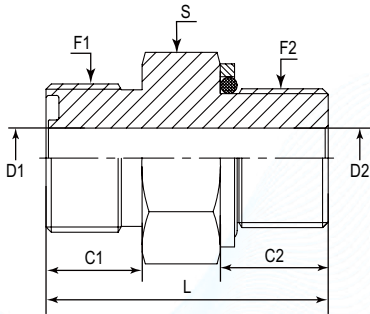

 German Technology Equipment



New-Standard

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAOF5106Q-0402	9/16"-18	1/8"-28	9.80	8.00	4.37	4.37	25.00	15.88
DAOF5106Q-0404	9/16"-18	1/4"-19	9.80	11.20	4.37	7.50	30.00	19.00
DAOF5106Q-0406	9/16"-18	3/8"-19	9.80	11.20	4.37	9.90	31.00	22.00
DAOF5106Q-0408	9/16"-18	1/2"-14	9.80	14.50	4.50	12.30	34.50	30.00
DAOF5106Q-0604	11/16"-16	1/4"-19	11.20	11.20	6.71	6.71	31.50	19.00
DAOF5106Q-0606	11/16"-16	3/8"-19	11.20	11.20	6.71	9.90	32.50	22.00
DAOF5106Q-0608	11/16"-16	1/2"-14	11.20	14.50	6.71	12.30	36.00	30.00
DAOF5106Q-0804	13/16"-16	1/4"-19	12.80	11.20	7.50	7.50	33.50	22.00
DAOF5106Q-0806	13/16"-16	3/8"-19	12.80	11.20	9.60	9.60	33.50	22.00
DAOF5106Q-0808	13/16"-16	1/2"-14	12.80	14.50	9.50	12.30	37.00	30.00
DAOF5106Q-0810	13/16"-16	5/8"-14	12.80	14.50	9.50	12.50	41.00	32.00
DAOF5106Q-0812	13/16"-16	3/4"-14	12.80	14.50	9.60	15.50	38.00	36.00
DAOF5106Q-0816	13/16"-16	1"-11	12.80	18.60	9.60	21.50	43.50	41.00
DAOF5106Q-1006	1"-14	3/8"-19	15.49	11.20	12.29	9.90	37.00	27.00
DAOF5106Q-1008	1"-14	1/2"-14	15.50	14.50	12.29	12.29	39.50	30.00
DAOF5106Q-1010	1"-14	5/8"-14	15.49	14.50	12.30	12.30	41.50	32.00
DAOF5106Q-1012	1"-14	3/4"-14	15.49	14.50	12.50	15.00	43.50	36.00
DAOF5106Q-1208	1-3/16"-12	1/2"-14	17.02	14.50	12.29	12.29	44.00	32.00
DAOF5106Q-1212	1-3/16"-12	3/4"-14	17.02	14.50	15.47	15.47	45.00	36.00
DAOF5106Q-1216	1-3/16"-12	1"-11	17.02	18.60	15.47	21.50	47.50	41.00
DAOF5106Q-1608	1-7/16"-12	1/2"-14	17.50	14.50	20.60	12.30	43.00	38.00
DAOF5106Q-1612	1-7/16"-12	3/4"-14	17.50	14.50	20.60	15.50	43.00	36.00
DAOF5106Q-1616	1-7/16"-12	1"-11	17.50	18.60	20.60	20.60	48.00	46.00
DAOF5106Q-1620	1-7/16"-12	1-1/4"-11	17.50	18.60	20.60	26.00	51.50	50.00
DAOF5106Q-2016	1-11/16"-12	1"-11	17.50	18.60	26.00	21.50	51.50	50.00
DAOF5106Q-2020	1-11/16"-12	1-1/4"-11	17.50	18.60	26.00	26.00	51.50	50.00
DAOF5106Q-2424	2"-12	1-1/2"-11	17.50	18.60	32.00	32.00	50.00	55.00


DAOF51525

Straight Connector ORFS Male - Metric Male + O Ring

D	A	OF	5	1	52	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Male + O Ring	Straight	Metric	Male + O Ring



DME&JDE Code:	DAOF51525
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Straight
Connection Type:	Male x Male
Thread Types:	UNF x Metric + O Ring
Sealing Method:	O Ring

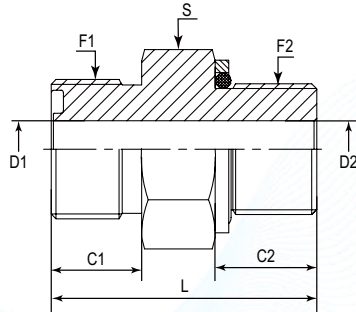

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAOF51525-0408	9/16"-18	M8X1	9.80	9.50	4.37	2.00	28.00	17.00
DAOF51525-0412	9/16"-18	M12X1.5	9.80	9.50	4.37	4.37	28.50	17.00
DAOF51525-0414	9/16"-18	M14X1.5	9.80	9.50	4.37	4.37	29.00	19.05
DAOF51525-0416	9/16"-18	M16X1.5	9.80	11.50	4.37	9.00	32.50	22.00
DAOF51525-0418	9/16"-18	M18X1.5	9.80	14.00	4.37	9.00	34.50	24.00
DAOF51525-0612	11/16"-16	M12X1.5	11.20	11.00	4.00	4.00	32.00	19.00
DAOF51525-0614	11/16"-16	M14X1.5	11.20	9.50	6.71	6.71	31.00	19.05
DAOF51525-0616	11/16"-16	M16X1.5	11.20	11.00	6.71	6.71	32.00	19.05
DAOF51525-0618	11/16"-16	M18X1.5	11.20	14.00	6.71	9.00	36.00	24.00
DAOF51525-0620	11/16"-16	M20X1.5	11.20	14.00	6.71	10.00	38.00	27.00
DAOF51525-0814	13/16"-16	M14X1.5	12.80	9.50	9.60	6.00	33.00	22.00
DAOF51525-0816	13/16"-16	M16X1.5	12.80	11.00	7.00	7.00	35.00	22.22
DAOF51525-0818	13/16"-16	M18X1.5	12.80	14.00	9.00	9.00	38.00	24.00
DAOF51525-0820	13/16"-16	M20X1.5	12.80	14.00	9.60	9.60	39.50	27.00
DAOF51525-0822	13/16"-16	M22X1.5	12.80	15.00	9.60	12.00	39.50	27.00
DAOF51525-0833	13/16"-16	M33X2	12.80	18.50	9.60	20.00	44.00	41.00
DAOF51525-1018	1"-14	M18X1.5	15.49	12.50	12.29	9.00	40.00	27.00
DAOF51525-1022	1"-14	M22X1.5	15.49	13.00	12.29	12.29	38.00	27.00
DAOF51525-1027	1"-14	M27X2	15.49	18.50	12.29	15.00	44.00	32.00
DAOF51525-1218	1-3/16"-12	M18X1.5	17.02	14.00	15.47	9.00	44.00	32.00
DAOF51525-1222	1-3/16"-12	M22X1.5	17.02	15.00	15.47	12.00	45.50	32.00
DAOF51525-1226	1-3/16"-12	M26X1.5	17.02	16.00	15.47	15.47	47.00	31.75
DAOF51525-1227	1-3/16"-12	M27X2	17.02	16.00	15.47	15.47	44.00	31.75
DAOF51525-1233	1-3/16"-12	M33X2	17.02	18.50	15.47	20.00	48.00	41.00
DAOF51525-1242	1-3/16"-12	M42X2	17.02	19.00	15.47	26.00	49.50	50.00
DAOF51525-1622	1-7/16"-12	M22X1.5	17.50	15.00	20.60	12.00	48.50	41.00
DAOF51525-1627	1-7/16"-12	M27X2	17.50	18.50	20.60	15.00	52.00	41.00
DAOF51525-1633	1-7/16"-12	M33X2	17.50	16.00	20.60	20.60	45.50	41.00
DAOF51525-2042	1-11/16"-12	M42X2	17.50	16.00	26.00	26.00	47.00	50.00
DAOF51525-2048	1-11/16"-12	M48X2	17.50	17.50	26.00	36.00	48.50	55.00

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, PC, DEKRA, DIN, SAE, MA, CE, UK CA


DAOF51061

Straight Connector ORFS Male - BSPP Male with ED Ring

D	A	OF	5	1	061
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	ORFS UNF	Male + O Ring	Straight	BSPP Male with ED Ring



DME&JDE Code:	DAOF51061
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Straight
Connection Type:	Male x Male
Thread Types:	UNF x BSPP with ED Ring
Sealing Method:	ED Ring

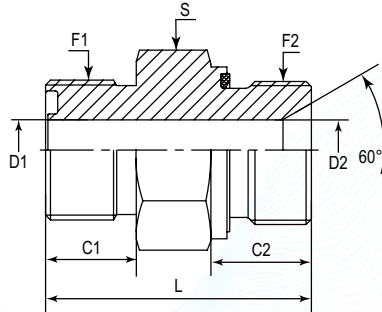

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAOF51061-0402	9/16"-18	1/8"-28	9.80	8.00	4.37	4.37	26.00	17.00
DAOF51061-0404	9/16"-18	1/4"-19	9.80	12.00	4.37	7.00	31.00	19.00
DAOF51061-0406	9/16"-18	3/8"-19	9.80	12.00	4.37	9.00	31.80	22.00
DAOF51061-0408	9/16"-18	1/2"-14	9.80	14.00	4.37	10.00	38.00	27.00
DAOF51061-0602	11/16"-16	1/8"-28	11.20	8.00	6.71	4.37	28.00	19.00
DAOF51061-0604	11/16"-16	1/4"-19	11.20	12.00	6.71	6.71	32.50	19.00
DAOF51061-0606	11/16"-16	3/8"-19	11.20	12.00	6.71	9.90	33.50	22.00
DAOF51061-0608	11/16"-16	1/2"-14	11.20	14.00	6.71	12.30	38.50	27.00
DAOF51061-0804	13/16"-16	1/4"-19	12.80	12.00	9.60	5.00	34.50	22.00
DAOF51061-0806	13/16"-16	3/8"-19	12.80	12.00	9.60	9.60	35.30	22.00
DAOF51061-0808	13/16"-16	1/2"-14	12.80	14.00	9.60	9.60	39.00	27.00
DAOF51061-0810	13/16"-16	5/8"-14	12.80	14.00	9.60	9.60	38.80	30.00
DAOF51061-0812	13/16"-16	3/4"-14	12.80	16.00	9.60	15.50	41.80	32.00
DAOF51061-1006	1"-14	3/8"-19	15.49	12.00	12.29	9.90	38.50	27.00
DAOF51061-1008	1"-14	1/2"-14	15.49	14.00	12.29	12.29	41.00	27.00
DAOF51061-1010	1"-14	5/8"-14	15.49	14.00	12.29	12.29	41.50	30.00
DAOF51061-1012	1"-14	3/4"-14	15.49	16.00	12.29	12.29	45.00	32.00
DAOF51061-1208	1-3/16"-12	1/2"-14	17.02	14.00	15.47	12.30	44.50	32.00
DAOF51061-1212	1-3/16"-12	3/4"-14	17.02	16.00	15.47	15.47	46.50	32.00
DAOF51061-1216	1-3/16"-12	1"-11	17.02	18.00	15.47	21.50	49.00	41.00
DAOF51061-1612	1-7/16"-12	3/4"-14	17.50	16.00	20.60	16.00	47.50	41.00
DAOF51061-1616	1-7/16"-12	1"-11	17.50	18.00	20.60	20.60	50.00	41.00
DAOF51061-1620	1-7/16"-12	1-1/4"-11	17.50	20.00	20.60	27.50	53.50	50.00
DAOF51061-2016	1-11/16"-12	1"-11	17.50	18.00	26.00	20.00	52.00	46.00
DAOF51061-2020	1-11/16"-12	1-1/4"-11	17.50	20.00	26.00	27.50	55.50	50.00
DAOF51061-2424	2"-12	1-1/2"-11	17.50	22.00	32.00	32.00	57.60	55.00

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, PC, DEKRA, DIN, SAE, MA, CE, UK CA

DAOF51521

Straight Connector ORFS Male - Metric Male with ED Ring

D

A

OF

5

1

521

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DAE

Adaptor

ORFS UNF

Male

Straight

Metric Male with ED Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF51521

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

UNF × Metric

Sealing Method:

ED Ring

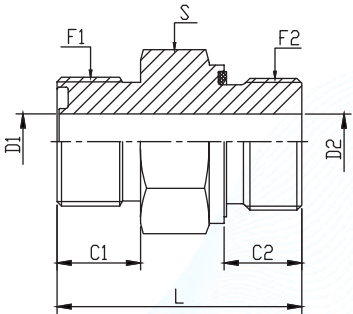

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAOF51521-0412	9/16"-18	M12X1.5	9.8	12	4.37	4.37	30	17
DAOF51521-0614	11/16"-16	M14X1.5	11.20	12.00	6.00	6.00	31.00	19.00
DAOF51521-0618	11/16"-16	M18X1.5	11.20	12.00	6.71	9.00	32.50	24.00
DAOF51521-0818	13/16"-16	M18X1.5	12.80	12.00	9.00	9.00	35.00	24.00
DAOF51521-0822	13/16"-16	M22X1.5	12.80	14.00	9.60	12.00	39.00	27.00
DAOF51521-1022	1"-14	M22X1.5	15.49	14.00	12.29	12.29	42.00	27.00
DAOF51521-1027	1"-14	M27X2	15.49	16.00	12.29	12.29	45.00	32.00
DAOF51521-1227	1-3/16"-12	M27X2	17.02	16.00	15.47	15.47	46.50	32.00



Certificate:

DAOF5128F

Straight Connector ORFS Male - NPTF Fixed Female

D

A

OF

5

1

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DAE

Adaptor

ORFS UNF

Male + 0 Ring

Straight

NPTF

Female

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF5128F

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

UNF × NPTF



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S	Hex
#	UNF	NPTF	mm	mm	mm	-	-
DAOF5128F-0404	9/16"-18	1/4"-18	9.80	4.37	31.75	19 mm	Metric
DAOF5128F-0404IN	9/16"-18	1/4"-18	9.80	4.37	31.75	3/4"	Imperial
DAOF5128F-0606	11/16"-16	3/8"-18	11.20	6.71	33.00	22 mm	Metric
DAOF5128F-0606IN	11/16"-16	3/8"-18	11.20	6.71	33.00	7/8"	Imperial
DAOF5128F-0808	13/16"-16	1/2"-14	12.80	9.60	41.66	27 mm	Metric
DAOF5128F-0808IN	13/16"-16	1/2"-14	12.80	9.60	41.66	1-1/8"	Imperial
DAOF5128F-1008	1"-14	1/2"-14	15.50	12.50	43.50	27 mm	Metric
DAOF5128F-1008IN	1"-14	1/2"-14	15.50	12.50	43.50	1-1/8"	Imperial
DAOF5128F-1212	1-3/16"-12	3/4"-14	17.02	15.47	47.37	32 mm	Metric
DAOF5128F-1212IN	1-3/16"-12	3/4"-14	17.02	15.47	47.37	1-1/4"	Imperial
DAOF5128F-1616	1-7/16"-12	1"-11-1/2	17.50	20.60	51.00	41 mm	Metric
DAOF5128F-1616IN	1-7/16"-12	1"-11-1/2	17.50	20.60	51.00	1-1/2"	Imperial
DAOF5128F-2020	1-11/16"-12	1-1/4"-11-1/2	17.50	26.00	50.00	50 mm	Metric
DAOF5128F-2020IN	1-11/16"-12	1-1/4"-11-1/2	17.50	26.00	50.00	1-7/8"	Imperial



Certificate:

DAOF51241

Straight Connector ORFS Male - ORFS Swivel Female

D

A

OF

5

1

241

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type



Adaptor

ORFS UNF

Male + O Ring

Straight

ORFS Swivel Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF51241

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Straight

Connection Type:

Male × Swivel Female

Thread Types:

ORFS UNF × ORFS UNF 74°

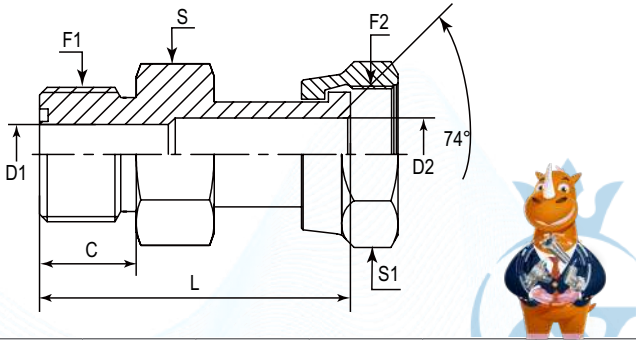

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAOF51241-0404	9/16"-18	9/16"-18	9.80	4.19	4.19	35.00	17 mm	17 mm	Metric
DAOF51241-0406	9/16"-18	11/16"-16	9.80	4.50	6.71	37.00	19 mm	22 mm	Metric
DAOF51241-0410	9/16"-18	1"-14	9.80	4.37	11.51	44.50	27 mm	30 mm	Metric
DAOF51241-0412	9/16"-18	1-3/16"-12	9.80	4.37	13.89	49.00	32 mm	36 mm	Metric
DAOF51241-0416	9/16"-18	1-7/16"-12	9.80	4.37	19.89	51.50	36 mm	41 mm	Metric
DAOF51241-0404IN	9/16"-18	9/16"-18	9.80	4.19	4.19	35.00	5/8"	11/16"	Imperial
DAOF51241-0406IN	9/16"-18	11/16"-16	9.80	4.50	6.71	37.00	3/4"	7/8"	Imperial
DAOF51241-0410IN	9/16"-18	1"-14	9.80	4.37	11.51	44.50	1-1/8"	1-1/8"	Imperial
DAOF51241-0412IN	9/16"-18	1-3/16"-12	9.80	4.37	13.89	49.00	1-1/4"	1-3/8"	Imperial
DAOF51241-0416IN	9/16"-18	1-7/16"-12	9.80	4.37	19.89	51.50	1-3/8"	1-5/8"	Imperial
DAOF51241-0604	11/16"-16	9/16"-18	11.20	6.71	4.19	36.50	19 mm	17 mm	Metric
DAOF51241-0606	11/16"-16	11/16"-16	11.20	6.71	6.71	38.50	19 mm	22 mm	Metric
DAOF51241-0608	11/16"-16	13/16"-16	11.20	6.71	9.09	40.00	19 mm	24 mm	Metric
DAOF51241-0610	11/16"-16	1"-14	11.20	6.71	11.51	46.00	27 mm	30 mm	Metric
DAOF51241-0612	11/16"-16	1-3/16"-12	11.20	6.71	13.89	50.80	32 mm	36 mm	Metric
DAOF51241-0604IN	11/16"-16	9/16"-18	11.20	6.71	4.19	36.50	3/4"	11/16"	Imperial
DAOF51241-0606IN	11/16"-16	11/16"-16	11.20	6.71	6.71	38.50	3/4"	7/8"	Imperial
DAOF51241-0608IN	11/16"-16	13/16"-16	11.20	6.71	9.09	40.00	3/4"	15/16"	Imperial
DAOF51241-0610IN	11/16"-16	1"-14	11.20	6.71	11.51	46.00	1-1/8"	1-1/8"	Imperial
DAOF51241-0612IN	11/16"-16	1-3/16"-12	11.20	6.71	13.89	50.80	1-1/4"	1-3/8"	Imperial
DAOF51241-0806	13/16"-16	11/16"-16	12.80	9.60	6.71	40.50	22	22 mm	Metric
DAOF51241-0808	13/16"-16	13/16"-16	12.80	9.09	9.09	43.50	22	24 mm	Metric

Certificate:



DAOF51241-0810	13/16"-16	1"-14	12.80	9.60	11.51	48.00	27	30 mm	Metric
DAOF51241-0812	13/16"-16	1-3/16"-12	12.80	9.60	13.89	52.00	32	36 mm	Metric
DAOF51241-0816	13/16"-16	1-7/16"-12	12.80	9.60	19.89	54.00	36	41 mm	Metric
DAOF51241-0806IN	13/16"-16	11/16"-16	12.80	9.60	6.71	40.50	7/8"	7/8"	Imperial
DAOF51241-0808IN	13/16"-16	13/16"-16	12.80	9.09	9.09	43.50	7/8"	15/16"	Imperial
DAOF51241-0810IN	13/16"-16	1"-14	12.80	9.60	11.51	48.00	1-1/8"	1-1/8"	Imperial
DAOF51241-0812IN	13/16"-16	1-3/16"-12	12.80	9.60	13.89	52.00	1-1/4"	1-3/8"	Imperial
DAOF51241-0816IN	13/16"-16	1-7/16"-12	12.80	9.60	19.89	54.00	1-3/8"	1-5/8"	Imperial
DAOF51241-1008	1"-14	13/16"-16	15.49	12.50	9.09	48.50	27	24 mm	Metric
DAOF51241-1010	1"-14	1"-14	15.49	11.51	11.51	52.00	27	30 mm	Metric
DAOF51241-1012	1"-14	1-3/16"-12	15.49	12.29	13.89	56.50	32	36 mm	Metric
DAOF51241-1008IN	1"-14	13/16"-16	15.49	12.50	9.09	48.50	1-1/8"	15/16"	Imperial
DAOF51241-1010IN	1"-14	1"-14	15.49	11.51	11.51	52.00	1-1/8"	1-1/8"	Imperial
DAOF51241-1012IN	1"-14	1-3/16"-12	15.49	12.29	13.89	56.50	1-1/4"	1-3/8"	Imperial
DAOF51241-1208	1-3/16"-12	13/16"-16	17.02	15.47	9.09	51.00	32	24 mm	Metric
DAOF51241-1210	1-3/16"-12	1"-14	17.02	15.47	11.51	55.00	32	30 mm	Metric
DAOF51241-1212	1-3/16"-12	1-3/16"-12	17.02	13.89	13.89	58.00	32	36 mm	Metric
DAOF51241-1216	1-3/16"-12	1-7/16"-12	17.02	15.47	19.89	60.50	36	41 mm	Metric
DAOF51241-1208IN	1-3/16"-12	13/16"-16	17.02	15.47	9.09	51.00	1-1/4"	15/16"	Imperial
DAOF51241-1210IN	1-3/16"-12	1"-14	17.02	15.47	11.51	55.00	1-1/4"	1-1/8"	Imperial
DAOF51241-1212IN	1-3/16"-12	1-3/16"-12	17.02	13.89	13.89	58.00	1-1/4"	1-3/8"	Imperial
DAOF51241-1216IN	1-3/16"-12	1-7/16"-12	17.02	15.47	19.89	60.50	1-3/8"	1-5/8"	Imperial
DAOF51241-1608	1-7/16"-12	13/16"-16	17.50	20.60	9.09	53.00	38	24 mm	Metric
DAOF51241-1612	1-7/16"-12	1-3/16"-12	17.50	20.60	13.89	60.00	38	36 mm	Metric
DAOF51241-1616	1-7/16"-12	1-7/16"-12	17.50	19.89	19.89	62.00	38	41 mm	Metric
DAOF51241-1620	1-7/16"-12	1-11/16"-12	17.50	20.60	26.01	60.00	41	50 mm	Metric
DAOF51241-1608IN	1-7/16"-12	13/16"-16	17.50	20.60	9.09	53.00	1-1/2"	15/16"	Imperial
DAOF51241-1612IN	1-7/16"-12	1-3/16"-12	17.50	20.60	13.89	60.00	1-1/2"	1-3/8"	Imperial
DAOF51241-1616IN	1-7/16"-12	1-7/16"-12	17.50	19.89	19.89	62.00	1-1/2"	1-5/8"	Imperial
DAOF51241-1620IN	1-7/16"-12	1-11/16"-12	17.50	20.60	26.01	60.00	1-1/2"	1-7/8"	Imperial
DAOF51241-2016	1-11/16"-12	1-7/16"-12	17.50	26.00	19.89	61.50	46	41 mm	Metric
DAOF51241-2020	1-11/16"-12	1-11/16"-12	17.50	26.00	26.00	66.50	48	50 mm	Metric
DAOF51241-2024	1-11/16"-12	2"-12	17.50	26.00	32.00	66.00	50	60 mm	Metric
DAOF51241-2016IN	1-11/16"-12	1-7/16"-12	17.50	26.00	19.89	61.50	1-3/4"	1-5/8"	Imperial
DAOF51241-2020IN	1-11/16"-12	1-11/16"-12	17.50	26.00	26.00	66.50	1-7/8"	1-7/8"	Imperial
DAOF51241-2024IN	1-11/16"-12	2"-12	17.50	26.00	32.00	66.00	2"	2-1/4"	Imperial
DAOF51241-2424	2"-12	2"-12	17.50	32.00	32.00	66.00	55	60 mm	Metric
DAOF51241-2424IN	2"-12	2"-12	17.50	32.00	32.00	66.00	2-1/8"	2-1/4"	Imperial

Certificate:




DAOF51251

Straight Connector ORFS Male - JIC 74° Swivel Female

D	A	OF	5	1	251
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	ORFS UNF	Male + O Ring	Straight	JIC Swivel Female



DME&JDE Code:	DAOF51251
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Straight
Connection Type:	Male × Swivel Female
Thread Types:	UNF × UNF 74°

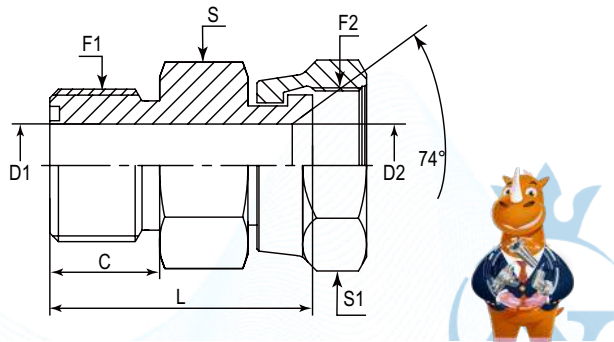

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAOF51251-0404	9/16"-18	7/16"-20	9.80	4.37	4.37	25.70	17 mm	14 mm	Metric
DAOF51251-0606	11/16"-16	9/16"-18	11.20	6.71	6.71	30.23	19 mm	19 mm	Metric
DAOF51251-0808	13/16"-16	3/4"-16	12.80	9.50	9.50	34.24	22 mm	22 mm	Metric
DAOF51251-1010	1"-14	7/8"-14	15.49	12.29	12.29	38.00	27 mm	27 mm	Metric
DAOF51251-1210	1-3/16"-12	7/8"-14	17.02	15.47	12.29	42.50	32 mm	27 mm	Metric
DAOF51251-1212	1-3/16"-12	1-1/16"-12	17.02	15.47	15.47	43.35	32 mm	32 mm	Metric
DAOF51251-1616	1-7/16"-12	1-5/16"-12	17.50	20.50	20.50	47.40	41 mm	41 mm	Metric
DAOF51251-2020	1-11/16"-12	1-5/8"-12	17.50	26.00	26.00	50.00	46 mm	50 mm	Metric
DAOF51251-2424	2"-12	1-7/8"-12	17.50	32.00	32.00	52.00	55 mm	60 mm	Metric
DAOF51251-0404IN	9/16"-18	7/16"-20	9.80	4.37	4.37	25.70	5/8"	9/16"	Imperial
DAOF51251-0606IN	11/16"-16	9/16"-18	11.20	6.71	6.71	30.23	3/4"	11/16"	Imperial
DAOF51251-0808IN	13/16"-16	3/4"-16	12.80	9.50	9.50	34.24	7/8"	7/8"	Imperial
DAOF51251-1010IN	1"-14	7/8"-14	15.49	12.29	12.29	38.00	1-1/16"	1"	Imperial
DAOF51251-1210IN	1-3/16"-12	7/8"-14	17.02	15.47	12.29	42.50	1-1/4"	1"	Imperial
DAOF51251-1212IN	1-3/16"-12	1-1/16"-12	17.02	15.47	15.47	43.35	1-1/4"	1-1/4"	Imperial
DAOF51251-1616IN	1-7/16"-12	1-5/16"-12	17.50	20.50	20.50	47.40	1-1/2"	1-1/2"	Imperial
DAOF51251-2020IN	1-11/16"-12	1-5/8"-12	17.50	26.00	26.00	50.00	1-3/4"	2"	Imperial
DAOF51251-2424IN	2"-12	1-7/8"-12	17.50	32.00	32.00	52.00	2-1/8"	2-1/2"	Imperial

Certificate:


DAOF5100B

Straight Connector ORFS Male - Metric / Imperial Tube - Socket Welding-SW

D	A	OF	5	1	00	B
Company	Product Range	Thread Types	Sealing Method	Adaptor Structure	Sealing Type	Welding Type
DME	Adaptor	ORFS UNF	Male + O Ring	Straight	Welding	Socket



DME&JDE Code:	DAOF5100B
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Straight
Connection Type:	Male
Thread Types:	UNF
Sealing Method:	Welding

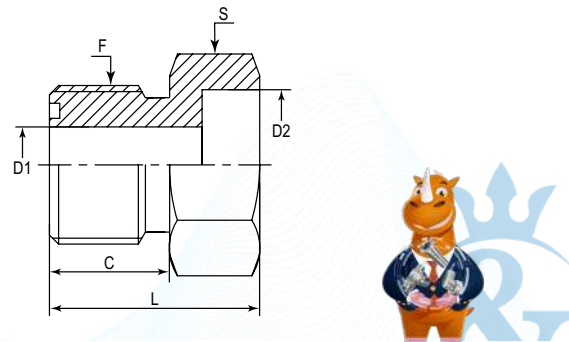

PART NUMBER	F (Thread)	C	D1	D2	L	S	Hex
#	UNF	mm	mm	mm	mm	-	-
DAOF5100B-0406	9/16"-18	9.80	4.37	6.50	21.84	17 mm	Metric
DAOF5100B-0410	9/16"-18	9.80	4.37	9.53	22.86	19 mm	Metric
DAOF5100B-0406IN	9/16"-18	9.80	4.37	6.50	21.84	5/8"	Imperial
DAOF5100B-0410IN	9/16"-18	9.80	4.37	9.53	22.86	3/4"	Imperial
DAOF5100B-0612	11/16"-16	11.20	6.71	12.85	22.86	22 mm	Metric
DAOF5100B-0612IN	11/16"-16	11.20	6.71	12.85	22.86	7/8"	Imperial
DAOF5100B-0810	13/16"-16	12.80	7.54	9.68	24.64	22 mm	Metric
DAOF5100B-0816	13/16"-16	12.80	9.60	16.03	24.64	22 mm	Metric
DAOF5100B-0820	13/16"-16	12.80	9.60	19.23	28.60	27 mm	Metric
DAOF5100B-0810IN	13/16"-16	12.80	7.54	9.68	24.64	7/8"	Imperial
DAOF5100B-0816IN	13/16"-16	12.80	9.60	16.03	24.64	7/8"	Imperial
DAOF5100B-0820IN	13/16"-16	12.80	9.60	19.23	28.60	1-1/16"	Imperial
DAOF5100B-1016	1"-14	15.49	12.29	16.03	27.18	27 mm	Metric
DAOF5100B-1020	1"-14	15.49	12.29	19.23	31.25	32 mm	Metric
DAOF5100B-1016IN	1"-14	15.49	12.29	16.03	27.18	1-1/16"	Imperial
DAOF5100B-1020IN	1"-14	15.49	12.29	19.23	31.25	1-1/4"	Imperial
DAOF5100B-1216	1-3/16"-12	17.02	12.29	16.03	30.00	32 mm	Metric
DAOF5100B-1220	1-3/16"-12	17.02	15.47	19.23	33.50	32 mm	Metric
DAOF5100B-1225	1-3/16"-12	17.02	15.47	25.58	35.05	41 mm	Metric
DAOF5100B-1216IN	1-3/16"-12	17.02	12.29	16.03	30.00	1-1/4"	Imperial
DAOF5100B-1220IN	1-3/16"-12	17.02	15.47	19.23	33.50	1-1/4"	Imperial
DAOF5100B-1225IN	1-3/16"-12	17.02	15.47	25.58	35.05	1-1/2"	Imperial
DAOF5100B-1620	1-7/16"-12	17.50	15.47	19.23	37.10	41 mm	Metric
DAOF5100B-1625	1-7/16"-12	17.50	20.50	25.58	38.10	41 mm	Metric
DAOF5100B-1632	1-7/16"-12	17.50	20.60	31.95	38.60	46 mm	Metric
DAOF5100B-1620IN	1-7/16"-12	17.50	15.47	19.23	37.10	1-1/2"	Imperial
DAOF5100B-1625IN	1-7/16"-12	17.50	20.50	25.58	38.10	1-1/2"	Imperial
DAOF5100B-1632IN	1-7/16"-12	17.50	20.60	31.95	38.60	1-3/4"	Imperial
DAOF5100B-2025	1-11/16"-12	17.50	20.60	25.58	38.61	46 mm	Metric
DAOF5100B-2032	1-11/16"-12	17.50	26.01	31.95	38.60	46 mm	Metric
DAOF5100B-2038	1-11/16"-12	17.50	26.01	38.30	38.60	55 mm	Metric
DAOF5100B-2025IN	1-11/16"-12	17.50	20.60	25.58	38.61	1-3/4"	Imperial
DAOF5100B-2032IN	1-11/16"-12	17.50	26.01	31.95	38.60	1-3/4"	Imperial
DAOF5100B-2038IN	1-11/16"-12	17.50	26.01	38.30	38.60	2-1/8"	Imperial
DAOF5100B-2438	2"-12	17.50	32.00	38.30	38.60	55 mm	Metric
DAOF5100B-2438IN	2"-12	17.50	32.00	38.30	38.60	2-1/8"	Imperial

Certificate:


DAOF5100B

Straight Connector ORFS Male - Metric / Imperial Tube - Socket Welding-SW

D	A	OF	5	1	00	B
Company	Product Range	Thread Types	Sealing Method	Adaptor Structure	Sealing Type	Welding Type
DME	Adaptor	ORFS UNF	Male + O Ring	Straight	Welding	Socket



DME&JDE Code:	DAOF5100B
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Straight
Connection Type:	Male
Thread Types:	UNF
Sealing Method:	Welding

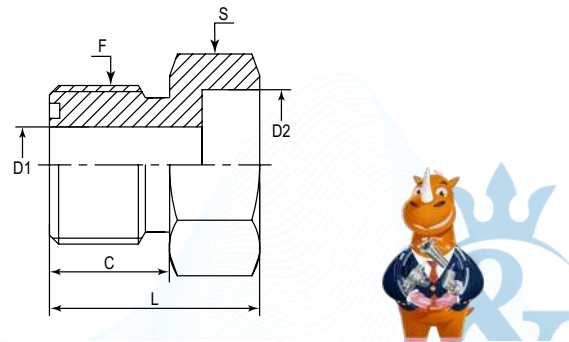

PART NUMBER	F (Thread)	C	D1	D2	L	S	Hex
#	UNF	mm	mm	mm	mm	-	-
DAOF5100B-0406	9/16"-18	9.80	4.37	6.50	21.84	17 mm	Metric
DAOF5100B-0410	9/16"-18	9.80	4.37	9.53	22.86	19 mm	Metric
DAOF5100B-0406IN	9/16"-18	9.80	4.37	6.50	21.84	5/8"	Imperial
DAOF5100B-0410IN	9/16"-18	9.80	4.37	9.53	22.86	3/4"	Imperial
DAOF5100B-0612	11/16"-16	11.20	6.71	12.85	22.86	22 mm	Metric
DAOF5100B-0612IN	11/16"-16	11.20	6.71	12.85	22.86	7/8"	Imperial
DAOF5100B-0810	13/16"-16	12.80	7.54	9.68	24.64	22 mm	Metric
DAOF5100B-0816	13/16"-16	12.80	9.60	16.03	24.64	22 mm	Metric
DAOF5100B-0820	13/16"-16	12.80	9.60	19.23	28.60	27 mm	Metric
DAOF5100B-0810IN	13/16"-16	12.80	7.54	9.68	24.64	7/8"	Imperial
DAOF5100B-0816IN	13/16"-16	12.80	9.60	16.03	24.64	7/8"	Imperial
DAOF5100B-0820IN	13/16"-16	12.80	9.60	19.23	28.60	1-1/16"	Imperial
DAOF5100B-1016	1"-14	15.49	12.29	16.03	27.18	27 mm	Metric
DAOF5100B-1020	1"-14	15.49	12.29	19.23	31.25	32 mm	Metric
DAOF5100B-1016IN	1"-14	15.49	12.29	16.03	27.18	1-1/16"	Imperial
DAOF5100B-1020IN	1"-14	15.49	12.29	19.23	31.25	1-1/4"	Imperial
DAOF5100B-1216	1-3/16"-12	17.02	12.29	16.03	30.00	32 mm	Metric
DAOF5100B-1220	1-3/16"-12	17.02	15.47	19.23	33.50	32 mm	Metric
DAOF5100B-1225	1-3/16"-12	17.02	15.47	25.58	35.05	41 mm	Metric
DAOF5100B-1216IN	1-3/16"-12	17.02	12.29	16.03	30.00	1-1/4"	Imperial
DAOF5100B-1220IN	1-3/16"-12	17.02	15.47	19.23	33.50	1-1/4"	Imperial
DAOF5100B-1225IN	1-3/16"-12	17.02	15.47	25.58	35.05	1-1/2"	Imperial
DAOF5100B-1620	1-7/16"-12	17.50	15.47	19.23	37.10	41 mm	Metric
DAOF5100B-1625	1-7/16"-12	17.50	20.50	25.58	38.10	41 mm	Metric
DAOF5100B-1632	1-7/16"-12	17.50	20.60	31.95	38.60	46 mm	Metric
DAOF5100B-1620IN	1-7/16"-12	17.50	15.47	19.23	37.10	1-1/2"	Imperial
DAOF5100B-1625IN	1-7/16"-12	17.50	20.50	25.58	38.10	1-1/2"	Imperial
DAOF5100B-1632IN	1-7/16"-12	17.50	20.60	31.95	38.60	1-3/4"	Imperial
DAOF5100B-2025	1-11/16"-12	17.50	20.60	25.58	38.61	46 mm	Metric
DAOF5100B-2032	1-11/16"-12	17.50	26.01	31.95	38.60	46 mm	Metric
DAOF5100B-2038	1-11/16"-12	17.50	26.01	38.30	38.60	55 mm	Metric
DAOF5100B-2025IN	1-11/16"-12	17.50	20.60	25.58	38.61	1-3/4"	Imperial
DAOF5100B-2032IN	1-11/16"-12	17.50	26.01	31.95	38.60	1-3/4"	Imperial
DAOF5100B-2038IN	1-11/16"-12	17.50	26.01	38.30	38.60	2-1/8"	Imperial
DAOF5100B-2438	2"-12	17.50	32.00	38.30	38.60	55 mm	Metric
DAOF5100B-2438IN	2"-12	17.50	32.00	38.30	38.60	2-1/8"	Imperial

Certificate:

DAOF51000

ORFS Male Plug

D

A

OF

S

1

000

Company

Product Range

Thread Types

Sealing Type

Adaptor Structure

Other Features

DAE

Adaptor

ORFS UNF

Male + O Ring

Straight

Nut/Plug

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF51000

Product Type

Hydraulic adaptor

Standard:

ORFS

Connection Type:


Male

Thread types:

UNF

Other Features:

Nut/Plug



PART NUMBER	F (Thread)	C	D	L	S	Hex
#	UNF	mm	mm	mm	-	-
DAOF51000-0400	9/16"-18	9.80	4.37	16.70	17 mm	Metric
DAOF51000-0400IN	9/16"-18	9.80	4.37	16.70	5/8"	Imperial
DAOF51000-0600	11/16"-16	11.20	6.71	19.10	19 mm	Metric
DAOF51000-0600IN	11/16"-16	11.20	6.71	19.10	3/4"	Imperial
DAOF51000-0800	13/16"-16	12.80	9.60	21.70	22 mm	Metric
DAOF51000-0800IN	13/16"-16	12.80	9.60	21.70	7/8"	Imperial
DAOF51000-1000	1"-14	15.49	12.29	25.90	27 mm	Metric
DAOF51000-1000IN	1"-14	15.49	12.29	25.90	1-1/16"	Imperial
DAOF51000-1200	1-3/16"-12	17.02	15.47	27.40	32 mm	Metric
DAOF51000-1200IN	1-3/16"-12	17.02	15.47	27.40	1-1/4"	Imperial
DAOF51000-1600	1-7/16"-12	17.50	20.60	27.90	41 mm	Metric
DAOF51000-1600IN	1-7/16"-12	17.50	20.60	27.90	1-1/2"	Imperial
DAOF51000-2000	1-11/16"-12	17.50	26.00	27.90	46 mm	Metric
DAOF51000-2000IN	1-11/16"-12	17.50	26.00	27.90	1-3/4"	Imperial
DAOF51000-2400	2"-12	17.50	32.00	27.90	55 mm	Metric
DAOF51000-2400IN	2"-12	17.50	32.00	27.90	2-1/8"	Imperial
DAOF51000-3200	2-1/2"-12	22.25	45.00	35.50	70 mm	Metric
DAOF51000-3200IN	2-1/2"-12	22.25	45.00	35.50	2-3/4"	Imperial



Certificate:

DAOF11305

Straight Connector ORFS Swivel Female - SAE Male O Ring

D

A

OF

1

1

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DAE

Adaptor

ORFS UNF

Swivel Female

Straight

SAE UNF

Male O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF11305

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

Straight

Connection Type:


Swivel Female × Male

Thread Types:

ORFS UNF × SAE UNF + O Ring

Sealing Method:

O Ring

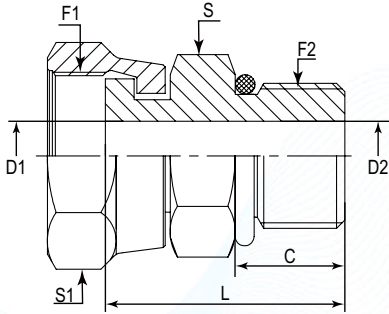

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAOF11305-0404	9/16"-18	7/16"-20	11.00	4.19	4.19	37.00	17 mm	17 mm	Metric
DAOF11305-0404IN	9/16"-18	7/16"-20	11.00	4.19	4.19	37.00	5/8"	11/16"	Imperial
DAOF11305-0606	11/16"-16	9/16"-18	11.99	6.71	6.71	39.30	19 mm	22 mm	Metric
DAOF11305-0606IN	11/16"-16	9/16"-18	11.99	6.71	6.71	39.30	3/4"	13/16"	Imperial
DAOF11305-0806	13/16"-16	9/16"-18	11.99	9.09	7.54	47.00	22 mm	24 mm	Metric
DAOF11305-0808	13/16"-16	3/4"-16	14.00	9.09	9.09	45.50	22 mm	24 mm	Metric
DAOF11305-0806IN	13/16"-16	9/16"-18	11.99	9.09	7.54	47.00	7/8"	15/16"	Imperial
DAOF11305-0808IN	13/16"-16	3/4"-16	14.00	9.09	9.09	45.50	7/8"	15/16"	Imperial
DAOF11305-1008	1"-14	3/4"-16	14.00	11.50	10.00	56.10	27 mm	30 mm	Metric
DAOF11305-1010	1"-14	7/8"-14	16.00	11.50	12.29	53.85	27 mm	30 mm	Metric
DAOF11305-1008IN	1"-14	3/4"-16	14.00	11.50	10.00	56.10	1-1/16"	1-1/8"	Imperial
DAOF11305-1010IN	1"-14	7/8"-14	16.00	11.50	12.29	53.85	1-1/16"	1-1/8"	Imperial
DAOF11305-1210	1-3/16"-12	7/8"-14	16.00	13.89	12.29	59.50	32 mm	36 mm	Metric
DAOF11305-1212	1-3/16"-12	1-1/16"-12	18.49	13.89	15.47	59.60	32 mm	36 mm	Metric
DAOF11305-1210IN	1-3/16"-12	7/8"-14	16.00	13.89	12.29	59.50	1-1/4"	1-3/8"	Imperial
DAOF11305-1212IN	1-3/16"-12	1-1/16"-12	18.49	13.89	15.47	59.60	1-1/4"	1-3/8"	Imperial
DAOF11305-1616	1-7/16"-12	1-5/16"-12	18.49	19.89	19.89	62.60	41 mm	41 mm	Metric
DAOF11305-1616IN	1-7/16"-12	1-5/16"-12	18.49	19.89	19.89	62.60	1-1/2"	1-5/8"	Imperial
DAOF11305-2020	1-11/16"-12	1-5/8"-12	18.49	26.01	26.01	67.51	50 mm	50 mm	Metric
DAOF11305-2020IN	1-11/16"-12	1-5/8"-12	18.49	26.01	26.01	67.51	1-7/8"	1-7/8"	Imperial
DAOF11305-2424	2"-12	1-7/8"-12	18.50	32.00	32.00	67.50	55 mm	60 mm	Metric
DAOF11305-2424IN	2"-12	1-7/8"-12	18.50	32.00	32.00	67.50	2-1/8"	2-1/4"	Imperial

Certificate:



DAOF31245

Straight Connector ORFS Swivel Female - ORFS Male

D

A

OF

3

1

24

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Sealing Type

Adaptor

ORFS UNF

Female

Straight

ORFS UNF

Male+O Ring

German Technology Equipment

New-Standard

DAOF31245


Hydraulic adaptor

ORFS

Straight

Swivel Female × Male

UNF × UNF

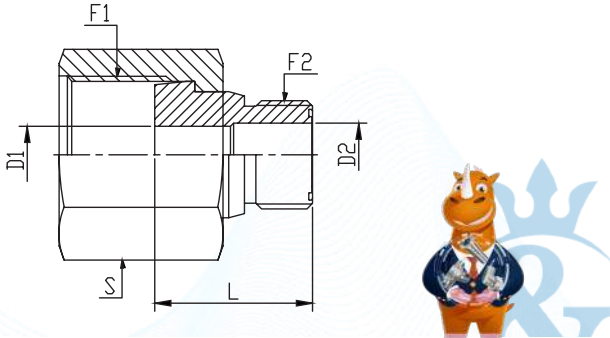

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L	S	Hex
#	UNF	UNF	mm	mm	mm	-	-
DAOF31245-0404	9/16"-18	9/16"-18	4.19	4.19	18.60	17 mm	Metric
DAOF31245-0406	9/16"-18	11/16"-16	4.20	4.20	17.80	17 mm	Metric
DAOF31245-0408	9/16"-18	13/16"-16	4.19	4.19	19.40	17 mm	Metric
DAOF31245-0404IN	9/16"-18	9/16"-18	4.19	4.19	18.60	11/16"	Imperial
DAOF31245-0406IN	9/16"-18	11/16"-16	4.20	4.20	17.80	11/16"	Imperial
DAOF31245-0408IN	9/16"-18	13/16"-16	4.19	4.19	19.40	11/16"	Imperial
DAOF31245-0604	11/16"-16	9/16"-18	4.37	4.37	19.56	22 mm	Metric
DAOF31245-0606	11/16"-16	11/16"-16	6.71	6.71	20.50	22 mm	Metric
DAOF31245-0608	11/16"-16	13/16"-16	6.71	9.60	23.30	22 mm	Metric
DAOF31245-0612	11/16"-16	1-3/16"-12	6.71	15.47	27.00	22 mm	Metric
DAOF31245-0604IN	11/16"-16	9/16"-18	4.37	4.37	19.56	13/16"	Imperial
DAOF31245-0606IN	11/16"-16	11/16"-16	6.71	6.71	20.50	13/16"	Imperial
DAOF31245-0608IN	11/16"-16	13/16"-16	6.71	9.60	23.30	13/16"	Imperial
DAOF31245-0612IN	11/16"-16	1-3/16"-12	6.71	15.47	27.00	13/16"	Imperial
DAOF31245-0804	13/16"-16	9/16"-18	4.37	4.37	21.84	24 mm	Metric
DAOF31245-0806	13/16"-16	11/16"-16	6.71	6.71	22.35	24 mm	Metric
DAOF31245-0808	13/16"-16	13/16"-16	9.60	9.60	24.00	24 mm	Metric
DAOF31245-0810	13/16"-16	1"-14	9.09	12.29	26.40	24 mm	Metric
DAOF31245-0812	13/16"-16	1-3/16"-12	9.09	15.47	27.50	24 mm	Metric
DAOF31245-0804IN	13/16"-16	9/16"-18	4.37	4.37	21.84	15/16"	Imperial
DAOF31245-0806IN	13/16"-16	11/16"-16	6.71	6.71	22.35	15/16"	Imperial
DAOF31245-0808IN	13/16"-16	13/16"-16	9.60	9.60	24.00	15/16"	Imperial
DAOF31245-0810IN	13/16"-16	1"-14	9.09	12.29	26.40	15/16"	Imperial
DAOF31245-0812IN	13/16"-16	1-3/16"-12	9.09	15.47	27.50	15/16"	Imperial

Certificate:

DAOF31245-1004	1"-14	9/16"-18	4.37	4.37	22.86	30 mm	Metric
DAOF31245-1006	1"-14	11/16"-16	6.71	6.71	24.20	30 mm	Metric
DAOF31245-1008	1"-14	13/16"-16	9.60	9.60	25.65	30 mm	Metric
DAOF31245-1010	1"-14	1"-14	11.51	11.51	28.50	30 mm	Metric
DAOF31245-1012	1"-14	1-3/16"-12	15.47	15.47	27.00	30 mm	Metric
DAOF31245-1004IN	1"-14	9/16"-18	4.37	4.37	22.86	1-1/8"	Imperial
DAOF31245-1006IN	1"-14	11/16"-16	6.71	6.71	24.20	1-1/8"	Imperial
DAOF31245-1008IN	1"-14	13/16"-16	9.60	9.60	25.65	1-1/8"	Imperial
DAOF31245-1010IN	1"-14	1"-14	11.51	11.51	28.50	1-1/8"	Imperial
DAOF31245-1012IN	1"-14	1-3/16"-12	15.47	15.47	27.00	1-1/8"	Imperial
DAOF31245-1204	1-3/16"-12	9/16"-18	4.37	4.37	24.90	36 mm	Metric
DAOF31245-1206	1-3/16"-12	11/16"-16	6.71	6.71	26.16	36 mm	Metric
DAOF31245-1208	1-3/16"-12	13/16"-16	9.60	9.60	27.69	36 mm	Metric
DAOF31245-1210	1-3/16"-12	1"-14	12.29	12.29	30.40	36 mm	Metric
DAOF31245-1216	1-3/16"-12	1-7/16"-12	15.47	15.47	31.50	36 mm	Metric
DAOF31245-1204IN	1-3/16"-12	9/16"-18	4.37	4.37	24.90	1-3/8"	Imperial
DAOF31245-1206IN	1-3/16"-12	11/16"-16	6.71	6.71	26.16	1-3/8"	Imperial
DAOF31245-1208IN	1-3/16"-12	13/16"-16	9.60	9.60	27.69	1-3/8"	Imperial
DAOF31245-1210IN	1-3/16"-12	1"-14	12.29	12.29	30.40	1-3/8"	Imperial
DAOF31245-1216IN	1-3/16"-12	1-7/16"-12	15.47	15.47	31.50	1-3/8"	Imperial
DAOF31245-1604	1-7/16"-12	9/16"-18	4.37	4.37	26.21	41 mm	Metric
DAOF31245-1606	1-7/16"-12	11/16"-16	6.71	6.71	27.61	41 mm	Metric
DAOF31245-1608	1-7/16"-12	13/16"-16	9.60	9.60	29.21	41 mm	Metric
DAOF31245-1610	1-7/16"-12	1"-14	12.29	12.29	31.90	41 mm	Metric
DAOF31245-1612	1-7/16"-12	1-3/16"-12	15.47	15.47	33.00	41 mm	Metric
DAOF31245-1616	1-7/16"-12	1-7/16"-12	19.89	19.89	33.50	41 mm	Metric
DAOF31245-1604IN	1-7/16"-12	9/16"-18	4.37	4.37	26.21	1-5/8"	Imperial
DAOF31245-1606IN	1-7/16"-12	11/16"-16	6.71	6.71	27.61	1-5/8"	Imperial
DAOF31245-1608IN	1-7/16"-12	13/16"-16	9.60	9.60	29.21	1-5/8"	Imperial
DAOF31245-1610IN	1-7/16"-12	1"-14	12.29	12.29	31.90	1-5/8"	Imperial
DAOF31245-1612IN	1-7/16"-12	1-3/16"-12	15.47	15.47	33.00	1-5/8"	Imperial
DAOF31245-1616IN	1-7/16"-12	1-7/16"-12	19.89	19.89	33.50	1-5/8"	Imperial
DAOF31245-2012	1-11/16"-12	1-3/16"-12	15.47	15.47	33.53	50 mm	Metric
DAOF31245-2016	1-11/16"-12	1-7/16"-12	20.60	20.60	38.46	50 mm	Metric
DAOF31245-2012IN	1-11/16"-12	1-3/16"-12	15.47	15.47	33.53	1-7/8"	Imperial
DAOF31245-2016IN	1-11/16"-12	1-7/16"-12	20.60	20.60	38.46	1-7/8"	Imperial
DAOF31245-2412	2"-12	1-3/16"-12	15.50	15.50	33.53	60 mm	Metric
DAOF31245-2416	2"-12	1-7/16"-12	20.60	20.60	34.04	60 mm	Metric
DAOF31245-2420	2"-12	1-11/16"-12	26.00	26.00	34.04	60 mm	Metric
DAOF31245-2412IN	2"-12	1-3/16"-12	15.50	15.50	33.53	2-1/4"	Imperial
DAOF31245-2416IN	2"-12	1-7/16"-12	20.60	20.60	34.04	2-1/4"	Imperial
DAOF31245-2420IN	2"-12	1-11/16"-12	26.00	26.00	34.04	2-1/4"	Imperial
DAOF31245-3224	2-1/2"-12	2"-12	32.00	32.00	40.50	73 mm	Metric
DAOF31245-3224IN	2-1/2"-12	2"-12	32.00	32.00	40.50	2-7/8"	Imperial

Certificate:




DAOF1105M

Straight Connector ORFS Female Swivel - BSPP 60° Male Cone

D	A	OF	1	1	05	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Swivel Female	Straight	BSPP	Male



DME&JDE Code:	DAOF1105M
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Straight
Connection Type:	Female Swivel × Male
Thread Types:	UNF × BSPP 60° Cone

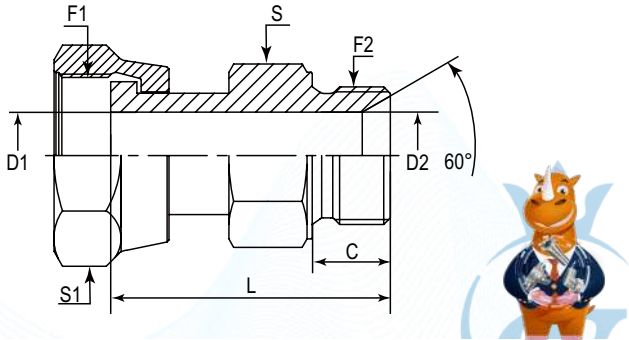

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAOF1105M-0404	9/16"-18	1/4"-19	11.00	4.19	4.19	34.50	19.00	19.00
DAOF1105M-0406	9/16"-18	3/8"-19	12.00	4.19	7.90	38.00	22.00	19.00
DAOF1105M-0604	11/16"-16	1/4"-19	11.00	6.71	4.70	39.20	19.00	20.64
DAOF1105M-0606	11/16"-16	3/8"-19	12.00	6.71	7.90	38.50	22.00	20.64
DAOF1105M-0608	11/16"-16	1/2"-14	14.00	6.71	11.10	41.00	27.00	22.00
DAOF1105M-0806	13/16"-16	3/8"-19	12.00	9.09	7.90	42.50	22.00	23.81
DAOF1105M-0808	13/16"-16	1/2"-14	14.00	9.09	11.10	44.30	27.00	23.81
DAOF1105M-0812	13/16"-16	3/4"-14	16.00	9.09	16.70	49.00	32.00	23.81
DAOF1105M-1008	1"-14	1/2"-14	14.00	11.10	11.10	47.50	27.00	30.00
DAOF1105M-1012	1"-14	3/4"-14	16.00	11.51	16.70	51.00	32.00	30.00
DAOF1105M-1212	1-3/16"-12	3/4"-14	16.00	13.89	16.70	55.00	32.00	36.00
DAOF1105M-1216	1-3/16"-12	1"-11	19.00	13.89	22.20	60.00	41.00	36.00
DAOF1105M-1616	1-7/16"-12	1"-11	19.00	19.90	22.20	61.00	41.00	41.00
DAOF1105M-1620	1-7/16"-12	1-1/4"-11	20.00	19.90	28.60	66.00	50.00	41.00

Certificate:


DAOF1125M

Straight Connector ORFS Swivel Female - JIC 74°Male

D	A	OF	1	1	25	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Swivel Female	Straight	JIC UNF	Male



DME&JDE Code:	DAOF1125M
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Straight
Connection Type:	Swivel Female × Male
Thread Types:	ORFS UNF × JIC UNF 74°

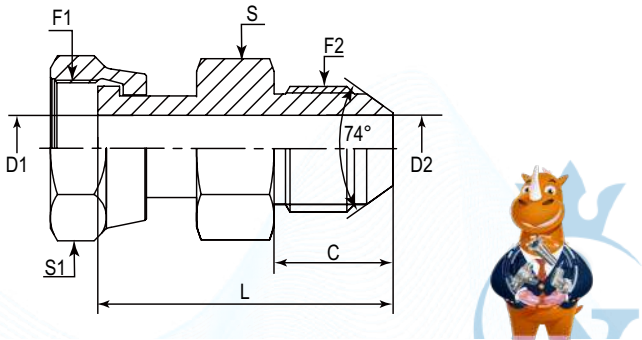

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAOF1125M-0404	9/16"-18	7/16"-20	13.97	4.19	4.19	40.10	17 mm	17 mm	Metric
DAOF1125M-0406	9/16"-18	9/16"-18	14.12	4.19	7.54	40.20	17 mm	17 mm	Metric
DAOF1125M-0404IN	9/16"-18	7/16"-20	13.97	4.19	4.19	40.10	5/8"	11/16"	Imperial
DAOF1125M-0406IN	9/16"-18	9/16"-18	14.12	4.19	7.54	40.20	5/8"	11/16"	Imperial
DAOF1125M-0604	11/16"-16	7/16"-20	13.97	6.71	4.37	42.20	19 mm	22 mm	Metric
DAOF1125M-0606	11/16"-16	9/16"-18	14.12	6.71	6.71	42.00	19 mm	22 mm	Metric
DAOF1125M-0604IN	11/16"-16	7/16"-20	13.97	6.71	4.37	42.20	3/4"	13/16"	Imperial
DAOF1125M-0606IN	11/16"-16	9/16"-18	14.12	6.71	6.71	42.00	3/4"	13/16"	Imperial
DAOF1125M-0804	13/16"-16	7/16"-20	13.97	9.09	4.37	49.30	22 mm	24 mm	Metric
DAOF1125M-0806	13/16"-16	9/16"-18	14.12	9.09	7.54	49.00	22 mm	24 mm	Metric
DAOF1125M-0808	13/16"-16	3/4"-16	16.69	9.09	9.93	48.26	22 mm	24 mm	Metric
DAOF1125M-0812	13/16"-16	1-1/16"-12	21.95	9.09	15.47	55.73	27 mm	24 mm	Metric
DAOF1125M-0804IN	13/16"-16	7/16"-20	13.97	9.09	4.37	49.30	7/8"	15/16"	Imperial
DAOF1125M-0806IN	13/16"-16	9/16"-18	14.12	9.09	7.54	49.00	7/8"	15/16"	Imperial
DAOF1125M-0808IN	13/16"-16	3/4"-16	16.69	9.09	9.93	48.26	7/8"	15/16"	Imperial
DAOF1125M-0812IN	13/16"-16	1-1/16"-12	21.95	9.09	15.47	55.73	1-1/16"	15/16"	Imperial
DAOF1125M-1010	1"-14	7/8"-14	19.25	11.51	12.29	57.10	27 mm	30 mm	Metric
DAOF1125M-1010IN	1"-14	7/8"-14	19.25	11.51	12.29	57.10	1-1/16"	1-1/8"	Imperial
DAOF1125M-1208	1-3/16"-12	3/4"-16	16.69	13.89	9.93	58.00	32 mm	36 mm	Metric
DAOF1125M-1212	1-3/16"-12	1-1/16"-12	21.95	13.89	15.47	63.50	32 mm	36 mm	Metric
DAOF1125M-1208IN	1-3/16"-12	3/4"-16	16.69	13.89	9.93	58.00	1-1/4"	1-3/8"	Imperial
DAOF1125M-1212IN	1-3/16"-12	1-1/16"-12	21.95	13.89	15.47	63.50	1-1/4"	1-3/8"	Imperial
DAOF1125M-1610	1-7/16"-12	7/8"-14	19.25	19.89	12.29	64.00	41 mm	41 mm	Metric
DAOF1125M-1612	1-7/16"-12	1-1/16"-12	21.95	19.89	15.47	67.00	41 mm	41 mm	Metric
DAOF1125M-1616	1-7/16"-12	1-5/16"-12	23.14	19.89	19.89	67.31	41 mm	41 mm	Metric
DAOF1125M-1610IN	1-7/16"-12	7/8"-14	19.25	19.89	12.29	64.00	1-1/2"	1-5/8"	Imperial
DAOF1125M-1612IN	1-7/16"-12	1-1/16"-12	21.95	19.89	15.47	67.00	1-1/2"	1-5/8"	Imperial
DAOF1125M-1616IN	1-7/16"-12	1-5/16"-12	23.14	19.89	19.89	67.31	1-1/2"	1-5/8"	Imperial
DAOF1125M-2020	1-11/16"-12	1-5/8"-12	24.33	26.01	27.38	73.35	50 mm	50 mm	Metric
DAOF1125M-2020IN	1-11/16"-12	1-5/8"-12	24.33	26.01	27.38	73.35	1-7/8"	1-7/8"	Imperial
DAOF1125M-2424	2"-12	1-7/8"-12	27.51	32.00	32.00	71.00	50 mm	60 mm	Metric
DAOF1125M-2424IN	2"-12	1-7/8"-12	27.51	32.00	32.00	71.00	2"	2-1/4"	Imperial

Certificate:



DAOF1107M

Straight Connector ORFS Swivel Female - BSPT Male 60° Cone

D

A

OF

1

1

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Swivel Female

Straight

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF1107M

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Straight

Connection Type:

Swivel Female × Male

Thread Types:

UNF × BSPT 60° Cone

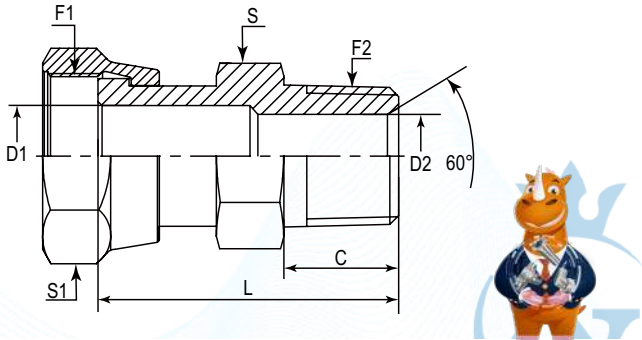

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	UNF	BSPT	mm	mm	mm	mm	mm	mm
DAOF1107M-0402	9/16"-18	1/8"-28	10.00	4.19	4.19	35.50	15.88	17.45
DAOF1107M-0404	9/16"-18	1/4"-19	14.00	4.19	6.00	39.50	15.88	17.45
DAOF1107M-0604	11/16"-16	1/4"-19	14.00	6.00	6.00	41.50	19.00	20.62
DAOF1107M-0606	11/16"-16	3/8"-19	15.00	6.71	9.00	42.50	19.05	20.62
DAOF1107M-0608	11/16"-16	1/2"-14	19.00	6.71	12.00	47.00	22.22	20.62
DAOF1107M-0806	13/16"-16	3/8"-19	15.00	9.00	9.00	46.00	22.22	23.81
DAOF1107M-0808	13/16"-16	1/2"-14	19.00	9.09	12.00	50.00	22.22	23.81
DAOF1107M-1008	1"-14	1/2"-14	19.00	11.51	11.51	54.50	25.40	30.00
DAOF1107M-1208	1-3/16"-12	1/2"-14	19.00	13.89	12.00	58.50	31.75	34.92
DAOF1107M-1212	1-3/16"-12	3/4"-14	20.00	13.89	16.70	59.50	31.75	34.92
DAOF1107M-1216	1-3/16"-12	1"-11	24.00	13.89	22.20	65.50	34.93	34.93
DAOF1107M-1612	1-7/16"-12	3/4"-14	20.00	19.89	16.70	65.50	38.10	41.28
DAOF1107M-1616	1-7/16"-12	1"-11	24.00	19.89	22.20	68.50	38.10	41.28



Certificate:



DAOF1106Q

Straight Connector ORFS Male - BSPT Male + O Ring + Retaining Ring

D

A

OF

1

1

06

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection & Sealing Method

DME

Adaptor

ORFS UNF

Male

Straight

BSPP

Male + O Ring + Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF1106Q

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

UNF × BSPP

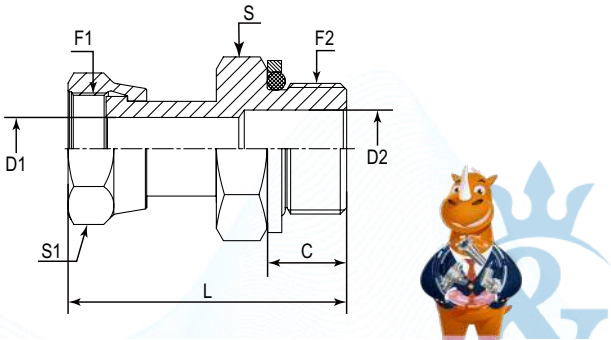

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAOF1106Q-0402	9/16"-18	1/8"-28	6.70	4.19	4.19	39.00	17	17
DAOF1106Q-0404	9/16"-18	1/4"-19	10.20	4.19	7.50	43.50	19	17
DAOF1106Q-0604	11/16"-16	1/4"-19	10.20	6.71	6.71	48.50	19	22
DAOF1106Q-0606	11/16"-16	3/8"-19	10.20	6.71	9.90	50.00	24	22
DAOF1106Q-0608	11/16"-16	1/2"-14	12.20	6.71	12.30	53.00	27	22
DAOF1106Q-0804	13/16"-16	1/4"-19	10.20	9.09	7.50	54.50	22	24
DAOF1106Q-0806	13/16"-16	3/8"-19	10.20	9.09	9.09	55.00	24	24
DAOF1106Q-0808	13/16"-16	1/2"-14	12.20	9.09	12.30	59.00	27	24
DAOF1106Q-1006	1"-14	3/8"-19	10.00	11.51	9.90	59.50	24	30
DAOF1106Q-1008	1"-14	1/2"-14	12.20	11.51	11.51	61.50	27	30
DAOF1106Q-1010	1"-14	3/4"-14	14.50	11.51	14.00	66.00	36	30
DAOF1106Q-1208	1-3/16"-12	1/2"-14	12.20	13.89	12.30	67.50	30	36
DAOF1106Q-1212	1-3/16"-12	3/4"-14	14.50	13.89	13.89	68.50	36	36
DAOF1106Q-1216	1-3/16"-12	1"-11	15.50	13.89	21.50	73.50	41	36
DAOF1106Q-1612	1-7/16"-12	3/4"-14	14.50	19.89	15.50	72.00	36	41
DAOF1106Q-1616	1-7/16"-12	1"-11	15.50	19.89	21.50	74.00	41	41
DAOF1106Q-1620	1-7/16"-12	1-1/4"-11	17.50	19.89	27.50	78.50	50	41
DAOF1106Q-2016	1-11/16"-12	1"-11	15.50	26.01	21.50	76.00	41	50
DAOF1106Q-2020	1-11/16"-12	1-1/4"-11	17.50	26.01	27.50	79.00	50	50
DAOF1106Q-2024	1-11/16"-12	1-1/2"-11	19.50	26.01	33.00	82.00	60	50
DAOF1106Q-2424	2"-12	1-1/2"-11	19.50	32.00	33.00	82.00	60	57

Certificate:







DAOF11061

Straight Connector ORFS Swivel Female - BSPP Male with ED Ring

D

A

OF

1

1

061

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection & Sealing Method

DME

Adaptor

ORFS UNF

Swivel Female

Straight

BSPP Male with ED Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF11061

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

Straight

Connection Type:


Swivel Female × Male

Thread Types:

UNF × BSPP

Sealing Method:

ED Ring

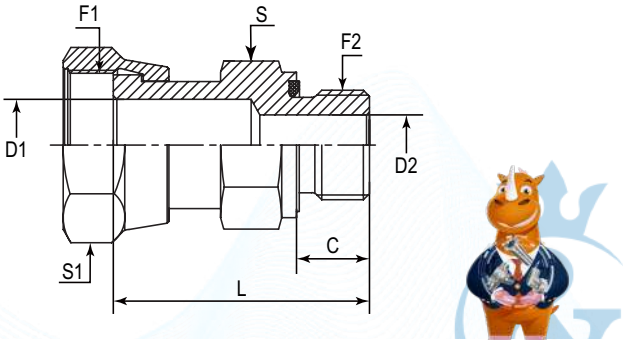

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAOF11061-0404	9/16"-18	1/4"-19	12.00	4.19	4.19	38.00	19	17
DAOF11061-0604	11/16"-16	1/4"-19	12.00	6.71	5.00	40.00	19	22
DAOF11061-0606	11/16"-16	3/8"-19	12.00	6.71	8.00	40.00	22	22
DAOF11061-0804	13/16"-16	1/4"-19	12.00	9.09	5.00	47.00	22	24
DAOF11061-0806	13/16"-16	3/8"-19	12.00	9.00	8.00	47.00	22	24
DAOF11061-0808	13/16"-16	1/2"-14	14.00	9.09	12.00	49.00	27	24
DAOF11061-1208	1-3/16"-12	1/2"-14	14.00	14.00	12.00	55.00	30	36
DAOF11061-1212	1-3/16"-12	3/4"-14	16.00	14.00	16.00	57.00	32	36
DAOF11061-1616	1-7/16"-12	1"-11	18.00	20.00	20.00	67.00	41	41

Certificate:

DAOF1128M

Straight Connector ORFS Swivel Female - NPTF 60° Male

D

A

OF

1

1

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Swivel Female

Straight

NPTF

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF1128M

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Straight

Connection Type:

Swivel Female × Male

Thread Types:

UNF × NPTF 60°

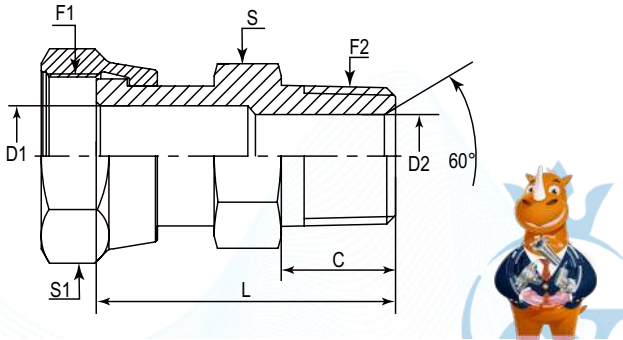

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1	Hex
#	UNF	NPTF	mm	mm	mm	mm	-	-	-
DAOF1128M-0404	9/16"-18	1/4"-18	14.22	4.19	7.14	38.50	17 mm	17 mm	Metric
DAOF1128M-0404IN	9/16"-18	1/4"-18	14.22	4.19	7.14	38.50	5/8"	11/16"	Imperial
DAOF1128M-0604	11/16"-16	1/4"-18	14.22	6.71	7.14	41.91	19 mm	22 mm	Metric
DAOF1128M-0606	11/16"-16	3/8"-18	14.22	6.71	10.31	42.42	19 mm	22 mm	Metric
DAOF1128M-0608	11/16"-16	1/2"-14	19.05	6.71	12.00	48.00	22 mm	22 mm	Metric
DAOF1128M-0604IN	11/16"-16	1/4"-18	14.22	6.71	7.14	41.91	3/4"	13/16"	Imperial
DAOF1128M-0606IN	11/16"-16	3/8"-18	14.22	6.71	10.31	42.42	3/4"	13/16"	Imperial
DAOF1128M-0608IN	11/16"-16	1/2"-14	19.05	6.71	12.00	48.00	7/8"	13/16"	Imperial
DAOF1128M-0806	13/16"-16	3/8"-18	14.22	9.09	9.09	45.70	22 mm	24 mm	Metric
DAOF1128M-0808	13/16"-16	1/2"-14	19.05	9.09	13.49	54.61	22 mm	24 mm	Metric
DAOF1128M-0806IN	13/16"-16	3/8"-18	14.22	9.09	9.09	45.70	7/8"	15/16"	Imperial
DAOF1128M-0808IN	13/16"-16	1/2"-14	19.05	9.09	13.49	54.61	7/8"	15/16"	Imperial
DAOF1128M-1008	1"-14	1/2"-14	19.05	11.51	13.49	54.50	27 mm	30 mm	Metric
DAOF1128M-1008IN	1"-14	1/2"-14	19.05	11.51	13.49	54.50	1"	1-3/16"	Imperial
DAOF1128M-1212	1-3/16"-12	3/4"-14	19.05	13.89	18.26	58.50	32 mm	36 mm	Metric
DAOF1128M-1216	1-3/16"-12	1"-11-1/2	23.88	13.89	20.00	65.50	36 mm	36 mm	Metric
DAOF1128M-1212IN	1-3/16"-12	3/4"-14	19.05	13.89	18.26	58.50	1-1/4"	1-3/8"	Imperial
DAOF1128M-1216IN	1-3/16"-12	1"-11-1/2	23.88	13.89	20.00	65.50	1-3/8"	1-3/8"	Imperial
DAOF1128M-1616	1-7/16"-12	1"-11-1/2	23.88	19.89	23.83	68.50	41 mm	41 mm	Metric
DAOF1128M-1616IN	1-7/16"-12	1"-11-1/2	23.88	19.89	23.83	68.50	1-1/2"	1-5/8"	Imperial
DAOF1128M-2020	1-11/16"-12	1-1/4"-11-1/2	24.64	26.01	31.75	70.00	46 mm	50 mm	Metric
DAOF1128M-2020IN	1-11/16"-12	1-1/4"-11-1/2	24.64	26.01	31.75	70.00	1-3/4"	1-7/8"	Imperial
DAOF1128M-2424	2"-12	1-1/2"-11-1/2	25.40	32.00	38.10	75.00	55 mm	60 mm	Metric
DAOF1128M-2424IN	2"-12	1-1/2"-11-1/2	25.40	32.00	38.10	75.00	2-1/8"	2-1/4"	Imperial

Certificate:




DAOF31000

ORFS Female Cap

D	A	OF	3	1	000
Company	Product Range	Thread Types	Adaptor Structure	Adaptor Structure	Other Features
DME	Adaptor	ORFS UNF	Slip-on female	Straight	Nut/Plug



DME&JDE Code:	DAOF31000
Product Type	Hydraulic adaptor
Standard:	ORFS
Connection Type:	Female
Thread Types:	UNF
Other Features:	Nut/Plug



PART NUMBER	F (Thread)	L	S	Hex	Revision History
-	UNF	mm	-	-	
DAOF31000-0400	9/16"-18	14.80	17 mm	Metric	
DAOF31000-0400IN	9/16"-18	14.80	11/16"	Imperial	
DAOF31000-0600	11/16"-16	17.02	22 mm	Metric	
DAOF31000-0600IN	11/16"-16	17.02	13/16"	Imperial	
DAOF31000-0800	13/16"-16	31.00	24 mm	Metric	
DAOF31000-0800IN	13/16"-16	21.00	15/16"	Imperial	
DAOF31000-1000	1"-14	23.50	30 mm	Metric	
DAOF31000-1000IN	1"-14	23.50	1-1/8"	Imperial	
DAOF31000-1200	1-3/16"-12	26.01	36 mm	Metric	
DAOF31000-1200IN	1-3/16"-12	26.01	1-3/8"	Imperial	
DAOF31000-1600	1-7/16"-12	27.80	41 mm	Metric	
DAOF31000-1600IN	1-7/16"-12	27.80	1-5/8"	Imperial	
DAOF31000-2000	1-11/16"-12	27.81	50 mm	Metric	
DAOF31000-2000IN	1-11/16"-12	27.81	1-7/8"	Imperial	
DAOF31000-2400	2"-12	27.81	60 mm	Metric	
DAOF31000-2400IN	2"-12	27.81	2-1/4"	Imperial	
DAOF31000-3200	2-1/2"-12	35.60	73 mm	Metric	
DAOF31000-3200IN	2-1/2"-12	35.60	2-7/8"	Imperial	




DAOF11241

Straight Connector Connector ORFS Swivel Female

D	A	OF	1	1	241
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	ORFS UNF	Swivel Female	Straight	ORFS Swivel Female



DME&JDE Code:	DAOF11241
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Straight
Connection Type:	Swivel Female x Swivel Female
Thread Types:	UNF x UNF

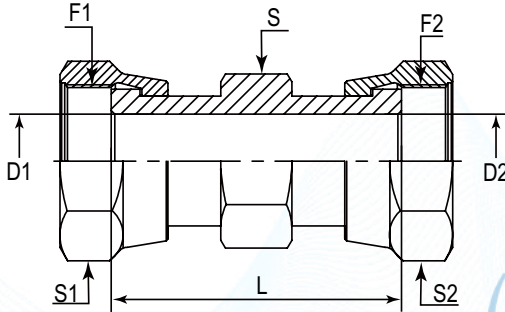

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L	S	S1	S2	Hex
#	UNF	UNF	mm	mm	mm	-	-	-	-
DAOF11241-0404	9/16"-18	9/16"-18	4.19	4.19	40.00	17 mm	17 mm	17 mm	Metric
DAOF11241-0404IN	9/16"-18	9/16"-18	4.19	4.19	40.00	5/8"	11/16"	11/16"	Imperial
DAOF11241-0606	11/16"-16	11/16"-16	6.71	6.71	46.00	19 mm	22 mm	22 mm	Metric
DAOF11241-0606IN	11/16"-16	11/16"-16	6.71	6.71	46.00	3/4"	13/16"	13/16"	Imperial
DAOF11241-0808	13/16"-16	13/16"-16	9.09	9.09	53.80	22 mm	24 mm	24 mm	Metric
DAOF11241-0808IN	13/16"-16	13/16"-16	9.09	9.09	53.80	7/8"	15/16"	15/16"	Imperial
DAOF11241-1010	1"-14	1"-14	11.51	11.51	61.00	27 mm	30 mm	30 mm	Metric
DAOF11241-1010IN	1"-14	1"-14	11.51	11.51	61.00	1-1/16"	1-1/8"	1-1/8"	Imperial
DAOF11241-1212	1-3/16"-12	1-3/16"-12	13.89	13.89	68.00	32 mm	36 mm	36 mm	Metric
DAOF11241-1212IN	1-3/16"-12	1-3/16"-12	13.89	13.89	68.00	1-1/4"	1-3/8"	1-3/8"	Imperial
DAOF11241-1616	1-7/16"-12	1-7/16"-12	19.90	19.90	70.00	36 mm	41 mm	41 mm	Metric
DAOF11241-1616IN	1-7/16"-12	1-7/16"-12	19.90	19.90	70.00	1-3/8"	1-1/2"	1-1/2"	Imperial
DAOF11241-2020	1-11/16"-12	1-11/16"-12	26.01	26.01	76.00	46 mm	50 mm	50 mm	Metric
DAOF11241-2020IN	1-11/16"-12	1-11/16"-12	26.01	26.01	76.00	1-3/4"	1-7/8"	1-7/8"	Imperial
DAOF11241-2424	2"-12	2"-12	32.00	32.00	80.00	55 mm	60 mm	60 mm	Metric
DAOF11241-2424IN	2"-12	2"-12	32.00	32.00	80.00	2-1/8"	2-1/4"	2-1/4"	Imperial



DAOF1128F

Straight Connector ORFS Swivel Female - NPTF Fixed Male

D

A

OF

1

1

05

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Swivel Female

Straight

BSP

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF1128F

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Straight

Connection Type:

Swivel Female × Fixed Male

Thread Types:

UNF × NPTF

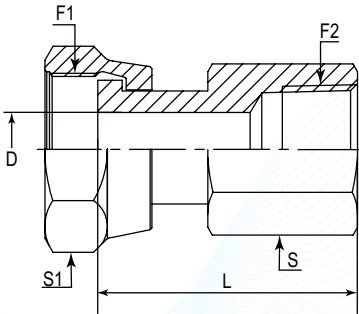

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S	Hex
#	UNF	NPTF	mm	mm	mm	-	-
DAOF1128F-0404	9/16"-18	1/4"-18	4.19	41.70	19 mm	17 mm	Metric
DAOF1128F-0404IN	9/16"-18	1/4"-18	4.19	41.70	3/4"	11/16"	Imperial
DAOF1128F-0606	11/16"-16	3/8"-18	6.71	42.00	22 mm	22 mm	Metric
DAOF1128F-0606IN	11/16"-16	3/8"-18	6.71	42.00	7/8"	13/16"	Imperial
DAOF1128F-1212	1-3/16"-12	3/4"-14	13.89	28.45	36 mm	36 mm	Metric
DAOF1128F-1212IN	1-3/16"-12	3/4"-14	13.89	28.45	1-3/8"	1-3/8"	Imperial
DAOF1128F-1616	1-7/16"-12	1"-11-1/2	19.89	65.00	41 mm	41 mm	Metric
DAOF1128F-1616IN	1-7/16"-12	1"-11-1/2	19.89	65.00	1-1/2"	1-1/2"	Imperial
DAOF1128F-2020	1-11/16"-12	1-1/4"-11-1/2	26.01	66.80	50 mm	50 mm	Metric
DAOF1128F-2020IN	1-11/16"-12	1-1/4"-11-1/2	26.01	66.80	2"	1-7/8"	Imperial
DAOF1128F-2424	2"-12	1-1/2"-11-1/2	32.00	67.00	60 mm	60 mm	Metric
DAOF1128F-2424IN	2"-12	1-1/2"-11-1/2	32.00	67.00	2-1/2"	2-1/4"	Imperial



Certificate:



DAOF5124T

Straight Connector Bulkhead ORFS Male - ORFS Male

D

A

OF

5

1

24

T

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

Straight

ORFS UNF

Male Bulkhead

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF5124T

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

UNF × UNF

Other Features:

Bulkhead

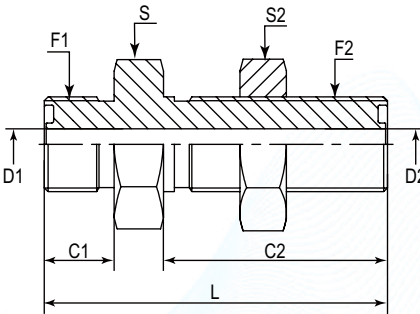

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	S2	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	-	-	-
DAOF5124T-0404	9/16"-18	9/16"-18	9.80	31.50	4.37	4.37	48.26	22 mm	22 mm	Metric
DAOF5124T-0404IN	9/16"-18	9/16"-18	9.80	31.50	4.37	4.37	48.26	13/16"	13/16"	Imperial
DAOF5124T-0606	11/16"-16	11/16"-16	11.00	34.00	6.50	6.50	53.10	27 mm	27 mm	Metric
DAOF5124T-0608	11/16"-16	13/16"-16	11.20	36.58	6.71	9.60	56.82	27 mm	30 mm	Metric
DAOF5124T-0606IN	11/16"-16	11/16"-16	11.00	34.00	6.50	6.50	53.10	1"	1"	Imperial
DAOF5124T-0608IN	11/16"-16	13/16"-16	11.20	36.58	6.71	9.60	56.82	1-1/8"	1-1/8"	Imperial
DAOF5124T-0806	13/16"-16	11/16"-16	13.00	34.00	9.50	6.50	55.50	30 mm	27 mm	Metric
DAOF5124T-0808	13/16"-16	13/16"-16	12.80	36.50	9.60	9.60	58.40	30 mm	30 mm	Metric
DAOF5124T-0806IN	13/16"-16	11/16"-16	13.00	34.00	9.50	6.50	55.50	1"	1"	Imperial
DAOF5124T-0808IN	13/16"-16	13/16"-16	12.80	36.50	9.60	9.60	58.40	1-1/8"	1-1/8"	Imperial
DAOF5124T-1010	1"-14	1"-14	15.49	40.64	12.29	12.29	66.55	36 mm	36 mm	Metric
DAOF5124T-1010IN	1"-14	1"-14	15.49	40.64	12.29	12.29	66.55	1-5/16"	1-5/16"	Imperial
DAOF5124T-1212	1-3/16"-12	1-3/16"-12	17.02	41.66	15.47	15.47	69.09	41 mm	41 mm	Metric
DAOF5124T-1212IN	1-3/16"-12	1-3/16"-12	17.02	41.66	15.47	15.47	69.09	1-1/2"	1-1/2"	Imperial
DAOF5124T-1616	1-7/16"-12	1-7/16"-12	17.50	42.16	20.60	20.60	70.10	46 mm	46 mm	Metric
DAOF5124T-1616IN	1-7/16"-12	1-7/16"-12	17.50	42.16	20.60	20.60	70.10	1-3/4"	1-3/4"	Imperial
DAOF5124T-2020	1-11/16"-12	1-11/16"-12	17.50	42.16	26.00	26.00	70.10	50 mm	50 mm	Metric
DAOF5124T-2020IN	1-11/16"-12	1-11/16"-12	17.50	42.16	26.00	26.00	70.10	2"	2"	Imperial
DAOF5124T-2424	2"-12	2"-12	17.50	42.16	32.00	32.00	70.10	60 mm	60 mm	Metric
DAOF5124T-2424IN	2"-12	2"-12	17.50	42.16	32.00	32.00	70.10	2-3/8"	2-3/8"	Imperial

Certificate:






DAOFT1305

Straight Connector Bulkhead ORFS Male - SAE Male O Ring

D	A	OF	T	1	30	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Bulkhead Male	Straight	SAE UNF	Male O Ring



DME&JDE Code:	DAOFT1305
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Straight
Connection Type:	Male x Male
Thread Types:	ORFS UNF x SAE UNF + O Ring
Sealing Method:	O Ring
Other Features:	Bulkhead

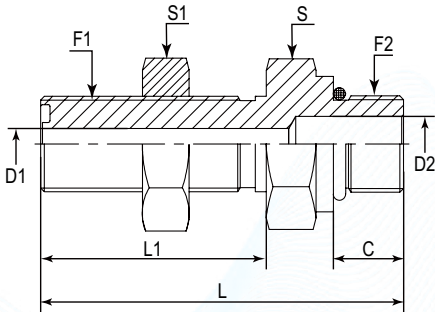

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L1	L	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	mm	-	-	-
DAOFT1305-0404	9/16"-18	7/16"-20	11.00	4.37	4.37	31.50	53.50	22 mm	22 mm	Metric
DAOFT1305-0404IN	9/16"-18	7/16"-20	11.00	4.37	4.37	31.50	53.50	13/16"	13/16"	Imperial
DAOFT1305-0604	11/16"-16	7/16"-20	11.00	6.71	6.71	34.04	57.50	27 mm	27 mm	Metric
DAOFT1305-0606	11/16"-16	9/16"-18	11.99	6.71	6.71	34.04	58.70	27 mm	27 mm	Metric
DAOFT1305-0604IN	11/16"-16	7/16"-20	11.00	6.71	6.71	34.04	57.50	1"	1"	Imperial
DAOFT1305-0606IN	11/16"-16	9/16"-18	11.99	6.71	6.71	34.04	58.70	1"	1"	Imperial
DAOFT1305-0808IN	11/16"-16	3/4"-16	14.00	9.60	9.60	36.58	69.50	1-1/8"	1-1/8"	Imperial
DAOFT1305-1008	1"-14	3/4"-16	14.00	12.29	9.60	40.64	72.50	36 mm	36 mm	Metric
DAOFT1305-1010	1"-14	7/8"-14	16.00	12.29	12.29	40.64	74.50	36 mm	36 mm	Metric
DAOFT1305-1008IN	1"-14	3/4"-16	14.00	12.29	9.60	40.64	72.50	1-5/16"	1-5/16"	Imperial
DAOFT1305-1010IN	1"-14	7/8"-14	16.00	12.29	12.29	40.64	74.50	1-5/16"	1-5/16"	Imperial
DAOFT1305-1212	1-3/16"-12	1-1/16"-12	18.50	15.47	15.47	41.66	80.00	41 mm	41 mm	Metric
DAOFT1305-1212IN	1-3/16"-12	1-1/16"-12	18.50	15.47	15.47	41.66	80.00	1-1/2"	1-1/2"	Imperial
DAOFT1305-1616	1-7/16"-12	1-5/16"-12	18.50	20.60	20.60	42.16	18.50	46 mm	46 mm	Metric
DAOFT1305-1616IN	1-7/16"-12	1-5/16"-12	18.50	20.60	20.60	42.16	18.50	1-3/4"	1-3/4"	Imperial

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, PC, DEKRA, DIN, SAE, MA, CE, UK CA


DAOFT1061

Straight Connector Bulkhead ORFS Male - BSPP 60° Male 60° with ED Ring

D	A	OF	T	1	06	061
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Bulkhead Male	Straight	BSPP	BSPP Male with ED Ring



DME&JDE Code:	DAOFT1061
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Straight
Connection Type:	Male x Male
Thread Types:	UNF x BSPP 60°
Other Features:	Bulkhead
Sealing Method:	ED Ring

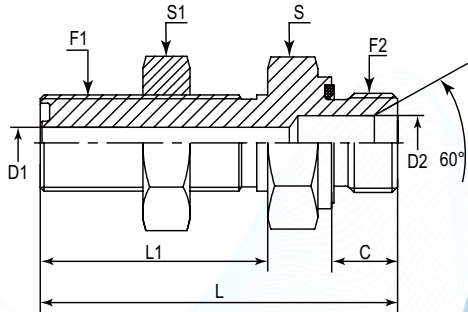

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L1	L	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm	mm
DAOFT1061-0406	9/16"-18	3/8"-19	12.00	4.50	8.00	31.50	54.00	22.00	22.00
DAOFT1061-0606	11/16"-18	3/8"-19	12.00	6.50	8.00	34.00	57.50	27.00	27.00
DAOFT1061-0806	13/16"-16	3/8"-19	12.00	9.50	8.00	36.50	62.50	30.00	30.00
DAOFT1061-1212	1-3/16"-12	3/4"-14	16.00	15.50	15.50	41.70	71.00	41.00	41.00
DAOFT1061-1616	1-7/16"-12	1"-11	18.00	20.00	20.00	42.20	75.50	46.00	46.00

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, PC, DEKRA, DIN, SAE, MA, CE, UK CA

DAOFLN

ORFS Bulkhead Nut

D

A

OF

LN

Company

Product Range

Thread Types

Other Features

DME

Adaptor

ORFS UNF

Bulkhead Nut

German Technology Equipment

SHIELD FLEX

New-Standard


DME&JDE Code: DAOFLN

Product Type Hydraulic adaptor

Adaptor Standard: ORFS

Thread types: UNF

Other Features: Bulkhead



PART NUMBER	F (Thread)	A	S	Hex
#	UNF	mm	-	-
DAOFLN-0400	9/16"-18	6.90	22 mm	Metric
DAOFLN-0400IN	9/16"-18	6.90	13/16"	Imperial
DAOFLN-0600	11/16"-16	8.00	27 mm	Metric
DAOFLN-0600IN	11/16"-16	8.00	1"	Imperial
DAOFLN-0800	13/16"-16	8.90	30 mm	Metric
DAOFLN-0800IN	13/16"-16	8.90	1-3/16"	Imperial
DAOFLN-1000	1"-14	10.40	36 mm	Metric
DAOFLN-1000IN	1"-14	10.40	1-5/16"	Imperial
DAOFLN-1200	1-3/16"-12	10.40	41 mm	Metric
DAOFLN-1200IN	1-3/16"-12	10.40	1-1/2"	Imperial
DAOFLN-1600	1-7/16"-12	10.40	46 mm	Metric
DAOFLN-1600IN	1-7/16"-12	10.40	1-3/4"	Imperial
DAOFLN-2000	1-11/16"-12	10.40	50 mm	Metric
DAOFLN-2000IN	1-11/16"-12	10.40	2"	Imperial
DAOFLN-2400	2"-12	10.40	60 mm	Metric
DAOFLN-2400IN	2"-12	10.40	2-3/8"	Imperial

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DAOF54245

45° Adjustable Elbow ORFS Male – ORFS Male

D

A

OF

5

4

24

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

45° Elbow

ORFS UNF

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code: DAOF54245


Product Type Hydraulic adaptor

Standard: ORFS

Structure: 45° Elbow

Connection Type: Adjustable Male × Male

Thread Types: UNF × UNF



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-
DAOF54245-0404	9/16"-18	9/16"-18	4.37	4.37	18.00	18.00	14 mm	Metric
DAOF54245-0404IN	9/16"-18	9/16"-18	4.37	4.37	18.00	18.00	9/16"	Imperial
DAOF54245-0604	11/16"-16	9/16"-18	6.71	4.37	19.50	19.00	19 mm	Metric
DAOF54245-0606	11/16"-16	11/16"-16	6.71	6.71	19.50	19.50	19 mm	Metric
DAOF54245-0604IN	11/16"-16	9/16"-18	6.71	4.37	19.50	19.00	3/4"	Imperial
DAOF54245-0606IN	11/16"-16	11/16"-16	6.71	6.71	19.50	19.50	3/4"	Imperial
DAOF54245-0806	13/16"-16	11/16"-16	9.60	6.71	20.30	20.00	19 mm	Metric
DAOF54245-0808	13/16"-16	13/16"-16	9.60	9.60	20.30	20.30	19 mm	Metric
DAOF54245-0806IN	13/16"-16	11/16"-16	9.60	6.71	20.30	20.00	3/4"	Imperial
DAOF54245-0808IN	13/16"-16	13/16"-16	9.60	9.60	20.30	20.30	3/4"	Imperial
DAOF54245-1008	1"-14	13/16"-16	12.29	9.60	25.00	25.00	27 mm	Metric
DAOF54245-1010	1"-14	1"-14	12.29	12.29	25.00	25.00	27 mm	Metric
DAOF54245-1008IN	1"-14	13/16"-16	12.29	9.60	25.00	25.00	1-1/8"	Imperial
DAOF54245-1010IN	1"-14	1"-14	12.29	12.29	25.00	25.00	1-1/8"	Imperial
DAOF54245-1208	1-3/16"-12	13/16"-16	15.47	9.60	25.90	25.90	30 mm	Metric
DAOF54245-1212	1-3/16"-12	1-3/16"-12	15.47	15.47	25.90	25.90	30 mm	Metric
DAOF54245-1208IN	1-3/16"-12	13/16"-16	15.47	9.60	25.90	25.90	1-3/16"	Imperial
DAOF54245-1212IN	1-3/16"-12	1-3/16"-12	15.47	15.47	25.90	25.90	1-3/16"	Imperial
DAOF54245-1612	1-7/16"-12	1-3/16"-12	20.60	15.47	30.00	30.00	36 mm	Metric
DAOF54245-1616	1-7/16"-12	1-7/16"-12	20.60	20.60	30.00	30.00	36 mm	Metric
DAOF54245-1612IN	1-7/16"-12	1-3/16"-12	20.60	15.47	30.00	30.00	1-3/8"	Imperial
DAOF54245-1616IN	1-7/16"-12	1-7/16"-12	20.60	20.60	30.00	30.00	1-3/8"	Imperial
DAOF54245-2016	1-11/16"-12	1-7/16"-12	26.00	20.60	32.00	32.00	41 mm	Metric
DAOF54245-2020	1-11/16"-12	1-11/16"-12	26.00	26.00	32.00	32.00	41 mm	Metric
DAOF54245-2016IN	1-11/16"-12	1-7/16"-12	26.00	20.60	32.00	32.00	1-1/2"	Imperial
DAOF54245-2020IN	1-11/16"-12	1-11/16"-12	26.00	26.00	32.00	32.00	1-1/2"	Imperial

Certificate:

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com




DAOF54241

45° Elbow Connector ORFS Male - ORFS Swivel Female

D	A	OF	5	4	241
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	ORFS UNF	Male	45° Elbow	ORFS Swivel Female



DME&JDE Code:	DAOF54241
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	45° Elbow
Connection Type:	Male × Swivel Female
Thread Types:	UNF × UNF



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAOF54241-0404	9/16"-18	9/16"-18	16.00	25.15	4.37	4.19	14 mm	17 mm	Metric
DAOF54241-0404IN	9/16"-18	9/16"-18	16.00	25.15	4.37	4.19	9/16"	11/16"	Imperial
DAOF54241-0606	11/16"-16	11/16"-16	19.00	28.50	6.71	6.71	19 mm	22 mm	Metric
DAOF54241-0606IN	11/16"-16	11/16"-16	19.00	28.50	6.71	6.71	3/4"	13/16"	Imperial
DAOF54241-0808	13/16"-16	13/16"-16	20.50	33.52	9.60	9.09	19 mm	24 mm	Metric
DAOF54241-0808IN	13/16"-16	13/16"-16	20.50	33.52	9.60	9.09	3/4"	15/16"	Imperial
DAOF54241-1010	1"-14	1"-14	23.50	36.58	12.29	11.51	27 mm	30 mm	Metric
DAOF54241-1010IN	1"-14	1"-14	23.50	36.58	12.29	11.51	1-1/16"	1-1/8"	Imperial
DAOF54241-1212	1-3/16"-12	1-3/16"-12	26.00	39.00	15.47	13.89	30 mm	36 mm	Metric
DAOF54241-1212IN	1-3/16"-12	1-3/16"-12	26.00	39.00	15.47	13.89	1-3/16"	1-3/8"	Imperial
DAOF54241-1616	1-7/16"-12	1-7/16"-12	30.00	47.50	20.50	20.00	36 mm	41 mm	Metric
DAOF54241-1616IN	1-7/16"-12	1-7/16"-12	30.00	47.50	20.50	20.00	1-7/16"	1-5/8"	Imperial
DAOF54241-2020	1-11/16"-12	1-11/16"-12	32.00	50.30	26.00	26.00	41 mm	50 mm	Metric
DAOF54241-2020IN	1-11/16"-12	1-11/16"-12	32.00	50.30	26.00	26.00	1-5/8"	1-7/8"	Imperial
DAOF54241-2424	2"-12	2"-12	36.80	52.30	32.00	32.00	50 mm	60 mm	Metric
DAOF54241-2424IN	2"-12	2"-12	36.80	52.30	32.00	32.00	1-7/8"	2-1/4"	Imperial

Certificate:




DAOF54305

45° Adjustable Elbow ORFS Male - SAE Male O Ring

D	A	OF	5	4	30	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Male	45° Elbow	SAE UNF	Male O Ring



DME&JDE Code:	DAOF54305
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	45° Elbow
Connection Type:	Adjustable Male × Male
Thread Types:	ORFS UNF × SAE UNF + O Ring
Sealing Method:	O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAOF54305-0404	9/16"-18	7/16"-20	16.00	30.00	4.37	4.37	14 mm	17 mm	Metric
DAOF54305-0406	9/16"-18	9/16"-18	17.30	33.00	4.37	6.71	19 mm	19 mm	Metric
DAOF54305-0408	9/16"-18	3/4"-16	17.30	36.30	4.37	9.60	19 mm	24 mm	Metric
DAOF54305-0404IN	9/16"-18	7/16"-20	16.00	30.00	4.37	4.37	9/16"	5/8"	Imperial
DAOF54305-0406IN	9/16"-18	9/16"-18	17.30	33.00	4.37	6.71	3/4"	3/4"	Imperial
DAOF54305-0408IN	9/16"-18	3/4"-16	17.30	36.30	4.37	9.60	3/4"	15/16"	Imperial
DAOF54305-0604	11/16"-16	7/16"-20	18.80	31.00	6.71	4.37	19 mm	17 mm	Metric
DAOF54305-0606	11/16"-16	9/16"-18	18.80	33.00	6.71	6.71	19 mm	19 mm	Metric
DAOF54305-0608	11/16"-16	3/4"-16	18.80	36.30	6.71	9.60	19 mm	24 mm	Metric
DAOF54305-0610	11/16"-16	7/8"-14	20.00	44.70	6.71	12.29	27 mm	27 mm	Metric
DAOF54305-0612	11/16"-16	1-1/16"-12	20.00	50.00	6.71	15.47	27 mm	36 mm	Metric
DAOF54305-0604IN	11/16"-16	7/16"-20	18.80	31.00	6.71	4.37	3/4"	5/8"	Imperial
DAOF54305-0606IN	11/16"-16	9/16"-18	18.80	33.00	6.71	6.71	3/4"	3/4"	Imperial
DAOF54305-0608IN	11/16"-16	3/4"-16	18.80	36.30	6.71	9.60	3/4"	15/16"	Imperial
DAOF54305-0610IN	11/16"-16	7/8"-14	20.00	44.70	6.71	12.29	1-1/16"	1-1/16"	Imperial
DAOF54305-0612IN	11/16"-16	1-1/16"-12	20.00	50.00	6.71	15.47	1-1/16"	1-3/8"	Imperial
DAOF54305-0806	13/16"-16	9/16"-18	20.30	32.30	9.60	6.71	19 mm	19 mm	Metric
DAOF54305-0808	13/16"-16	3/4"-16	20.30	36.30	9.50	10.00	19 mm	24 mm	Metric

Certificate:



DAOF54305-0810	13/16"-16	7/8"-14	20.80	44.70	9.60	12.29	27 mm	27 mm	Metric
DAOF54305-0812	13/16"-16	1-1/16"-12	22.50	50.00	9.60	15.50	30 mm	36 mm	Metric
DAOF54305-0806IN	13/16"-16	9/16"-18	20.30	32.30	9.60	6.71	3/4"	3/4"	Imperial
DAOF54305-0808IN	13/16"-16	3/4"-16	20.30	36.30	9.50	10.00	3/4"	15/16"	Imperial
DAOF54305-0810IN	13/16"-16	7/8"-14	20.80	44.70	9.60	12.29	1-1/16"	1-1/16"	Imperial
DAOF54305-0812IN	13/16"-16	1-1/16"-12	22.50	50.00	9.60	15.50	1-3/16"	1-3/8"	Imperial
DAOF54305-1008	1"-14	3/4"-16	23.50	40.20	12.50	10.00	27 mm	24 mm	Metric
DAOF54305-1010	1"-14	7/8"-14	23.40	44.70	12.29	12.29	27 mm	27 mm	Metric
DAOF54305-1012	1"-14	1-1/16"-12	24.50	50.00	12.50	15.47	30 mm	36 mm	Metric
DAOF54305-1008IN	1"-14	3/4"-16	23.50	40.20	12.50	10.00	1-1/16"	15/16"	Imperial
DAOF54305-1010IN	1"-14	7/8"-14	23.40	44.70	12.29	12.29	1-1/16"	1-1/16"	Imperial
DAOF54305-1012IN	1"-14	1-1/16"-12	24.50	50.00	12.50	15.47	1-3/16"	1-3/8"	Imperial
DAOF54305-1208	1-3/16"-12	3/4"-16	26.00	41.50	15.50	10.00	30 mm	24 mm	Metric
DAOF54305-1210	1-3/16"-12	7/8"-14	25.90	44.70	15.47	12.29	30 mm	27 mm	Metric
DAOF54305-1212	1-3/16"-12	1-1/16"-12	25.90	50.00	15.47	15.47	30 mm	36 mm	Metric
DAOF54305-1216	1-3/16"-12	1-5/16"-12	29.50	52.30	15.47	20.60	36 mm	41 mm	Metric
DAOF54305-1208IN	1-3/16"-12	3/4"-16	26.00	41.50	15.50	10.00	1-3/16"	15/16"	Imperial
DAOF54305-1210IN	1-3/16"-12	7/8"-14	25.90	44.70	15.47	12.29	1-3/16"	1-1/16"	Imperial
DAOF54305-1212IN	1-3/16"-12	1-1/16"-12	25.90	50.00	15.47	15.47	1-3/16"	1-3/8"	Imperial
DAOF54305-1216IN	1-3/16"-12	1-5/16"-12	29.50	52.30	15.47	20.60	1-7/16"	1-5/8"	Imperial
DAOF54305-1612	1-7/16"-12	1-1/16"-12	30.00	51.70	20.50	15.47	36 mm	36 mm	Metric
DAOF54305-1616	1-7/16"-12	1-5/16"-12	30.00	52.50	20.50	21.50	36 mm	41 mm	Metric
DAOF54305-1620	1-7/16"-12	1-5/8"-12	32.00	53.60	20.60	26.00	41 mm	50 mm	Metric
DAOF54305-1612IN	1-7/16"-12	1-1/16"-12	30.00	51.70	20.50	15.47	1-7/16"	1-3/8"	Imperial
DAOF54305-1616IN	1-7/16"-12	1-5/16"-12	30.00	52.50	20.50	21.50	1-7/16"	1-5/8"	Imperial
DAOF54305-1620IN	1-7/16"-12	1-5/8"-12	32.00	53.60	20.60	26.00	1-5/8"	1-7/8"	Imperial
DAOF54305-2016	1-11/16"-12	1-5/16"-12	32.00	53.50	26.00	21.50	41 mm	41 mm	Metric
DAOF54305-2020	1-11/16"-12	1-5/8"-12	32.00	53.60	26.00	27.50	41 mm	50 mm	Metric
DAOF54305-2016IN	1-11/16"-12	1-5/16"-12	32.00	53.50	26.00	21.50	1-5/8"	1-5/8"	Imperial
DAOF54305-2020IN	1-11/16"-12	1-5/8"-12	32.00	53.60	26.00	27.50	1-5/8"	1-7/8"	Imperial
DAOF54305-2424	2"-12	1-7/8"-12	36.80	53.60	32.00	32.00	50 mm	55 mm	Metric
DAOF54305-2424IN	2"-12	1-7/8"-12	36.80	53.60	32.00	32.00	1-7/8"	2-1/8"	Imperial

DAOF5406Q

45° Adjustable Elbow ORFS Male - BSPP Male + O Ring + Retaining Ring

D

A

OF

5

4

06

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type



Adaptor

ORFS UNF

Male

45° Elbow

BSPP

Male + O Ring + Retaining Ring

DME&JDE Code: DAOF5406Q

Product Type Hydraulic adaptor

Standard: ORFS

Structure: 45° Elbow

Connection Type: Adjustable Male × Male


Thread Types: UNF × BSPP

Sealing Method: O Ring + Retaining Ring

 German Technology Equipment



New-Standard



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAOF5406Q-0402	9/16"-18	1/8"-28	16.00	26.50	4.37	4.40	14.00	14.00
DAOF5406Q-0404	9/16"-18	1/4"-19	16.00	29.00	4.37	7.50	14.00	19.00
DAOF5406Q-0406	9/16"-18	3/8"-19	17.30	33.00	4.37	9.90	19.00	22.00
DAOF5406Q-0604	11/16"-16	1/4"-19	18.80	31.00	6.71	7.50	19.00	19.00
DAOF5406Q-0606	11/16"-16	3/8"-19	18.80	33.00	6.71	9.90	19.00	22.00
DAOF5406Q-0608	11/16"-16	1/2"-14	18.80	38.50	6.71	12.30	22.00	27.00
DAOF5406Q-0804	13/16"-16	1/4"-19	20.30	32.30	9.60	7.50	19.00	19.00
DAOF5406Q-0806	13/16"-16	3/8"-19	20.30	33.00	9.60	9.90	19.00	22.00
DAOF5406Q-0808	13/16"-16	1/2"-14	21.50	36.50	9.50	12.30	22.00	27.00
DAOF5406Q-1008	1"-14	1/2"-14	23.40	40.40	12.29	12.30	27.00	27.00
DAOF5406Q-1012	1"-14	3/4"-14	24.40	50.00	12.29	15.50	27.00	36.00
DAOF5406Q-1212	1-3/16"-12	3/4"-14	25.90	50.00	15.47	15.50	30.00	36.00
DAOF5406Q-1216	1-3/16"-12	1"-11	29.50	52.30	15.47	21.50	36.00	41.00
DAOF5406Q-1616	1-7/16"-12	1"-11	30.00	51.80	20.60	20.60	36.00	41.00
DAOF5406Q-1620	1-7/16"-12	1-1/4"-11	32.00	53.50	20.60	26.00	41.00	50.00
DAOF5406Q-2016	1-11/16"-12	1"-11	32.00	53.50	26.00	21.50	41.00	41.00
DAOF5406Q-2020	1-11/16"-12	1-1/4"-11	32.00	53.50	26.00	26.00	41.00	50.00
DAOF5406Q-2024	1-11/16"-12	1-1/2"-11	36.80	53.60	26.00	33.00	48.00	55.00

DAOF54525

45° Adjustable Elbow ORFS Male - Metric Male + O Ring

D

A

OF

5

4

52

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

45° Elbow

Metric

Male + O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF54525

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

45° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

UNF × Metric 60° + O Ring

Sealing Method:

O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAOF54525-0412	9/16"-18	M12X1.5	16.00	30.00	4.37	4.37	14.00	17.00
DAOF54525-0414	9/16"-18	M14X1.5	18.50	29.50	4.37	6.00	14.00	19.00
DAOF54525-0614	11/16"-16	M14X1.5	18.80	31.00	6.71	6.00	19.00	19.00
DAOF54525-0616	11/16"-16	M16X1.5	19.00	33.00	6.71	7.00	19.00	22.00
DAOF54525-0814	13/16"-16	M14X1.5	20.50	31.00	9.60	6.00	19.00	19.00
DAOF54525-0818	13/16"-16	M18X1.5	20.50	36.50	9.60	9.00	19.00	24.00
DAOF54525-1022	1"-14	M22X1.5	23.50	45.00	12.29	12.00	27.00	27.00
DAOF54525-1227	1-3/16"-12	M27X2	26.00	50.00	15.47	15.00	30.00	32.00
DAOF54525-1633	1-7/16"-12	M33X2	30.00	52.50	20.60	20.00	36.00	41.00
DAOF54525-2042	1-11/16"-12	M42X2	32.00	53.50	26.00	26.00	41.00	50.00
DAOF54525-2448	2"-12	M48X2	37.00	53.50	32.00	32.00	48.00	55.00

Certificate:



DAOF5428M

45° Elbow Connector ORFS Male - NPTF Male

D

A

OF

5

4

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

45° Elbow

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF5428M

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


45° Elbow

Connection Type:

Male × Male

Thread Types:

UNF × NPTF



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	Hex
#	UNF	NPTF	mm	mm	mm	mm	-	-
DAOF5428M-0402	9/16"-18	1/8"-27	16.00	17.00	4.37	4.78	14 mm	Metric
DAOF5428M-0404	9/16"-18	1/4"-18	16.00	21.80	4.37	7.14	14 mm	Metric
DAOF5428M-0402IN	9/16"-18	1/8"-27	16.00	17.00	4.37	4.78	9/16"	Imperial
DAOF5428M-0404IN	9/16"-18	1/4"-18	16.00	21.80	4.37	7.14	9/16"	Imperial
DAOF5428M-0604	11/16"-16	1/4"-18	18.80	21.80	6.71	7.14	19 mm	Metric
DAOF5428M-0606	11/16"-16	3/8"-18	18.80	24.10	6.71	10.31	19 mm	Metric
DAOF5428M-0608	11/16"-16	1/2"-14	20.00	29.70	6.71	13.49	22 mm	Metric
DAOF5428M-0604IN	11/16"-16	1/4"-18	18.80	21.80	6.71	7.14	3/4"	Imperial
DAOF5428M-0606IN	11/16"-16	3/8"-18	18.80	24.10	6.71	10.31	3/4"	Imperial
DAOF5428M-0608IN	11/16"-16	1/2"-14	20.00	29.70	6.71	13.49	7/8"	Imperial
DAOF5428M-0806	13/16"-16	3/8"-18	20.30	24.10	9.60	10.31	19 mm	Metric
DAOF5428M-0808	13/16"-16	1/2"-14	20.30	29.70	9.60	13.49	22 mm	Metric
DAOF5428M-0812	13/16"-16	3/4"-14	20.83	30.50	9.50	18.26	27 mm	Metric
DAOF5428M-0806IN	13/16"-16	3/8"-18	20.30	24.10	9.60	10.31	3/4"	Imperial
DAOF5428M-0808IN	13/16"-16	1/2"-14	20.30	29.70	9.60	13.49	7/8"	Imperial
DAOF5428M-0812IN	13/16"-16	3/4"-14	20.83	30.50	9.50	18.26	1-1/16"	Imperial
DAOF5428M-1008	1"-14	1/2"-14	23.40	29.90	12.29	13.49	27 mm	Metric
DAOF5428M-1008IN	1"-14	1/2"-14	23.40	29.90	12.29	13.49	1-1/16"	Imperial
DAOF5428M-1208	1-3/16"-12	1/2"-14	25.90	33.00	15.50	13.49	30 mm	Metric
DAOF5428M-1212	1-3/16"-12	3/4"-14	25.90	33.00	15.47	18.26	30 mm	Metric
DAOF5428M-1208IN	1-3/16"-12	1/2"-14	25.90	33.00	15.50	13.49	1-3/16"	Imperial
DAOF5428M-1212IN	1-3/16"-12	3/4"-14	25.90	33.00	15.47	18.26	1-3/16"	Imperial
DAOF5428M-1612	1-7/16"-12	3/4"-14	30.00	36.50	20.60	18.26	36 mm	Metric
DAOF5428M-1616	1-7/16"-12	1"-11-1/2	30.00	39.60	20.60	23.83	36 mm	Metric
DAOF5428M-1612IN	1-7/16"-12	3/4"-14	30.00	36.50	20.60	18.26	1-7/16"	Imperial
DAOF5428M-1616IN	1-7/16"-12	1"-11-1/2	30.00	39.60	20.60	23.83	1-7/16"	Imperial
DAOF5428M-2016	1-11/16"-12	1"-11-1/2	32.00	41.67	26.00	23.83	41 mm	Metric
DAOF5428M-2020	1-11/16"-12	1-1/4"-11-1/2	32.00	42.40	26.00	31.75	41 mm	Metric
DAOF5428M-2016IN	1-11/16"-12	1"-11-1/2	32.00	41.67	26.00	23.83	1-5/8"	Imperial
DAOF5428M-2020IN	1-11/16"-12	1-1/4"-11-1/2	32.00	42.40	26.00	31.75	1-5/8"	Imperial
DAOF5428M-2424	2"-12	1-1/2"-11-1/2	36.80	50.00	32.00	38.10	50 mm	Metric
DAOF5428M-2424IN	2"-12	1-1/2"-11-1/2	36.80	50.00	32.00	38.10	1-7/8"	Imperial

Certificate:





DAOF5424T

45° Bulkhead Elbow ORFS Male - ORFS Male

D

A

OF

5

4

24

T

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

45° Elbow

ORFS UNF

Bulkhead Male

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF5424T

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

45° Elbow

Connection Type:


Male × Male

Thread Types:

UNF × UNF

Other Features:

Bulkhead



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAOF5424T-0404	9/16"-18	9/16"-18	16.00	43.90	4.37	4.37	14 mm	22 mm	Metric
DAOF5424T-0404IN	9/16"-18	9/16"-18	16.00	43.90	4.37	4.37	9/16"	13/16"	Imperial
DAOF5424T-0606	11/16"-16	11/16"-16	18.80	48.50	6.71	6.71	19 mm	27 mm	Metric
DAOF5424T-0606IN	11/16"-16	11/16"-16	18.80	48.50	6.71	6.71	3/4"	1"	Imperial
DAOF5424T-0808	13/16"-16	13/16"-16	20.30	51.10	9.60	9.60	19 mm	30 mm	Metric
DAOF5424T-0808IN	13/16"-16	13/16"-16	20.30	51.10	9.60	9.60	3/4"	1-1/8"	Imperial
DAOF5424T-1010	1"-14	1"-14	23.50	56.50	12.50	12.50	27 mm	36 mm	Metric
DAOF5424T-1010IN	1"-14	1"-14	23.50	56.50	12.50	12.50	1-1/16"	1-5/16"	Imperial
DAOF5424T-1212	1-3/16"-12	1-3/16"-12	25.90	60.70	15.47	15.47	30 mm	41 mm	Metric
DAOF5424T-1212IN	1-3/16"-12	1-3/16"-12	25.90	60.70	15.47	15.47	1-3/16"	1-1/2"	Imperial
DAOF5424T-1616	1-7/16"-12	1-7/16"-12	30.00	65.30	20.60	20.60	36 mm	46 mm	Metric
DAOF5424T-1616IN	1-7/16"-12	1-7/16"-12	30.00	65.30	20.60	20.60	1-7/16"	1-3/4"	Imperial
DAOF5424T-2020	1-11/16"-12	1-11/16"-12	32.00	67.10	26.00	26.00	41 mm	50 mm	Metric
DAOF5424T-2020IN	1-11/16"-12	1-11/16"-12	32.00	67.10	26.00	26.00	1-5/8"	2"	Imperial
DAOF5424T-2424	2"-12	2"-12	36.80	67.10	32.00	32.00	48 mm	60 mm	Metric
DAOF5424T-2424IN	2"-12	2"-12	36.80	67.10	32.00	32.00	1-7/8"	2-3/8"	Imperial

Certificate:

DAOF59245

90° Elbow Connector ORFS Male - ORFS Male

D

A

OF

5

9

24

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

90° Elbow

ORFS UNF

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF59245

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


90° Elbow

Connection Type:

Male × Male

Thread Types:

UNF × UNF

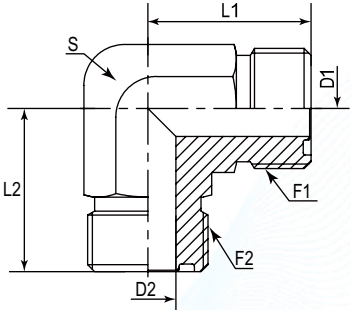

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-
DAOF59245-0404	9/16"-18	9/16"-18	21.60	21.60	4.50	4.50	14 mm	Metric
DAOF59245-0404IN	9/16"-18	9/16"-18	21.60	21.60	4.50	4.50	9/16"	Imperial
DAOF59245-0604	11/16"-16	9/16"-18	25.00	25.00	6.71	4.37	19 mm	Metric
DAOF59245-0606	11/16"-16	11/16"-16	24.90	24.90	6.71	6.71	19 mm	Metric
DAOF59245-0604IN	11/16"-16	9/16"-18	25.00	25.00	6.71	4.37	3/4"	Imperial
DAOF59245-0606IN	11/16"-16	11/16"-16	24.90	24.90	6.71	6.71	3/4"	Imperial
DAOF59245-0806	13/16"-16	11/16"-16	28.00	28.00	9.60	6.71	19 mm	Metric
DAOF59245-0808	13/16"-16	13/16"-16	28.00	28.00	9.60	9.60	19 mm	Metric
DAOF59245-0806IN	13/16"-16	11/16"-16	28.00	28.00	9.60	6.71	3/4"	Imperial
DAOF59245-0808IN	13/16"-16	13/16"-16	28.00	28.00	9.60	9.60	3/4"	Imperial
DAOF59245-1008	1"-14	13/16"-16	33.30	33.30	12.29	9.60	27 mm	Metric
DAOF59245-1010	1"-14	1"-14	33.30	33.30	12.29	12.29	27 mm	Metric
DAOF59245-1008IN	1"-14	13/16"-16	33.30	33.30	12.29	9.60	1-1/16"	Imperial
DAOF59245-1010IN	1"-14	1"-14	33.30	33.30	12.29	12.29	1-1/16"	Imperial
DAOF59245-1208	1-3/16"-12	13/16"-16	37.30	34.50	15.47	9.60	30 mm	Metric
DAOF59245-1212	1-3/16"-12	1-3/16"-12	37.50	37.50	15.50	15.50	30 mm	Metric
DAOF59245-1208IN	1-3/16"-12	13/16"-16	37.30	34.50	15.47	9.60	1-3/16"	Imperial
DAOF59245-1212IN	1-3/16"-12	1-3/16"-12	37.50	37.50	15.50	15.50	1-3/16"	Imperial
DAOF59245-1612	1-7/16"-12	1-3/16"-12	41.70	41.70	20.60	15.47	36 mm	Metric
DAOF59245-1616	1-7/16"-12	1-7/16"-12	41.70	41.70	20.60	20.60	36 mm	Metric
DAOF59245-1612IN	1-7/16"-12	1-3/16"-12	41.70	41.70	20.60	15.47	1-7/16"	Imperial
DAOF59245-1616IN	1-7/16"-12	1-7/16"-12	41.70	41.70	20.60	20.60	1-7/16"	Imperial
DAOF59245-2016	1-11/16"-12	1-7/16"-12	44.70	44.70	26.00	20.60	41 mm	Metric
DAOF59245-2020	1-11/16"-12	1-11/16"-12	44.70	44.70	26.00	26.00	41 mm	Metric
DAOF59245-2016IN	1-11/16"-12	1-7/16"-12	44.70	44.70	26.00	20.60	1-5/8"	Imperial
DAOF59245-2020IN	1-11/16"-12	1-11/16"-12	44.70	44.70	26.00	26.00	1-5/8"	Imperial
DAOF59245-2420	2"-12	1-11/16"-12	48.80	48.80	32.00	26.00	50 mm	Metric
DAOF59245-2424	2"-12	2"-12	48.80	48.80	32.00	32.00	50 mm	Metric
DAOF59245-2420IN	2"-12	1-11/16"-12	48.80	48.80	32.00	26.00	1-7/8"	Imperial
DAOF59245-2424IN	2"-12	2"-12	48.80	48.80	32.00	32.00	1-7/8"	Imperial

Certificate:



DAOF59305-0806	13/16"-16	9/16"-18	28.00	36.60	9.60	6.71	19 mm	19 mm	Metric	
DAOF59305-0808	13/16"-16	3/4"-16	28.00	40.60	9.60	9.60	19 mm	24 mm	Metric	
DAOF59305-0810	13/16"-16	7/8"-14	31.50	50.00	9.60	12.50	27 mm	27 mm	Metric	
DAOF59305-0812	13/16"-16	1-1/16"-12	34.00	55.00	9.60	15.47	30 mm	36 mm	Metric	
DAOF59305-0804IN	13/16"-16	7/16"-20	28.00	35.00	9.50	4.50	3/4"	5/8"	Imperial	
DAOF59305-0806IN	13/16"-16	9/16"-18	28.00	36.60	9.60	6.71	3/4"	3/4"	Imperial	
DAOF59305-0808IN	13/16"-16	3/4"-16	28.00	40.60	9.60	9.60	3/4"	15/16"	Imperial	
DAOF59305-0810IN	13/16"-16	7/8"-14	31.50	50.00	9.60	12.50	1-1/16"	1-1/16"	Imperial	
DAOF59305-0812IN	13/16"-16	1-1/16"-12	34.00	55.00	9.60	15.47	1-3/16"	1-3/8"	Imperial	
DAOF59305-1008	1"-14	3/4"-16	33.50	46.00	12.50	10.00	27 mm	24 mm	Metric	
DAOF59305-1010	1"-14	7/8"-14	33.30	50.00	12.29	12.29	27 mm	27 mm	Metric	
DAOF59305-1012	1"-14	1-1/16"-12	35.80	55.10	12.29	15.47	30 mm	36 mm	Metric	
DAOF59305-1008IN	1"-14	3/4"-16	33.50	46.00	12.50	10.00	1-1/16"	15/16"	Imperial	
DAOF59305-1010IN	1"-14	7/8"-14	33.30	50.00	12.29	12.29	1-1/16"	1-1/16"	Imperial	
DAOF59305-1012IN	1"-14	1-1/16"-12	35.80	55.10	12.29	15.47	1-3/16"	1-3/8"	Imperial	
DAOF59305-1208	1-3/16"-12	3/4"-16	37.50	46.50	15.50	10.00	30 mm	24 mm	Metric	
DAOF59305-1210	1-3/16"-12	7/8"-14	37.50	50.90	15.50	12.50	30 mm	27 mm	Metric	
DAOF59305-1212	1-3/16"-12	1-1/16"-12	37.50	55.00	15.50	15.50	30 mm	36 mm	Metric	
DAOF59305-1216	1-3/16"-12	1-5/16"-12	41.00	59.70	15.47	21.50	36 mm	41 mm	Metric	
DAOF59305-1220	1-3/16"-12	1-5/8"-12	44.20	62.20	15.47	26.01	41 mm	50 mm	Metric	
DAOF59305-1208IN	1-3/16"-12	3/4"-16	37.50	46.50	15.50	10.00	1-3/16"	15/16"	Imperial	
DAOF59305-1210IN	1-3/16"-12	7/8"-14	37.50	50.90	15.50	12.50	1-3/16"	1-1/16"	Imperial	
DAOF59305-1212IN	1-3/16"-12	1-1/16"-12	37.50	55.00	15.50	15.50	1-3/16"	1-3/8"	Imperial	
DAOF59305-1216IN	1-3/16"-12	1-5/16"-12	41.00	59.70	15.47	21.50	1-7/16"	1-5/8"	Imperial	
DAOF59305-1220IN	1-3/16"-12	1-5/8"-12	44.20	62.20	15.47	26.01	1-5/8"	1-7/8"	Imperial	
DAOF59305-1610	1-7/16"-12	7/8"-14	41.50	54.60	20.50	12.50	36 mm	27 mm	Metric	
DAOF59305-1612	1-7/16"-12	1-1/16"-12	41.70	58.90	20.60	15.47	36 mm	36 mm	Metric	
DAOF59305-1614	1-7/16"-12	1-3/16"-12	41.66	58.93	20.60	18.00	36 mm	41 mm	Metric	
DAOF59305-1616	1-7/16"-12	1-5/16"-12	41.70	59.70	20.60	20.60	36 mm	41 mm	Metric	
DAOF59305-1620	1-7/16"-12	1-5/8"-12	44.70	62.20	20.50	27.50	41 mm	50 mm	Metric	
DAOF59305-1624	1-7/16"-12	1-7/8"-12	48.80	65.80	20.60	32.00	50 mm	55 mm	Metric	
DAOF59305-1610IN	1-7/16"-12	7/8"-14	41.50	54.60	20.50	12.50	1-7/16"	1-1/16"	Imperial	
DAOF59305-1612IN	1-7/16"-12	1-1/16"-12	41.70	58.90	20.60	15.47	1-7/16"	1-3/8"	Imperial	
DAOF59305-1614IN	1-7/16"-12	1-3/16"-12	41.66	58.93	20.60	18.00	1-7/16"	1-1/2"	Imperial	
DAOF59305-1616IN	1-7/16"-12	1-5/16"-12	41.70	59.70	20.60	20.60	1-7/16"	1-5/8"	Imperial	
DAOF59305-1620IN	1-7/16"-12	1-5/8"-12	44.70	62.20	20.50	27.50	1-5/8"	1-7/8"	Imperial	
DAOF59305-1624IN	1-7/16"-12	1-7/8"-12	48.80	65.80	20.60	32.00	1-7/8"	2-1/8"	Imperial	
DAOF59305-2012	1-11/16"-12	1-1/16"-12	44.70	61.10	26.00	15.47	41 mm	36 mm	Metric	
DAOF59305-2016	1-11/16"-12	1-5/16"-12	44.70	62.20	26.00	21.50	41 mm	41 mm	Metric	
DAOF59305-2020	1-11/16"-12	1-5/8"-12	44.50	62.00	26.00	27.50	41 mm	50 mm	Metric	
DAOF59305-2024	1-11/16"-12	1-7/8"-12	48.80	65.80	26.00	32.00	50 mm	55 mm	Metric	
DAOF59305-2012IN	1-11/16"-12	1-1/16"-12	44.70	61.10	26.00	15.47	1-5/8"	1-3/8"	Imperial	
DAOF59305-2016IN	1-11/16"-12	1-5/16"-12	44.70	62.20	26.00	21.50	1-5/8"	1-5/8"	Imperial	
DAOF59305-2020IN	1-11/16"-12	1-5/8"-12	44.50	62.00	26.00	27.50	1-5/8"	1-7/8"	Imperial	
DAOF59305-2024IN	1-11/16"-12	1-7/8"-12	48.80	65.80	26.00	32.00	1-7/8"	2-1/8"	Imperial	
DAOF59305-2420	2"-12	1-5/8"-12	49.00	66.00	32.00	27.50	50 mm	50 mm	Metric	
DAOF59305-2424	2"-12	1-7/8"-12	49.00	66.00	32.00	33.50	50 mm	55 mm	Metric	
DAOF59305-2420IN	2"-12	1-5/8"-12	49.00	66.00	32.00	27.50	1-7/8"	1-7/8"	Imperial	
DAOF59305-2424IN	2"-12	1-7/8"-12	49.00	66.00	32.00	33.50	1-7/8"	2-1/8"	Imperial	

Certificate:



DAOF5906Q

90° Adjustable Elbow ORFS Male - BSPP Male + O Ring + Retaining Ring

D

A

OF

5

9

06

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type



Adaptor

ORFS UNF

Male

90° Elbow

BSPP

Male + O Ring + Retaining Ring

DME&JDE Code: DAOF5906Q

Product Type Hydraulic adaptor

Standard: ORFS

Structure: 90° Elbow

Connection Type: Adjustable Male × Male


Thread Types: UNF × BSPP

Sealing Method: O Ring + Retaining Ring

 German Technology Equipment



New-Standard



PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAOF5906Q-0402	9/16"-18	1/8"-28	21.50	30.00	4.37	4.40	14.00	14.00
DAOF5906Q-0404	9/16"-18	1/4"-19	23.50	35.00	4.37	7.50	14.00	19.00
DAOF5906Q-0406	9/16"-18	3/8"-19	25.00	38.00	4.37	9.90	19.00	22.00
DAOF5906Q-0604	11/16"-16	1/4"-19	25.00	36.00	6.71	7.50	19.00	19.00
DAOF5906Q-0606	11/16"-16	3/8"-19	26.50	38.00	6.71	9.90	19.00	22.00
DAOF5906Q-0608	11/16"-16	1/2"-14	29.50	48.00	6.71	12.30	22.00	27.00
DAOF5906Q-0804	13/16"-16	1/4"-19	28.00	35.00	9.60	7.50	19.00	19.00
DAOF5906Q-0806	13/16"-16	3/8"-19	28.00	36.50	9.60	9.90	19.00	22.00
DAOF5906Q-0808	13/16"-16	1/2"-14	31.00	48.00	9.60	12.30	27.00	27.00
DAOF5906Q-0812	13/16"-16	3/4"-14	30.70	49.00	9.60	15.50	27.00	36.00
DAOF5906Q-1006	1"-14	3/8"-19	35.50	43.00	12.29	9.90	27.00	22.00
DAOF5906Q-1008	1"-14	1/2"-14	33.50	48.00	12.29	12.30	27.00	27.00
DAOF5906Q-1010	1"-14	5/8"-14	37.00	48.00	12.29	14.00	27.00	32.00
DAOF5906Q-1012	1"-14	3/4"-14	36.00	51.50	12.29	15.50	30.00	36.00
DAOF5906Q-1208	1-3/16"-12	1/2"-14	37.50	49.00	15.47	12.30	30.00	27.00
DAOF5906Q-1212	1-3/16"-12	3/4"-14	37.50	51.50	15.47	15.50	30.00	36.00
DAOF5906Q-1216	1-3/16"-12	1"-11	41.50	58.00	15.47	21.50	36.00	41.00
DAOF5906Q-1612	1-7/16"-12	3/4"-14	42.00	57.50	20.60	15.50	36.00	36.00
DAOF5906Q-1616	1-7/16"-12	1"-11	42.00	58.00	20.60	21.50	36.00	41.00
DAOF5906Q-1620	1-7/16"-12	1-1/4"-11	44.50	60.50	20.60	27.50	41.00	50.00
DAOF5906Q-2016	1-11/16"-12	1"-11	44.70	60.50	26.00	21.50	41.00	41.00
DAOF5906Q-2020	1-11/16"-12	1-1/4"-11	44.70	60.50	26.00	27.50	41.00	50.00
DAOF5906Q-2024	1-11/16"-12	1-1/2"-11	49.00	64.50	26.00	33.00	48.00	55.00
DAOF5906Q-2424	2"-12	1-1/2"-11	49.00	64.50	32.00	33.00	48.00	55.00

Certificate:



DAOF59065

90° Adjustable Elbow ORFS Male - BSPP Male + O Ring

D

A

OF

5

9

06

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

90° Elbow

BSPP

Male + O Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAOF59065

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

UNF × BSPP + O Ring

Sealing Method:

O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	UNF	BSPP	mm	mm	mm	mm	mm	mm
DAOF59065-0402	9/16"-18	1/8"-28	21.50	30.00	4.37	4.40	14.00	14.00
DAOF59065-0404	9/16"-18	1/4"-19	23.50	35.00	4.37	7.50	14.00	19.00
DAOF59065-0406	9/16"-18	3/8"-19	25.00	38.00	4.37	9.90	19.00	22.00
DAOF59065-0604	11/16"-16	1/4"-19	25.00	36.00	6.71	7.50	19.00	19.00
DAOF59065-0606	11/16"-16	3/8"-19	26.50	38.00	6.71	9.90	19.00	22.00
DAOF59065-0608	11/16"-16	1/2"-14	29.50	48.00	6.71	12.30	22.00	27.00
DAOF59065-0804	13/16"-16	1/4"-19	28.00	35.00	9.60	7.50	19.00	19.00
DAOF59065-0806	13/16"-16	3/8"-19	28.00	36.50	9.60	9.90	19.00	22.00
DAOF59065-0808	13/16"-16	1/2"-14	31.00	48.00	9.60	12.30	27.00	27.00
DAOF59065-0812	13/16"-16	3/4"-14	30.70	49.00	9.60	15.50	27.00	36.00
DAOF59065-1006	1"-14	3/8"-19	35.50	43.00	12.29	9.90	27.00	22.00
DAOF59065-1008	1"-14	1/2"-14	33.50	48.00	12.29	12.30	27.00	27.00
DAOF59065-1010	1"-14	5/8"-14	37.00	48.00	12.29	14.00	27.00	32.00
DAOF59065-1012	1"-14	3/4"-14	36.00	51.50	12.29	15.50	30.00	36.00
DAOF59065-1208	1-3/16"-12	1/2"-14	37.50	49.00	15.47	12.30	30.00	27.00
DAOF59065-1212	1-3/16"-12	3/4"-14	37.50	51.50	15.47	15.50	30.00	36.00
DAOF59065-1216	1-3/16"-12	1"-11	41.50	58.00	15.47	21.50	36.00	41.00
DAOF59065-1612	1-7/16"-12	3/4"-14	42.00	57.50	20.60	15.50	36.00	36.00
DAOF59065-1616	1-7/16"-12	1"-11	42.00	58.00	20.60	21.50	36.00	41.00
DAOF59065-1620	1-7/16"-12	1-1/4"-11	44.50	60.50	20.60	27.50	41.00	50.00
DAOF59065-2016	1-11/16"-12	1"-11	44.70	60.50	26.00	21.50	41.00	41.00
DAOF59065-2020	1-11/16"-12	1-1/4"-11	44.70	60.50	26.00	27.50	41.00	50.00
DAOF59065-2024	1-11/16"-12	1-1/2"-11	49.00	64.50	26.00	33.00	48.00	55.00
DAOF59065-2424	2"-12	1-1/2"-11	49.00	64.50	32.00	33.00	48.00	55.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

PC

DEKRA

DIN

SAE

MA

CE

UK CA

DAOF5952Q

90° Adjustable Elbow ORFS Male - Metric Male + O Ring + Retaining Ring

D

A

OF

5

9

52

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

90° Elbow

Metric

Male + O Ring + Retaining Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAOF5952Q

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

UNF × Metric

Sealing Method:

O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAOF5952Q-0410	9/16"-18	M10X1	21.50	32.50	4.37	3.00	14.00	14.00
DAOF5952Q-0412	9/16"-18	M12X1.5	21.50	32.50	4.37	4.00	14.00	17.00
DAOF5952Q-0614	11/16"-16	M14X1.5	25.00	36.00	6.71	6.00	19.00	19.00
DAOF5952Q-0616	11/16"-16	M16X1.5	25.00	37.00	6.71	7.00	19.00	22.00
DAOF5952Q-0618	11/16"-16	M18X1.5	25.00	40.00	6.71	9.00	19.00	24.00
DAOF5952Q-0622	11/16"-16	M22X1.5	29.90	49.00	6.71	12.00	27.00	27.00
DAOF5952Q-0816	13/16"-16	M16X1.5	28.00	37.00	9.60	7.00	19.00	22.00
DAOF5952Q-0818	13/16"-16	M18X1.5	28.00	41.00	9.60	9.00	19.00	24.00
DAOF5952Q-0822	13/16"-16	M22X1.5	31.50	49.00	9.60	12.00	27.00	27.00
DAOF5952Q-1018	1"-14	M18X1.5	33.50	48.00	12.29	9.00	27.00	24.00
DAOF5952Q-1022	1"-14	M22X1.5	33.50	49.00	12.29	12.00	27.00	27.00
DAOF5952Q-1227	1-3/16"-12	M27X2	37.50	55.50	15.47	15.00	30.00	32.00
DAOF5952Q-1233	1-3/16"-12	M33X2	41.50	60.00	15.50	20.00	36.00	41.00
DAOF5952Q-1627	1-7/16"-12	M27X2	41.50	59.50	20.50	15.00	36.00	32.00
DAOF5952Q-1633	1-7/16"-12	M33X2	42.00	60.00	20.60	20.00	36.00	41.00
DAOF5952Q-2033	1-11/16"-12	M33X2	44.70	62.50	26.00	20.00	41.00	41.00
DAOF5952Q-2042	1-11/16"-12	M42X2	44.50	63.00	26.00	26.00	41.00	50.00
DAOF5952Q-2448	2"-12	M48X2	47.90	66.00	32.00	32.00	48.00	55.00

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

PC

DEKRA

DIN

SAE

MA

CE

UK CA

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com




DAOF59525

90° Adjustable Elbow ORFS Male - Metric Male + O Ring

D	A	OF	5	9	52	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Male	90° Elbow	Metric	Male + O Ring



DME&JDE Code:	DAOF59525
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	90° Elbow
Connection Type:	Adjustable Male × Male
Thread Types:	UNF × Metric + O Ring
Sealing Method:	O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAOF59525-0410	9/16"-18	M10X1	21.50	32.50	4.37	3.00	14.00	14.00
DAOF59525-0412	9/16"-18	M12X1.5	21.50	32.50	4.37	4.00	14.00	17.00
DAOF59525-0614	11/16"-16	M14X1.5	25.00	36.00	6.71	6.00	19.00	19.00
DAOF59525-0616	11/16"-16	M16X1.5	25.00	37.00	6.71	7.00	19.00	22.00
DAOF59525-0618	11/16"-16	M18X1.5	25.00	40.00	6.71	9.00	19.00	24.00
DAOF59525-0622	11/16"-16	M22X1.5	29.90	49.00	6.71	12.00	27.00	27.00
DAOF59525-0816	13/16"-16	M16X1.5	28.00	37.00	9.60	7.00	19.00	22.00
DAOF59525-0818	13/16"-16	M18X1.5	28.00	41.00	9.60	9.00	19.00	24.00
DAOF59525-0822	13/16"-16	M22X1.5	31.50	49.00	9.60	12.00	27.00	27.00
DAOF59525-1018	1"-14	M18X1.5	33.50	48.00	12.29	9.00	27.00	24.00
DAOF59525-1022	1"-14	M22X1.5	33.50	49.00	12.29	12.00	27.00	27.00
DAOF59525-1227	1-3/16"-12	M27X2	37.50	55.50	15.47	15.00	30.00	32.00
DAOF59525-1233	1-3/16"-12	M33X2	41.50	60.00	15.50	20.00	36.00	41.00
DAOF59525-1627	1-7/16"-12	M27X2	41.50	59.50	20.50	15.00	36.00	32.00
DAOF59525-1633	1-7/16"-12	M33X2	42.00	60.00	20.60	20.00	36.00	41.00
DAOF59525-2033	1-11/16"-12	M33X2	44.70	62.50	26.00	20.00	41.00	41.00
DAOF59525-2042	1-11/16"-12	M42X2	44.50	63.00	26.00	26.00	41.00	50.00
DAOF59525-2448	2"-12	M48X2	47.90	66.00	32.00	32.00	48.00	55.00

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, PC, DEKRA, DIN, SAE, MA, CE, UK CA


DAOF5928M

90° Elbow Connector ORFS Male - NPTF Male 60°

D	A	OF	5	9	28	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Male	90° Elbow	NPTF	Male



DME&JDE Code:	DAOF5928M
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	90° Elbow
Connection Type:	Male × Male
Thread Types:	UNF × NPTF 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	Hex
#	UNF	NPTF	mm	mm	mm	mm	-	-
DAOF5928M-0402	9/16"-18	1/8"-27	21.60	19.80	4.37	4.78	14 mm	Metric
DAOF5928M-0404	9/16"-18	1/4"-18	21.60	28.50	4.37	7.14	14 mm	Metric
DAOF5928M-0406	9/16"-18	3/8"-18	24.60	31.00	4.37	10.31	19 mm	Metric
DAOF5928M-0408	9/16"-18	1/2"-14	27.70	37.30	4.37	13.49	22 mm	Metric
DAOF5928M-0402IN	9/16"-18	1/8"-27	21.60	19.80	4.37	4.78	9/16"	Imperial
DAOF5928M-0404IN	9/16"-18	1/4"-18	21.60	28.50	4.37	7.14	9/16"	Imperial
DAOF5928M-0406IN	9/16"-18	3/8"-18	24.60	31.00	4.37	10.31	3/4"	Imperial
DAOF5928M-0408IN	9/16"-18	1/2"-14	27.70	37.30	4.37	13.49	7/8"	Imperial
DAOF5928M-0602	11/16"-16	1/8"-27	24.90	22.86	6.71	4.78	19 mm	Metric
DAOF5928M-0604	11/16"-16	1/4"-18	24.90	27.70	6.71	7.14	19 mm	Metric
DAOF5928M-0606	11/16"-16	3/8"-18	24.90	31.00	6.71	10.31	19 mm	Metric
DAOF5928M-0608	11/16"-16	1/2"-14	29.21	37.34	6.71	13.49	22 mm	Metric
DAOF5928M-0612	11/16"-16	3/4"-14	33.50	40.40	6.71	18.26	27 mm	Metric
DAOF5928M-0602IN	11/16"-16	1/8"-27	24.90	22.86	6.71	4.78	3/4"	Imperial
DAOF5928M-0604IN	11/16"-16	1/4"-18	24.90	27.70	6.71	7.14	3/4"	Imperial
DAOF5928M-0606IN	11/16"-16	3/8"-18	24.90	31.00	6.71	10.31	3/4"	Imperial
DAOF5928M-0608IN	11/16"-16	1/2"-14	29.21	37.34	6.71	13.49	7/8"	Imperial

Certificate: ISO 9001, ISO 14001, MSHA, DAKKS, PC, DEKRA, DIN, SAE, MA, CE, UK CA

DAOF5928M-0612IN	11/16"-16	3/4"-14	33.50	40.40	6.71	18.26	1-1/16"	Imperial
DAOF5928M-0804	13/16"-16	1/4"-18	27.90	31.00	9.60	7.14	19 mm	Metric
DAOF5928M-0806	13/16"-16	3/8"-18	27.90	31.00	9.60	10.31	19 mm	Metric
DAOF5928M-0808	13/16"-16	1/2"-14	27.97	37.30	9.60	13.49	19 mm	Metric
DAOF5928M-0812	13/16"-16	3/4"-14	33.50	40.40	9.60	18.26	22 mm	Metric
DAOF5928M-0804IN	13/16"-16	1/4"-18	27.90	31.00	9.60	7.14	27 mm	Metric
DAOF5928M-0806IN	13/16"-16	3/8"-18	27.90	31.00	9.60	10.31	3/4"	Imperial
DAOF5928M-0808IN	13/16"-16	1/2"-14	27.97	37.30	9.60	13.49	7/8"	Imperial
DAOF5928M-0812IN	13/16"-16	3/4"-14	33.50	40.40	9.60	18.26	1-1/16"	Imperial
DAOF5928M-1008	1"-14	1/2"-14	33.30	37.30	12.29	13.49	27 mm	Metric
DAOF5928M-1012	1"-14	3/4"-14	35.80	40.40	12.29	18.26	27 mm	Metric
DAOF5928M-1016	1"-14	1"-11-1/2	39.60	50.00	12.29	23.83	33 mm	Metric
DAOF5928M-1008IN	1"-14	1/2"-14	33.30	37.30	12.29	13.49	1-1/16"	Imperial
DAOF5928M-1012IN	1"-14	3/4"-14	35.80	40.40	12.29	18.26	1-1/16"	Imperial
DAOF5928M-1016IN	1"-14	1"-11-1/2	39.60	50.00	12.29	23.83	1-5/16"	Imperial
DAOF5928M-1206	1-3/16"-12	3/8"-18	37.30	37.50	15.47	10.31	30 mm	Metric
DAOF5928M-1208	1-3/16"-12	1/2"-14	37.30	40.40	15.47	13.49	30 mm	Metric
DAOF5928M-1212	1-3/16"-12	3/4"-14	37.30	40.40	15.47	18.26	30 mm	Metric
DAOF5928M-1216	1-3/16"-12	1"-11-1/2	41.20	50.00	15.47	23.83	33 mm	Metric
DAOF5928M-1206IN	1-3/16"-12	3/8"-18	37.30	37.50	15.47	10.31	1-3/16"	Imperial
DAOF5928M-1208IN	1-3/16"-12	1/2"-14	37.30	40.40	15.47	13.49	1-3/16"	Imperial
DAOF5928M-1212IN	1-3/16"-12	3/4"-14	37.30	40.40	15.47	18.26	1-3/16"	Imperial
DAOF5928M-1216IN	1-3/16"-12	1"-11-1/2	41.20	50.00	15.47	23.83	1-5/16"	Imperial
DAOF5928M-1616	1-7/16"-12	1"-11-1/2	41.70	50.00	20.60	23.83	36 mm	Metric
DAOF5928M-1616IN	1-7/16"-12	1"-11-1/2	41.70	50.00	20.60	23.83	1-7/16"	Imperial
DAOF5928M-2016	1-11/16"-12	1"-11-1/2	44.70	59.70	26.00	23.83	41 mm	Metric
DAOF5928M-2020	1-11/16"-12	1-1/4"-11-1/2	44.70	60.50	26.00	31.75	41 mm	Metric
DAOF5928M-2016IN	1-11/16"-12	1"-11-1/2	44.70	59.70	26.00	23.83	1-5/8"	Imperial
DAOF5928M-2020IN	1-11/16"-12	1-1/4"-11-1/2	44.70	60.50	26.00	31.75	1-5/8"	Imperial
DAOF5928M-2424	2"-12	1-1/2"-11-1/2	48.80	67.00	32.00	38.10	50 mm	Metric
DAOF5928M-2424IN	2"-12	1-1/2"-11-1/2	48.80	67.00	32.00	38.10	1-7/8"	Imperial

DAOF5907M

90° Elbow Connector ORFS Male - BSPT Male


D	A	OF	5	9	07	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
	Adaptor	ORFS UNF	Male	90° Elbow	BSPT	Male

 German Technology Equipment



New-Standard

DME&JDE Code:	DAOF5907M
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	90° Elbow
Connection Type:	Male × Male
Thread Types:	UNF × BSPT



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S
#	UNF	BSPT	mm	mm	mm	mm	mm
DAOF5907M-0404	9/16"-18	1/4"-19	4.37	6.00	23.50	27.70	14.00
DAOF5907M-0606	11/16"-16	3/8"-19	6.71	9.00	26.50	31.00	19.00
DAOF5907M-0808	13/16"-16	1/2"-14	9.60	12.00	31.00	37.50	22.00
DAOF5907M-1010	1"-14	5/8"-14	12.29	14.00	37.00	39.00	27.00
DAOF5907M-1212	1-3/16"-12	3/4"-14	15.47	16.70	37.50	42.00	30.00
DAOF5907M-1616	1-7/16"-12	1"-11	20.60	22.20	42.00	50.00	36.00
DAOF5907M-2020	1-11/16"-12	1-1/4"-11	26.00	28.60	49.00	60.50	48.00
DAOF5907M-2424	2"-12	1-1/2"-11	32.00	33.30	49.00	67.10	48.00


DAOF5924T

90° Elbow Bulkhead Connector ORFS Male - ORFS Male

D	A	0F	5	9	24	T
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Male	90° Elbow	ORFS UNF	Bulkhead Male



DME&JDE Code:	DAOF5924T
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	90° Elbow
Connection Type:	Male × Male
Thread Types:	UNF × UNF
Other Features:	Bulkhead



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAOF5924T-0404	9/16"-18	9/16"-18	22.60	47.00	4.37	4.37	14 mm	22 mm	Metric
DAOF5924T-0404IN	9/16"-18	9/16"-18	22.60	47.00	4.37	4.37	9/16"	13/16"	Imperial
DAOF5924T-0606	11/16"-16	11/16"-16	26.00	52.00	6.50	6.50	19 mm	27 mm	Metric
DAOF5924T-0606IN	11/16"-16	11/16"-16	26.00	52.00	6.50	6.50	3/4"	1"	Imperial
DAOF5924T-0808	13/16"-16	13/16"-16	29.00	55.40	9.60	9.60	19 mm	30 mm	Metric
DAOF5924T-0808IN	13/16"-16	13/16"-16	29.00	55.40	9.60	9.60	3/4"	1-1/8"	Imperial
DAOF5924T-1010	1"-14	1"-14	34.50	63.00	12.50	12.50	27 mm	36 mm	Metric
DAOF5924T-1010IN	1"-14	1"-14	34.50	63.00	12.50	12.50	1-1/16"	1-5/16"	Imperial
DAOF5924T-1212	1-3/16"-12	1-3/16"-12	38.50	67.20	15.47	15.47	30 mm	41 mm	Metric
DAOF5924T-1212IN	1-3/16"-12	1-3/16"-12	38.50	67.20	15.47	15.47	1-3/16"	1-1/2"	Imperial
DAOF5924T-1616	1-7/16"-12	1-7/16"-12	42.40	71.10	20.60	20.60	36 mm	46 mm	Metric
DAOF5924T-1616IN	1-7/16"-12	1-7/16"-12	42.40	71.10	20.60	20.60	1-7/16"	1-3/4"	Imperial
DAOF5924T-2020	1-11/16"-12	1-11/16"-12	45.50	75.40	26.00	26.00	41 mm	50 mm	Metric
DAOF5924T-2020IN	1-11/16"-12	1-11/16"-12	45.50	75.40	26.00	26.00	1-5/8"	2"	Imperial
DAOF5924T-2424	2"-12	2"-12	49.50	79.50	32.00	32.00	50 mm	60 mm	Metric
DAOF5924T-2424IN	2"-12	2"-12	49.50	79.50	32.00	32.00	1-7/8"	2-3/8"	Imperial




DAOF19305

90° Adjustable Elbow ORFS Female Swivel - SAE Male O Ring

D	A	OF	1	9	30	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Male	90° Elbow	SAE UNF	Male O Ring



DME&JDE Code:	DAOF19305
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	90° Elbow
Connection Type:	Swivel Female × Adjustable Male
Thread Types:	ORFS UNF × SAE UNF + O Ring
Sealing Method:	O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S2	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-	-
DAOF19305-0404	9/16"-18	7/16"-20	26.41	32.80	4.19	4.37	14 mm	17 mm	17 mm	Metric
DAOF19305-0406	9/16"-18	9/16"-18	28.90	36.80	4.19	6.71	19 mm	17 mm	19 mm	Metric
DAOF19305-0404IN	9/16"-18	7/16"-20	26.41	32.80	4.19	4.37	9/16"	11/16"	5/8"	Imperial
DAOF19305-0406IN	9/16"-18	9/16"-18	28.90	36.80	4.19	6.71	3/4"	11/16"	3/4"	Imperial
DAOF19305-0606	11/16"-16	9/16"-18	31.00	36.80	6.71	6.71	19 mm	22 mm	19 mm	Metric
DAOF19305-0606IN	11/16"-16	9/16"-18	31.00	36.80	6.71	6.71	3/4"	13/16"	3/4"	Imperial
DAOF19305-0808	13/16"-16	3/4"-16	38.00	40.50	9.09	9.60	19 mm	24 mm	24 mm	Metric
DAOF19305-0808IN	13/16"-16	3/4"-16	38.00	40.50	9.09	9.60	3/4"	15/16"	15/16"	Imperial
DAOF19305-1010	1"-14	7/8"-14	41.20	50.00	11.51	12.50	27 mm	30 mm	27 mm	Metric
DAOF19305-1010IN	1"-14	7/8"-14	41.20	50.00	11.51	12.50	1-1/16"	1-1/8"	1-1/16"	Imperial
DAOF19305-1212	1-3/16"-12	1-1/16"-12	46.50	55.00	14.00	15.47	30 mm	36 mm	36 mm	Metric
DAOF19305-1212IN	1-3/16"-12	1-1/16"-12	46.50	55.00	14.00	15.47	1-3/16"	1-3/8"	1-3/8"	Imperial
DAOF19305-1616	1-7/16"-12	1-5/16"-12	53.50	59.50	20.00	21.50	36 mm	41 mm	41 mm	Metric
DAOF19305-1616IN	1-7/16"-12	1-5/16"-12	53.50	59.50	20.00	21.50	1-7/16"	1-5/8"	1-5/8"	Imperial
DAOF19305-2020	1-11/16"-12	1-5/8"-12	58.17	62.20	26.01	26.01	41 mm	50 mm	50 mm	Metric
DAOF19305-2020IN	1-11/16"-12	1-5/8"-12	58.17	62.20	26.01	26.01	1-5/8"	1-7/8"	1-7/8"	Imperial
DAOF19305-2424	2"-12	1-7/8"-12	58.80	66.00	32.00	32.00	50 mm	60 mm	55 mm	Metric
DAOF19305-2424IN	2"-12	1-7/8"-12	58.80	66.00	32.00	32.00	1-7/8"	2-1/4"	2-1/8"	Imperial





DAOF1906Q

90° Adjustable Elbow ORFS Female Swivel - BSPP Male + O Ring + Retaining Ring

D

A

OF

1

9

06

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Swivel Female


90° Elbow

BSPP

Male + O Ring + Retaining Ring

German Technology Equipment

New-Standard



DME&JDE Code:

DAOF1906Q

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

90° Elbow

Connection Type:

Swivel Female × Adjustable Male

Thread Types:

UNF × BSPP

Sealing Method:

O Ring + Retaining Ring

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	S2
#	UNF	BSPP	mm	mm	mm	mm	mm	mm	mm
DAOF1906Q-0404	9/16"-18	1/4"-19	4.19	7.50	26.41	35.00	14.00	17.46	19.00
DAOF1906Q-0606	11/16"-16	3/8"-19	6.71	9.90	29.21	38.00	19.00	20.62	22.00
DAOF1906Q-0808	13/16"-16	1/2"-14	9.09	12.30	38.00	48.00	22.00	23.81	27.00
DAOF1906Q-1212	1-3/16"-12	3/4"-14	13.89	15.50	46.30	51.50	30.00	34.93	36.00
DAOF1906Q-1616	1-7/16"-12	1"-11	19.89	21.50	53.34	58.00	36.00	41.28	41.00
DAOF1906Q-2020	1-11/16"-12	1-1/4"-11	26.01	27.50	58.17	60.50	41.00	47.60	50.00
DAOF1906Q-2424	2"-12	1-1/2"-11	32.00	33.00	61.20	64.50	48.00	57.15	55.00

Certificate:

DAOF59251

90° Elbow ORFS Male - JIC Swivel Female 74°

D

A

OF

5

9

251

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

JIC Swivel Female

DME

Adaptor

ORFS UNF


Male

90° Elbow

JIC Swivel Female

German Technology Equipment

New-Standard



DME&JDE Code:

DAOF59251

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

90° Elbow

Connection Type:

Male × Swivel Female

Thread Types:

ORFS UNF× JIC UNF 74°

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAOF59251-0404	9/16"-18	7/16"-20	4.37	4.37	21.50	22.00	14 mm	14 mm	Metric
DAOF59251-0404IN	9/16"-18	7/16"-20	4.37	4.37	21.50	22.00	9/16"	9/16"	Imperial
DAOF59251-0606	11/16"-16	9/16"-18	6.71	7.54	25.00	23.90	19 mm	19 mm	Metric
DAOF59251-0606IN	11/16"-16	9/16"-18	6.71	7.54	25.00	23.90	3/4"	5/8"	Imperial
DAOF59251-0808	13/16"-16	3/4"-16	9.60	9.93	28.00	24.50	19 mm	22 mm	Metric
DAOF59251-0808IN	13/16"-16	3/4"-16	9.60	9.93	28.00	24.50	3/4"	7/8"	Imperial
DAOF59251-1212	1-3/16"-12	1-1/16"-12	15.50	15.47	37.50	32.00	30 mm	32 mm	Metric
DAOF59251-1212IN	1-3/16"-12	1-1/16"-12	15.50	15.47	37.50	32.00	1-1/4"	1-1/4"	Imperial
DAOF59251-1616	1-7/16"-12	1-5/16"-12	20.50	21.44	41.70	36.50	36 mm	41 mm	Metric
DAOF59251-1616IN	1-7/16"-12	1-5/16"-12	20.50	21.44	41.70	36.50	1-3/8"	1-1/2"	Imperial
DAOF59251-2020	1-11/16"-12	1-5/8"-12	26.00	27.42	44.70	42.80	41 mm	50 mm	Metric
DAOF59251-2020IN	1-11/16"-12	1-5/8"-12	26.00	27.42	44.70	42.80	1-1/2"	2"	Imperial
DAOF59251-2424	2"-12	1-7/8"-12	32.00	33.32	48.80	47.14	48 mm	60 mm	Metric
DAOF59251-2424IN	2"-12	1-7/8"-12	32.00	33.32	48.80	47.14	1-7/8"	2-1/4"	Imperial

Certificate:



DAOF5930J

90° Adjustable Long Elbow ORFS Male - SAE Male O Ring

D

A

OF

5

9

30

J

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

90° Elbow

SAE UNF

Male Long O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF5930J

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

ORFS UNF × SAE UNF

Sealing Method:

Long O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	Hex
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAOF5930J-0404	9/16"-18	7/16"-20	21.59	56.64	4.37	4.37	14 mm	17 mm	Metric
DAOF5930J-0404IN	9/16"-18	7/16"-20	21.59	56.64	4.37	4.37	9/16"	5/8"	Imperial
DAOF5930J-0606	11/16"-16	9/16"-18	25.00	66.30	6.71	6.71	19 mm	19 mm	Metric
DAOF5930J-0606IN	11/16"-16	9/16"-18	25.00	66.30	6.71	6.71	3/4"	3/4"	Imperial
DAOF5930J-0808	13/16"-16	3/4"-16	28.00	74.90	9.50	9.60	19 mm	24 mm	Metric
DAOF5930J-0808IN	13/16"-16	3/4"-16	28.00	74.90	9.50	9.60	3/4"	15/16"	Imperial
DAOF5930J-1010	1"-14	7/8"-14	33.30	89.20	12.29	12.29	27 mm	27 mm	Metric
DAOF5930J-1012	1"-14	1-1/16"-12	35.80	100.84	12.29	15.47	30 mm	36 mm	Metric
DAOF5930J-1010IN	1"-14	7/8"-14	33.30	89.20	12.29	12.29	1-1/16"	1-1/16"	Imperial
DAOF5930J-1012IN	1"-14	1-1/16"-12	35.80	100.84	12.29	15.47	1-3/16"	1-3/8"	Imperial
DAOF5930J-1212	1-3/16"-12	1-1/16"-12	37.30	100.84	15.47	15.47	30 mm	36 mm	Metric
DAOF5930J-1216	1-3/16"-12	1-5/16"-12	41.20	114.60	15.47	20.60	36 mm	41 mm	Metric
DAOF5930J-1212IN	1-3/16"-12	1-1/16"-12	37.30	100.84	15.47	15.47	1-3/16"	1-3/8"	Imperial
DAOF5930J-1216IN	1-3/16"-12	1-5/16"-12	41.20	114.60	15.47	20.60	1-7/16"	1-5/8"	Imperial
DAOF5930J-1616	1-7/16"-12	1-5/16"-12	41.70	114.60	20.60	20.60	36 mm	41 mm	Metric
DAOF5930J-1616IN	1-7/16"-12	1-5/16"-12	41.70	114.60	20.60	20.60	1-7/16"	1-5/8"	Imperial
DAOF5930J-2020	1-11/16"-12	1-5/8"-12	44.70	126.50	26.00	26.01	41 mm	50 mm	Metric
DAOF5930J-2020IN	1-11/16"-12	1-5/8"-12	44.70	126.50	26.00	26.01	1-5/8"	1-7/8"	Imperial
DAOF5930J-2424	2"-12	1-7/8"-12	48.80	139.20	32.00	32.00	50 mm	55 mm	Metric
DAOF5930J-2424IN	2"-12	1-7/8"-12	48.80	139.20	32.00	32.00	1-7/8"	2-1/8"	Imperial



Certificate:



DAOF59305-LL

90° Adjustable X-Long Elbow ORFS Male - SAE Male O Ring

D

A

OF

5

9

30

5

LL

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

90° Elbow

SAE UNF

Male O Ring

X-Long

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF59305-LL

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

ORFS × SAE + X-Long O Ring

Sealing Method:

X-Long O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	S1
#	UNF	UNF	mm	mm	mm	mm	-	-	-
DAOF59305-LL-0404	9/16"-18	7/16"-20	4.37	4.37	21.59	71.00	14 mm	17 mm	Metric
DAOF59305-LL-0404IN	9/16"-18	7/16"-20	4.37	4.37	21.59	71.00	9/16"	5/8"	Imperial
DAOF59305-LL-0808	13/16"-16	3/4"-16	9.60	9.60	27.90	88.90	19 mm	24 mm	Metric
DAOF59305-LL-0808IN	13/16"-16	3/4"-16	9.60	9.60	27.90	88.90	3/4"	15/16"	Imperial
DAOF59305-LL-1212	1-3/16"-12	1-1/16"-12	15.50	15.50	37.50	114.30	32 mm	36 mm	Metric
DAOF59305-LL-1212IN	1-3/16"-12	1-1/16"-12	15.50	15.50	37.50	114.30	1-1/4"	1-3/8"	Imperial
DAOF59305-LL-1616	1-7/16"-12	1-5/16"-12	20.60	20.60	41.66	127.00	36 mm	36 mm	Metric
DAOF59305-LL-1616IN	1-7/16"-12	1-5/16"-12	20.60	20.60	41.66	127.00	1-3/8"	1-3/8"	Imperial
DAOF59305-LL-2020	1-11/16"-12	1-5/8"-12	26.00	27.50	44.50	140.00	41 mm	41 mm	Metric
DAOF59305-LL-2020IN	1-11/16"-12	1-5/8"-12	26.00	27.50	44.50	140.00	1-5/8"	1-5/8"	Imperial
DAOF59305-LL-2424	2"-11	1-7/8"-12	32.00	33.50	49.00	156.00	50 mm	55 mm	Metric
DAOF59305-LL-2424IN	2"-11	1-7/8"-12	32.00	33.50	49.00	156.00	1-7/8"	2-1/8"	Imperial

Certificate:





DAOF5952Y

90° Adjustable Long Elbow ORFS Male - Metric Male + O Ring + Retaining Ring

D

A

OF

5

9

06

Y

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

90° Elbow

Metric

Male + Long O Ring + Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF5952Y

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

UNF × Metric

Sealing Method:

Long O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAOF5952Y-0412	9/16"-18	M12X1.5	21.50	56.50	4.37	4.37	14.00	17.00
DAOF5952Y-0616	11/16"-16	M16X1.5	25.00	67.00	6.71	7.00	19.00	22.00
DAOF5952Y-0818	13/16"-16	M18X1.5	28.00	75.00	9.60	9.00	19.00	24.00
DAOF5952Y-1022	1"-14	M22X1.5	33.50	89.00	12.29	12.00	27.00	27.00
DAOF5952Y-1227	1-3/16"-12	M27X2	37.50	100.00	15.47	15.00	30.00	32.00
DAOF5952Y-1633	1-7/16"-12	M33X2	42.00	113.00	20.60	20.00	36.00	41.00
DAOF5952Y-2042	1-11/16"-12	M42X2	45.00	125.00	26.00	26.00	41.00	50.00
DAOF5952Y-2448	2"-12	M48X2	49.00	139.00	32.00	32.00	48.00	55.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAOF5952J

90° Adjustable Long Elbow ORFS Male - Metric Male + O Ring

D

A

OF

5

9

52

J

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

90° Elbow

Metric

Male Long O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF5952J

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

UNF × Metric

Sealing Method:

Long O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	UNF	Metric	mm	mm	mm	mm	mm	mm
DAOF5952J-0412	9/16"-18	M12X1.5	21.50	56.50	4.37	4.37	14.00	17.00
DAOF5952J-0616	11/16"-16	M16X1.5	25.00	67.00	6.71	7.00	19.00	22.00
DAOF5952J-0818	13/16"-16	M18X1.5	28.00	75.00	9.60	9.00	19.00	24.00
DAOF5952J-1022	1"-14	M22X1.5	33.50	89.00	12.29	12.00	27.00	27.00
DAOF5952J-1227	1-3/16"-12	M27X2	37.50	100.00	15.47	15.00	30.00	32.00
DAOF5952J-1633	1-7/16"-12	M33X2	42.00	113.00	20.60	20.00	36.00	41.00
DAOF5952J-2042	1-11/16"-12	M42X2	45.00	125.00	26.00	26.00	41.00	50.00
DAOF5952J-2448	2"-12	M48X2	49.00	139.00	32.00	32.00	48.00	55.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:





DAOF5T245

Tee Connector ORFS Male

D

A

OF

5

T

24

5

Company

Product Range

Thread Types

Sealing Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

Branch Tee

ORFS

Male+O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF5T245

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

Tee

Connection Type:


Male × Male × Male

Thread Types:

UNF × UNF × UNF

Sealing Method:

O Ring

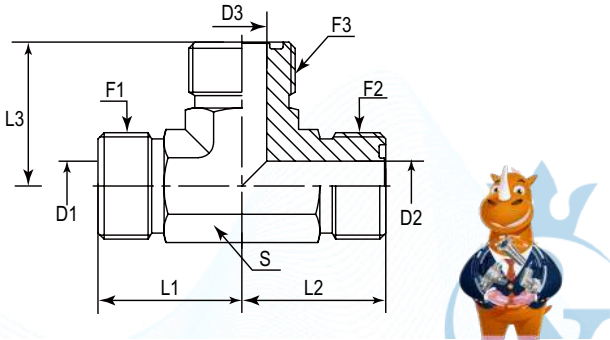

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-
DAOF5T245-0404	9/16"-18	9/16"-18	9/16"-18	21.60	21.60	21.60	4.37	4.37	4.37	14 mm	Metric
DAOF5T245-0404IN	9/16"-18	9/16"-18	9/16"-18	21.60	21.60	21.60	4.37	4.37	4.37	9/16"	Imperial
DAOF5T245-0606	11/16"-16	11/16"-16	11/16"-16	25.00	25.00	25.00	6.71	6.71	6.71	19 mm	Metric
DAOF5T245-060608	11/16"-16	11/16"-16	13/16"-16	26.50	26.50	28.00	6.50	6.50	9.60	19 mm	Metric
DAOF5T245-060806	11/16"-16	13/16"-16	11/16"-16	24.89	27.90	24.89	6.50	9.50	6.50	19 mm	Metric
DAOF5T245-060808	11/16"-16	13/16"-16	13/16"-16	26.30	27.90	27.90	6.71	9.60	9.60	19 mm	Metric
DAOF5T245-0606IN	11/16"-16	11/16"-16	11/16"-16	25.00	25.00	25.00	6.71	6.71	6.71	3/4"	Imperial
DAOF5T245-060608IN	11/16"-16	11/16"-16	13/16"-16	26.50	26.50	28.00	6.50	6.50	9.60	3/4"	Imperial
DAOF5T245-060806IN	11/16"-16	13/16"-16	11/16"-16	24.89	27.90	24.89	6.50	9.50	6.50	3/4"	Imperial
DAOF5T245-060808IN	11/16"-16	13/16"-16	13/16"-16	26.30	27.90	27.90	6.71	9.60	9.60	3/4"	Imperial
DAOF5T245-0808	13/16"-16	13/16"-16	13/16"-16	28.00	28.00	28.00	9.60	9.60	9.60	19 mm	Metric
DAOF5T245-080810	13/16"-16	13/16"-16	1"-14	30.73	30.73	33.30	9.60	9.60	12.29	27 mm	Metric
DAOF5T245-0808IN	13/16"-16	13/16"-16	13/16"-16	28.00	28.00	28.00	9.60	9.60	9.60	3/4"	Imperial
DAOF5T245-080810IN	13/16"-16	13/16"-16	1"-14	30.73	30.73	33.30	9.60	9.60	12.29	1-1/16"	Imperial
DAOF5T245-1010	1"-14	1"-14	1"-14	33.50	33.50	33.50	12.50	12.50	12.50	27 mm	Metric
DAOF5T245-101012	1"-14	1"-14	1-3/16"-12	35.81	35.81	37.34	12.50	12.50	15.50	30 mm	Metric
DAOF5T245-1010IN	1"-14	1"-14	1"-14	33.50	33.50	33.50	12.50	12.50	12.50	1-1/16"	Imperial
DAOF5T245-101012IN	1"-14	1"-14	1-3/16"-12	35.81	35.81	37.34	12.50	12.50	15.50	1-3/16"	Imperial
DAOF5T245-121208	1-3/16"-12	1-3/16"-12	13/16"-16	37.30	37.30	34.30	15.47	15.47	9.60	30 mm	Metric
DAOF5T245-1212	1-3/16"-12	1-3/16"-12	1-3/16"-12	37.50	37.50	37.50	15.50	15.50	15.50	30 mm	Metric
DAOF5T245-121216	1-3/16"-12	1-3/16"-12	1-7/16"-12	41.10	41.10	41.60	15.47	15.47	20.60	36 mm	Metric
DAOF5T245-121208IN	1-3/16"-12	1-3/16"-12	13/16"-16	37.30	37.30	34.30	15.47	15.47	9.60	1-3/16"	Imperial
DAOF5T245-1212IN	1-3/16"-12	1-3/16"-12	1-3/16"-12	37.50	37.50	37.50	15.50	15.50	15.50	1-3/16"	Imperial
DAOF5T245-121216IN	1-3/16"-12	1-3/16"-12	1-7/16"-12	41.10	41.10	41.60	15.47	15.47	20.60	1-7/16"	Imperial
DAOF5T245-1616	1-7/16"-12	1-7/16"-12	1-7/16"-12	41.50	41.50	41.50	20.50	20.50	20.50	36 mm	Metric
DAOF5T245-1616IN	1-7/16"-12	1-7/16"-12	1-7/16"-12	41.50	41.50	41.50	20.50	20.50	20.50	1-7/16"	Imperial
DAOF5T245-202016	1-11/16"-12	1-11/16"-12	1-7/16"-12	44.70	44.70	44.70	26.00	26.00	20.50	41 mm	Metric
DAOF5T245-2020	1-11/16"-12	1-11/16"-12	1-11/16"-12	44.70	44.70	44.70	26.00	26.00	26.00	41 mm	Metric
DAOF5T245-202016IN	1-11/16"-12	1-11/16"-12	1-7/16"-12	44.70	44.70	44.70	26.00	26.00	20.50	1-5/8"	Imperial
DAOF5T245-2020IN	1-11/16"-12	1-11/16"-12	1-11/16"-12	44.70	44.70	44.70	26.00	26.00	26.00	1-5/8"	Imperial
DAOF5T245-2424	2"-12	2"-12	2"-12	48.80	48.80	48.80	32.00	32.00	32.00	48 mm	Metric
DAOF5T245-2424IN	2"-12	2"-12	2"-12	48.80	48.80	48.80	32.00	32.00	32.00	1-7/8"	Imperial
DAOF5T245-3232	2-1/2"-12	2-1/2"-12	2-1/2"-12	63.30	63.30	63.30	45.00	45.00	45.00	63 mm	Metric
DAOF5T245-3232IN	2-1/2"-12	2-1/2"-12	2-1/2"-12	63.30	63.30	63.30	45.00	45.00	45.00	2-1/2"	Imperial

Certificate:

DAOF5T28M

Branch Tee Connector ORFS Male - NPTF Male

D

A

OF

5

T

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

Branch Tee

NPTF

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF5T28M

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Branch Tee

Connection Type:

Male × Male × Male

Thread Types:

UNF × UNF × NPTF

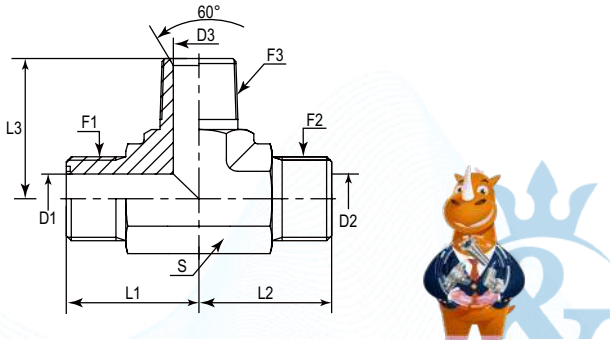

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	Hex
#	UNF	UNF	NPTF	mm	mm	mm	mm	mm	mm	-	-
DAOF5T28M-0402	9/16"-18	9/16"-18	1/8"-27	21.60	21.60	19.80	4.37	4.37	4.78	14 mm	Metric
DAOF5T28M-0404	9/16"-18	9/16"-18	1/4"-18	21.60	21.60	28.45	4.37	4.37	7.14	14 mm	Metric
DAOF5T28M-0402IN	9/16"-18	9/16"-18	1/8"-27	21.60	21.60	19.80	4.37	4.37	4.78	9/16"	Imperial
DAOF5T28M-0404IN	9/16"-18	9/16"-18	1/4"-18	21.60	21.60	28.45	4.37	4.37	7.14	9/16"	Imperial
DAOF5T28M-0604	11/16"-16	11/16"-16	1/4"-18	24.90	24.90	27.70	6.71	6.71	7.14	19 mm	Metric
DAOF5T28M-0606	11/16"-16	11/16"-16	3/8"-18	24.90	24.90	31.00	6.71	6.71	10.31	19 mm	Metric
DAOF5T28M-0604IN	11/16"-16	11/16"-16	1/4"-18	24.90	24.90	27.70	6.71	6.71	7.14	3/4"	Imperial
DAOF5T28M-0606IN	11/16"-16	11/16"-16	3/8"-18	24.90	24.90	31.00	6.71	6.71	10.31	3/4"	Imperial
DAOF5T28M-0806	13/16"-16	13/16"-16	3/8"-18	27.90	27.90	31.00	9.60	9.60	10.31	19 mm	Metric
DAOF5T28M-0808	13/16"-16	13/16"-16	1/2"-14	27.90	27.90	37.30	9.60	9.60	13.49	22 mm	Metric
DAOF5T28M-0806IN	13/16"-16	13/16"-16	3/8"-18	27.90	27.90	31.00	9.60	9.60	10.31	3/4"	Imperial
DAOF5T28M-0808IN	13/16"-16	13/16"-16	1/2"-14	27.90	27.90	37.30	9.60	9.60	13.49	7/8"	Imperial
DAOF5T28M-1008	1"-14	1"-14	1/2"-14	33.30	33.30	37.30	12.29	12.29	13.49	27 mm	Metric
DAOF5T28M-1008IN	1"-14	1"-14	1/2"-14	33.30	33.30	37.30	12.29	12.29	13.49	1-1/16"	Imperial
DAOF5T28M-1208	1-3/16"-12	1-3/16"-12	1/2"-14	37.30	37.30	40.40	15.47	15.47	13.49	30 mm	Metric
DAOF5T28M-1212	1-3/16"-12	1-3/16"-12	3/4"-14	37.30	37.30	40.40	15.47	15.47	18.26	30 mm	Metric
DAOF5T28M-1208IN	1-3/16"-12	1-3/16"-12	1/2"-14	37.30	37.30	40.40	15.47	15.47	13.49	1-3/16"	Imperial
DAOF5T28M-1212IN	1-3/16"-12	1-3/16"-12	3/4"-14	37.30	37.30	40.40	15.47	15.47	18.26	1-3/16"	Imperial
DAOF5T28M-1616	1-7/16"-12	1-7/16"-12	1"-11-1/2	41.70	41.70	50.00	20.60	20.60	23.83	36 mm	Metric
DAOF5T28M-1616IN	1-7/16"-12	1-7/16"-12	1"-11-1/2	41.70	41.70	50.00	20.60	20.60	23.83	1-7/16"	Imperial
DAOF5T28M-2020	1-11/16"-12	1-11/16"-12	1-1/4"-11-1/2	44.70	44.70	60.50	26.00	26.00	31.75	41 mm	Metric
DAOF5T28M-2020IN	1-11/16"-12	1-11/16"-12	1-1/4"-11-1/2	44.70	44.70	60.50	26.00	26.00	31.75	1-5/8"	Imperial
DAOF5T28M-2424	2"-12	2"-12	1-1/2"-11-1/2	48.80	48.80	67.00	32.00	32.00	38.10	48 mm	Metric
DAOF5T28M-2424IN	2"-12	2"-12	1-1/2"-11-1/2	48.80	48.80	67.00	32.00	32.00	38.10	1-7/8"	Imperial

Certificate:




DAOF5T305

Branch Adjustable Tee ORFS Male - SAE Male O Ring

D	A	OF	5	T	30	5
Company	Product Range	Thread Types	Sealing Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Male	Branch Tee	SAE UNF	Male O Ring



DME&JDE Code:	DAOF5T305
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Branch Tee
Connection Type:	Adjustable Male × Male × Male
Thread Types:	ORFS UNF × ORFS UNF × SAE UNF + O Ring
Sealing Method:	O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-
DAOF5T305-0404	9/16"-18	9/16"-18	7/16"-20	21.60	21.60	32.80	4.37	4.37	4.37	14 mm	17 mm	Metric
DAOF5T305-0406	9/16"-18	9/16"-18	9/16"-18	23.40	23.40	36.80	4.37	4.37	6.71	19 mm	19 mm	Metric
DAOF5T305-0404IN	9/16"-18	9/16"-18	7/16"-20	21.60	21.60	32.80	4.37	4.37	4.37	9/16"	5/8"	Imperial
DAOF5T305-0406IN	9/16"-18	9/16"-18	9/16"-18	23.40	23.40	36.80	4.37	4.37	6.71	3/4"	3/4"	Imperial
DAOF5T305-0604	11/16"-16	11/16"-16	7/16"-20	24.90	24.90	34.80	6.71	6.71	4.37	19 mm	17 mm	Metric
DAOF5T305-0606	11/16"-16	11/16"-16	9/16"-18	24.90	24.90	36.80	6.71	6.71	6.71	19 mm	19 mm	Metric
DAOF5T305-0608	11/16"-16	11/16"-16	3/4"-16	26.40	26.40	40.60	6.71	6.71	9.60	19 mm	24 mm	Metric
DAOF5T305-0604IN	11/16"-16	11/16"-16	7/16"-20	24.90	24.90	34.80	6.71	6.71	4.37	3/4"	5/8"	Imperial
DAOF5T305-0606IN	11/16"-16	11/16"-16	9/16"-18	24.90	24.90	36.80	6.71	6.71	6.71	3/4"	3/4"	Imperial
DAOF5T305-0608IN	11/16"-16	11/16"-16	3/4"-16	26.40	26.40	40.60	6.71	6.71	9.60	3/4"	15/16"	Imperial
DAOF5T305-0806	13/16"-16	13/16"-16	9/16"-18	28.00	28.00	36.60	9.60	9.60	6.71	19 mm	19 mm	Metric
DAOF5T305-0808	13/16"-16	13/16"-16	3/4"-16	27.94	27.94	40.60	9.60	9.60	9.60	19 mm	24 mm	Metric
DAOF5T305-0806IN	13/16"-16	13/16"-16	9/16"-18	28.00	28.00	36.60	9.60	9.60	6.71	3/4"	3/4"	Imperial
DAOF5T305-0808IN	13/16"-16	13/16"-16	3/4"-16	27.94	27.94	40.60	9.60	9.60	9.60	3/4"	15/16"	Imperial
DAOF5T305-1008	1"-14	1"-14	3/4"-16	33.30	33.30	46.00	12.29	12.29	9.60	27 mm	24 mm	Metric
DAOF5T305-1010	1"-14	1"-14	7/8"-14	33.30	33.30	50.00	12.29	12.29	12.29	27 mm	27 mm	Metric
DAOF5T305-1008IN	1"-14	1"-14	3/4"-16	33.30	33.30	46.00	12.29	12.29	9.60	1-1/16"	15/16"	Imperial
DAOF5T305-1010IN	1"-14	1"-14	7/8"-14	33.30	33.30	50.00	12.29	12.29	12.29	1-1/16"	1-1/16"	Imperial
DAOF5T305-1210	1-3/16"-12	1-3/16"-12	7/8"-14	37.30	37.30	51.10	15.50	15.50	12.50	30 mm	27 mm	Metric
DAOF5T305-1212	1-3/16"-12	1-3/16"-12	1-1/16"-12	37.30	37.30	55.10	15.47	15.47	15.47	30 mm	36 mm	Metric
DAOF5T305-1216	1-3/16"-12	1-3/16"-12	1-5/16"-12	41.20	41.20	59.70	15.47	15.47	20.60	36 mm	41 mm	Metric
DAOF5T305-1210IN	1-3/16"-12	1-3/16"-12	7/8"-14	37.30	37.30	51.10	15.50	15.50	12.50	1-3/16"	1-1/16"	Imperial
DAOF5T305-1212IN	1-3/16"-12	1-3/16"-12	1-1/16"-12	37.30	37.30	55.10	15.47	15.47	15.47	1-3/16"	1-3/8"	Imperial
DAOF5T305-1216IN	1-3/16"-12	1-3/16"-12	1-5/16"-12	41.20	41.20	59.70	15.47	15.47	20.60	1-7/16"	1-5/8"	Imperial
DAOF5T305-1612	1-7/16"-12	1-7/16"-12	1-1/16"-12	41.70	41.70	58.50	20.60	20.60	15.47	36 mm	36 mm	Metric
DAOF5T305-1616	1-7/16"-12	1-7/16"-12	1-5/16"-12	41.50	41.50	59.70	20.50	20.50	21.50	36 mm	41 mm	Metric
DAOF5T305-1620	1-7/16"-12	1-7/16"-12	1-5/8"-12	44.70	44.70	62.20	20.50	20.50	26.00	41 mm	50 mm	Metric
DAOF5T305-1612IN	1-7/16"-12	1-7/16"-12	1-1/16"-12	41.70	41.70	58.50	20.60	20.60	15.47	1-7/16"	1-3/8"	Imperial
DAOF5T305-1616IN	1-7/16"-12	1-7/16"-12	1-5/16"-12	41.50	41.50	59.70	20.50	20.50	21.50	1-7/16"	1-5/8"	Imperial
DAOF5T305-1620IN	1-7/16"-12	1-7/16"-12	1-5/8"-12	44.70	44.70	62.20	20.50	20.50	26.00	1-5/8"	1-7/8"	Imperial
DAOF5T305-2016	1-11/16"-12	1-11/16"-12	1-5/16"-12	44.70	44.70	62.20	26.00	26.00	20.60	41 mm	41 mm	Metric
DAOF5T305-2020	1-11/16"-12	1-11/16"-12	1-5/8"-12	44.70	44.70	62.20	26.00	26.00	27.50	41 mm	50 mm	Metric
DAOF5T305-2016IN	1-11/16"-12	1-11/16"-12	1-5/16"-12	44.70	44.70	62.20	26.00	26.00	20.60	1-5/8"	1-5/8"	Imperial
DAOF5T305-2020IN	1-11/16"-12	1-11/16"-12	1-5/8"-12	44.70	44.70	62.20	26.00	26.00	27.50	1-5/8"	1-7/8"	Imperial
DAOF5T305-2424	2"-12	2"-12	1-7/8"-12	48.80	48.80	65.80	32.00	32.00	32.00	50 mm	55 mm	Metric
DAOF5T305-2424IN	2"-12	2"-12	1-7/8"-12	48.80	48.80	65.80	32.00	32.00	32.00	1-7/8"	2-1/8"	Imperial


DAOF5T06Q

Branch Adjustable Tee ORFS Male - BSPP Male + O Ring + Retaining Ring

D	A	OF	5	T	06	0
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Male	Branch Tee	BSPP	Male + O Ring + Retaining Ring



DME&JDE Code:	DAOF5T06Q
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Branch Tee
Connection Type:	Adjustable Male × Male × Male
Thread Types:	UNF × UNF × BSPP
Sealing Method:	O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	UNF	UNF	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DAOF5T06Q-0402	9/16"-18	9/16"-18	1/8"-28	21.50	21.50	30.00	4.37	4.37	4.40	14	14
DAOF5T06Q-0404	9/16"-18	9/16"-18	1/4"-19	23.50	23.50	35.00	4.37	4.37	7.50	14	19
DAOF5T06Q-0604	11/16"-16	11/16"-16	1/4"-19	25.00	25.00	36.00	6.71	6.71	7.50	19	19
DAOF5T06Q-0606	11/16"-16	11/16"-16	3/8"-19	26.50	26.50	38.00	6.71	6.71	9.90	19	22
DAOF5T06Q-0608	11/16"-16	11/16"-16	1/2"-14	29.50	29.50	48.00	6.71	6.71	12.30	22	27
DAOF5T06Q-0804	13/16"-16	13/16"-16	1/4"-19	28.00	28.00	35.00	9.60	9.60	7.50	19	19
DAOF5T06Q-0806	13/16"-16	13/16"-16	3/8"-19	28.00	28.00	36.50	9.60	9.60	9.90	19	22
DAOF5T06Q-0808	13/16"-16	13/16"-16	1/2"-14	31.00	31.00	48.00	9.50	9.50	12.30	27	27
DAOF5T06Q-1008	1"-14	1"-14	1/2"-14	33.50	33.50	48.00	12.29	12.29	12.30	27	27
DAOF5T06Q-1012	1"-14	1"-14	3/4"-14	36.00	36.00	51.50	12.50	12.50	15.50	30	36
DAOF5T06Q-1212	1-3/16"-12	1-3/16"-12	3/4"-14	37.50	37.50	51.50	15.47	15.47	15.50	30	36
DAOF5T06Q-1216	1-3/16"-12	1-3/16"-12	1"-11	41.50	41.50	58.00	15.47	15.47	21.50	36	41
DAOF5T06Q-1616	1-7/16"-12	1-7/16"-12	1"-11	42.00	42.00	58.00	20.60	20.60	21.50	36	41
DAOF5T06Q-2020	1-11/16"-12	1-11/16"-12	1-1/4"-11	45.00	45.00	60.50	26.00	26.00	27.50	41	50
DAOF5T06Q-2424	2"-12	2"-12	1-1/2"-11	49.00	49.00	64.50	32.00	32.00	33.00	48	55

DAOF5T065

Branch Adjustable Tee ORFS Male - BSPP Male + O Ring

D

A

OF

5

T

06

5

Company

Product Range

Thread Types

Sealing Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

ORFS UNF

Male

Branch Tee

BSPP

Male + O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF5T065

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

Branch Tee

Connection Type:


Adjustable Male × Male × Male

Thread Types:

UNF × UNF × BSPP + O Ring

Sealing Method:

O Ring

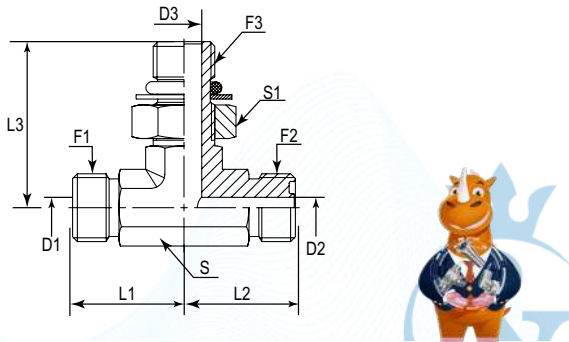

PART NUMBER	F1 (Thread)	F2 (Thread)	F3(Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	UNF	UNF	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DAOF5T065-0402	9/16"-18	9/16"-18	1/8"-28	21.5	21.5	30	4.37	4.37	4.4	14	14
DAOF5T065-0404	9/16"-18	9/16"-18	1/4"-19	23.5	23.5	35	4.37	4.37	7.5	14	19
DAOF5T065-0604	11/16"-16	11/16"-16	1/4"-19	25	25	36	6.71	6.71	7.5	19	19
DAOF5T065-0606	11/16"-16	11/16"-16	3/8"-19	26.5	26.5	38	6.71	6.71	9.9	19	22
DAOF5T065-0608	11/16"-16	11/16"-16	1/2"-14	29.5	29.5	48	6.71	6.71	12.3	22	27
DAOF5T065-0804	13/16"-16	13/16"-16	1/4"-19	28	28	35	9.6	9.6	7.5	19	19
DAOF5T065-0806	13/16"-16	13/16"-16	3/8"-19	28	28	36.5	9.6	9.6	9.9	19	22
DAOF5T065-0808	13/16"-16	13/16"-16	1/2"-14	31	31	48	9.5	9.5	12.3	27	27
DAOF5T065-1008	1"-14	1"-14	1/2"-14	33.5	33.5	48	12.29	12.29	12.3	27	27
DAOF5T065-1012	1"-14	1"-14	3/4"-14	36	36	51.5	12.5	12.5	15.5	30	36
DAOF5T065-1212	1-3/16"-12	1-3/16"-12	3/4"-14	37.5	37.5	51.5	15.47	15.47	15.5	30	36
DAOF5T065-1216	1-3/16"-12	1-3/16"-12	1"-11	41.5	41.5	58	15.47	15.47	21.5	36	41
DAOF5T065-1616	1-7/16"-12	1-7/16"-12	1"-11	42	42	58	20.6	20.6	21.5	36	41
DAOF5T065-2020	1-11/16"-12	1-11/16"-12	1-1/4"-11	45	45	60.5	26	26	27.5	41	50
DAOF5T065-2424	2"-12	2"-12	1-1/2"-11	49	49	64.5	32	32	33	48	55

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DAOF5T52Q

Branch Adjustable Tee ORFS Male - Metric Male + O Ring + Retaining Ring

D

A

OF

5

T

52

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

ORFS UNF

Male

Branch Tee

Metric

Male + O Ring + Retaining Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF5T52Q

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

Branch Tee

Connection Type:


Adjustable Male × Male × Male

Thread Types:

UNF × UNF × Metric

Sealing Method:

O Ring + Retaining Ring

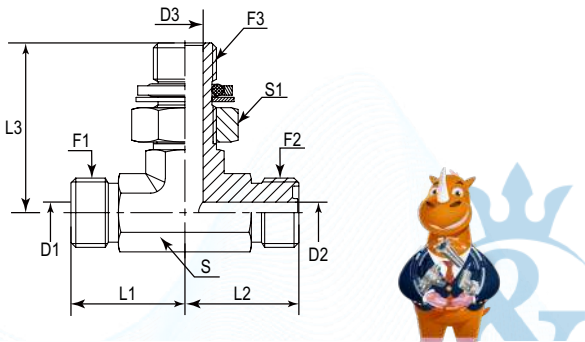

PART NUMBER	F1 (Thread)	F2 (Thread)	F3(Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	UNF	UNF	METRIC	mm	mm	mm	mm	mm	mm	mm	mm
DAOF5T52Q-0410	9/16"-18	9/16"-18	M10X1	21.50	21.50	32.50	4.37	4.37	3.00	14	14
DAOF5T52Q-0412	9/16"-18	9/16"-18	M12X1.5	21.50	21.50	32.50	4.37	4.37	4.00	14	17
DAOF5T52Q-0614	11/16"-16	11/16"-16	M14X1.5	25.00	25.00	36.00	6.71	6.71	6.00	19	19
DAOF5T52Q-0616	11/16"-16	11/16"-16	M16X1.5	25.00	25.00	37.00	6.71	6.71	7.00	19	22
DAOF5T52Q-0816	13/16"-16	13/16"-16	M16X1.5	28.00	28.00	37.00	9.60	9.60	7.00	19	22
DAOF5T52Q-0818	13/16"-16	13/16"-16	M18X1.5	28.00	28.00	40.00	9.60	9.60	9.00	19	24
DAOF5T52Q-0822	13/16"-16	13/16"-16	M22X1.5	31.50	31.50	49.00	9.60	9.60	12.00	27	27
DAOF5T52Q-1018	1"-14	1"-14	M18X1.5	33.50	33.50	48.00	12.29	12.29	9.00	27	24
DAOF5T52Q-1022	1"-14	1"-14	M22X1.5	33.50	33.50	49.00	12.29	12.29	12.00	27	27
DAOF5T52Q-1227	1-3/16"-12	1-3/16"-12	M27X2	37.50	37.50	55.50	15.47	15.47	15.00	30	32
DAOF5T52Q-1233	1-3/16"-12	1-3/16"-12	M33X2	41.50	41.50	60.00	15.50	15.50	20.00	36	41
DAOF5T52Q-1633	1-7/16"-12	1-7/16"-12	M33X2	42.00	42.00	60.00	20.60	20.60	20.00	36	41
DAOF5T52Q-2033	1-11/16"-12	1-11/16"-12	M33X2	44.70	44.70	62.50	26.00	26.00	20.00	41	41
DAOF5T52Q-2448	2"-12	2"-12	M48X2	47.90	47.90	66.00	32.00	32.00	32.00	48	55

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:


DAOF5T525

Branch Adjustable Tee ORFS Male - Metric Male + O Ring

D	A	OF	5	T	52	5
Company	Product Range	Thread Types	Sealing Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Male	Branch Tee	Metric	Male + O Ring



DME&JDE Code:	DAOF5T525
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Branch Tee
Connection Type:	Adjustable Male x Male x Male
Thread Types:	UNF x UNF x Metric + O Ring
Sealing Method:	O Ring

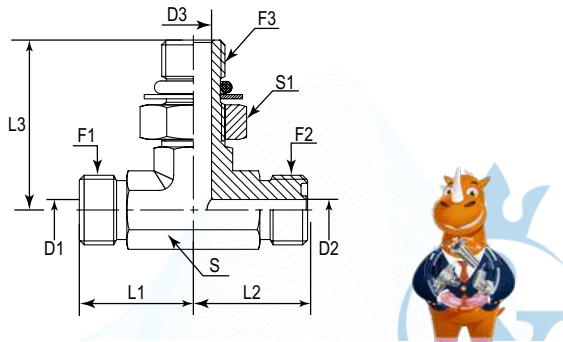

PART NUMBER	F1 (Thread)	F2 (Thread)	F3(Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	UNF	UNF	METRIC	mm	mm	mm	mm	mm	mm	mm	mm
DAOF5T525-0410	9/16"-18	9/16"-18	M10X1	21.50	21.50	32.50	4.37	4.37	3.00	14	14
DAOF5T525-0412	9/16"-18	9/16"-18	M12X1.5	21.50	21.50	32.50	4.37	4.37	4.00	14	17
DAOF5T525-0614	11/16"-16	11/16"-16	M14X1.5	25.00	25.00	36.00	6.71	6.71	6.00	19	19
DAOF5T525-0616	11/16"-16	11/16"-16	M16X1.5	25.00	25.00	37.00	6.71	6.71	7.00	19	22
DAOF5T525-0816	13/16"-16	13/16"-16	M16X1.5	28.00	28.00	37.00	9.60	9.60	7.00	19	22
DAOF5T525-0818	13/16"-16	13/16"-16	M18X1.5	28.00	28.00	40.00	9.60	9.60	9.00	19	24
DAOF5T525-0822	13/16"-16	13/16"-16	M22X1.5	31.50	31.50	49.00	9.60	9.60	12.00	27	27
DAOF5T525-1018	1"-14	1"-14	M18X1.5	33.50	33.50	48.00	12.29	12.29	9.00	27	24
DAOF5T525-1022	1"-14	1"-14	M22X1.5	33.50	33.50	49.00	12.29	12.29	12.00	27	27
DAOF5T525-1227	1-3/16"-12	1-3/16"-12	M27X2	37.50	37.50	55.50	15.47	15.47	15.00	30	32
DAOF5T525-1233	1-3/16"-12	1-3/16"-12	M33X2	41.50	41.50	60.00	15.50	15.50	20.00	36	41
DAOF5T525-1633	1-7/16"-12	1-7/16"-12	M33X2	42.00	42.00	60.00	20.60	20.60	20.00	36	41
DAOF5T525-2033	1-11/16"-12	1-11/16"-12	M33X2	44.70	44.70	62.50	26.00	26.00	20.00	41	41
DAOF5T525-2448	2"-12	2"-12	M48X2	47.90	47.90	66.00	32.00	32.00	32.00	48	55




DAOF3T245

Branch Tee ORFS Swivel Female - ORFS Male

D	A	OF	3	T	24	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Sealing Type
DME	Adaptor	ORFS UNF	Swivel Female	Branch Tee	ORFS UNF	Male+O Ring



DME&JDE Code:	DAOF3T245
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Branch Tee
Connection Type:	Swivel Female x Swivel Female x Male
Thread Types:	UNF x UNF x UNF
Sealing Method:	O Ring

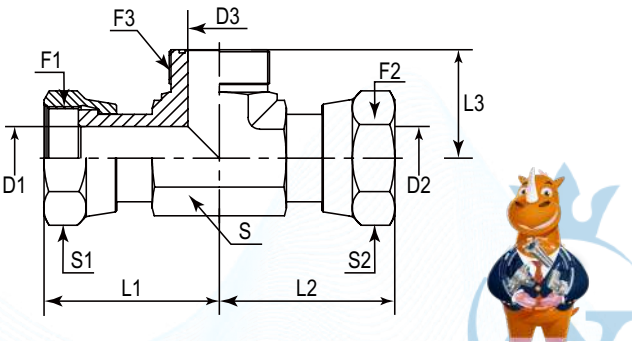

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1	S2	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-	-
DAOF3T245-0404	9/16"-18	9/16"-18	9/16"-18	4.19	4.19	4.37	34.60	34.60	21.50	14 mm	17 mm	17 mm	Metric
DAOF3T245-0404IN	9/16"-18	9/16"-18	9/16"-18	4.19	4.19	4.37	34.60	34.60	21.50	9/16"	11/16"	11/16"	Imperial
DAOF3T245-0606	11/16"-16	11/16"-16	11/16"-16	6.71	6.71	6.50	38.70	38.70	24.90	19 mm	22 mm	22 mm	Metric
DAOF3T245-0606IN	11/16"-16	11/16"-16	11/16"-16	6.71	6.71	6.50	38.70	38.70	24.90	3/4"	7/8"	7/8"	Imperial
DAOF3T245-0808	13/16"-16	13/16"-16	13/16"-16	9.09	9.09	9.60	49.00	49.00	28.96	19 mm	24 mm	24 mm	Metric
DAOF3T245-0808IN	13/16"-16	13/16"-16	13/16"-16	9.09	9.09	9.60	49.00	49.00	28.96	3/4"	15/16"	15/16"	Imperial
DAOF3T245-1212	1-3/16"-12	1-3/16"-12	1-3/16"-12	14.00	14.00	15.50	60.80	60.80	37.30	30 mm	36 mm	36 mm	Metric
DAOF3T245-1212IN	1-3/16"-12	1-3/16"-12	1-3/16"-12	14.00	14.00	15.50	60.80	60.80	37.30	1-3/16"	1-3/8"	1-3/8"	Imperial
DAOF3T245-1616	1-7/16"-12	1-7/16"-12	1-7/16"-12	18.89	19.89	20.50	68.20	68.20	41.70	36 mm	41 mm	41 mm	Metric
DAOF3T245-1616IN	1-7/16"-12	1-7/16"-12	1-7/16"-12	18.89	19.89	20.50	68.20	68.20	41.70	1-7/16"	1-5/8"	1-5/8"	Imperial
DAOF3T245-2020	1-11/16"-12	1-11/16"-12	1-11/16"-12	26.01	26.01	26.00	72.80	72.80	44.70	41 mm	50 mm	50 mm	Metric
DAOF3T245-2020IN	1-11/16"-12	1-11/16"-12	1-11/16"-12	26.01	26.01	26.00	72.80	72.80	44.70	1-5/8"	1-7/8"	1-7/8"	Imperial
DAOF3T245-2424	2"-12	2"-12	2"-12	32.00	32.00	32.00	76.10	76.10	48.80	50 mm	60 mm	60 mm	Metric
DAOF3T245-2424IN	2"-12	2"-12	2"-12	32.00	32.00	32.00	76.10	76.10	48.80	1-7/8"	2-1/4"	2-1/4"	Imperial





DAOF5L241

Run Tee Connector ORFS Male - ORFS Swivel Female

D

A

OF

5

L

241

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

ORFS UNF

Male

Run Tee

ORFS Swivel Female

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF5L241

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Run Tee

Connection Type:

Male x Swivel Female x Male

Thread Types:

UNF x UNF x UNF

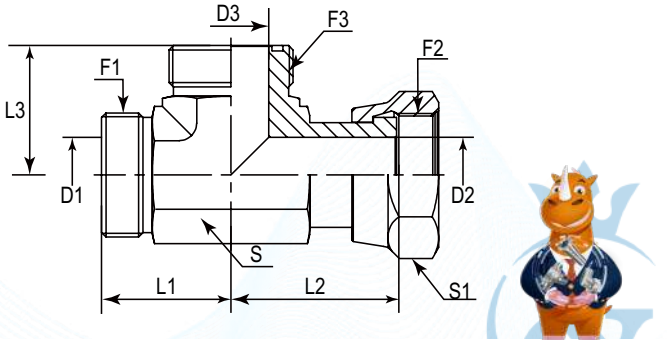

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-
DAOF5L241-0404	9/16"-18	9/16"-18	9/16"-18	21.60	26.40	21.60	4.37	4.19	4.37	14 mm	17 mm	Metric
DAOF5L241-0404IN	9/16"-18	9/16"-18	9/16"-18	21.60	26.40	21.60	4.37	4.19	4.37	9/16"	11/16"	Imperial
DAOF5L241-0606	11/16"-16	11/16"-16	11/16"-16	24.89	29.21	24.89	6.71	6.71	6.71	19 mm	22 mm	Metric
DAOF5L241-0606IN	11/16"-16	11/16"-16	11/16"-16	24.89	29.21	24.89	6.71	6.71	6.71	3/4"	13/16"	Imperial
DAOF5L241-0808	13/16"-16	13/16"-16	13/16"-16	27.94	37.85	27.94	9.60	9.09	9.60	19 mm	24 mm	Metric
DAOF5L241-0808IN	13/16"-16	13/16"-16	13/16"-16	27.94	37.85	27.94	9.60	9.09	9.60	3/4"	15/16"	Imperial
DAOF5L241-1010	1"-14	1"-14	1"-14	33.50	41.00	33.50	12.50	11.51	12.50	27 mm	30 mm	Metric
DAOF5L241-1010IN	1"-14	1"-14	1"-14	33.50	41.00	33.50	12.50	11.51	12.50	1-1/16"	1-1/8"	Imperial
DAOF5L241-1212	1-3/16"-12	1-3/16"-12	1-3/16"-12	37.50	46.50	37.50	15.47	13.89	15.47	30 mm	36 mm	Metric
DAOF5L241-1212IN	1-3/16"-12	1-3/16"-12	1-3/16"-12	37.50	46.50	37.50	15.47	13.89	15.47	1-3/16"	1-3/8"	Imperial
DAOF5L241-1616	1-7/16"-12	1-7/16"-12	1-7/16"-12	41.66	53.34	41.66	20.50	19.89	20.50	36 mm	41 mm	Metric
DAOF5L241-1616IN	1-7/16"-12	1-7/16"-12	1-7/16"-12	41.66	53.34	41.66	20.50	19.89	20.50	1-7/16"	1-5/8"	Imperial
DAOF5L241-2020	1-11/16"-12	1-11/16"-12	1-11/16"-12	44.70	58.17	44.70	26.00	26.01	26.00	41 mm	50 mm	Metric
DAOF5L241-2020IN	1-11/16"-12	1-11/16"-12	1-11/16"-12	44.70	58.17	44.70	26.00	26.01	26.00	1-5/8"	1-7/8"	Imperial
DAOF5L241-2424	2"-12	2"-12	2"-12	48.80	61.21	48.80	32.00	32.00	32.00	50 mm	60 mm	Metric
DAOF5L241-2424IN	2"-12	2"-12	2"-12	48.80	61.21	48.80	32.00	32.00	32.00	1-7/8"	2-1/4"	Imperial

Certificate:

DAOF5L305

Run Adjustable Tee ORFS Male - SAE Male O Ring

D

A

OF

5

L

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

Run Tee

SAE UNF

Male O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF5L305

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

Run Tee

Connection Type:


Adjustable Male x Male x Male

Thread Types:

ORFS UNF x ORFS UNF x SAE UNF + O Ring

Sealing Method:

O Ring

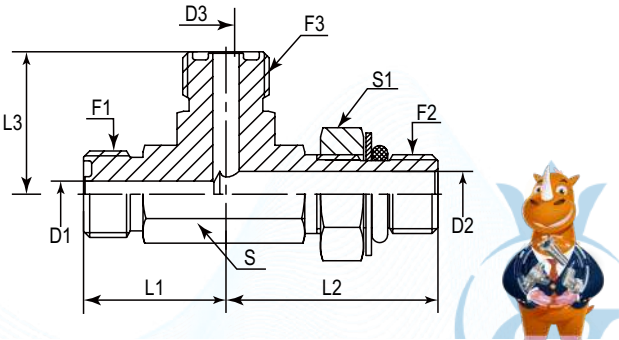

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-
DAOF5L305-0404	9/16"-18	7/16"-20	9/16"-18	21.60	32.80	21.60	4.37	4.37	4.37	14 mm	17 mm	Metric
DAOF5L305-0406	9/16"-18	9/16"-18	9/16"-18	23.50	36.80	23.50	4.37	6.71	4.37	19 mm	19 mm	Metric
DAOF5L305-0408	9/16"-18	3/4"-16	9/16"-18	25.00	40.60	25.00	4.37	9.60	4.37	19 mm	24 mm	Metric
DAOF5L305-0404IN	9/16"-18	7/16"-20	9/16"-18	21.60	32.80	21.60	4.37	4.37	4.37	9/16"	5/8"	Imperial
DAOF5L305-0406IN	9/16"-18	9/16"-18	9/16"-18	23.50	36.80	23.50	4.37	6.71	4.37	3/4"	3/4"	Imperial
DAOF5L305-0408IN	9/16"-18	3/4"-16	9/16"-18	25.00	40.60	25.00	4.37	9.60	4.37	3/4"	15/16"	Imperial
DAOF5L305-0604	11/16"-16	7/16"-20	11/16"-16	25.00	35.00	25.00	6.50	4.50	6.50	19 mm	17 mm	Metric
DAOF5L305-0606	11/16"-16	9/16"-18	11/16"-16	24.90	36.80	24.90	6.71	6.71	6.71	19 mm	19 mm	Metric
DAOF5L305-0608	11/16"-16	3/4"-16	11/16"-16	26.40	40.60	26.40	6.71	9.60	6.71	19 mm	24 mm	Metric
DAOF5L305-0604IN	11/16"-16	7/16"-20	11/16"-16	25.00	35.00	25.00	6.50	4.50	6.50	3/4"	5/8"	Imperial
DAOF5L305-0606IN	11/16"-16	9/16"-18	11/16"-16	24.90	36.80	24.90	6.71	6.71	6.71	3/4"	3/4"	Imperial
DAOF5L305-0608IN	11/16"-16	3/4"-16	11/16"-16	26.40	40.60	26.40	6.71	9.60	6.71	3/4"	15/16"	Imperial
DAOF5L305-0806	13/16"-16	9/16"-18	13/16"-16	28.00	36.80	28.00	9.60	6.71	9.60	19 mm	19 mm	Metric
DAOF5L305-0808	13/16"-16	3/4"-16	13/16"-16	27.90	40.60	27.90	9.60	9.60	9.60	19 mm	24 mm	Metric
DAOF5L305-0810	13/16"-16	7/8"-14	13/16"-16	30.70	50.00	30.70	9.60	12.29	9.60	27 mm	27 mm	Metric
DAOF5L305-0812	13/16"-16	1-1/16"-12	13/16"-16	33.50	55.10	33.50	9.60	15.47	9.60	30 mm	36 mm	Metric

Certificate:




DAOF5L305-0806IN	13/16"-16	9/16"-18	13/16"-16	28.00	36.80	28.00	9.60	6.71	9.60	3/4"	3/4"	Imperial
DAOF5L305-0808IN	13/16"-16	3/4"-16	13/16"-16	27.90	40.60	27.90	9.60	9.60	9.60	3/4"	15/16"	Imperial
DAOF5L305-0810IN	13/16"-16	7/8"-14	13/16"-16	30.70	50.00	30.70	9.60	12.29	9.60	1-1/16"	1-1/16"	Imperial
DAOF5L305-0812IN	13/16"-16	1-1/16"-12	13/16"-16	33.50	55.10	33.50	9.60	15.47	9.60	1-3/16"	1-3/8"	Imperial
DAOF5L305-1008	1"-14	3/4"-16	1"-14	33.50	46.00	33.50	12.50	9.60	12.50	27 mm	24 mm	Metric
DAOF5L305-1010	1"-14	7/8"-14	1"-14	33.30	50.00	33.30	12.29	12.29	12.29	27 mm	27 mm	Metric
DAOF5L305-1012	1"-14	1-1/16"-12	1"-14	35.81	55.12	35.81	12.29	12.29	12.29	30 mm	36 mm	Metric
DAOF5L305-1008IN	1"-14	3/4"-16	1"-14	33.50	46.00	33.50	12.50	9.60	12.50	1-1/16"	15/16"	Imperial
DAOF5L305-1010IN	1"-14	7/8"-14	1"-14	33.30	50.00	33.30	12.29	12.29	12.29	1-1/16"	1-1/16"	Imperial
DAOF5L305-1012IN	1"-14	1-1/16"-12	1"-14	35.81	55.12	35.81	12.29	12.29	12.29	1-3/16"	1-3/8"	Imperial
DAOF5L305-1208	1-3/16"-12	3/4"-16	1-3/16"-12	37.34	48.50	37.34	15.47	9.60	15.47	30 mm	24 mm	Metric
DAOF5L305-1212	1-3/16"-12	1-1/16"-12	1-3/16"-12	37.30	55.10	37.30	15.47	15.47	15.47	30 mm	36 mm	Metric
DAOF5L305-1216	1-3/16"-12	1-5/16"-12	1-3/16"-12	41.20	59.70	41.20	15.47	20.60	15.47	36 mm	41 mm	Metric
DAOF5L305-1208IN	1-3/16"-12	3/4"-16	1-3/16"-12	37.34	48.50	37.34	15.47	9.60	15.47	1-3/16"	15/16"	Imperial
DAOF5L305-1212IN	1-3/16"-12	1-1/16"-12	1-3/16"-12	37.30	55.10	37.30	15.47	15.47	15.47	1-3/16"	1-3/8"	Imperial
DAOF5L305-1216IN	1-3/16"-12	1-5/16"-12	1-3/16"-12	41.20	59.70	41.20	15.47	20.60	15.47	1-7/16"	1-5/8"	Imperial
DAOF5L305-1612	1-7/16"-12	1-1/16"-12	1-7/16"-12	41.70	58.50	41.70	20.60	15.47	20.60	36 mm	36 mm	Metric
DAOF5L305-1616	1-7/16"-12	1-5/16"-12	1-7/16"-12	41.50	59.50	41.50	20.50	21.50	20.50	36 mm	41 mm	Metric
DAOF5L305-1620	1-7/16"-12	1-5/8"-12	1-7/16"-12	44.70	62.20	44.70	20.60	26.01	20.60	41 mm	50 mm	Metric
DAOF5L305-1612IN	1-7/16"-12	1-1/16"-12	1-7/16"-12	41.70	58.50	41.70	20.60	15.47	20.60	1-7/16"	1-3/8"	Imperial
DAOF5L305-1616IN	1-7/16"-12	1-5/16"-12	1-7/16"-12	41.50	59.50	41.50	20.50	21.50	20.50	1-7/16"	1-5/8"	Imperial
DAOF5L305-1620IN	1-7/16"-12	1-5/8"-12	1-7/16"-12	44.70	62.20	44.70	20.60	26.01	20.60	1-5/8"	1-7/8"	Imperial
DAOF5L305-2016	1-11/16"-12	1-5/16"-12	1-11/16"-12	44.70	62.20	44.70	26.00	20.60	26.00	41 mm	41 mm	Metric
DAOF5L305-2020	1-11/16"-12	1-5/8"-12	1-11/16"-12	44.50	62.20	44.50	26.00	27.50	26.00	41 mm	50 mm	Metric
DAOF5L305-2016IN	1-11/16"-12	1-5/16"-12	1-11/16"-12	44.70	62.20	44.70	26.00	20.60	26.00	1-5/8"	1-5/8"	Imperial
DAOF5L305-2020IN	1-11/16"-12	1-5/8"-12	1-11/16"-12	44.50	62.20	44.50	26.00	27.50	26.00	1-5/8"	1-7/8"	Imperial
DAOF5L305-2424	2"-12	1-7/8"-12	2"-12	48.80	65.80	48.80	32.00	32.00	32.00	50 mm	55 mm	Metric
DAOF5L305-2424IN	2"-12	1-7/8"-12	2"-12	48.80	65.80	48.80	32.00	32.00	32.00	1-7/8"	2-1/8"	Imperial

DAOF5L06Q

Run Adjustable Tee ORFS Male - BSPP Male + O Ring + Retaining Ring

D	A	OF	5	L	06	0
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
	Adaptor	ORFS UNF	Male	Run Tee	BSPP	Male + O Ring + Retaining Ring

DME&JDE Code:	DAOF5L06Q
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Run Tee
Connection Type:	Adjustable Male × Male × Male
Thread Types:	UNF × BSPP × UNF
Sealing Method:	O Ring + Retaining Ring

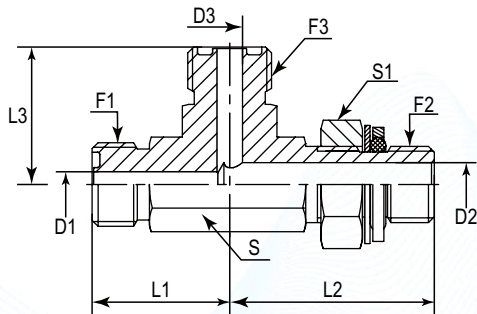

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	UNF	BSPP	UNF	mm	mm	mm	mm	mm	mm	mm	mm
DAOF5L06Q-0402	9/16"-18	1/8"-28	9/16"-18	21.50	30.00	21.50	4.37	4.40	4.37	14	14
DAOF5L06Q-0404	9/16"-18	1/4"-19	9/16"-18	23.50	35.00	23.50	4.37	7.50	4.37	14	19
DAOF5L06Q-0604	11/16"-16	1/4"-19	11/16"-16	25.00	36.00	25.00	6.71	7.50	6.71	19	19
DAOF5L06Q-0606	11/16"-16	3/8"-19	11/16"-16	26.50	38.00	26.50	6.50	9.90	6.50	19	22
DAOF5L06Q-0608	11/16"-16	1/2"-14	11/16"-16	29.50	48.00	29.50	6.71	12.30	6.71	22	27
DAOF5L06Q-0804	13/16"-16	1/4"-19	13/16"-16	28.00	35.00	28.00	9.60	7.50	9.60	19	19
DAOF5L06Q-0806	13/16"-16	3/8"-19	13/16"-16	28.00	36.50	28.00	9.60	9.90	9.60	19	22
DAOF5L06Q-0808	13/16"-16	1/2"-14	13/16"-16	31.00	48.00	31.00	9.60	12.30	9.60	22	27
DAOF5L06Q-1008	1"-14	1/2"-14	1"-14	33.50	48.00	33.50	12.29	12.30	12.29	27	27
DAOF5L06Q-1012	1"-14	3/4"-14	1"-14	36.00	51.50	36.00	12.29	15.50	12.29	30	36
DAOF5L06Q-1212	1-3/16"-12	3/4"-14	1-3/16"-12	37.50	51.50	37.50	15.47	15.50	15.47	30	36
DAOF5L06Q-1616	1-7/16"-12	1"-11	1-7/16"-12	42.00	58.00	42.00	20.60	21.50	20.60	36	41
DAOF5L06Q-2020	1-11/16"-12	1-1/4"-11	1-11/16"-12	45.00	60.50	45.00	26.00	27.50	26.00	41	50
DAOF5L06Q-2424	2"-12	1-1/2"-11	2"-12	49.00	64.50	49.00	32.00	33.00	32.00	48	55




DAOF5L065

Run Adjustable Tee ORFS Male - BSPP Male + O Ring

D	A	OF	5	L	06	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Male	Run Tee	BSPP	Male + O Ring



DME&JDE Code:	DAOF5L065
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Run Tee
Connection Type:	Adjustable Male × Male × Male
Thread Types:	UNF × BSPP × UNF + O Ring
Sealing Method:	O Ring

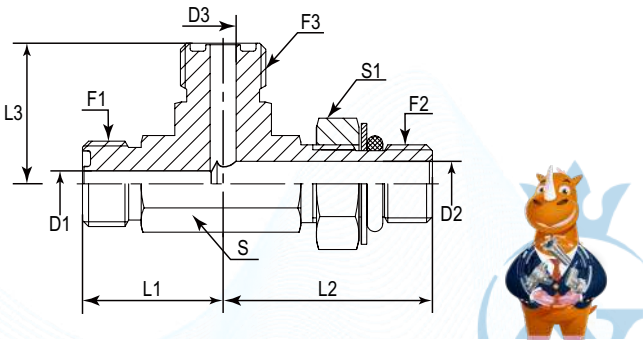

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	UNF	BSPP	UNF	mm	mm	mm	mm	mm	mm	mm	mm
DAOF5L065-0402	9/16"-18	1/8"-28	9/16"-18	21.50	30.00	21.50	4.37	4.40	4.37	14	14
DAOF5L065-0404	9/16"-18	1/4"-19	9/16"-18	23.50	35.00	23.50	4.37	7.50	4.37	14	19
DAOF5L065-0604	11/16"-16	1/4"-19	11/16"-16	25.00	36.00	25.00	6.71	7.50	6.71	19	19
DAOF5L065-0606	11/16"-16	3/8"-19	11/16"-16	26.50	38.00	26.50	6.50	9.90	6.50	19	22
DAOF5L065-0608	11/16"-16	1/2"-14	11/16"-16	29.50	48.00	29.50	6.71	12.30	6.71	22	27
DAOF5L065-0804	13/16"-16	1/4"-19	13/16"-16	28.00	35.00	28.00	9.60	7.50	9.60	19	19
DAOF5L065-0806	13/16"-16	3/8"-19	13/16"-16	28.00	36.50	28.00	9.60	9.90	9.60	19	22
DAOF5L065-0808	13/16"-16	1/2"-14	13/16"-16	31.00	48.00	31.00	9.60	12.30	9.60	22	27
DAOF5L065-1008	1"-14	1/2"-14	1"-14	33.50	48.00	33.50	12.29	12.30	12.29	27	27
DAOF5L065-1012	1"-14	3/4"-14	1"-14	36.00	51.50	36.00	12.29	15.50	12.29	30	36
DAOF5L065-1212	1-3/16"-12	3/4"-14	1-3/16"-12	37.50	51.50	37.50	15.47	15.50	15.47	30	36
DAOF5L065-1616	1-7/16"-12	1"-11	1-7/16"-12	42.00	58.00	42.00	20.60	21.50	20.60	36	41
DAOF5L065-2020	1-11/16"-12	1-1/4"-11	1-11/16"-12	45.00	60.50	45.00	26.00	27.50	26.00	41	50
DAOF5L065-2424	2"-12	1-1/2"-11	2"-12	49.00	64.50	49.00	32.00	33.00	32.00	48	55

Certificate:


DAOF5L52Q

Run Adjustable Tee ORFS Male - Metric Male + O Ring + Retaining Ring

D	A	OF	5	L	52	0
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	ORFS UNF	Male	Run Tee	Metric	Male + O Ring + Retaining Ring



DME&JDE Code:	DAOF5L52Q
Product Type	Hydraulic adaptor
Standard:	ORFS
Structure:	Run Tee
Connection Type:	Adjustable Male × Male × Male
Thread Types:	UNF × Metric × UNF
Sealing Method:	O Ring + Retaining Ring

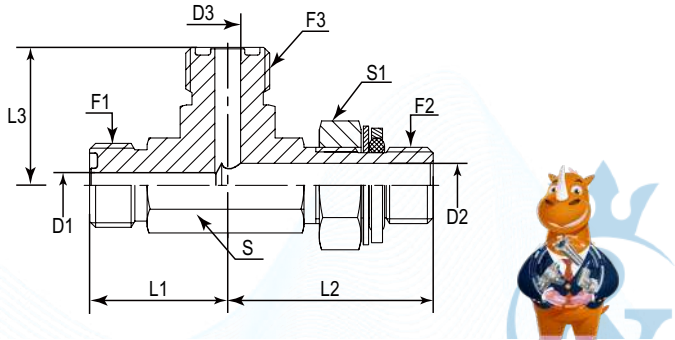

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	UNF	METRIC	UNF	mm	mm	mm	mm	mm	mm	mm	mm
DAOF5L52Q-0410	9/16"-18	M10X1	9/16"-18	21.50	32.50	21.50	4.37	3.00	4.37	14	14
DAOF5L52Q-0412	9/16"-18	M12X1.5	9/16"-18	21.50	32.50	21.50	4.37	4.00	4.37	14	17
DAOF5L52Q-0614	11/16"-16	M14X1.5	11/16"-16	25.00	36.00	25.00	6.71	6.00	6.71	19	19
DAOF5L52Q-0616	11/16"-16	M16X1.5	11/16"-16	25.00	37.00	25.00	6.71	7.00	6.71	19	22
DAOF5L52Q-0816	13/16"-16	M16X1.5	13/16"-16	28.00	37.00	28.00	9.60	7.00	9.60	19	22
DAOF5L52Q-0818	13/16"-16	M18X1.5	13/16"-16	28.00	40.00	28.00	9.60	9.00	9.60	19	24
DAOF5L52Q-0822	13/16"-16	M22X1.5	13/16"-16	31.50	49.00	31.50	9.60	12.00	9.60	27	27
DAOF5L52Q-1018	1"-14	M18X1.5	1"-14	33.50	48.00	33.50	12.29	9.00	12.29	27	24
DAOF5L52Q-1022	1"-14	M22X1.5	1"-14	33.50	49.00	33.50	12.29	12.00	12.29	27	27
DAOF5L52Q-1227	1-3/16"-12	M27X2	1-3/16"-12	37.50	55.50	37.50	15.47	15.00	15.47	30	32
DAOF5L52Q-1233	1-3/16"-12	M33X2	1-3/16"-12	41.50	60.00	41.50	15.50	20.00	15.50	36	41
DAOF5L52Q-1633	1-7/16"-12	M33X2	1-7/16"-12	42.00	60.00	42.00	20.60	20.00	20.60	36	41
DAOF5L52Q-2033	1-11/16"-12	M33X2	1-11/16"-12	44.70	62.50	44.70	26.00	20.00	26.00	41	41
DAOF5L52Q-2448	2"-12	M48X2	2"-12	47.90	66.00	47.90	32.00	32.00	32.00	48	55

Certificate:





DAOF5L525

Run Adjustable Tee ORFS Male - Metric Male + O Ring

D

A

OF

5

L

52

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

Run Tee

Metric

Male + O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF5L525

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Run Tee

Connection Type:

Adjustable Male × Male × Male

Thread Types:

UNF × Metric × UNF + O Ring

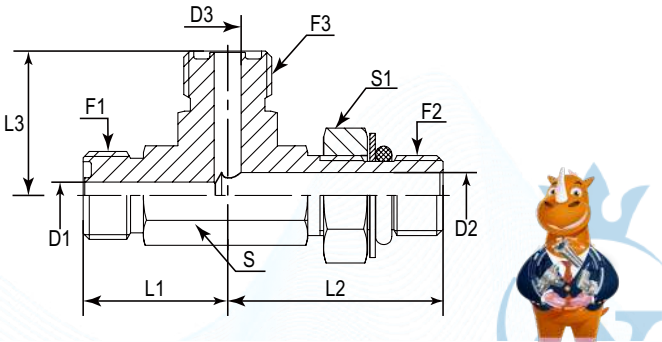

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	UNF	METRIC	UNF	mm	mm	mm	mm	mm	mm	mm	mm
DAOF5L525-0410	9/16"-18	M10X1	9/16"-18	21.50	32.50	21.50	4.37	3.00	4.37	14	14
DAOF5L525-0412	9/16"-18	M12X1.5	9/16"-18	21.50	32.50	21.50	4.37	4.00	4.37	14	17
DAOF5L525-0614	11/16"-16	M14X1.5	11/16"-16	25.00	36.00	25.00	6.71	6.00	6.71	19	19
DAOF5L525-0616	11/16"-16	M16X1.5	11/16"-16	25.00	37.00	25.00	6.71	7.00	6.71	19	22
DAOF5L525-0816	13/16"-16	M16X1.5	13/16"-16	28.00	37.00	28.00	9.60	7.00	9.60	19	22
DAOF5L525-0818	13/16"-16	M18X1.5	13/16"-16	28.00	40.00	28.00	9.60	9.00	9.60	19	24
DAOF5L525-0822	13/16"-16	M22X1.5	13/16"-16	31.50	49.00	31.50	9.60	12.00	9.60	27	27
DAOF5L525-1018	1"-14	M18X1.5	1"-14	33.50	48.00	33.50	12.29	9.00	12.29	27	24
DAOF5L525-1022	1"-14	M22X1.5	1"-14	33.50	49.00	33.50	12.29	12.00	12.29	27	27
DAOF5L525-1227	1-3/16"-12	M27X2	1-3/16"-12	37.50	55.50	37.50	15.47	15.00	15.47	30	32
DAOF5L525-1233	1-3/16"-12	M33X2	1-3/16"-12	41.50	60.00	41.50	15.50	20.00	15.50	36	41
DAOF5L525-1633	1-7/16"-12	M33X2	1-7/16"-12	42.00	60.00	42.00	20.60	20.00	20.60	36	41
DAOF5L525-2033	1-11/16"-12	M33X2	1-11/16"-12	44.70	62.50	44.70	26.00	20.00	26.00	41	41
DAOF5L525-2448	2"-12	M48X2	2"-12	47.90	66.00	47.90	32.00	32.00	32.00	48	55

Certificate:

DAOF5L24T

Run Tee Bulkhead Connector ORFS Male - ORFS Male

D

A

OF

5

L

24

T

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

Run Tee

ORFS UNF

Bulkhead Male

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF5L24T

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

Run Tee

Connection Type:


Male × Male × Male

Thread Types:

UNF × UNF × UNF

Other Features:

Bulkhead

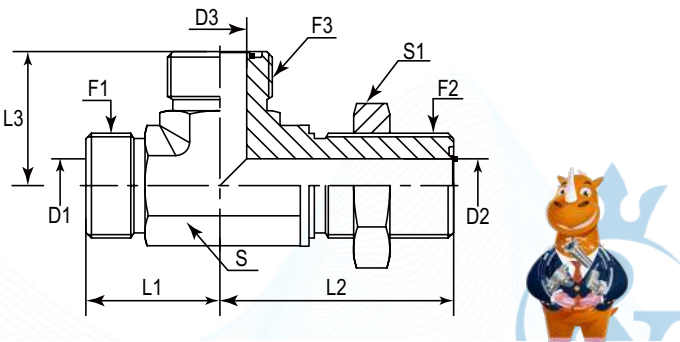

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-
DAOF5L24T-0404	9/16"-18	9/16"-18	9/16"-18	22.60	47.00	22.60	4.37	4.37	4.37	14 mm	22 mm	Metric
DAOF5L24T-0404IN	9/16"-18	9/16"-18	9/16"-18	22.60	47.00	22.60	4.37	4.37	4.37	9/16"	13/16"	Imperial
DAOF5L24T-0606	11/16"-16	11/16"-16	11/16"-16	26.00	52.00	26.00	6.71	6.71	6.71	19 mm	27 mm	Metric
DAOF5L24T-0606IN	11/16"-16	11/16"-16	11/16"-16	26.00	52.00	26.00	6.71	6.71	6.71	3/4"	1"	Imperial
DAOF5L24T-0808	13/16"-16	13/16"-16	13/16"-16	29.00	55.40	29.00	9.60	9.60	9.60	19 mm	30 mm	Metric
DAOF5L24T-0808IN	13/16"-16	13/16"-16	13/16"-16	29.00	55.40	29.00	9.60	9.60	9.60	3/4"	1-1/8"	Imperial
DAOF5L24T-1010	1"-14	1"-14	1"-14	34.50	63.00	34.50	12.29	12.29	12.29	27 mm	36 mm	Metric
DAOF5L24T-1010IN	1"-14	1"-14	1"-14	34.50	63.00	34.50	12.29	12.29	12.29	1-1/16"	1-5/16"	Imperial
DAOF5L24T-1212	1-3/16"-12	1-3/16"-12	1-3/16"-12	38.60	67.30	38.60	15.47	15.47	15.47	30 mm	41 mm	Metric
DAOF5L24T-1212IN	1-3/16"-12	1-3/16"-12	1-3/16"-12	38.60	67.30	38.60	15.47	15.47	15.47	1-3/16"	1-1/2"	Imperial
DAOF5L24T-1616	1-7/16"-12	1-7/16"-12	1-7/16"-12	42.40	71.20	42.40	20.60	20.60	20.60	36 mm	46 mm	Metric
DAOF5L24T-1616IN	1-7/16"-12	1-7/16"-12	1-7/16"-12	42.40	71.20	42.40	20.60	20.60	20.60	1-7/16"	1-3/4"	Imperial
DAOF5L24T-2020	1-11/16"-12	1-11/16"-12	1-11/16"-12	45.50	75.40	45.50	26.00	26.00	26.00	41 mm	50 mm	Metric
DAOF5L24T-2020IN	1-11/16"-12	1-11/16"-12	1-11/16"-12	45.50	75.40	45.50	26.00	26.00	26.00	1-5/8"	2"	Imperial
DAOF5L24T-2424	2"-12	2"-12	2"-12	49.50	79.50	49.50	32.00	32.00	32.00	50 mm	60 mm	Metric
DAOF5L24T-2424IN	2"-12	2"-12	2"-12	49.50	79.50	49.50	32.00	32.00	32.00	1-7/8"	2-3/8"	Imperial

Certificate:





DAOF3L245

Run Tee ORFS Swivel Female - ORFS Male

D

A

OF

3

L

24

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Swivel Female

Run Tee

ORFS UNF

Male + O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF3L245

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:

Run Tee

Connection Type:


Male × Swivel Female × Swivel Female

Thread Types:

UNF × UNF × UNF

Sealing Method:

O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1	S2	Hex
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	-	-	-	-
DAOF3L245-0404	9/16"-18	9/16"-18	9/16"-18	4.37	4.19	4.19	21.60	34.60	34.60	14 mm	17 mm	17 mm	Metric
DAOF3L245-0404IN	9/16"-18	9/16"-18	9/16"-18	4.37	4.19	4.19	21.60	34.60	34.60	9/16"	11/16"	11/16"	Imperial
DAOF3L245-0606	11/16"-16	11/16"-16	11/16"-16	6.71	6.71	6.71	24.90	38.70	38.70	19 mm	22 mm	22 mm	Metric
DAOF3L245-0606IN	11/16"-16	11/16"-16	11/16"-16	6.71	6.71	6.71	24.90	38.70	38.70	3/4"	7/8"	7/8"	Imperial
DAOF3L245-0808	13/16"-16	13/16"-16	13/16"-16	9.60	9.09	9.09	27.90	49.00	49.00	19 mm	24 mm	24 mm	Metric
DAOF3L245-0808IN	13/16"-16	13/16"-16	13/16"-16	9.60	9.09	9.09	27.90	49.00	49.00	3/4"	15/16"	15/16"	Imperial
DAOF3L245-1010	1"-14	1"-14	1"-14	12.29	11.51	11.51	33.27	54.30	54.30	27 mm	30 mm	30 mm	Metric
DAOF3L245-1010IN	1"-14	1"-14	1"-14	12.29	11.51	11.51	33.27	54.30	54.30	1-1/16"	1-1/8"	1-1/8"	Imperial
DAOF3L245-1212	1-3/16"-12	1-3/16"-12	1-3/16"-12	15.47	13.89	13.89	37.30	60.80	60.80	32 mm	36 mm	36 mm	Metric
DAOF3L245-1212IN	1-3/16"-12	1-3/16"-12	1-3/16"-12	15.47	13.89	13.89	37.30	60.80	60.80	1-1/4"	1-3/8"	1-3/8"	Imperial
DAOF3L245-1616	1-7/16"-12	1-7/16"-12	1-7/16"-12	20.60	19.89	19.89	41.70	68.20	68.20	36 mm	41 mm	41 mm	Metric
DAOF3L245-1616IN	1-7/16"-12	1-7/16"-12	1-7/16"-12	20.60	19.89	19.89	41.70	68.20	68.20	1-3/8"	1-5/8"	1-5/8"	Imperial

Certificate:

DAOF5X245

Cross Connector ORFS Male

D

A

OF

5

X

24

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

ORFS UNF

Male

Cross

ORFS UNF

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF5X245

Product Type

Hydraulic adaptor

Standard:

ORFS

Structure:


Cross

Connection Type:

Male × Male × Male × Male

Thread Types:

UNF × UNF × UNF × UNF

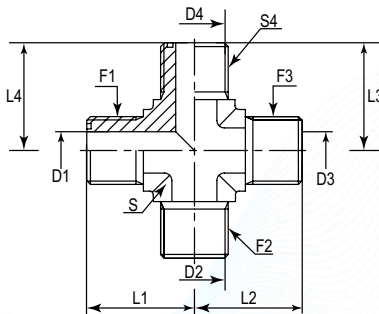

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	F4 (Thread)	L1	L2	L3	L4	D1	D2	D3	D4	S	Hex
#	UNF	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm	mm	mm	-	-
DAOF5X245-0404	9/16"-18	9/16"-18	9/16"-18	9/16"-18	21.60	21.60	21.60	21.60	4.50	4.50	4.50	4.50	14 mm	Metric
DAOF5X245-0404IN	9/16"-18	9/16"-18	9/16"-18	9/16"-18	21.60	21.60	21.60	21.60	4.50	4.50	4.50	4.50	9/16"	Imperial
DAOF5X245-0606	11/16"-16	11/16"-16	11/16"-16	11/16"-16	24.90	24.90	24.90	24.90	6.50	6.50	6.50	6.50	19 mm	Metric
DAOF5X245-0606IN	11/16"-16	11/16"-16	11/16"-16	11/16"-16	24.90	24.90	24.90	24.90	6.50	6.50	6.50	6.50	3/4"	Imperial
DAOF5X245-0808	13/16"-16	13/16"-16	13/16"-16	13/16"-16	28.00	28.00	28.00	28.00	9.60	9.60	9.60	9.60	19 mm	Metric
DAOF5X245-0808IN	13/16"-16	13/16"-16	13/16"-16	13/16"-16	28.00	28.00	28.00	28.00	9.60	9.60	9.60	9.60	3/4"	Imperial
DAOF5X245-1010	1"-14	1"-14	1"-14	1"-14	33.30	33.30	33.30	33.30	12.29	12.29	12.29	12.29	27 mm	Metric
DAOF5X245-1010IN	1"-14	1"-14	1"-14	1"-14	33.30	33.30	33.30	33.30	12.29	12.29	12.29	12.29	1-1/8"	Imperial
DAOF5X245-1212	1-3/16"-12	1-3/16"-12	1-3/16"-12	1-3/16"-12	37.50	37.50	37.50	37.50	15.50	15.50	15.50	15.50	30 mm	Metric
DAOF5X245-1212IN	1-3/16"-12	1-3/16"-12	1-3/16"-12	1-3/16"-12	37.50	37.50	37.50	37.50	15.50	15.50	15.50	15.50	1-3/16"	Imperial
DAOF5X245-1616	1-7/16"-12	1-7/16"-12	1-7/16"-12	1-7/16"-12	41.50	41.50	41.50	41.50	20.50	20.50	20.50	20.50	36 mm	Metric
DAOF5X245-1616IN	1-7/16"-12	1-7/16"-12	1-7/16"-12	1-7/16"-12	41.50	41.50	41.50	41.50	20.50	20.50	20.50	20.50	1-3/8"	Imperial
DAOF5X245-2020	1-11/16"-12	1-11/16"-12	1-11/16"-12	1-11/16"-12	44.70	44.70	44.70	44.70	26.00	26.00	26.00	26.00	41 mm	Metric
DAOF5X245-2020IN	1-11/16"-12	1-11/16"-12	1-11/16"-12	1-11/16"-12	44.70	44.70	44.70	44.70	26.00	26.00	26.00	26.00	1-5/8"	Imperial
DAOF5X245-2424	2"-12	2"-12	2"-12	2"-12	48.80	48.80	48.80	48.80	32.00	32.00	32.00	32.00	48 mm	Metric
DAOF5X245-2424IN	2"-12	2"-12	2"-12	2"-12	48.80	48.80	48.80	48.80	32.00	32.00	32.00	32.00	1-7/8"	Imperial

Certificate:





Hydraulic Adaptors

NPTF »




DANPM128M P497 Straight Connector NPTF Male 60° - NPTF Male 60°	DANPM1061 P500 Straight Connector NPTF Male 60° - BSPP 60° Male with ED Ring	DANPM1305 P501 Straight Connector NPTF Male 60° - SAE Male O Ring	DANPM1000 P503 NPTF Male Plug
DANPM128FR P504 Straight Bushing Connector NPTF Male 60° - NPTF Female	DANPM128F P506 Straight Connector NPTF Male 60° - NPTF Female	DANPM105F P508 Straight Connector NPTF Male 60° - BSPP Female	DANPM1081 P509 Straight Connector NPTF Male 60° - BSPP Swivel Female 60° Cone
DANPM1091 P510 Straight Connector NPTF Male 60° - NPSM Swivel Female 60°	DANPF152Q P512 Straight Connector NPTF Female - Metric Male 24° + O Ring + Retaining Ring	DANPF1305 P513 Straight Connector NPTF Female - SAE Male O Ring	DANPF106Q P516 Straight Connector NPTF Male 60° - BSPP Swivel Female 60° Cone
DANPS1305 P517 Straight Connector NPSM Swivel Female 60° - SAE Male + O Ring	DANPF128F P519 Hexagon Straight Coupling NPTF Female - NPTF Female	DANP31000 P521 Hexagon Socket Plug NPTF Male	DANP21000-HHP P522 Hexagon Socket Plug NPTF Male



DANPF1091


P523



Straight Connector NPTF Female -
NPSM Swivel Female 60°

DANPM428M


P525



45° Elbow Connector NPTF Male
60° - NPTF Male 60°

DANPM428F


P526



45° Elbow Connector NPTF Male
60° - NPTF Female

DANPM4091


P527



45° Elbow Connector NPTF Male -
NPSM Swivel Female 60°

DANPS4305


P528



45° Adjustable Elbow NPSM Swivel
Female 60° - SAE Male O Ring

DANPF428F


P531



45° Elbow Connector NPTF Female
- NPTF Female

DANPF4091


P532



45° Elbow Connector NPTF Female
- NPSM Swivel Female 60°

DANPF4251


P533



45° Elbow Connector NPTF Female
- JIC Swivel Female 74°

DANPM928M


P534



90° Elbow Connector NPTF Male
60° - NPTF Male 60°

DANPM9305


P535



90° Adjustable Elbow NPTF Male
60° - SAE Male O Ring

DANPM928F


P536



90° Elbow Connector NPTF Male
60° - NPTF Female

DANPF9091


P538



90° Elbow Connector NPTF Male -
NPSM Swivel Female 60° Cone

DANPP9091


P539



90° Long Elbow Connector NPTF
Male 60° - NPSM Swivel Female
60° Cone

DANPM9091-LL


P540



90° X-Long Elbow Connector NPTF
Male 60° - NPSM Swivel Female
60° Cone

DANPF9305


P541



90° Adjustable Elbow NPTF Female
- SAE Male + O Ring

DANPS9305


P542



90° Adjustable Elbow NPSM Swivel
Female 60° - SAE Male O Ring

DANPS906Q


P544



90° Adjustable Elbow NPSM Swivel
Female 60° - BSPP Male + O Ring +
Retaining Ring

DANPF928F


P545



90° Elbow Connector NPTF Female
- NPTF Female

DANPF9251


P546



90° Elbow Connector NPTF Female
- JIC Swivel Female 74°

DANPMT28M


P547



Branch Tee Connector NPTF Male
60° - NPTF Male 60°

DANPMT25M


P548



Branch Tee Connector NPTF Male
60° - JIC Male 74°

DANPFT25M


P549



Branch Tee Connector NPTF
Female - JIC Male 74°

DANPFT28M


P550



Branch Tee Connector NPTF
Female - NPTF Male 60°

DANPMT28F


P551



Branch Tee Connector NPTF Male
60° - NPTF Female

DANPFT28F


P552



Branch Tee Connector NPTF
Female - NPTF Female

DANPST091


P553



Branch Tee Connector NPSM
Swivel Female 60° - NPSM Swivel
Female 60°

DANPST28F


P554



Branch Tee Connector NPSM
Swivel Female 60° - NPTF Female

DANPST28M


P555



Branch Tee Connector NPSM
Swivel Female 60° - NPTF Male
60°

DANPML25M


P556



Run Tee Connector NPTF
Male 60° - JIC Male 74°

DANPFL25M


P557



Run Tee Connector NPTF
Male 60° - JIC Male 74°

DANPFL28M


P558



Run Tee Connector NPTF
Female - NPTF Male 60°

DANPML28F


P559



Run Tee Connector NPTF
Male 60° - NPTF Female

DANPFX28F

P560



Run Tee Connector NPTF
Male 60° - NPTF Female

DANPM128M

Straight Connector NPTF Male 60° - NPTF Male 60°

D

A

NP

M

1

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

NPTF

Male

Straight

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DANPM128M

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

NPTF 60° × NPTF 60°

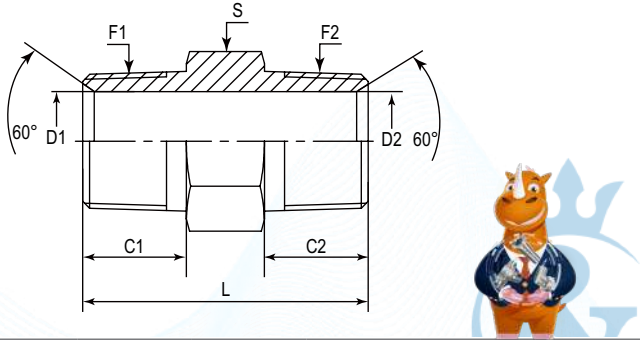

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Hex
#	NPTF	NPTF	mm	mm	mm	mm	mm	-	-
DANPM128M-0202	1/8"-27	1/8"-27	9.65	9.65	4.78	4.78	26.90	11 mm	Metric
DANPM128M-0202IN	1/8"-27	1/8"-27	9.65	9.65	4.78	4.78	26.90	7/16"	Imperial
DANPM128M-0402	1/4"-18	1/8"-27	14.22	9.65	7.14	4.78	32.00	17 mm	Metric
DANPM128M-0404	1/4"-18	1/4"-18	14.22	14.22	7.14	7.14	36.84	17 mm	Metric
DANPM128M-0402IN	1/4"-18	1/8"-27	14.22	9.65	7.14	4.78	32.00	5/8"	Imperial
DANPM128M-0404IN	1/4"-18	1/4"-18	14.22	14.22	7.14	7.14	36.84	5/8"	Imperial
DANPM128M-0602	3/8"-18	1/8"-27	14.22	9.65	10.31	4.78	32.00	19 mm	Metric
DANPM128M-0604	3/8"-18	1/4"-18	14.22	14.22	10.31	7.14	36.83	19 mm	Metric
DANPM128M-0606	3/8"-18	3/8"-18	14.22	14.22	10.31	10.31	36.26	19 mm	Metric
DANPM128M-0602IN	3/8"-18	1/8"-27	14.22	9.65	10.31	4.78	32.00	3/4"	Imperial
DANPM128M-0604IN	3/8"-18	1/4"-18	14.22	14.22	10.31	7.14	36.83	3/4"	Imperial
DANPM128M-0606IN	3/8"-18	3/8"-18	14.22	14.22	10.31	10.31	36.26	3/4"	Imperial
DANPM128M-0802	1/2"-14	1/8"-27	19.05	9.65	13.49	4.78	38.60	22 mm	Metric
DANPM128M-0804	1/2"-14	1/4"-18	19.05	14.22	13.49	7.14	43.20	22 mm	Metric
DANPM128M-0806	1/2"-14	3/8"-18	19.05	14.22	13.49	10.31	43.20	22 mm	Metric



Certificate:



DANPM128M-0808	1/2"-14	1/2"-14	19.05	19.05	13.49	13.49	48.00	22 mm	Metric
DANPM128M-0802IN	1/2"-14	1/8"-27	19.05	9.65	13.49	4.78	38.60	7/8"	Imperial
DANPM128M-0804IN	1/2"-14	1/4"-18	19.05	14.22	13.49	7.14	43.20	7/8"	Imperial
DANPM128M-0806IN	1/2"-14	3/8"-18	19.05	14.22	13.49	10.31	43.20	7/8"	Imperial
DANPM128M-0808IN	1/2"-14	1/2"-14	19.05	19.05	13.49	13.49	48.00	7/8"	Imperial
DANPM128M-1204	3/4"-14	1/4"-18	19.05	14.22	18.26	7.14	45.00	27 mm	Metric
DANPM128M-1206	3/4"-14	3/8"-18	19.05	14.22	18.26	10.31	45.00	27 mm	Metric
DANPM128M-1208	3/4"-14	1/2"-14	19.05	19.05	18.26	13.49	49.80	27 mm	Metric
DANPM128M-1212	3/4"-14	3/4"-14	19.05	19.05	18.26	18.26	49.78	27 mm	Metric
DANPM128M-1204IN	3/4"-14	1/4"-18	19.05	14.22	18.26	7.14	45.00	1-1/8"	Imperial
DANPM128M-1206IN	3/4"-14	3/8"-18	19.05	14.22	18.26	10.31	45.00	1-1/8"	Imperial
DANPM128M-1208IN	3/4"-14	1/2"-14	19.05	19.05	18.26	13.49	49.80	1-1/8"	Imperial
DANPM128M-1212IN	3/4"-14	3/4"-14	19.05	19.05	18.26	18.26	49.78	1-1/8"	Imperial
DANPM128M-1604	1"-11-1/2	1/4"-18	23.88	14.22	23.83	7.14	49.80	36 mm	Metric
DANPM128M-1606	1"-11-1/2	3/8"-18	23.88	14.22	23.83	10.31	49.80	36 mm	Metric
DANPM128M-1608	1"-11-1/2	1/2"-14	23.88	19.05	23.83	13.49	53.09	36 mm	Metric
DANPM128M-1612	1"-11-1/2	3/4"-14	23.88	19.05	23.83	18.26	54.61	36 mm	Metric
DANPM128M-1616	1"-11-1/2	1"-11-1/2	23.88	23.88	23.83	23.83	59.44	36 mm	Metric
DANPM128M-1604IN	1"-11-1/2	1/4"-18	23.88	14.22	23.83	7.14	49.80	1-3/8"	Imperial
DANPM128M-1606IN	1"-11-1/2	3/8"-18	23.88	14.22	23.83	10.31	49.80	1-3/8"	Imperial
DANPM128M-1608IN	1"-11-1/2	1/2"-14	23.88	19.05	23.83	13.49	53.09	1-3/8"	Imperial
DANPM128M-1612IN	1"-11-1/2	3/4"-14	23.88	19.05	23.83	18.26	54.61	1-3/8"	Imperial
DANPM128M-1616IN	1"-11-1/2	1"-11-1/2	23.88	23.88	23.83	23.83	59.44	1-3/8"	Imperial
DANPM128M-2008	1-1/4"-11-1/2	1/2"-14	24.64	19.05	31.75	13.49	57.50	46 mm	Metric
DANPM128M-2012	1-1/4"-11-1/2	3/4"-14	24.64	19.05	31.75	18.26	57.40	46 mm	Metric
DANPM128M-2016	1-1/4"-11-1/2	1"-11-1/2	24.64	23.88	31.75	23.83	62.30	46 mm	Metric
DANPM128M-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	24.64	24.64	31.75	31.75	63.00	46 mm	Metric

Certificate:





DANPM128M-2008IN	1-1/4"-11-1/2	1/2"-14	24.64	19.05	31.75	13.49	57.50	1-3/4"	Imperial
DANPM128M-2012IN	1-1/4"-11-1/2	3/4"-14	24.64	19.05	31.75	18.26	57.40	1-3/4"	Imperial
DANPM128M-2016IN	1-1/4"-11-1/2	1"-11-1/2	24.64	23.88	31.75	23.83	62.30	1-3/4"	Imperial
DANPM128M-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	24.64	24.64	31.75	31.75	63.00	1-3/4"	Imperial
DANPM128M-2412	1-1/2"-11-1/2	3/4"-14	25.40	19.05	38.10	18.26	60.45	50 mm	Metric
DANPM128M-2416	1-1/2"-11-1/2	1"-11-1/2	25.40	23.88	38.10	23.83	64.80	50 mm	Metric
DANPM128M-2420	1-1/2"-11-1/2	1-1/4"-11-1/2	25.40	24.64	38.10	31.75	66.29	50 mm	Metric
DANPM128M-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	25.40	25.40	38.10	38.10	66.30	50 mm	Metric
DANPM128M-2412IN	1-1/2"-11-1/2	3/4"-14	25.40	19.05	38.10	18.26	60.45	2"	Imperial
DANPM128M-2416IN	1-1/2"-11-1/2	1"-11-1/2	25.40	23.88	38.10	23.83	64.80	2"	Imperial
DANPM128M-2420IN	1-1/2"-11-1/2	1-1/4"-11-1/2	25.40	24.64	38.10	31.75	66.29	2"	Imperial
DANPM128M-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	25.40	25.40	38.10	38.10	66.30	2"	Imperial
DANPM128M-3212	2"-11-1/2	3/4"-14	26.16	19.05	49.23	18.26	64.50	65 mm	Metric
DANPM128M-3216	2"-11-1/2	1"-11-1/2	26.16	23.88	49.23	23.83	69.30	65 mm	Metric
DANPM128M-3220	2"-11-1/2	1-1/4"-11-1/2	26.16	24.64	49.23	31.75	70.10	65 mm	Metric
DANPM128M-3224	2"-11-1/2	1-1/2"-11-1/2	26.16	25.40	49.23	38.10	70.87	65 mm	Metric
DANPM128M-3232	2"-11-1/2	2"-11-1/2	26.20	26.20	49.23	49.23	71.63	65 mm	Metric
DANPM128M-3212IN	2"-11-1/2	3/4"-14	26.16	19.05	49.23	18.26	64.50	2-1/2"	Imperial
DANPM128M-3216IN	2"-11-1/2	1"-11-1/2	26.16	23.88	49.23	23.83	69.30	2-1/2"	Imperial
DANPM128M-3220IN	2"-11-1/2	1-1/4"-11-1/2	26.16	24.64	49.23	31.75	70.10	2-1/2"	Imperial
DANPM128M-3224IN	2"-11-1/2	1-1/2"-11-1/2	26.16	25.40	49.23	38.10	70.87	2-1/2"	Imperial
DANPM128M-3232IN	2"-11-1/2	2"-11-1/2	26.20	26.20	49.23	49.23	71.63	2-1/2"	Imperial
DANPM128M-4040	2-1/2"-8	2-1/2"-8	38.86	38.86	59.00	59.00	96.40	85 mm	Metric
DANPM128M-4040IN	2-1/2"-8	2-1/2"-8	38.86	38.86	59.00	59.00	96.40	3-1/4"	Imperial
DANPM128M-4848	3"-8	3"-8	41.40	41.40	70.64	70.64	103.50	90 mm	Metric
DANPM128M-4848IN	3"-8	3"-8	41.40	41.40	70.64	70.64	103.50	3-9/16"	Imperial



DANPM1061

Straight Connector NPTF Male 60° - BSPP 60° Male with ED Ring

D

A

NP

M

1

061

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Adaptor

NPTF

Male

Straight

BSPP Male with ED Ring


German Technology Equipment



New-Standard

DME&JDE Code:
DANPM1061

Product Type
Hydraulic Adaptor


Standard:
NPTF

Structure:
Straight

Connection Type:
Male × Male

Thread Types:
NPTF 60° × BSPP 60°

Sealing Method:
ED Ring

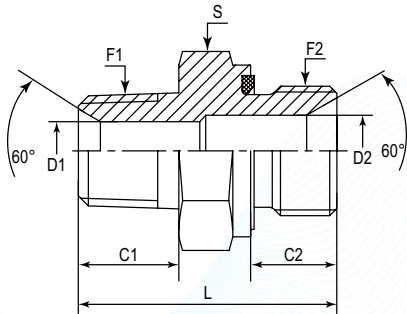

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	NPTF	BSPP	mm	mm	mm	mm	mm	mm
DANPM1061-0404	1/4"-18	1/4"-19	14.22	12.00	6.00	6.00	35.50	19.00
DANPM1061-0606	3/8"-18	3/8"-19	14.22	12.00	10.31	7.90	36.00	22.00
DANPM1061-0808	1/2"-14	1/2"-14	19.05	14.00	13.49	11.10	43.00	27.00
DANPM1061-1212	3/4"-14	3/4"-14	19.05	16.00	20.65	17.50	50.00	32.00



DANPM1305

Straight Connector NPTF Male 60° - SAE Male O Ring

D

A

NP

M

1

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

NPTF

Male

Straight

SAE UNF

Male O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DANPM1305

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

NPTF 60° × SAE UNF

Sealing Method:

O Ring

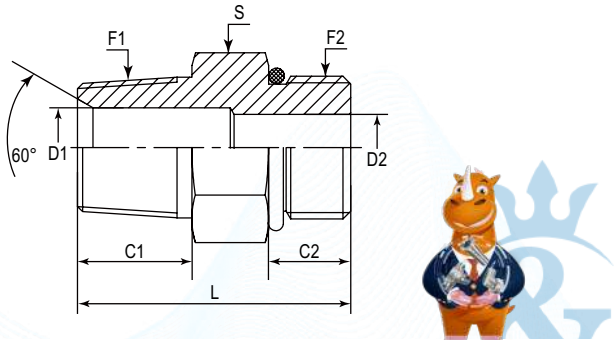

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Hex
#	NPTF	UNF	mm	mm	mm	mm	mm	-	-
DANPM1305-0202	1/8"-27	5/16"-24	9.65	7.54	4.78	1.57	25.65	11 mm	Metric
DANPM1305-0203	1/8"-27	3/8"-24	9.65	7.54	4.78	3.18	25.50	12 mm	Metric
DANPM1305-0204	1/8"-27	7/16"-20	9.65	9.14	4.37	4.37	26.70	14 mm	Metric
DANPM1305-0205	1/8"-27	1/2"-20	9.65	9.14	4.78	4.78	26.90	17 mm	Metric
DANPM1305-0206	1/8"-27	9/16"-18	9.65	9.93	4.78	7.54	28.70	17 mm	Metric
DANPM1305-0202IN	1/8"-27	5/16"-24	9.65	7.54	4.78	1.57	25.65	7/16"	Imperial
DANPM1305-0203IN	1/8"-27	3/8"-24	9.65	7.54	4.78	3.18	25.50	1/2"	Imperial
DANPM1305-0204IN	1/8"-27	7/16"-20	9.65	9.14	4.37	4.37	26.70	9/16"	Imperial
DANPM1305-0205IN	1/8"-27	1/2"-20	9.65	9.14	4.78	4.78	26.90	5/8"	Imperial
DANPM1305-0206IN	1/8"-27	9/16"-18	9.65	9.93	4.78	7.54	28.70	11/16"	Imperial
DANPM1305-0403	1/4"-18	3/8"-24	14.22	7.54	7.14	3.18	29.70	14 mm	Metric
DANPM1305-0404	1/4"-18	7/16"-20	14.22	9.14	7.14	4.37	31.30	14 mm	Metric
DANPM1305-0405	1/4"-18	1/2"-20	14.22	9.14	5.94	5.94	31.20	17 mm	Metric
DANPM1305-0406	1/4"-18	9/16"-18	14.22	9.93	7.14	7.54	32.80	17 mm	Metric
DANPM1305-0408	1/4"-18	3/4"-16	14.22	11.13	7.14	9.93	34.54	22 mm	Metric
DANPM1305-0410	1/4"-18	7/8"-14	14.22	12.70	7.14	12.29	36.83	27 mm	Metric
DANPM1305-0403IN	1/4"-18	3/8"-24	14.22	7.54	7.14	3.18	29.70	9/16"	Imperial
DANPM1305-0404IN	1/4"-18	7/16"-20	14.22	9.14	7.14	4.37	31.30	9/16"	Imperial
DANPM1305-0405IN	1/4"-18	1/2"-20	14.22	9.14	5.94	5.94	31.20	5/8"	Imperial
DANPM1305-0406IN	1/4"-18	9/16"-18	14.22	9.93	7.14	7.54	32.80	11/16"	Imperial
DANPM1305-0408IN	1/4"-18	3/4"-16	14.22	11.13	7.14	9.93	34.54	7/8"	Imperial
DANPM1305-0410IN	1/4"-18	7/8"-14	14.22	12.70	7.14	12.29	36.83	1"	Imperial
DANPM1305-0604	3/8"-18	7/16"-20	14.22	9.14	10.31	4.37	33.30	19 mm	Metric
DANPM1305-0606	3/8"-18	9/16"-18	14.22	9.93	10.31	7.54	32.00	22 mm	Metric
DANPM1305-0608	3/8"-18	3/4"-16	14.22	11.13	9.93	9.93	35.30	22 mm	Metric
DANPM1305-0610	3/8"-18	7/8"-14	14.22	12.70	10.31	12.29	38.10	27 mm	Metric
DANPM1305-0612	3/8"-18	1-1/16"-12	14.22	15.09	10.31	15.47	41.21	32 mm	Metric
DANPM1305-0604IN	3/8"-18	7/16"-20	14.22	9.14	10.31	4.37	33.30	3/4"	Imperial



Certificate:



DANPM1305-0606IN	3/8"-18	9/16"-18	14.22	9.93	10.31	7.54	32.00	13/16"	Imperial
DANPM1305-0608IN	3/8"-18	3/4"-16	14.22	11.13	9.93	9.93	35.30	7/8"	Imperial
DANPM1305-0610IN	3/8"-18	7/8"-14	14.22	12.70	10.31	12.29	38.10	1"	Imperial
DANPM1305-0612IN	3/8"-18	1-1/16"-12	14.22	15.09	10.31	15.47	41.21	1-1/4"	Imperial
DANPM1305-0806	1/2"-14	9/16"-18	19.05	9.93	13.49	7.54	39.10	22 mm	Metric
DANPM1305-0808	1/2"-14	3/4"-16	19.05	11.13	13.49	9.93	38.81	22 mm	Metric
DANPM1305-0810	1/2"-14	7/8"-14	19.05	12.70	13.49	12.29	41.91	27 mm	Metric
DANPM1305-0812	1/2"-14	1-1/16"-12	19.05	15.09	13.49	15.47	46.74	32 mm	Metric
DANPM1305-0816	1/2"-14	1-5/16"-12	19.05	15.09	13.49	21.44	46.84	41 mm	Metric
DANPM1305-0806IN	1/2"-14	9/16"-18	19.05	9.93	13.49	7.54	39.10	7/8"	Imperial
DANPM1305-0808IN	1/2"-14	3/4"-16	19.05	11.13	13.49	9.93	38.81	7/8"	Imperial
DANPM1305-0810IN	1/2"-14	7/8"-14	19.05	12.70	13.49	12.29	41.91	1"	Imperial
DANPM1305-0812IN	1/2"-14	1-1/16"-12	19.05	15.09	13.49	15.47	46.74	1-1/4"	Imperial
DANPM1305-0816IN	1/2"-14	1-5/16"-12	19.05	15.09	13.49	21.44	46.84	1-1/2"	Imperial
DANPM1305-1204	3/4"-14	7/16"-20	19.05	9.14	18.26	4.37	40.50	27 mm	Metric
DANPM1305-1206	3/4"-14	9/16"-18	19.05	9.93	18.26	7.54	41.30	27 mm	Metric
DANPM1305-1208	3/4"-14	3/4"-16	19.05	11.13	18.26	9.93	41.50	27 mm	Metric
DANPM1305-1210	3/4"-14	7/8"-14	19.05	12.70	18.26	12.29	43.10	27 mm	Metric
DANPM1305-1212	3/4"-14	1-1/16"-12	19.05	15.09	18.26	15.47	43.94	32 mm	Metric
DANPM1305-1216	3/4"-14	1-5/16"-12	19.05	15.09	18.26	21.44	49.80	41 mm	Metric
DANPM1305-1220	3/4"-14	1-5/8"-12	19.05	15.09	18.26	27.38	50.00	50 mm	Metric
DANPM1305-1204IN	3/4"-14	7/16"-20	19.05	9.14	18.26	4.37	40.50	1-1/16"	Imperial
DANPM1305-1206IN	3/4"-14	9/16"-18	19.05	9.93	18.26	7.54	41.30	1-1/16"	Imperial
DANPM1305-1208IN	3/4"-14	3/4"-16	19.05	11.13	18.26	9.93	41.50	1-1/16"	Imperial
DANPM1305-1210IN	3/4"-14	7/8"-14	19.05	12.70	18.26	12.29	43.10	1-1/8"	Imperial
DANPM1305-1212IN	3/4"-14	1-1/16"-12	19.05	15.09	18.26	15.47	43.94	1-1/4"	Imperial
DANPM1305-1216IN	3/4"-14	1-5/16"-12	19.05	15.09	18.26	21.44	49.80	1-1/2"	Imperial
DANPM1305-1220IN	3/4"-14	1-5/8"-12	19.05	15.09	18.26	27.38	50.00	1-7/8"	Imperial
DANPM1305-1606	1"-11-1/2	9/16"-18	23.88	9.93	23.83	7.54	46.00	36 mm	Metric
DANPM1305-1608	1"-11-1/2	3/4"-16	23.88	11.13	23.83	9.93	47.00	36 mm	Metric
DANPM1305-1612	1"-11-1/2	1-1/16"-12	23.88	15.09	23.83	15.47	50.90	36 mm	Metric
DANPM1305-1614	1"-11-1/2	1-3/16"-12	23.88	15.09	23.83	18.26	45.20	36 mm	Metric
DANPM1305-1616	1"-11-1/2	1-5/16"-12	23.88	15.09	23.83	21.44	53.80	41 mm	Metric
DANPM1305-1620	1"-11-1/2	1-5/8"-12	23.88	15.09	23.83	27.38	54.66	50 mm	Metric
DANPM1305-1624	1"-11-1/2	1-7/8"-12	23.88	15.09	23.83	33.32	56.39	55 mm	Metric
DANPM1305-1606IN	1"-11-1/2	9/16"-18	23.88	9.93	23.83	7.54	46.00	1-3/8"	Imperial
DANPM1305-1608IN	1"-11-1/2	3/4"-16	23.88	11.13	23.83	9.93	47.00	1-3/8"	Imperial
DANPM1305-1612IN	1"-11-1/2	1-1/16"-12	23.88	15.09	23.83	15.47	50.90	1-3/8"	Imperial
DANPM1305-1614IN	1"-11-1/2	1-3/16"-12	23.88	15.09	23.83	18.26	45.20	1-3/8"	Imperial
DANPM1305-1616IN	1"-11-1/2	1-5/16"-12	23.88	15.09	23.83	21.44	53.80	1-1/2"	Imperial
DANPM1305-1620IN	1"-11-1/2	1-5/8"-12	23.88	15.09	23.83	27.38	54.66	1-7/8"	Imperial
DANPM1305-1624IN	1"-11-1/2	1-7/8"-12	23.88	15.09	23.83	33.32	56.39	2 1/8"	Imperial
DANPM1305-2016	1-1/4"-11-1/2	1-5/16"-12	24.64	15.09	31.75	21.44	56.80	46 mm	Metric
DANPM1305-2020	1-1/4"-11-1/2	1-5/8"-12	24.64	15.09	31.75	27.38	54.86	50 mm	Metric
DANPM1305-2016IN	1-1/4"-11-1/2	1-5/16"-12	24.64	15.09	31.75	21.44	56.80	1-3/4"	Imperial
DANPM1305-2020IN	1-1/4"-11-1/2	1-5/8"-12	24.64	15.09	31.75	27.38	54.86	1-7/8"	Imperial
DANPM1305-2420	1-1/2"-11-1/2	1-5/8"-12	25.40	15.09	38.10	27.38	60.96	50 mm	Metric
DANPM1305-2424	1-1/2"-11-1/2	1-7/8"-12	25.40	15.09	38.10	33.32	58.10	55 mm	Metric
DANPM1305-2420IN	1-1/2"-11-1/2	1-5/8"-12	25.40	15.09	38.10	27.38	60.96	2"	Imperial
DANPM1305-2424IN	1-1/2"-11-1/2	1-7/8"-12	25.40	15.09	38.10	33.32	58.10	2-1/8"	Imperial
DANPM1305-3232	2"-11-1/2	2-1/2"-12	26.16	15.09	49.23	45.24	63.00	70 mm	Metric
DANPM1305-3232IN	2"-11-1/2	2-1/2"-12	26.16	15.09	49.23	45.24	63.00	2-3/4"	Imperial

Certificate:





DANPM1000

NPTF Male Plug

D

A

NP

M

1

000

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Other Features

Adaptor

NPTF

Male

Straight

Nut/Plug

German Technology Equipment

New-Standard

DME&JDE Code:

DANPM1000

Product Type

Hydraulic Adaptor

Standard:

NPTF

Connection Type:


Male

Thread Types:

NPTF

Other Features:

Nut/Plug



PART NUMBER	F (Thread)	C	D	L	S	Hex
#	NPTF	mm	mm	mm	-	-
DANPM1000-0200	1/8"-27	9.65	4.78	14.25	11 mm	Metric
DANPM1000-0200IN	1/8"-27	9.65	4.78	14.25	7/16"	Imperial
DANPM1000-0200 Without Hole	1/8"-27	9.65	N/A	14.25	7/16"	Imperial
DANPM1000-0400	1/4"-18	14.22	7.14	18.82	14 mm	Metric
DANPM1000-0400IN	1/4"-18	14.22	7.14	18.82	9/16"	Imperial
DANPM1000-0400 Without Hole	1/4"-18	14.22	N/A	18.82	9/16"	Imperial
DANPM1000-0600	3/8"-18	14.22	10.31	19.60	17 mm	Metric
DANPM1000-0600IN	3/8"-18	14.22	10.31	19.60	11/16"	Imperial
DANPM1000-0600 Without Hole	3/8"-18	14.22	N/A	19.60	11/16"	Imperial
DANPM1000-0800	1/2"-14	19.05	13.49	24.44	22 mm	Metric
DANPM1000-0800IN	1/2"-14	19.05	13.49	24.44	7/8"	Imperial
DANPM1000-0800 Without Hole	1/2"-14	19.05	N/A	24.44	7/8"	Imperial
DANPM1000-1200	3/4"-14	19.05	18.26	28.75	27 mm	Metric
DANPM1000-1200IN	3/4"-14	19.05	18.26	28.75	1-1/8"	Imperial
DANPM1000-1200 Without Hole	3/4"-14	19.05	N/A	28.75	1-1/8"	Imperial
DANPM1000-1600	1"-11-1/2	23.88	23.83	34.58	36 mm	Metric
DANPM1000-1600IN	1"-11-1/2	23.88	23.83	34.58	1-3/8"	Imperial
DANPM1000-1600 Without Hole	1"-11-1/2	23.88	N/A	34.58	1-3/8"	Imperial
DANPM1000-2000	1-1/4"-11-1/2	24.64	31.75	36.34	46 mm	Metric
DANPM1000-2000IN	1-1/4"-11-1/2	24.64	31.75	36.34	1-3/4"	Imperial
DANPM1000-2000 Without Hole	1-1/4"-11-1/2	24.64	N/A	36.34	1-3/4"	Imperial
DANPM1000-2400	1-1/2"-11-1/2	25.40	38.10	39.90	50 mm	Metric
DANPM1000-2400IN	1-1/2"-11-1/2	25.40	38.10	39.90	2"	Imperial
DANPM1000-2400 Without Hole	1-1/2"-11-1/2	25.40	N/A	39.90	2"	Imperial
DANPM1000-3200	2"-11-1/2	26.16	49.23	43.50	60 mm	Metric
DANPM1000-3200IN	2"-11-1/2	26.16	49.23	43.50	2-1/2"	Imperial
DANPM1000-3200 Without Hole	2"-11-1/2	26.16	N/A	43.50	2-1/2"	Imperial
DANPM1000-4000	2-1/2"-8	38.86	59.00	57.50	85 mm	Metric
DANPM1000-4000IN	2-1/2"-8	38.86	59.00	57.50	3-1/4"	Imperial
DANPM1000-4000 Without Hole	2-1/2"-8	38.86	N/A	57.50	3-1/4"	Imperial

Certificate:

DANPM128FR

Straight Bushing Connector NPTF Male 60° - NPTF Female

D

A

NP

M

1

28

F

R

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Other Features

Adaptor

NPTF

Male

Straight

NPTF

Female

Bushing

German Technology Equipment

New-Standard

DME&JDE Code:

DANPM128FR

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:

Straight

Connection Type:


Male × Female

Thread Types:

NPTF 60° × NPTF

Other Features:

Bushing



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S	Hex
#	NPTF	NPTF	mm	mm	mm	-	-
DANPM128FR-0402	1/4"-18	1/8"-27	14.22	7.14	21.59	17 mm	Metric
DANPM128FR-0402IN	1/4"-18	1/8"-27	14.22	7.14	21.59	5/8"	Imperial
DANPM128FR-0602	3/8"-18	1/8"-27	14.22	10.31	21.59	19 mm	Metric
DANPM128FR-0604	3/8"-18	1/4"-18	14.22	10.31	21.59	19 mm	Metric
DANPM128FR-0602IN	3/8"-18	1/8"-27	14.22	10.31	21.59	3/4"	Imperial
DANPM128FR-0604IN	3/8"-18	1/4"-18	14.22	10.31	21.59	3/4"	Imperial
DANPM128FR-0802	1/2"-14	1/8"-27	19.05	13.49	27.94	22 mm	Metric
DANPM128FR-0804	1/2"-14	1/4"-18	19.05	13.49	27.90	22 mm	Metric
DANPM128FR-0806	1/2"-14	3/8"-18	19.05	13.49	27.90	22 mm	Metric
DANPM128FR-0802IN	1/2"-14	1/8"-27	19.05	13.49	27.94	7/8"	Imperial
DANPM128FR-0804IN	1/2"-14	1/4"-18	19.05	13.49	27.90	7/8"	Imperial
DANPM128FR-0806IN	1/2"-14	3/8"-18	19.05	13.49	27.90	7/8"	Imperial
DANPM128FR-1202	3/4"-14	1/8"-27	19.05	18.26	29.70	27 mm	Metric
DANPM128FR-1204	3/4"-14	1/4"-18	19.05	18.26	29.72	27 mm	Metric
DANPM128FR-1206	3/4"-14	3/8"-18	19.05	18.26	29.70	27 mm	Metric
DANPM128FR-1208	3/4"-14	1/2"-14	19.05	18.26	29.72	27 mm	Metric
DANPM128FR-1202IN	3/4"-14	1/8"-27	19.05	18.26	29.70	1-1/8"	Imperial
DANPM128FR-1204IN	3/4"-14	1/4"-18	19.05	18.26	29.72	1-1/8"	Imperial
DANPM128FR-1206IN	3/4"-14	3/8"-18	19.05	18.26	29.70	1-1/8"	Imperial
DANPM128FR-1208IN	3/4"-14	1/2"-14	19.05	18.26	29.72	1-1/8"	Imperial
DANPM128FR-1602	1"-11-1/2	1/8"-27	23.88	23.83	34.50	36 mm	Metric
DANPM128FR-1604	1"-11-1/2	1/4"-18	23.88	23.83	34.50	36 mm	Metric
DANPM128FR-1606	1"-11-1/2	3/8"-18	23.88	23.83	34.54	36 mm	Metric
DANPM128FR-1608	1"-11-1/2	1/2"-14	23.88	23.83	34.54	36 mm	Metric
DANPM128FR-1612	1"-11-1/2	3/4"-14	23.88	23.83	34.54	36 mm	Metric

Certificate:





DANPM128FR-1602IN	1"-11-1/2	1/8"-27	23.88	23.83	34.50	1-3/8"	Imperial
DANPM128FR-1604IN	1"-11-1/2	1/4"-18	23.88	23.83	34.50	1-3/8"	Imperial
DANPM128FR-1606IN	1"-11-1/2	3/8"-18	23.88	23.83	34.54	1-3/8"	Imperial
DANPM128FR-1608IN	1"-11-1/2	1/2"-14	23.88	23.83	34.54	1-3/8"	Imperial
DANPM128FR-1612IN	1"-11-1/2	3/4"-14	23.88	23.83	34.54	1-3/8"	Imperial
DANPM128FR-2004	1-1/4"-11-1/2	1/4"-18	24.64	31.75	37.30	46 mm	Metric
DANPM128FR-2006	1-1/4"-11-1/2	3/8"-18	24.64	31.75	37.30	46 mm	Metric
DANPM128FR-2008	1-1/4"-11-1/2	1/2"-14	24.64	31.75	37.34	46 mm	Metric
DANPM128FR-2012	1-1/4"-11-1/2	3/4"-14	24.64	31.75	37.34	46 mm	Metric
DANPM128FR-2016	1-1/4"-11-1/2	1"-11-1/2	24.64	31.75	37.34	46 mm	Metric
DANPM128FR-2004IN	1-1/4"-11-1/2	1/4"-18	24.64	31.75	37.30	1-3/4"	Imperial
DANPM128FR-2006IN	1-1/4"-11-1/2	3/8"-18	24.64	31.75	37.30	1-3/4"	Imperial
DANPM128FR-2008IN	1-1/4"-11-1/2	1/2"-14	24.64	31.75	37.34	1-3/4"	Imperial
DANPM128FR-2012IN	1-1/4"-11-1/2	3/4"-14	24.64	31.75	37.34	1-3/4"	Imperial
DANPM128FR-2016IN	1-1/4"-11-1/2	1"-11-1/2	24.64	31.75	37.34	1-3/4"	Imperial
DANPM128FR-2404	1-1/2"-11-1/2	1/4"-18	25.40	38.10	39.88	50 mm	Metric
DANPM128FR-2406	1-1/2"-11-1/2	3/8"-18	25.40	38.10	39.90	50 mm	Metric
DANPM128FR-2408	1-1/2"-11-1/2	1/2"-14	25.40	38.10	39.90	50 mm	Metric
DANPM128FR-2412	1-1/2"-11-1/2	3/4"-14	25.40	38.10	39.88	50 mm	Metric
DANPM128FR-2416	1-1/2"-11-1/2	1"-11-1/2	25.40	38.10	39.88	50 mm	Metric
DANPM128FR-2420	1-1/2"-11-1/2	1-1/4"-11-1/2	25.40	38.10	39.88	50 mm	Metric
DANPM128FR-2404IN	1-1/2"-11-1/2	1/4"-18	25.40	38.10	39.88	2"	Imperial
DANPM128FR-2406IN	1-1/2"-11-1/2	3/8"-18	25.40	38.10	39.90	2"	Imperial
DANPM128FR-2408IN	1-1/2"-11-1/2	1/2"-14	25.40	38.10	39.90	2"	Imperial
DANPM128FR-2412IN	1-1/2"-11-1/2	3/4"-14	25.40	38.10	39.88	2"	Imperial
DANPM128FR-2416IN	1-1/2"-11-1/2	1"-11-1/2	25.40	38.10	39.88	2"	Imperial
DANPM128FR-2420IN	1-1/2"-11-1/2	1-1/4"-11-1/2	25.40	38.10	39.88	2"	Imperial
DANPM128FR-3204	2"-11-1/2	1/4"-18	26.16	49.23	44.45	60 mm	Metric
DANPM128FR-3206	2"-11-1/2	3/8"-18	26.16	49.23	44.45	60 mm	Metric
DANPM128FR-3208	2"-11-1/2	1/2"-14	26.16	49.23	44.45	60 mm	Metric
DANPM128FR-3212	2"-11-1/2	3/4"-14	26.16	49.23	44.50	60 mm	Metric
DANPM128FR-3216	2"-11-1/2	1"-11-1/2	26.16	49.23	44.50	60 mm	Metric
DANPM128FR-3220	2"-11-1/2	1-1/4"-11-1/2	26.16	49.23	44.45	60 mm	Metric
DANPM128FR-3224	2"-11-1/2	1-1/2"-11-1/2	26.16	49.23	44.45	60 mm	Metric
DANPM128FR-3204IN	2"-11-1/2	1/4"-18	26.16	49.23	44.45	2-1/2"	Imperial
DANPM128FR-3206IN	2"-11-1/2	3/8"-18	26.16	49.23	44.45	2-1/2"	Imperial
DANPM128FR-3208IN	2"-11-1/2	1/2"-14	26.16	49.23	44.45	2-1/2"	Imperial
DANPM128FR-3212IN	2"-11-1/2	3/4"-14	26.16	49.23	44.50	2-1/2"	Imperial
DANPM128FR-3216IN	2"-11-1/2	1"-11-1/2	26.16	49.23	44.50	2-1/2"	Imperial
DANPM128FR-3220IN	2"-11-1/2	1-1/4"-11-1/2	26.16	49.23	44.45	2-1/2"	Imperial
DANPM128FR-3224IN	2"-11-1/2	1-1/2"-11-1/2	26.16	49.23	44.45	2-1/2"	Imperial
DANPM128FR-4032	2-1/2"-8	2"-11-1/2	38.86	59.00	60.19	75 mm	Metric
DANPM128FR-4032IN	2-1/2"-8	2"-11-1/2	38.86	59.00	60.19	3"	Imperial
DANPM128FR-4832	3"-8	2"-11-1/2	41.40	70.64	61.80	95 mm	Metric
DANPM128FR-4832IN	3"-8	2"-11-1/2	41.40	70.64	61.80	3-3/4"	Imperial

Certificate:

DANPM128F

Straight Connector NPTF Male 60° - NPTF Female

D

A

NP

M

1

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

NPTF

Male

Straight

NPTF

Female

German Technology Equipment

New-Standard

DME&JDE Code: DANPM128F


Product Type Hydraulic Adaptor

Standard: NPTF

Structure: Straight

Connection Type: Male × Female

Thread Types: NPTF 60° × NPTF

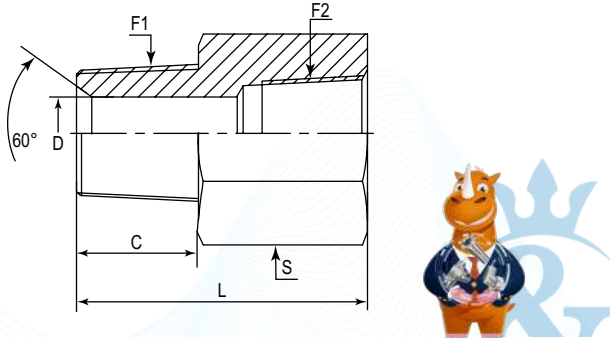

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S	Hex
#	NPTF	NPTF	mm	mm	mm	-	-
DANPM128F-0202	1/8"-27	1/8"-27	9.65	4.78	26.40	17 mm	Metric
DANPM128F-0204	1/8"-27	1/4"-18	9.65	4.78	30.70	19 mm	Metric
DANPM128F-0206	1/8"-27	3/8"-18	9.65	4.78	32.00	22 mm	Metric
DANPM128F-0208	1/8"-27	1/2"-14	9.65	4.78	38.00	27 mm	Metric
DANPM128F-0202IN	1/8"-27	1/8"-27	9.65	4.78	26.40	5/8"	Imperial
DANPM128F-0204IN	1/8"-27	1/4"-18	9.65	4.78	30.70	3/4"	Imperial
DANPM128F-0206IN	1/8"-27	3/8"-18	9.65	4.78	32.00	7/8"	Imperial
DANPM128F-0208IN	1/8"-27	1/2"-14	9.65	4.78	38.00	1-1/8"	Imperial
DANPM128F-0402	1/4"-18	1/8"-27	14.22	7.14	30.90	17 mm	Metric
DANPM128F-0404	1/4"-18	1/4"-18	14.22	7.14	35.30	19 mm	Metric
DANPM128F-0406	1/4"-18	3/8"-18	14.22	7.14	36.60	22 mm	Metric
DANPM128F-0408	1/4"-18	1/2"-14	14.22	7.14	42.70	27 mm	Metric
DANPM128F-0412	1/4"-18	3/4"-14	14.22	7.14	44.20	36 mm	Metric
DANPM128F-0416	1/4"-18	1"-11-1/2	14.22	7.14	50.50	41 mm	Metric
DANPM128F-0402IN	1/4"-18	1/8"-27	14.22	7.14	30.90	5/8"	Imperial
DANPM128F-0404IN	1/4"-18	1/4"-18	14.22	7.14	35.30	3/4"	Imperial
DANPM128F-0406IN	1/4"-18	3/8"-18	14.22	7.14	36.60	7/8"	Imperial
DANPM128F-0408IN	1/4"-18	1/2"-14	14.22	7.14	42.70	1-1/8"	Imperial
DANPM128F-0412IN	1/4"-18	3/4"-14	14.22	7.14	44.20	1-3/8"	Imperial
DANPM128F-0416IN	1/4"-18	1"-11-1/2	14.22	7.14	50.50	1-5/8"	Imperial
DANPM128F-0602	3/8"-18	1/8"-27	14.22	10.31	36.32	19 mm	Metric
DANPM128F-0604	3/8"-18	1/4"-18	14.22	10.31	36.30	19 mm	Metric
DANPM128F-0606	3/8"-18	3/8"-18	14.22	10.31	36.60	22 mm	Metric
DANPM128F-0608	3/8"-18	1/2"-14	14.22	10.31	42.70	27 mm	Metric
DANPM128F-0612	3/8"-18	3/4"-14	14.22	10.31	44.20	36 mm	Metric
DANPM128F-0602IN	3/8"-18	1/8"-27	14.22	10.31	36.32	3/4"	Imperial
DANPM128F-0604IN	3/8"-18	1/4"-18	14.22	10.31	36.30	3/4"	Imperial
DANPM128F-0606IN	3/8"-18	3/8"-18	14.22	10.31	36.60	7/8"	Imperial
DANPM128F-0608IN	3/8"-18	1/2"-14	14.22	10.31	42.70	1-1/8"	Imperial

Certificate:



DANPM128F-0612IN	3/8"-18	3/4"-14	14.22	10.31	44.20	1-3/8"	Imperial
DANPM128F-0804	1/2"-14	1/4"-18	19.05	13.49	41.66	22 mm	Metric
DANPM128F-0806	1/2"-14	3/8"-18	19.05	13.49	42.20	22 mm	Metric
DANPM128F-0808	1/2"-14	1/2"-14	19.05	13.49	47.50	27 mm	Metric
DANPM128F-0812	1/2"-14	3/4"-14	19.05	13.49	49.00	32 mm	Metric
DANPM128F-0816	1/2"-14	1-11-1/2"	19.05	13.49	55.40	36 mm	Metric
DANPM128F-0804IN	1/2"-14	1/4"-18	19.05	13.49	41.66	41 mm	Metric
DANPM128F-0806IN	1/2"-14	3/8"-18	19.05	13.49	42.20	7/8"	Imperial
DANPM128F-0808IN	1/2"-14	1/2"-14	19.05	13.49	47.50	1-1/8"	Imperial
DANPM128F-0812IN	1/2"-14	3/4"-14	19.05	13.49	49.00	1-3/8"	Imperial
DANPM128F-0816IN	1/2"-14	1-11-1/2"	19.05	13.49	55.40	1-5/8"	Imperial
DANPM128F-1204	3/4"-14	1/4"-18	19.05	18.26	40.60	27 mm	Metric
DANPM128F-1206	3/4"-14	3/8"-18	19.05	18.26	41.40	27 mm	Metric
DANPM128F-1208	3/4"-14	1/2"-14	19.05	18.26	49.30	27 mm	Metric
DANPM128F-1212	3/4"-14	3/4"-14	19.05	18.26	49.00	36 mm	Metric
DANPM128F-1216	3/4"-14	1"-11-1/2"	19.05	18.26	55.40	41 mm	Metric
DANPM128F-1220	3/4"-14	1-1/4"-11-1/2"	19.05	18.26	57.66	50 mm	Metric
DANPM128F-1204IN	3/4"-14	1/4"-18	19.05	18.26	40.60	1-1/8"	Imperial
DANPM128F-1206IN	3/4"-14	3/8"-18	19.05	18.26	41.40	1-1/8"	Imperial
DANPM128F-1208IN	3/4"-14	1/2"-14	19.05	18.26	49.30	1-1/8"	Imperial
DANPM128F-1212IN	3/4"-14	3/4"-14	19.05	18.26	49.00	1-3/8"	Imperial
DANPM128F-1216IN	3/4"-14	1"-11-1/2"	19.05	18.26	55.40	1-5/8"	Imperial
DANPM128F-1220IN	3/4"-14	1-1/4"-11-1/2"	19.05	18.26	57.66	2"	Imperial
DANPM128F-1612	1"-11-1/2"	3/4"-14	23.88	23.83	53.80	36 mm	Metric
DANPM128F-1616	1"-11-1/2"	1"-11-1/2"	23.88	23.83	60.20	41 mm	Metric
DANPM128F-1620	1"-11-1/2"	1-1/4"-11-1/2"	23.88	23.83	62.50	50 mm	Metric
DANPM128F-1624	1"-11-1/2"	1-1/2"-11-1/2"	23.88	23.83	62.70	60 mm	Metric
DANPM128F-1632	1"-11-1/2"	2"-11-1/2"	23.88	23.83	65.00	73 mm	Metric
DANPM128F-1612IN	1"-11-1/2"	3/4"-14	23.88	23.83	53.80	1-3/8"	Imperial
DANPM128F-1616IN	1"-11-1/2"	1"-11-1/2"	23.88	23.83	60.20	1-5/8"	Imperial
DANPM128F-1620IN	1"-11-1/2"	1-1/4"-11-1/2"	23.88	23.83	62.50	2"	Imperial
DANPM128F-1624IN	1"-11-1/2"	1-1/2"-11-1/2"	23.88	23.83	62.70	2-3/8"	Imperial
DANPM128F-1632IN	1"-11-1/2"	2"-11-1/2"	23.88	23.83	65.00	2-7/8"	Imperial
DANPM128F-2012	1-1/4"-11-1/2"	3/4"-14	24.64	31.75	54.60	46 mm	Metric
DANPM128F-2016	1-1/4"-11-1/2"	1"-11-1/2"	24.64	31.75	63.30	46 mm	Metric
DANPM128F-2020	1-1/4"-11-1/2"	1-1/4"-11-1/2"	24.64	31.75	63.30	50 mm	Metric
DANPM128F-2024	1-1/4"-11-1/2"	1-1/2"-11-1/2"	24.64	31.75	63.50	60 mm	Metric
DANPM128F-2032	1-1/4"-11-1/2"	2"-11-1/2"	24.64	31.75	66.80	73 mm	Metric
DANPM128F-2012IN	1-1/4"-11-1/2"	3/4"-14	24.64	31.75	54.60	1-3/4"	Imperial
DANPM128F-2016IN	1-1/4"-11-1/2"	1"-11-1/2"	24.64	31.75	63.30	1-3/4"	Imperial
DANPM128F-2020IN	1-1/4"-11-1/2"	1-1/4"-11-1/2"	24.64	31.75	63.30	2"	Imperial
DANPM128F-2024IN	1-1/4"-11-1/2"	1-1/2"-11-1/2"	24.64	31.75	63.50	2-3/8"	Imperial
DANPM128F-2032IN	1-1/4"-11-1/2"	2"-11-1/2"	24.64	31.75	66.80	2-7/8"	Imperial
DANPM128F-2420	1-1/2"-11-1/2"	1-1/4"-11-1/2"	25.40	38.10	64.00	50 mm	Metric
DANPM128F-2424	1-1/2"-11-1/2"	1-1/2"-11-1/2"	25.40	38.10	64.30	60 mm	Metric
DANPM128F-2432	1-1/2"-11-1/2"	2"-11-1/2"	25.40	38.10	66.80	73 mm	Metric
DANPM128F-2420IN	1-1/2"-11-1/2"	1-1/4"-11-1/2"	25.40	38.10	64.00	2"	Imperial
DANPM128F-2424IN	1-1/2"-11-1/2"	1-1/2"-11-1/2"	25.40	38.10	64.30	2-3/8"	Imperial
DANPM128F-2432IN	1-1/2"-11-1/2"	2"-11-1/2"	25.40	38.10	66.80	2-7/8"	Imperial
DANPM128F-3232	2"-11-1/2"	2"-11-1/2"	26.16	49.23	67.56	73 mm	Metric
DANPM128F-3232IN	2"-11-1/2"	2"-11-1/2"	26.16	49.23	67.56	2-7/8"	Imperial
DANPM128F-4032	2-1/2"-8	2"-11-1/2"	38.86	59.00	80.00	85 mm	Metric
DANPM128F-4032IN	2-1/2"-8	2"-11-1/2"	38.86	59.00	80.00	3-1/4"	Imperial

DANPM105F

Straight Connector NPTF Male 60° - BSPP Female

D

A

NP

M

1

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type



Adaptor

NPTF

Male

Straight

BSPP


Female

 German Technology Equipment



New-Standard

- DME&JDE Code: DANPM105F
- Product Type Hydraulic Adaptor
- Standard: NPTF
- Structure: Straight
- Connection Type: Male × Female
- Thread Types: NPTF 60° × BSPP

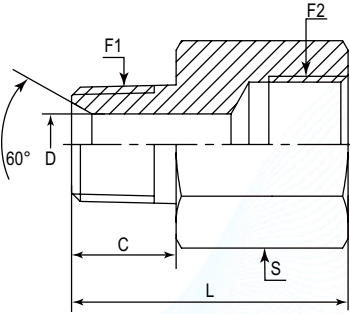

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	NPTF	BSPP	mm	mm	mm	mm
DANPM105F-0202	1/8"-27	1/8"-28	9.65	4.78	28.00	14.00
DANPM105F-0204	1/8"-27	1/4"-19	9.65	4.78	30.50	19.00
DANPM105F-0402	1/4"-18	1/8"-28	14.22	7.14	29.50	17.00
DANPM105F-0404	1/4"-18	1/4"-19	14.22	7.14	33.50	19.00
DANPM105F-0406	1/4"-18	3/8"-19	14.22	7.14	36.50	22.00
DANPM105F-0604	3/8"-18	1/4"-19	14.22	10.31	35.50	19.00
DANPM105F-0606	3/8"-18	3/8"-19	14.22	10.31	36.50	22.00
DANPM105F-0804	1/2"-14	1/4"-19	19.05	13.49	30.00	22.00
DANPM105F-0806	1/2"-14	3/8"-19	19.05	13.49	37.00	22.00
DANPM105F-0808	1/2"-14	1/2"-14	19.05	13.49	46.50	27.00
DANPM105F-1204	3/4"-14	1/4"-19	19.05	18.26	30.00	28.58
DANPM105F-1206	3/4"-14	3/8"-19	19.05	18.26	30.00	28.58
DANPM105F-1208	3/4"-14	1/2"-14	19.05	18.26	41.00	28.58
DANPM105F-1212	3/4"-14	3/4"-14	19.05	18.26	46.00	32.00
DANPM105F-1216	3/4"-14	1"-11	19.05	18.26	51.50	41.00
DANPM105F-1606	1"-11-1/2"	3/8"-19	23.88	23.83	35.00	36.00
DANPM105F-1608	1"-11-1/2"	1/2"-14	23.88	23.83	35.00	36.00
DANPM105F-1612	1"-11-1/2"	3/4"-14	23.88	23.83	51.00	38.00
DANPM105F-1616	1"-11-1/2"	1"-11	23.88	23.83	57.50	41.28
DANPM105F-2008	1-1/4"-11-1/2"	1/2"-14	24.64	31.75	38.00	44.45
DANPM105F-2020	1-1/4"-11-1/2"	1-1/4"-11	24.64	31.75	62.50	50.00
DANPM105F-2416	1-1/2"-11-1/2"	1"-11	25.40	38.10	40.50	50.00
DANPM105F-2420	1-1/2"-11-1/2"	1-1/4"-11	25.40	38.10	55.00	50.80
DANPM105F-2424	1-1/2"-11-1/2"	1-1/2"-11	25.40	38.10	62.00	55.00
DANPM105F-3216	2"-11-1/2"	1"-11	26.16	49.23	46.00	65.00
DANPM105F-3220	2"-11-1/2"	1-1/4"-11	26.16	49.23	46.00	65.00
DANPM105F-3232	2"-11-1/2"	2"-11	26.16	49.23	72.40	70.00
DANPM105F-4040	2-1/2"-8	2-1/2"-11	38.86	59.00	88.00	90.00
DANPM105F-4832	3"-8	2"-11	41.40	70.64	78.00	90.00

DANPM1081

Straight Connector NPTF Male 60° - BSPP Swivel Female 60° Cone

D

A

NP

M

1

081

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

NPTF

Male

Straight

BSPP Swivel Female

German Technology Equipment

New-Standard

DME&JDE Code:

DANPM1081

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


Straight

Connection Type:

Male × Swivel Female

Thread Types:

NPTF 60° × BSPP 60° Cone

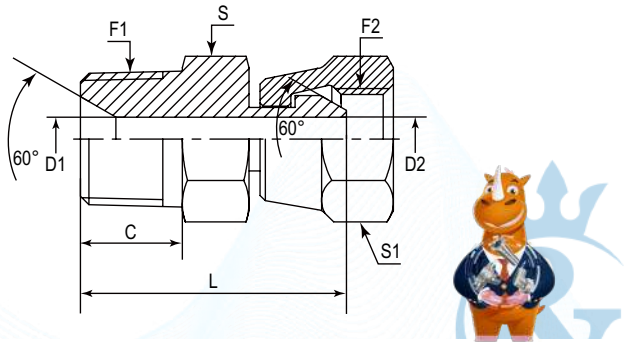

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S
#	NPTF	BSPP	mm	mm	mm	mm	mm	mm
DANPM1081-0202	1/8"-27	1/8"-28	9.65	3.50	3.50	27.00	14	14
DANPM1081-0404	1/4"-18	1/4"-19	14.22	7.14	4.70	34.00	17	19
DANPM1081-0406	1/4"-18	3/8"-19	14.22	7.14	7.90	34.50	19	22
DANPM1081-0604	3/8"-18	1/4"-19	14.22	10.31	4.70	33.50	19	19
DANPM1081-0606	3/8"-18	3/8"-19	14.22	10.31	7.90	34.50	19	22
DANPM1081-0608	3/8"-18	1/2"-14	14.22	10.31	11.10	38.00	22	27
DANPM1081-0806	1/2"-14	3/8"-19	19.05	13.49	15.20	39.50	22	22
DANPM1081-0808	1/2"-14	1/2"-14	19.05	13.49	11.10	43.00	22	27
DANPM1081-1208	3/4"-14	1/2"-14	19.05	18.26	11.10	45.50	30	27
DANPM1081-1212	3/4"-14	3/4"-14	19.05	18.26	16.70	49.00	32	32
DANPM1081-1216	3/4"-14	1"-11	19.05	18.26	22.20	51.50	38	41
DANPM1081-1612	1"-11-1/2	3/4"-14	23.88	23.83	16.70	54.00	36	32
DANPM1081-1616	1"-11-1/2	1"-11	23.88	23.83	22.20	56.50	38	41
DANPM1081-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	24.64	31.75	28.60	60.50	46	50

DANPM1091

Straight Connector NPTF Male 60° - NPSM Swivel Female 60°

D

A

NP

M

1

091

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

NPTF

Male

Straight

NPSM Swivel Female

German Technology Equipment

New-Standard

DME&JDE Code:

DANPM1091

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


Straight

Connection Type:

Male × Swivel Female

Thread Types:

NPTF 60° × NPSM 60°

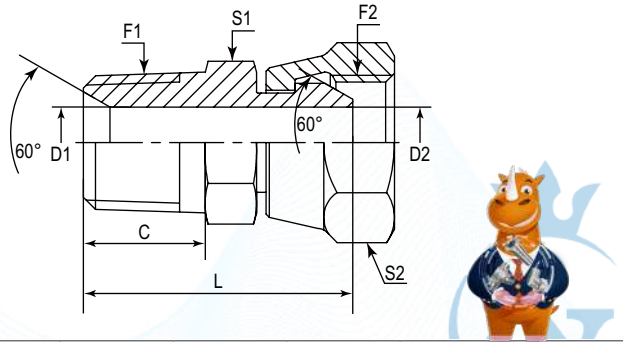

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S1	S2	Hex
#	NPTF	NPSM	mm	mm	mm	mm	-	-	-
DANPM1091-0202	1/8"-27	1/8"-27	9.65	4.78	2.79	24.86	14 mm	14 mm	Metric
DANPM1091-0204	1/8"-27	1/4"-18	9.65	4.78	5.33	26.67	17 mm	19 mm	Metric
DANPM1091-0202IN	1/8"-27	1/8"-27	9.65	4.78	2.79	24.86	9/16"	9/16"	Imperial
DANPM1091-0204IN	1/8"-27	1/4"-18	9.65	4.78	5.33	26.67	11/16"	11/16"	Imperial
DANPM1091-0402	1/4"-18	1/8"-27	14.22	7.14	3.51	30.15	17 mm	14 mm	Metric
DANPM1091-0404	1/4"-18	1/4"-18	14.22	7.14	5.33	31.24	17 mm	19 mm	Metric
DANPM1091-0406	1/4"-18	3/8"-18	14.22	7.14	8.13	33.27	17 mm	22 mm	Metric
DANPM1091-0408	1/4"-18	1/2"-14	14.22	7.14	11.18	36.20	22 mm	27 mm	Metric
DANPM1091-0402IN	1/4"-18	1/8"-27	14.22	7.14	3.51	30.15	11/16"	9/16"	Imperial
DANPM1091-0404IN	1/4"-18	1/4"-18	14.22	7.14	5.33	31.24	11/16"	11/16"	Imperial
DANPM1091-0406IN	1/4"-18	3/8"-18	14.22	7.14	8.13	33.27	11/16"	7/8"	Imperial
DANPM1091-0408IN	1/4"-18	1/2"-14	14.22	7.14	11.18	36.20	7/8"	1"	Imperial
DANPM1091-0602	3/8"-18	1/8"-27	14.22	10.31	3.51	29.50	19 mm	14 mm	Metric
DANPM1091-0604	3/8"-18	1/4"-18	14.22	10.31	5.33	33.27	14 mm	19 mm	Metric
DANPM1091-0606	3/8"-18	3/8"-18	14.22	10.31	8.13	33.02	22 mm	22 mm	Metric
DANPM1091-0608	3/8"-18	1/2"-14	14.22	10.31	11.18	39.12	22 mm	27 mm	Metric
DANPM1091-0612	3/8"-18	3/4"-14	14.22	10.31	15.49	38.20	32 mm	32 mm	Metric
DANPM1091-0602IN	3/8"-18	1/8"-27	14.22	10.31	3.51	29.50	3/4"	9/16"	Imperial
DANPM1091-0604IN	3/8"-18	1/4"-18	14.22	10.31	5.33	33.27	9/16"	11/16"	Imperial
DANPM1091-0606IN	3/8"-18	3/8"-18	14.22	10.31	8.13	33.02	7/8"	7/8"	Imperial
DANPM1091-0608IN	3/8"-18	1/2"-14	14.22	10.31	11.18	39.12	7/8"	1"	Imperial
DANPM1091-0612IN	3/8"-18	3/4"-14	14.22	10.31	15.49	38.20	1-1/4"	1-1/4"	Imperial
DANPM1091-0804	1/2"-14	1/4"-18	19.05	13.49	5.33	38.89	22 mm	19 mm	Metric

DANPM1091-0806	1/2"-14	3/8"-18	19.05	13.49	8.13	39.62	22 mm	22 mm	Metric
DANPM1091-0808	1/2"-14	1/2"-14	19.05	13.49	11.18	42.64	27 mm	27 mm	Metric
DANPM1091-0812	1/2"-14	3/4"-14	19.05	13.49	15.49	44.20	32 mm	32 mm	Metric
DANPM1091-0804IN	1/2"-14	1/4"-18	19.05	13.49	5.33	38.89	7/8"	11/16"	Imperial
DANPM1091-0806IN	1/2"-14	3/8"-18	19.05	13.49	8.13	39.62	7/8"	7/8"	Imperial
DANPM1091-0808IN	1/2"-14	1/2"-14	19.05	13.49	11.18	42.64	1"	1"	Imperial
DANPM1091-0812IN	1/2"-14	3/4"-14	19.05	13.49	15.49	44.20	1-1/4"	1-1/4"	Imperial
DANPM1091-1206	3/4"-14	3/8"-18	19.05	18.26	8.13	40.00	27 mm	22 mm	Metric
DANPM1091-1208	3/4"-14	1/2"-14	19.05	18.26	11.18	42.00	27 mm	27 mm	Metric
DANPM1091-1212	3/4"-14	3/4"-14	19.05	15.49	15.49	44.45	32 mm	32 mm	Metric
DANPM1091-1216	3/4"-14	1"-11-1/2	19.05	18.26	19.81	46.00	36 mm	41 mm	Metric
DANPM1091-1220	3/4"-14	1-1/4"-11-1/2	19.05	18.26	25.65	47.25	46 mm	50 mm	Metric
DANPM1091-1206IN	3/4"-14	3/8"-18	19.05	18.26	8.13	40.00	1-1/8"	7/8"	Imperial
DANPM1091-1208IN	3/4"-14	1/2"-14	19.05	18.26	11.18	42.00	1-1/8"	1"	Imperial
DANPM1091-1212IN	3/4"-14	3/4"-14	19.05	15.49	15.49	44.45	1-1/4"	1-1/4"	Imperial
DANPM1091-1216IN	3/4"-14	1"-11-1/2	19.05	18.26	19.81	46.00	1-3/8"	1-1/2"	Imperial
DANPM1091-1220IN	3/4"-14	1-1/4"-11-1/2	19.05	18.26	25.65	47.25	1-3/4"	1-7/8"	Imperial
DANPM1091-1608	1"-11-1/2	1/2"-14	23.88	23.83	11.18	46.50	36 mm	27 mm	Metric
DANPM1091-1612	1"-11-1/2	3/4"-14	23.88	23.83	15.49	48.20	41 mm	32 mm	Metric
DANPM1091-1616	1"-11-1/2	1"-11-1/2	23.88	23.83	19.81	51.77	41 mm	41 mm	Metric
DANPM1091-1620	1"-11-1/2	1-1/4"-11-1/2	23.88	23.83	25.65	52.50	46 mm	50 mm	Metric
DANPM1091-1624	1"-11-1/2	1-1/2"-11-1/2	23.88	23.83	31.75	55.26	55 mm	55 mm	Metric
DANPM1091-1608IN	1"-11-1/2	1/2"-14	23.88	23.83	11.18	46.50	1-3/8"	1"	Imperial
DANPM1091-1612IN	1"-11-1/2	3/4"-14	23.88	23.83	15.49	48.20	1-1/2"	1-1/4"	Imperial
DANPM1091-1616IN	1"-11-1/2	1"-11-1/2	23.88	23.83	19.81	51.77	1-1/2"	1-1/2"	Imperial
DANPM1091-1620IN	1"-11-1/2	1-1/4"-11-1/2	23.88	23.83	25.65	52.50	1-3/4"	1-7/8"	Imperial
DANPM1091-1624IN	1"-11-1/2	1-1/2"-11-1/2	23.88	23.83	31.75	55.26	2-1/8"	2-1/8"	Imperial
DANPM1091-2008	1-1/4"-11-1/2	1/2"-14	24.64	31.75	11.18	52.50	50 mm	27 mm	Metric
DANPM1091-2016	1-1/4"-11-1/2	1"-11-1/2	24.64	31.75	19.81	52.07	50 mm	41 mm	Metric
DANPM1091-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	24.64	31.75	25.65	56.09	50 mm	50 mm	Metric
DANPM1091-2024	1-1/4"-11-1/2	1-1/2"-11-1/2	24.64	31.75	31.75	61.00	55 mm	55 mm	Metric
DANPM1091-2008IN	1-1/4"-11-1/2	1/2"-14	24.64	31.75	11.18	52.50	1-7/8"	1"	Imperial
DANPM1091-2016IN	1-1/4"-11-1/2	1"-11-1/2	24.64	31.75	19.81	52.07	1-7/8"	1-1/2"	Imperial
DANPM1091-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	24.64	31.75	25.65	56.09	1-7/8"	1-7/8"	Imperial
DANPM1091-2024IN	1-1/4"-11-1/2	1-1/2"-11-1/2	24.64	31.75	31.75	61.00	2-1/8"	2-1/8"	Imperial
DANPM1091-2420	1-1/2"-11-1/2	1-1/4"-11-1/2	25.40	38.10	25.65	58.70	55 mm	50 mm	Metric
DANPM1091-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	25.40	38.10	31.75	61.83	55 mm	55 mm	Metric
DANPM1091-2432	1-1/2"-11-1/2	2"-11-1/2	25.40	38.10	43.69	61.70	60 mm	65 mm	Metric
DANPM1091-2420IN	1-1/2"-11-1/2	1-1/4"-11-1/2	25.40	38.10	25.65	58.70	2-1/8"	1-7/8"	Imperial
DANPM1091-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	25.40	38.10	31.75	61.83	2-1/8"	2-1/8"	Imperial
DANPM1091-2432IN	1-1/2"-11-1/2	2"-11-1/2	25.40	38.10	43.69	61.70	2-3/8"	2-5/8"	Imperial
DANPM1091-3232	2"-11-1/2	2"-11-1/2	26.16	49.23	43.69	62.48	65 mm	70 mm	Metric
DANPM1091-3232IN	2"-11-1/2	2"-11-1/2	26.16	49.23	43.69	62.48	2-5/8"	2-5/8"	Imperial

DANPF152Q


Straight Connector NPTF Female - Metric Male 24° + O Ring + Retaining Ring

D	A	NP	F	1	28	F
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DAE	Adaptor	NPTF	Female	Straight	NPTF	Female



New-Standard

- DME&JDE Code: DANPF152Q
- Product Type Hydraulic Adaptor
- Standard: NPTF
- Structure: Straight
- Connection Type: Female × Male
- Thread Types: NPTF × Metric 24° Cone
- Sealing Method: O Ring + Retaining Ring

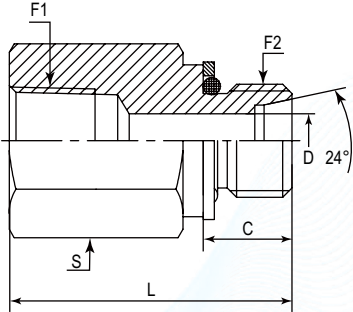

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	NPTF	Metric	mm	mm	mm	mm
DANPF152Q-0212	1/8"-27	M12X1.5	11.00	4.00	31.00	17.00
DANPF152Q-0216	1/8"-27	M16X1.5	11.50	8.00	32.00	22.00
DANPF152Q-0410	1/4"-18	M10X1	8.00	3.50	30.00	19.00
DANPF152Q-0412	1/4"-18	M12X1.5	11.00	4.00	32.90	19.00
DANPF152Q-0414	1/4"-18	M14X1.5	11.00	6.00	35.00	19.00
DANPF152Q-0416	1/4"-18	M16X1.5	11.50	8.00	37.50	22.00
DANPF152Q-0418	1/4"-18	M18X1.5	12.50	10.00	38.50	24.00
DANPF152Q-0612	3/8"-18	M12X1.5	11.00	4.00	38.00	22.00
DANPF152Q-0614	3/8"-18	M14X1.5	11.00	6.00	38.00	22.00
DANPF152Q-0616	3/8"-18	M16X1.5	11.50	8.00	38.50	22.00
DANPF152Q-0618	3/8"-18	M18X1.5	12.50	10.00	40.50	24.00
DANPF152Q-0620	3/8"-18	M20X1.5	12.50	10.00	40.50	24.00
DANPF152Q-0622	3/8"-18	M22X1.5	14.00	12.00	38.50	27.00
DANPF152Q-0816	1/2"-14	M16X1.5	11.50	8.00	40.00	27.00
DANPF152Q-0818	1/2"-14	M18X1.5	12.50	10.00	41.50	27.00
DANPF152Q-0820	1/2"-14	M20X1.5	12.50	8.00	41.00	27.00
DANPF152Q-0822	1/2"-14	M22X1.5	14.00	12.00	42.50	27.00
DANPF152Q-1222	3/4"-14	M22X1.5	14.00	12.00	46.50	36.00
DANPF152Q-1226	3/4"-14	M26X1.5	16.00	15.00	46.00	36.00
DANPF152Q-1227	3/4"-14	M27X1.5	16.00	15.00	48.00	36.00
DANPF152Q-1230	3/4"-14	M30X2	16.00	19.00	45.30	36.00
DANPF152Q-1633	1"-11-1/2	M33X2	16.00	20.00	53.50	41.00

DANPF1305

Straight Connector NPTF Female - SAE Male O Ring

D

A

BP

F

1

30

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

NPTF

Female

Straight

SAE UNF

Male O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DANPF1305

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:

Straight

Connection Type:


Female × Male

Thread Types:

NPTF × SAE UNF

Sealing Method:

O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S	Hex
#	NPTF	UNF	mm	mm	mm	-	-
DANPF1305-0202	1/8"-27	5/16"-24	7.54	1.57	24.13	14 mm	Metric
DANPF1305-0203	1/8"-27	3/8"-24	7.54	3.18	24.10	14 mm	Metric
DANPF1305-0204	1/8"-27	7/16"-20	9.14	4.37	25.40	14 mm	Metric
DANPF1305-0205	1/8"-27	1/2"-20	9.14	5.94	25.15	17 mm	Metric
DANPF1305-0206	1/8"-27	9/16"-18	9.93	7.54	26.00	17 mm	Metric
DANPF1305-0208	1/8"-27	3/4"-16	11.13	9.93	27.90	22 mm	Metric
DANPF1305-0210	1/8"-27	7/8"-14	12.70	10.70	20.50	27 mm	Metric
DANPF1305-0212	1/8"-27	1-1/16"-12	15.09	15.47	27.70	32 mm	Metric
DANPF1305-0202IN	1/8"-27	5/16"-24	7.54	1.57	24.13	9/16"	Imperial
DANPF1305-0203IN	1/8"-27	3/8"-24	7.54	3.18	24.10	9/16"	Imperial
DANPF1305-0204IN	1/8"-27	7/16"-20	9.14	4.37	25.40	9/16"	Imperial
DANPF1305-0205IN	1/8"-27	1/2"-20	9.14	5.94	25.15	5/8"	Imperial
DANPF1305-0206IN	1/8"-27	9/16"-18	9.93	7.54	26.00	11/16"	Imperial
DANPF1305-0208IN	1/8"-27	3/4"-16	11.13	9.93	27.90	7/8"	Imperial
DANPF1305-0210IN	1/8"-27	7/8"-14	12.70	10.70	20.50	1"	Imperial
DANPF1305-0212IN	1/8"-27	1-1/16"-12	15.09	15.47	27.70	1-1/4"	Imperial
DANPF1305-0402	1/4"-18	5/16"-24	7.54	1.57	31.24	19 mm	Metric
DANPF1305-0403	1/4"-18	3/8"-24	7.54	3.18	30.80	19 mm	Metric
DANPF1305-0404	1/4"-18	7/16"-20	9.14	4.37	29.46	19 mm	Metric
DANPF1305-0405	1/4"-18	1/2"-20	9.14	5.94	29.50	19 mm	Metric
DANPF1305-0406	1/4"-18	9/16"-18	9.93	7.54	27.69	19 mm	Metric
DANPF1305-0408	1/4"-18	3/4"-16	11.13	9.93	25.90	22 mm	Metric
DANPF1305-0410	1/4"-18	7/8"-14	12.70	12.29	20.57	27 mm	Metric
DANPF1305-0412	1/4"-18	1-1/16"-12	15.09	15.47	27.70	32 mm	Metric

Certificate:



YOUR CONNECTORS & HOSES OEM SOLUTIONS

DANPF1305-0416	1/4"-18	1-5/16"-12	15.09	10.94	28.85	41 mm	Metric
DANPF1305-0402IN	1/4"-18	5/16"-24	7.54	1.57	31.24	3/4"	Imperial
DANPF1305-0403IN	1/4"-18	3/8"-24	7.54	3.18	30.80	3/4"	Imperial
DANPF1305-0404IN	1/4"-18	7/16"-20	9.14	4.37	29.46	3/4"	Imperial
DANPF1305-0405IN	1/4"-18	1/2"-20	9.14	5.94	29.50	3/4"	Imperial
DANPF1305-0406IN	1/4"-18	9/16"-18	9.93	7.54	27.69	3/4"	Imperial
DANPF1305-0408IN	1/4"-18	3/4"-16	11.13	9.93	25.90	7/8"	Imperial
DANPF1305-0410IN	1/4"-18	7/8"-14	12.70	12.29	20.57	1"	Imperial
DANPF1305-0412IN	1/4"-18	1-1/16"-12	15.09	15.47	27.70	1-1/4"	Imperial
DANPF1305-0416IN	1/4"-18	1-5/16"-12	15.09	10.94	28.85	1-1/2"	Imperial
DANPF1305-0604	3/8"-18	7/16"-20	9.14	4.37	34.30	22 mm	Metric
DANPF1305-0606	3/8"-18	9/16"-18	9.93	7.54	33.81	22 mm	Metric
DANPF1305-0608	3/8"-18	3/4"-16	11.13	9.93	32.50	22 mm	Metric
DANPF1305-0610	3/8"-18	7/8"-14	12.70	12.29	35.56	27 mm	Metric
DANPF1305-0612	3/8"-18	1-1/16"-12	15.09	15.47	38.10	32 mm	Metric
DANPF1305-0616	3/8"-18	1-5/16"-12	15.09	21.44	28.58	41 mm	Metric
DANPF1305-0604IN	3/8"-18	7/16"-20	9.14	4.37	34.30	7/8"	Imperial
DANPF1305-0606IN	3/8"-18	9/16"-18	9.93	7.54	33.81	7/8"	Imperial
DANPF1305-0608IN	3/8"-18	3/4"-16	11.13	9.93	32.50	7/8"	Imperial
DANPF1305-0610IN	3/8"-18	7/8"-14	12.70	12.29	35.56	1"	Imperial
DANPF1305-0612IN	3/8"-18	1-1/16"-12	15.09	15.47	38.10	1-1/4"	Imperial
DANPF1305-0616IN	3/8"-18	1-5/16"-12	15.09	21.44	28.58	1-1/2"	Imperial
DANPF1305-0806	1/2"-14	9/16"-18	9.93	7.54	38.10	27 mm	Metric
DANPF1305-0808	1/2"-14	3/4"-16	11.13	9.93	37.30	27 mm	Metric
DANPF1305-0810	1/2"-14	7/8"-14	12.70	12.29	39.30	27 mm	Metric
DANPF1305-0812	1/2"-14	1-1/16"-12	15.09	15.47	35.81	32 mm	Metric
DANPF1305-0814	1/2"-14	1-3/16"-12	15.09	18.26	26.92	36 mm	Metric
DANPF1305-0816	1/2"-14	1-5/16"-12	15.09	21.44	43.70	41 mm	Metric
DANPF1305-0820	1/2"-14	1-5/8"-12	15.09	16.48	30.40	50 mm	Metric
DANPF1305-0806IN	1/2"-14	9/16"-18	9.93	7.54	38.10	1-1/8"	Imperial
DANPF1305-0808IN	1/2"-14	3/4"-16	11.13	9.93	37.30	1-1/8"	Imperial
DANPF1305-0810IN	1/2"-14	7/8"-14	12.70	12.29	39.30	1-1/8"	Imperial
DANPF1305-0812IN	1/2"-14	1-1/16"-12	15.09	15.47	35.81	1-1/4"	Imperial
DANPF1305-0814IN	1/2"-14	1-3/16"-12	15.09	18.26	26.92	1-3/8"	Imperial
DANPF1305-0816IN	1/2"-14	1-5/16"-12	15.09	21.44	43.70	1-1/2"	Imperial
DANPF1305-0820IN	1/2"-14	1-5/8"-12	15.09	16.48	30.40	1-7/8"	Imperial
DANPF1305-1206	3/4"-14	9/16"-18	9.93	7.54	43.00	36 mm	Metric
DANPF1305-1208	3/4"-14	3/4"-16	11.13	9.93	45.21	36 mm	Metric
DANPF1305-1210	3/4"-14	7/8"-14	12.70	12.29	42.20	36 mm	Metric
DANPF1305-1212	3/4"-14	1-1/16"-12	15.09	15.47	43.69	36 mm	Metric
DANPF1305-1214	3/4"-14	1-3/16"-12	15.09	18.26	45.20	36 mm	Metric
DANPF1305-1216	3/4"-14	1-5/16"-12	15.09	21.34	41.12	41 mm	Metric
DANPF1305-1220	3/4"-14	1-5/8"-12	15.09	27.38	45.20	50 mm	Metric

Certificate:





DANPF1305-1224	3/4"-14	1-7/8"-12	15.09	23.04	32.25	55 mm	Metric
DANPF1305-1206IN	3/4"-14	9/16"-18	9.93	7.54	43.00	1-3/8"	Imperial
DANPF1305-1208IN	3/4"-14	3/4"-16	11.13	9.93	45.21	1-3/8"	Imperial
DANPF1305-1210IN	3/4"-14	7/8"-14	12.70	12.29	42.20	1-3/8"	Imperial
DANPF1305-1212IN	3/4"-14	1-1/16"-12	15.09	15.47	43.69	1-3/8"	Imperial
DANPF1305-1214IN	3/4"-14	1-3/16"-12	15.09	18.26	45.20	1-3/8"	Imperial
DANPF1305-1216IN	3/4"-14	1-5/16"-12	15.09	21.34	41.12	1-1/2"	Imperial
DANPF1305-1220IN	3/4"-14	1-5/8"-12	15.09	27.38	45.20	1-7/8"	Imperial
DANPF1305-1224IN	3/4"-14	1-7/8"-12	15.09	23.04	32.25	2-1/8"	Imperial
DANPF1305-1612	1"-11-1/2	1-1/16"-12	15.09	15.47	51.60	41 mm	Metric
DANPF1305-1616	1"-11-1/2	1-5/16"-12	15.09	21.44	49.53	41 mm	Metric
DANPF1305-1620	1"-11-1/2	1-5/8"-12	15.09	27.38	25.40	50 mm	Metric
DANPF1305-1624	1"-11-1/2	1-7/8"-12	15.09	28.37	32.26	55 mm	Metric
DANPF1305-1632	1"-11-1/2	2-1/2"-12	15.09	29.36	36.40	70 mm	Metric
DANPF1305-1612IN	1"-11-1/2	1-1/16"-12	15.09	15.47	51.60	1-5/8"	Imperial
DANPF1305-1616IN	1"-11-1/2	1-5/16"-12	15.09	21.44	49.53	1-5/8"	Imperial
DANPF1305-1620IN	1"-11-1/2	1-5/8"-12	15.09	27.38	25.40	1-7/8"	Imperial
DANPF1305-1624IN	1"-11-1/2	1-7/8"-12	15.09	28.37	32.26	2-1/8"	Imperial
DANPF1305-1632IN	1"-11-1/2	2-1/2"-12	15.09	29.36	36.40	2-3/4"	Imperial
DANPF1305-2012	1-1/4"-11-1/2	1-1/16"-12	15.09	15.47	54.61	50 mm	Metric
DANPF1305-2016	1-1/4"-11-1/2	1-5/16"-12	15.09	21.44	54.61	50 mm	Metric
DANPF1305-2020	1-1/4"-11-1/2	1-5/8"-12	15.09	27.38	50.00	50 mm	Metric
DANPF1305-2024	1-1/4"-11-1/2	1-7/8"-12	15.09	33.32	54.86	55 mm	Metric
DANPF1305-2032	1-1/4"-11-1/2	2-1/2"-12	15.09	45.00	50.80	70 mm	Metric
DANPF1305-2012IN	1-1/4"-11-1/2	1-1/16"-12	15.09	15.47	54.61	2"	Imperial
DANPF1305-2016IN	1-1/4"-11-1/2	1-5/16"-12	15.09	21.44	54.61	2"	Imperial
DANPF1305-2020IN	1-1/4"-11-1/2	1-5/8"-12	15.09	27.38	50.00	2"	Imperial
DANPF1305-2024IN	1-1/4"-11-1/2	1-7/8"-12	15.09	33.32	54.86	2-1/8"	Imperial
DANPF1305-2032IN	1-1/4"-11-1/2	2-1/2"-12	15.09	45.00	50.80	2-3/4"	Imperial
DANPF1305-2416	1-1/2"-11-1/2	1-5/16"-12	15.09	21.44	58.42	60 mm	Metric
DANPF1305-2420	1-1/2"-11-1/2	1-5/8"-12	15.09	27.38	51.30	60 mm	Metric
DANPF1305-2424	1-1/2"-11-1/2	1-7/8"-12	15.09	33.32	54.86	60 mm	Metric
DANPF1305-2432	1-1/2"-11-1/2	2-1/2"-12	15.09	45.00	50.80	70 mm	Metric
DANPF1305-2416IN	1-1/2"-11-1/2	1-5/16"-12	15.09	21.44	58.42	2-3/8"	Imperial
DANPF1305-2420IN	1-1/2"-11-1/2	1-5/8"-12	15.09	27.38	51.30	2-3/8"	Imperial
DANPF1305-2424IN	1-1/2"-11-1/2	1-7/8"-12	15.09	33.32	54.86	2-3/8"	Imperial
DANPF1305-2432IN	1-1/2"-11-1/2	2-1/2"-12	15.09	45.00	50.80	2-3/4"	Imperial
DANPF1305-3220	2"-11-1/2	1-5/8"-12	15.09	27.38	60.96	70 mm	Metric
DANPF1305-3232	2"-11-1/2	2-1/2"-12	15.09	45.24	56.90	73 mm	Metric
DANPF1305-3220IN	2"-11-1/2	1-5/8"-12	15.09	27.38	60.96	2-3/4"	Imperial
DANPF1305-3232IN	2"-11-1/2	2-1/2"-12	15.09	45.24	56.90	2-7/8"	Imperial

Certificate:

DANPF106Q

Straight NPTF Fixed Female - BSPP Male + O Ring + Retaining Ring

D

A

NP

F

1

06

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

NPTF

Female

Straight

BSPP

Male + O Ring + Retaining Ring

DME&JDE Code:

DANPF106Q

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:

Straight

Connection Type:


Fixed Female × Male

Thread Types:

NPTF × BSPP

Sealing Method:

O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	NPTF	BSPP	mm	mm	mm	mm
DANPF106Q-0202	1/8"-27	1/8"-28	7.60	4.40	25.00	17.00
DANPF106Q-0204	1/8"-27	1/4"-19	11.20	7.50	28.50	19.00
DANPF106Q-0402	1/4"-18	1/8"-28	7.60	4.40	30.00	19.00
DANPF106Q-0404	1/4"-18	1/4"-19	11.20	7.50	32.00	19.00
DANPF106Q-0406	1/4"-18	3/8"-19	11.20	9.90	31.00	22.00
DANPF106Q-0604	3/8"-18	1/4"-19	11.20	7.50	31.00	22.00
DANPF106Q-0606	3/8"-18	3/8"-19	11.20	9.90	31.00	22.00
DANPF106Q-0608	3/8"-18	1/2"-14	14.50	12.30	35.00	27.00
DANPF106Q-0806	1/2"-14	3/8"-19	11.20	9.90	36.50	27.00
DANPF106Q-0808	1/2"-14	1/2"-14	14.50	12.30	38.50	27.00
DANPF106Q-0812	1/2"-14	3/4"-14	14.50	15.50	39.50	36.00
DANPF106Q-1208	3/4"-14	1/2"-14	14.50	12.30	40.00	36.00
DANPF106Q-1212	3/4"-14	3/4"-14	14.50	15.50	40.00	36.00
DANPF106Q-1616	1"-11-1/2	1"-11	18.60	21.50	54.50	41.00
DANPF106Q-2016	1-1/4"-11-1/2	1"-11	18.60	21.50	54.00	50.00
DANPF106Q-2020	1-1/4"-11-1/2	1-1/4"-11	18.60	27.50	54.00	50.00
DANPF106Q-2424	1-1/2"-11-1/2	1-1/2"-11	18.60	33.00	54.50	60.33

Certificate:




DANPS1305

Straight Connector NPSM Swivel Female 60° - SAE Male + O Ring

D	A	NPS	1	1	30	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	NPSM	Swivel Female	Straight	SAE UNF	Male + O Ring



DME&JDE Code:	DANPS1305
Product Type	Hydraulic Adaptor
Standard:	NPTF
Structure:	Straight
Connection Type:	Swivel Female × Male
Thread Types:	NPSM 60° × SAE + O Ring
Sealing Method:	O Ring

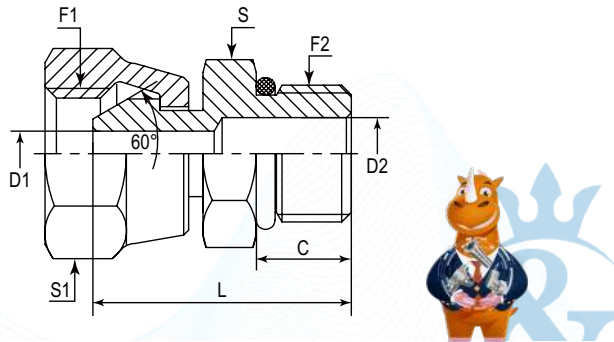

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1	Hex
#	NPSM	UNF	mm	mm	mm	mm	-	-	-
DANPS1305-0204	1/8"-27	7/16"-20	9.14	2.79	4.37	25.4	14 mm	14 mm	Metric
DANPS1305-0204IN	1/8"-27	7/16"-20	9.14	2.79	4.37	25.4	9/16"	9/16"	Imperial
DANPS1305-0404	1/4"-18	7/16"-20	9.14	5.33	4.37	28.19	14 mm	19 mm	Metric
DANPS1305-0405	1/4"-18	1/2"-20	9.14	5.33	5.33	27.70	17 mm	19 mm	Metric
DANPS1305-0406	1/4"-18	9/16"-18	9.93	5.33	7.54	28.96	17 mm	19 mm	Metric
DANPS1305-0408	1/4"-18	3/4"-16	11.13	5.33	9.93	29.70	22 mm	19 mm	Metric
DANPS1305-0404IN	1/4"-18	7/16"-20	9.14	5.33	4.37	28.19	9/16"	11/16"	Imperial
DANPS1305-0405IN	1/4"-18	1/2"-20	9.14	5.33	5.33	27.70	5/8"	11/16"	Imperial
DANPS1305-0406IN	1/4"-18	9/16"-18	9.93	5.33	7.54	28.96	11/16"	11/16"	Imperial
DANPS1305-0408IN	1/4"-18	3/4"-16	11.13	5.33	9.93	29.70	7/8"	11/16"	Imperial
DANPS1305-0604	3/8"-18	7/16"-20	10.41	8.13	4.37	29.21	17 mm	22 mm	Metric
DANPS1305-0605	3/8"-18	1/2"-20	9.14	8.13	5.94	28.50	17 mm	22 mm	Metric
DANPS1305-0606	3/8"-18	9/16"-18	9.93	8.13	7.54	29.70	17 mm	22 mm	Metric
DANPS1305-0608	3/8"-18	3/4"-16	11.13	8.13	9.93	31.24	22 mm	22 mm	Metric
DANPS1305-0610	3/8"-18	7/8"-14	12.70	8.64	12.29	32.00	27 mm	22 mm	Metric
DANPS1305-0612	3/8"-18	1-1/16"-12	15.09	8.13	15.47	35.81	32 mm	22 mm	Metric
DANPS1305-0604IN	3/8"-18	7/16"-20	10.41	8.13	4.37	29.21	11/16"	7/8"	Imperial
DANPS1305-0605IN	3/8"-18	1/2"-20	9.14	8.13	5.94	28.50	11/16"	7/8"	Imperial
DANPS1305-0606IN	3/8"-18	9/16"-18	9.93	8.13	7.54	29.70	11/16"	7/8"	Imperial
DANPS1305-0608IN	3/8"-18	3/4"-16	11.13	8.13	9.93	31.24	7/8"	7/8"	Imperial
DANPS1305-0610IN	3/8"-18	7/8"-14	12.70	8.64	12.29	32.00	1"	7/8"	Imperial
DANPS1305-0612IN	3/8"-18	1-1/16"-12	15.09	8.13	15.47	35.81	1-1/4"	7/8"	Imperial
DANPS1305-0804	1/2"-14	7/16"-20	9.14	11.18	4.37	30.70	22 mm	27 mm	Metric

DANPS1305-0805	1/2"-14	1/2"-20	9.14	11.18	5.94	33.00	22 mm	27 mm	Metric
DANPS1305-0806	1/2"-14	9/16"-18	9.93	11.18	7.54	32.80	22 mm	27 mm	Metric
DANPS1305-0808	1/2"-14	3/4"-16	11.13	11.18	9.93	33.00	22 mm	27 mm	Metric
DANPS1305-0810	1/2"-14	7/8"-14	12.70	11.18	12.29	35.56	27 mm	27 mm	Metric
DANPS1305-0812	1/2"-14	1-1/16"-12	15.09	11.18	15.47	36.83	32 mm	27 mm	Metric
DANPS1305-0816	1/2"-14	1-5/16"-12	15.09	11.18	21.44	40.42	41 mm	27 mm	Metric
DANPS1305-0804IN	1/2"-14	7/16"-20	9.14	11.18	4.37	30.70	13/16"	1"	Imperial
DANPS1305-0805IN	1/2"-14	1/2"-20	9.14	11.18	5.94	33.00	13/16"	1"	Imperial
DANPS1305-0806IN	1/2"-14	9/16"-18	9.93	11.18	7.54	32.80	13/16"	1"	Imperial
DANPS1305-0808IN	1/2"-14	3/4"-16	11.13	11.18	9.93	33.00	7/8"	1"	Imperial
DANPS1305-0810IN	1/2"-14	7/8"-14	12.70	11.18	12.29	35.56	1"	1"	Imperial
DANPS1305-0812IN	1/2"-14	1-1/16"-12	15.09	11.18	15.47	36.83	1-1/4"	1"	Imperial
DANPS1305-0816IN	1/2"-14	1-5/16"-12	15.09	11.18	21.44	40.42	1-1/2"	1"	Imperial
DANPS1305-1208	3/4"-14	3/4"-16	11.13	15.49	9.93	35.80	27 mm	32 mm	Metric
DANPS1305-1210	3/4"-14	7/8"-14	12.70	16.13	12.29	34.80	27 mm	32 mm	Metric
DANPS1305-1212	3/4"-14	1-1/16"-12	15.09	15.47	15.47	40.60	32 mm	32 mm	Metric
DANPS1305-1214	3/4"-14	1-3/16"-12	15.09	15.49	18.26	40.90	36 mm	32 mm	Metric
DANPS1305-1216	3/4"-14	1-5/16"-12	15.09	15.49	21.44	43.94	41 mm	32 mm	Metric
DANPS1305-1220	3/4"-14	1-5/8"-12	15.09	15.49	27.38	42.20	50 mm	32 mm	Metric
DANPS1305-1208IN	3/4"-14	3/4"-16	11.13	15.49	9.93	35.80	1"	1-1/4"	Imperial
DANPS1305-1210IN	3/4"-14	7/8"-14	12.70	16.13	12.29	34.80	1"	1-1/4"	Imperial
DANPS1305-1212IN	3/4"-14	1-1/16"-12	15.09	15.47	15.47	40.60	1-1/4"	1-1/4"	Imperial
DANPS1305-1214IN	3/4"-14	1-3/16"-12	15.09	15.49	18.26	40.90	1-3/8"	1-1/4"	Imperial
DANPS1305-1216IN	3/4"-14	1-5/16"-12	15.09	15.49	21.44	43.94	1-1/2"	1-1/4"	Imperial
DANPS1305-1220IN	3/4"-14	1-5/8"-12	15.09	15.49	27.38	42.20	1-7/8"	1-1/4"	Imperial
DANPS1305-1612	1"-11-1/2	1-1/16"-12	15.09	19.81	15.47	43.00	32 mm	41 mm	Metric
DANPS1305-1614	1"-11-1/2	1-3/16"-12	15.09	19.81	18.26	43.00	36 mm	41 mm	Metric
DANPS1305-1616	1"-11-1/2	1-5/16"-12	15.09	19.81	21.44	43.50	41 mm	41 mm	Metric
DANPS1305-1620	1"-11-1/2	1-5/8"-12	15.09	19.81	27.38	45.78	50 mm	41 mm	Metric
DANPS1305-1612IN	1"-11-1/2	1-1/16"-12	15.09	19.81	15.47	43.00	1-1/4"	1-1/2"	Imperial
DANPS1305-1614IN	1"-11-1/2	1-3/16"-12	15.09	19.81	18.26	43.00	1-3/8"	1-1/2"	Imperial
DANPS1305-1616IN	1"-11-1/2	1-5/16"-12	15.09	19.81	21.44	43.50	1-1/2"	1-1/2"	Imperial
DANPS1305-1620IN	1"-11-1/2	1-5/8"-12	15.09	19.81	27.38	45.78	1-7/8"	1-1/2"	Imperial
DANPS1305-2016	1-1/4"-11-1/2	1-5/16"-12	15.09	25.65	21.44	46.55	46 mm	50 mm	Metric
DANPS1305-2020	1-1/4"-11-1/2	1-5/8"-12	15.09	25.65	25.65	45.50	50 mm	50 mm	Metric
DANPS1305-2024	1-1/4"-11-1/2	1-7/8"-12	15.09	25.65	33.32	49.50	55 mm	50 mm	Metric
DANPS1305-2016IN	1-1/4"-11-1/2	1-5/16"-12	15.09	25.65	21.44	46.55	1-11/16"	1-7/8"	Imperial
DANPS1305-2020IN	1-1/4"-11-1/2	1-5/8"-12	15.09	25.65	25.65	45.50	1-7/8"	1-7/8"	Imperial
DANPS1305-2024IN	1-1/4"-11-1/2	1-7/8"-12	15.09	25.65	33.32	49.50	2-1/8"	1-7/8"	Imperial
DANPS1305-2424	1-7/8"-12	1-7/8"-12	18.93	45.34	33.32	49.53	55 mm	55 mm	Metric
DANPS1305-2424IN	1-7/8"-12	1-7/8"-12	18.93	45.34	33.32	49.53	2-1/8"	2-1/8"	Imperial
DANPS1305-3232	2-1/2"-12	2"-11-1/2	15.09	43.69	45.25	53.70	70 mm	65 mm	Metric
DANPS1305-3232IN	2-1/2"-12	2"-11-1/2	15.09	43.69	45.25	53.70	2-3/4"	2-5/8"	Imperial

DANPF128F

Hexagon Straight Coupling NPTF Female - NPTF Female

D

A

NP

F

1

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type



Adaptor

NPTF

Female

Hexagon Straight

NPTF

Female


German Technology Equipment


New-Standard

DME&JDE Code:
DANPF128F

Product Type
Hydraulic Adaptor


Standard:
NPTF

Connection Type:
Female × Female


Thread Types:
NPTF × NPTF

Sealing Method:
O Ring

Other Features:
Hexagon



DANPF128F



DANPF128F - IN



PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	L	S	Hex
#	NPTF	NPTF	mm	mm	mm	-	-
DANPF128F-0202	1/8"-27	1/8"-27	6.35	6.35	19.05	17 mm	Metric
DANPF128F-0202IN	1/8"-27	1/8"-27	6.35	6.35	19.05	5/8"	Imperial
DANPF128F-0402	1/4"-18	1/8"-27	10.92	10.92	28.70	19 mm	Metric
DANPF128F-0404	1/4"-18	1/4"-18	10.92	10.92	28.70	19 mm	Metric
DANPF128F-0402IN	1/4"-18	1/8"-27	10.92	10.92	28.70	3/4"	Imperial
DANPF128F-0404IN	1/4"-18	1/4"-18	10.92	10.92	28.70	3/4"	Imperial
DANPF128F-0602	3/8"-18	1/8"-27	10.92	10.92	28.70	22 mm	Metric
DANPF128F-0604	3/8"-18	1/4"-18	10.90	10.90	28.70	22 mm	Metric
DANPF128F-0606	3/8"-18	3/8"-18	10.92	10.92	28.70	22 mm	Metric
DANPF128F-0602IN	3/8"-18	1/8"-27	10.92	10.92	28.70	7/8"	Imperial
DANPF128F-0604IN	3/8"-18	1/4"-18	10.90	10.90	28.70	7/8"	Imperial
DANPF128F-0606IN	3/8"-18	3/8"-18	10.92	10.92	28.70	7/8"	Imperial
DANPF128F-0802	1/2"-14	1/8"-27	14.22	14.22	38.10	27 mm	Metric
DANPF128F-0804	1/2"-14	1/4"-18	14.22	14.22	38.10	27 mm	Metric
DANPF128F-0806	1/2"-14	3/8"-18	14.22	14.22	38.10	27 mm	Metric
DANPF128F-0808	1/2"-14	1/2"-14	14.22	14.22	38.10	27 mm	Metric
DANPF128F-0802IN	1/2"-14	1/8"-27	14.22	14.22	38.10	1-1/8"	Imperial
DANPF128F-0804IN	1/2"-14	1/4"-18	14.22	14.22	38.10	1-1/8"	Imperial



DANPF128F-0806IN	1/2"-14	3/8"-18	14.22	14.22	38.10	1-1/8"	Imperial
DANPF128F-0808IN	1/2"-14	1/2"-14	14.22	14.22	38.10	1-1/8"	Imperial
DANPF128F-1204	3/4"-14	1/4"-18	14.22	14.22	38.90	36 mm	Metric
DANPF128F-1206	3/4"-14	3/8"-18	14.22	14.22	38.90	36 mm	Metric
DANPF128F-1208	3/4"-14	1/2"-14	14.22	14.22	38.90	36 mm	Metric
DANPF128F-1212	3/4"-14	3/4"-14	14.22	14.22	38.86	36 mm	Metric
DANPF128F-1204IN	3/4"-14	1/4"-18	14.22	14.22	38.90	1-3/8"	Imperial
DANPF128F-1206IN	3/4"-14	3/8"-18	14.22	14.22	38.90	1-3/8"	Imperial
DANPF128F-1208IN	3/4"-14	1/2"-14	14.22	14.22	38.90	1-3/8"	Imperial
DANPF128F-1212IN	3/4"-14	3/4"-14	14.22	14.22	38.86	1-3/8"	Imperial
DANPF128F-1606	1"-11-1/2	3/8"-18	17.53	17.53	48.00	41 mm	Metric
DANPF128F-1608	1"-11-1/2	1/2"-14	17.53	17.53	48.00	41 mm	Metric
DANPF128F-1612	1"-11-1/2	3/4"-14	17.53	17.53	48.00	41 mm	Metric
DANPF128F-1616	1"-11-1/2	1"-11-1/2	17.53	17.53	48.01	41 mm	Metric
DANPF128F-1606IN	1"-11-1/2	3/8"-18	17.53	17.53	48.00	1-5/8"	Imperial
DANPF128F-1608IN	1"-11-1/2	1/2"-14	17.53	17.53	48.00	1-5/8"	Imperial
DANPF128F-1612IN	1"-11-1/2	3/4"-14	17.53	17.53	48.00	1-5/8"	Imperial
DANPF128F-1616IN	1"-11-1/2	1"-11-1/2	17.53	17.53	48.01	1-5/8"	Imperial
DANPF128F-2012	1-1/4"-11-1/2	3/4"-14	17.53	17.53	49.00	50 mm	Metric
DANPF128F-2016	1-1/4"-11-1/2	1"-11-1/2	17.53	17.53	49.00	50 mm	Metric
DANPF128F-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	17.50	17.50	49.02	50 mm	Metric
DANPF128F-2012IN	1-1/4"-11-1/2	3/4"-14	17.53	17.53	49.00	2"	Imperial
DANPF128F-2016IN	1-1/4"-11-1/2	1"-11-1/2	17.53	17.53	49.00	2"	Imperial
DANPF128F-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	17.50	17.50	49.02	2"	Imperial
DANPF128F-2416	1-1/2"-11-1/2	1-11-1/2	17.53	17.53	49.02	60 mm	Metric
DANPF128F-2420	1-1/2"-11-1/2	1-1/4"-11-1/2	17.53	17.53	49.02	60 mm	Metric
DANPF128F-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	17.50	17.50	49.02	60 mm	Metric
DANPF128F-2416IN	1-1/2"-11-1/2	1-11-1/2	17.53	17.53	49.02	2-3/8"	Imperial
DANPF128F-2420IN	1-1/2"-11-1/2	1-1/4"-11-1/2	17.53	17.53	49.02	2-3/8"	Imperial
DANPF128F-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	17.50	17.50	49.02	2-3/8"	Imperial
DANPF128F-3224	2"-11-1/2	1-1/2"-11-1/2	16.00	16.00	49.78	73 mm	Metric
DANPF128F-3232	2"-11-1/2	2"-11-1/2	16.00	16.00	49.78	73 mm	Metric
DANPF128F-3224IN	2"-11-1/2	1-1/2"-11-1/2	16.00	16.00	49.78	2-7/8"	Imperial
DANPF128F-3232IN	2"-11-1/2	2"-11-1/2	16.00	16.00	49.78	2-7/8"	Imperial

Certificate:













DANP31000

Hexagon Socket Plug NPTF Male

D

A

NP

3

1

000

Company

Product Range

Thread Types

Adaptor Structure

Adaptor Structure

Other Features

DME

Adaptor

NPTF

Male

Straight

Nut/Plug

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DANP31000

Product Type

Hydraulic Adaptor

Standard:

NPTF

Connection Type:


Slip-on Female

Thread Types:

NPTF

Other Features:

Nut/Plug



PART NUMBER	F1 (Thread)	L	S	Hex
#	NPTF	mm	-	-
DANP31000-02	1/8"-27	17.00-19.00	14 mm	Metric
DANP31000-02IN	1/8"-27	17.00-19.00	9/16"	Imperial
DANP31000-04	1/4"-18	23.10	19 mm	Metric
DANP31000-04IN	1/4"-18	23.10	3/4"	Imperial
DANP31000-06	3/8"-18	20.60	17 mm	Metric
DANP31000-06IN	3/8"-18	20.60	11/16"	Imperial
DANP31000-08	1/2"-14	25.40	27 mm	Metric
DANP31000-08IN	1/2"-14	25.40	1"	Imperial
DANP31000-12	3/4"-14	28.70	30 mm	Metric
DANP31000-12IN	3/4"-14	28.70	1-3/16"	Imperial
DANP31000-16	1"-11-1/2	29.21	41 mm	Metric
DANP31000-16IN	1"-11-1/2	29.21	1-1/2"	Imperial
DANP31000-20	1-1/4"-11-1/2	31.80	50 mm	Metric
DANP31000-20IN	1-1/4"-11-1/2	31.80	2"	Imperial
DANP31000-24	1-1/2"-11-1/2	39.12	60 mm	Metric
DANP31000-24IN	1-1/2"-11-1/2	39.12	2-3/8"	Imperial
DANP31000-32	2"-11-1/2	34.80	73 mm	Metric
DANP31000-32IN	2"-11-1/2	34.80	2-7/8"	Imperial



Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

SGS

DEKRA

DIN

SAE

MA

CE

UK CA

DANP21000-HHP

Hexagon Socket Plug NPTF Male

D

A

NP

2

1

000

HHP

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Other Features

Plug Head Type

DME

Adaptor

NPTF

Male

Straight

Nut/Plug

Hexagon Head

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DANP21000-HHP

Product Type

Hydraulic Adaptor

Standard:

NPTF

Connection Type:


Male

Thread Types:

NPTF

Other Features:

Nut/Plug



PART NUMBER	F (Thread)	L	S
#	NPTF	mm	mm
DANP21000-HHP-0100	1/16"-27	7.90	1/6"
DANP21000-HHP-0200	1/8"-27	7.90	3/16"
DANP21000-HHP-0400	1/4"-18	12.10	1/4"
DANP21000-HHP-0600	3/8"-18	12.10	5/16"
DANP21000-HHP-0800	1/2"-14	16.00	3/8"
DANP21000-HHP-1200	3/4"-14	16.26	9/16"
DANP21000-HHP-1600	1"-11-1/2	20.07	5/8"
DANP21000-HHP-2000	1-1/4"-11-1/2	21.10	3/4"
DANP21000-HHP-2400	1-1/2"-11-1/2	21.10	1"
DANP21000-HHP-3200	2"-11-1/2	22.10	3/4"



Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

SGS

DEKRA

DIN

SAE

MA

CE

UK CA

DANPF1091

Straight Connector NPTF Female - NPSM Swivel Female 60°

D

A

NP

F

1

091

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

NPTF

Female

Straight

NPSM Swivel Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DANPF1091

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


Straight

Connection Type:

Female × Swivel Female

Thread Types:

NPTF × NPSM 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	D	L	S1	S2	Hex
#	NPTF	NPSM	mm	mm	-	-	-
DANPF1091-0202	1/8"-27	1/8"-27	2.79	22.35	14 mm	14 mm	Metric
DANPF1091-0204	1/8"-27	1/4"-18	5.33	27.90	14 mm	19 mm	Metric
DANPF1091-0202IN	1/8"-27	1/8"-27	2.79	22.35	9/16"	9/16"	Imperial
DANPF1091-0204IN	1/8"-27	1/4"-18	5.33	27.90	9/16"	11/16"	Imperial
DANPF1091-0402	1/4"-18	1/8"-27	2.79	29.72	17 mm	14 mm	Metric
DANPF1091-0404	1/4"-18	1/4"-18	5.33	31.24	17 mm	19 mm	Metric
DANPF1091-0406	1/4"-18	3/8"-18	8.13	32.30	17 mm	22 mm	Metric
DANPF1091-0402IN	1/4"-18	1/8"-27	2.79	29.72	11/16"	9/16"	Imperial
DANPF1091-0404IN	1/4"-18	1/4"-18	5.33	31.24	11/16"	11/16"	Imperial
DANPF1091-0406IN	1/4"-18	3/8"-18	8.13	32.30	11/16"	7/8"	Imperial
DANPF1091-0604	3/8"-18	1/4"-18	5.33	32.76	22 mm	19 mm	Metric
DANPF1091-0606	3/8"-18	3/8"-18	8.13	33.27	22 mm	22 mm	Metric
DANPF1091-0608	3/8"-18	1/2"-14	11.18	38.10	22 mm	27 mm	Metric
DANPF1091-0604IN	3/8"-18	1/4"-18	5.33	32.76	7/8"	11/16"	Imperial
DANPF1091-0606IN	3/8"-18	3/8"-18	8.13	33.27	7/8"	7/8"	Imperial
DANPF1091-0608IN	3/8"-18	1/2"-14	11.18	38.10	7/8"	1"	Imperial

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



DANPF1091-0804	1/2"-14	1/4"-18	5.33	39.62	27 mm	19 mm	Metric
DANPF1091-0806	1/2"-14	3/8"-18	8.64	36.83	27 mm	22 mm	Metric
DANPF1091-0808	1/2"-14	1/2"-14	11.18	39.62	27 mm	27 mm	Metric
DANPF1091-0812	1/2"-14	3/4"-14	15.49	41.10	32 mm	32 mm	Metric
DANPF1091-0804IN	1/2"-14	1/4"-18	5.33	39.62	1"	11/16"	Imperial
DANPF1091-0806IN	1/2"-14	3/8"-18	8.64	36.83	1"	7/8"	Imperial
DANPF1091-0808IN	1/2"-14	1/2"-14	11.18	39.62	1"	1"	Imperial
DANPF1091-0812IN	1/2"-14	3/4"-14	15.49	41.10	1-1/4"	1-1/4"	Imperial
DANPF1091-1206	3/4"-14	3/8"-18	8.13	42.80	32 mm	22 mm	Metric
DANPF1091-1208	3/4"-14	1/2"-14	11.68	41.40	32 mm	27 mm	Metric
DANPF1091-1212	3/4"-14	3/4"-14	15.49	41.15	32 mm	32 mm	Metric
DANPF1091-1216	3/4"-14	1"-11-1/2	19.81	46.50	41 mm	41 mm	Metric
DANPF1091-1206IN	3/4"-14	3/8"-18	8.13	42.80	1-1/4"	7/8"	Imperial
DANPF1091-1208IN	3/4"-14	1/2"-14	11.68	41.40	1-1/4"	1"	Imperial
DANPF1091-1212IN	3/4"-14	3/4"-14	15.49	41.15	1-1/4"	1-1/4"	Imperial
DANPF1091-1216IN	3/4"-14	1"-11-1/2	19.81	46.50	1-1/2"	1-1/2"	Imperial
DANPF1091-1612	1"-11-1/2	3/4"-14	15.49	48.30	41 mm	32 mm	Metric
DANPF1091-1616	1"-11-1/2	1"-11-1/2	19.81	50.80	41 mm	41 mm	Metric
DANPF1091-1620	1"-11-1/2	1-1/4"-11-1/2	25.65	50.30	50 mm	50 mm	Metric
DANPF1091-1612IN	1"-11-1/2	3/4"-14	15.49	48.30	1-1/2"	1-1/4"	Imperial
DANPF1091-1616IN	1"-11-1/2	1"-11-1/2	19.81	50.80	1-1/2"	1-1/2"	Imperial
DANPF1091-1620IN	1"-11-1/2	1-1/4"-11-1/2	25.65	50.30	1-7/8"	1-7/8"	Imperial
DANPF1091-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	25.65	50.30	50 mm	50 mm	Metric
DANPF1091-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	25.65	50.30	1-7/8"	1-7/8"	Imperial
DANPF1091-2420	1-1/2"-11-1/2	1-1/4"-11-1/2	25.65	52.50	55 mm	50 mm	Metric
DANPF1091-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	31.75	55.37	55 mm	55 mm	Metric
DANPF1091-2420IN	1-1/2"-11-1/2	1-1/4"-11-1/2	25.65	52.50	2-1/8"	1-7/8"	Imperial
DANPF1091-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	31.75	55.37	2-1/8"	2-1/8"	Imperial
DANPF1091-3232	2"-11-1/2	2"-11-1/2	43.69	57.15	65 mm	70 mm	Metric
DANPF1091-3232IN	2"-11-1/2	2"-11-1/2	43.69	57.15	2-5/8"	2-5/8"	Imperial

Certificate:



Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



DANPM428M

45° Elbow Connector NPTF Male 60° - NPTF Male 60°

D

A

NP

M

4

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

NPTF

Male

45° Elbow

NPTF

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DANPM428M

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


45° Elbow

Connection Type:

Male × Male

Thread Types:

NPTF 60° × NPTF 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	Hex
#	NPTF	NPTF	mm	mm	mm	mm	-	-
DANPM428M-0202	1/8"-27	1/8"-27	16.20	16.20	4.78	4.78	11 mm	Metric
DANPM428M-0202IN	1/8"-27	1/8"-27	16.20	16.20	4.78	4.78	7/16"	Imperial
DANPM428M-0404	1/4"-18	1/4"-18	21.80	21.80	7.14	7.14	14 mm	Metric
DANPM428M-0404IN	1/4"-18	1/4"-18	21.80	21.80	7.14	7.14	9/16"	Imperial
DANPM428M-0604	3/8"-18	1/4"-18	24.10	24.10	10.31	7.14	19 mm	Metric
DANPM428M-0606	3/8"-18	3/8"-18	24.10	24.10	10.31	10.31	19 mm	Metric
DANPM428M-0604IN	3/8"-18	1/4"-18	24.10	24.10	10.31	7.14	3/4"	Imperial
DANPM428M-0606IN	3/8"-18	3/8"-18	24.10	24.10	10.31	10.31	3/4"	Imperial
DANPM428M-0808	1/2"-14	1/2"-14	29.70	29.70	13.49	13.49	22 mm	Metric
DANPM428M-0808IN	1/2"-14	1/2"-14	29.70	29.70	13.49	13.49	7/8"	Imperial
DANPM428M-1208	3/4"-14	1/2"-14	30.50	30.50	18.26	13.49	27 mm	Metric
DANPM428M-1212	3/4"-14	3/4"-14	30.50	30.50	18.26	18.26	27 mm	Metric
DANPM428M-1208IN	3/4"-14	1/2"-14	30.50	30.50	18.26	13.49	1-1/16"	Imperial
DANPM428M-1212IN	3/4"-14	3/4"-14	30.50	30.50	18.26	18.26	1-1/16"	Imperial
DANPM428M-1616	1"-11-1/2	1"-11-1/2	37.60	37.60	23.83	23.83	33 mm	Metric
DANPM428M-1616IN	1"-11-1/2	1"-11-1/2	37.60	37.60	23.83	23.83	1-5/16"	Imperial
DANPM428M-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	42.40	42.40	31.75	31.75	41 mm	Metric
DANPM428M-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	42.40	42.40	31.75	31.75	1-5/8"	Imperial
DANPM428M-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	44.96	44.96	38.10	38.10	50 mm	Metric
DANPM428M-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	44.96	44.96	38.10	38.10	1-7/8"	Imperial
DANPM428M-3232	2"-11-1/2	2"-11-1/2	53.60	53.60	49.23	49.23	60 mm	Metric
DANPM428M-3232IN	2"-11-1/2	2"-11-1/2	53.60	53.60	49.23	49.23	2-1/2"	Imperial

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DANPM428F

45° Elbow Connector NPTF Male 60° - NPTF Female

D

A

NP

M

4

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

NPTF

Male

45° Elbow

NPTF

Female

German Technology Equipment

New-Standard

DME&JDE Code:

DANPM428F

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


45° Elbow

Connection Type:

Male × Female

Thread Types:

NPTF 60° × NPTF



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	S	Hex
#	NPTF	NPTF	mm	mm	mm	-	-
DANPM428F-0202	1/8"-27	1/8"-27	18.30	11.90	4.78	14 mm	Metric
DANPM428F-0202IN	1/8"-27	1/8"-27	18.30	11.90	4.78	9/16"	Imperial
DANPM428F-0404	1/4"-18	1/4"-18	26.70	15.80	7.14	19 mm	Metric
DANPM428F-0404IN	1/4"-18	1/4"-18	26.70	15.80	7.14	3/4"	Imperial
DANPM428F-0604	3/8"-18	1/4"-18	26.90	18.00	10.31	22 mm	Metric
DANPM428F-0606	3/8"-18	3/8"-18	26.90	18.30	10.31	22 mm	Metric
DANPM428F-0604IN	3/8"-18	1/4"-18	26.90	18.00	10.31	7/8"	Imperial
DANPM428F-0606IN	3/8"-18	3/8"-18	26.90	18.30	10.31	7/8"	Imperial
DANPM428F-0808	1/2"-14	1/2"-14	34.00	23.10	13.49	27 mm	Metric
DANPM428F-0808IN	1/2"-14	1/2"-14	34.00	23.10	13.49	1-1/16"	Imperial
DANPM428F-1212	3/4"-14	3/4"-14	35.10	24.60	18.26	33 mm	Metric
DANPM428F-1212IN	3/4"-14	3/4"-14	35.10	24.60	18.26	1-5/16"	Imperial
DANPM428F-1616	1"-11-1/2	1"-11-1/2	43.70	28.50	23.83	41 mm	Metric
DANPM428F-1620	1"-11-1/2	1-1/4"-11-1/2	45.70	41.40	23.83	50 mm	Metric
DANPM428F-1616IN	1"-11-1/2	1"-11-1/2	43.70	28.50	23.83	1-5/8"	Imperial
DANPM428F-1620IN	1"-11-1/2	1-1/4"-11-1/2	45.70	41.40	23.83	1-7/8"	Imperial
DANPM428F-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	45.70	41.40	31.75	50 mm	Metric
DANPM428F-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	45.70	41.40	31.75	1-7/8"	Imperial
DANPM428F-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	52.30	42.90	38.10	65 mm	Metric
DANPM428F-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	52.30	42.90	38.10	2-9/16"	Imperial
DANPM428F-3232	2"-11-1/2	2"-11-1/2	54.61	55.63	49.23	70 mm	Metric
DANPM428F-3232IN	2"-11-1/2	2"-11-1/2	54.61	55.63	49.23	2-13/16"	Imperial

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DANPS4305

45° Adjustable Elbow NPSM Swivel Female 60° - SAE Male O Ring

D

A

NPS

4

30

5

Company

Product Range

Thread Types

Adaptor Structure

Thread Types

Connection Type

Adaptor

NPSM

45° Elbow

SAE UNF

Male O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DANPS4305

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:

45°Adjustable Elbow

Connection Type:


Swivel Female × Male

Thread Types:

NPSM 60° × UNF + O Ring

Sealing Method:

O Ring

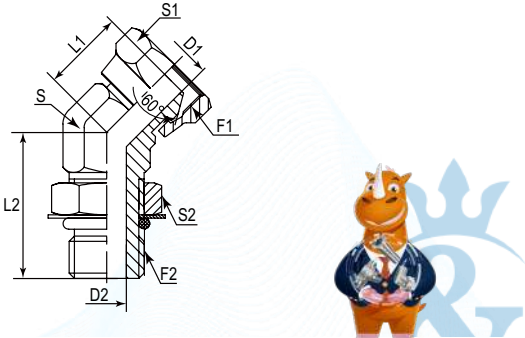

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S2	Hex
#	NPSM	UNF	mm	mm	mm	mm	-	-	-	-
DANPS4305-0404	1/4"-18	7/16"-20	15.50	26.70	5.33	4.37	14 mm	19 mm	14 mm	Metric
DANPS4305-0406	1/4"-18	9/16"-18	20.57	29.00	5.33	7.54	14 mm	19 mm	17 mm	Metric
DANPS4305-0408	1/4"-18	3/4"-16	20.07	33.00	5.33	9.93	19 mm	19 mm	22 mm	Metric
DANPS4305-0404IN	1/4"-18	7/16"-20	15.50	26.70	5.33	4.37	9/16"	11/16"	9/16"	Imperial
DANPS4305-0406IN	1/4"-18	9/16"-18	20.57	29.00	5.33	7.54	9/16"	11/16"	11/16"	Imperial
DANPS4305-0408IN	1/4"-18	3/4"-16	20.07	33.00	5.33	9.93	3/4"	11/16"	7/8"	Imperial
DANPS4305-0604	3/8"-18	7/16"-20	18.96	26.16	8.13	4.37	14 mm	22 mm	14 mm	Metric
DANPS4305-0606	3/8"-18	9/16"-18	21.08	28.96	8.13	7.54	14 mm	22 mm	17 mm	Metric
DANPS4305-0608	3/8"-18	3/4"-16	20.57	33.00	8.13	9.93	19 mm	22 mm	22 mm	Metric
DANPS4305-0610	3/8"-18	7/8"-14	19.22	38.60	8.13	12.29	22 mm	22 mm	27 mm	Metric
DANPS4305-0612	3/8"-18	1-1/16"-12	23.80	43.90	8.13	15.47	27 mm	22 mm	32 mm	Metric
DANPS4305-0604IN	3/8"-18	7/16"-20	18.96	26.16	8.13	4.37	9/16"	7/8"	9/16"	Imperial
DANPS4305-0606IN	3/8"-18	9/16"-18	21.08	28.96	8.13	7.54	9/16"	7/8"	11/16"	Imperial
DANPS4305-0608IN	3/8"-18	3/4"-16	20.57	33.00	8.13	9.93	3/4"	7/8"	7/8"	Imperial
DANPS4305-0610IN	3/8"-18	7/8"-14	19.22	38.60	8.13	12.29	7/8"	7/8"	1"	Imperial
DANPS4305-0612IN	3/8"-18	1-1/16"-12	23.80	43.90	8.13	15.47	1-1/16"	7/8"	1-1/4"	Imperial
DANPS4305-0804	1/2"-14	7/16"-20	23.90	28.20	11.18	4.37	19 mm	27 mm	14 mm	Metric
DANPS4305-0808	1/2"-14	3/4"-16	22.61	33.00	11.18	9.93	19 mm	27 mm	22 mm	Metric
DANPS4305-0810	1/2"-14	7/8"-14	22.35	38.60	11.18	12.29	22 mm	27 mm	27 mm	Metric

DANPS4305-0812	1/2"-14	1-1/16"-12	25.90	43.90	11.18	15.47	27 mm	27 mm	32 mm	Metric
DANPS4305-0804IN	1/2"-14	7/16"-20	23.90	28.20	11.18	4.37	3/4"	1"	9/16"	Imperial
DANPS4305-0808IN	1/2"-14	3/4"-16	22.61	33.00	11.18	9.93	3/4"	1"	7/8"	Imperial
DANPS4305-0810IN	1/2"-14	7/8"-14	22.35	38.60	11.18	12.29	7/8"	1"	1"	Imperial
DANPS4305-0812IN	1/2"-14	1-1/16"-12	25.90	43.90	11.18	15.47	1-1/16"	1"	1-1/4"	Imperial
DANPS4305-1006	7/8"-14	9/16"-18	19.22	38.60	8.13	12.29	22 mm	22 mm	22 mm	Metric
DANPS4305-1008	7/8"-14	3/4"-16	22.35	38.60	11.18	12.29	22 mm	22 mm	27 mm	Metric
DANPS4305-1012	7/8"-14	1-1/16"-12	25.90	39.90	16.13	12.29	27 mm	32 mm	22 mm	Metric
DANPS4305-1006IN	7/8"-14	9/16"-18	19.22	38.60	8.13	12.29	7/8"	7/8"	7/8"	Imperial
DANPS4305-1008IN	7/8"-14	3/4"-16	22.35	38.60	11.18	12.29	7/8"	7/8"	1"	Imperial
DANPS4305-1012IN	7/8"-14	1-1/16"-12	25.90	39.90	16.13	12.29	1-1/16"	1-1/4"	7/8"	Imperial
DANPS4305-1210	3/4"-14	7/8"-14	25.90	39.90	16.13	12.29	27 mm	32 mm	27 mm	Metric
DANPS4305-1212	3/4"-14	1-1/16"-12	25.90	43.90	15.49	15.47	27 mm	32 mm	32 mm	Metric
DANPS4305-1216	3/4"-14	1-5/16"-12	25.65	47.20	15.75	21.44	33 mm	32 mm	41 mm	Metric
DANPS4305-1210IN	3/4"-14	7/8"-14	25.90	39.90	16.13	12.29	1-1/16"	1-1/4"	1"	Imperial
DANPS4305-1212IN	3/4"-14	1-1/16"-12	25.90	43.90	15.49	15.47	1-1/16"	1-1/4"	1-1/4"	Imperial
DANPS4305-1216IN	3/4"-14	1-5/16"-12	25.65	47.20	15.75	21.44	1-5/16"	1-1/4"	1-1/2"	Imperial
DANPS4305-1612	1"-11-1/2	1-1/16"-12	25.65	47.20	15.75	21.44	33 mm	32 mm	41 mm	Metric
DANPS4305-1616	1"-11-1/2	1-5/16"-12	29.21	47.20	19.81	21.44	33 mm	41 mm	41 mm	Metric
DANPS4305-1620	1"-11-1/2	1-5/8"-12	31.20	48.50	25.65	21.44	41 mm	50 mm	41 mm	Metric
DANPS4305-1612IN	1"-11-1/2	1-1/16"-12	25.65	47.20	15.75	21.44	1-5/16"	1-1/4"	1-1/2"	Imperial
DANPS4305-1616IN	1"-11-1/2	1-5/16"-12	29.21	47.20	19.81	21.44	1-5/16"	1-1/2"	1-1/2"	Imperial
DANPS4305-1620IN	1"-11-1/2	1-5/8"-12	31.20	48.50	25.65	21.44	1-5/8"	1-7/8"	1-1/2"	Imperial
DANPS4305-2016	1-1/4"-11-1/2	1-5/16"-12	31.20	48.50	25.65	21.44	41 mm	50 mm	41 mm	Metric
DANPS4305-2020	1-1/4"-11-1/2	1-5/8"-12	31.25	48.50	25.65	27.38	41 mm	50 mm	50 mm	Metric
DANPS4305-2024	1-1/4"-11-1/2	1-7/8"-12	36.82	48.50	31.75	27.38	50 mm	55 mm	50 mm	Metric
DANPS4305-2016IN	1-1/4"-11-1/2	1-5/16"-12	31.20	48.50	25.65	21.44	1-5/8"	1-7/8"	1-1/2"	Imperial
DANPS4305-2020IN	1-1/4"-11-1/2	1-5/8"-12	31.25	48.50	25.65	27.38	1-5/8"	1-7/8"	1-7/8"	Imperial
DANPS4305-2024IN	1-1/4"-11-1/2	1-7/8"-12	36.82	48.50	31.75	27.38	1-7/8"	2-1/8"	1-7/8"	Imperial
DANPS4305-2420	1-1/2"-11-1/2	1-5/8"-12	36.82	48.50	31.75	27.38	50 mm	55 mm	55 mm	Metric
DANPS4305-2424	1-1/2"-11-1/2	1-7/8"-12	34.30	48.51	31.75	33.32	50 mm	55 mm	55 mm	Metric
DANPS4305-2420IN	1-1/2"-11-1/2	1-5/8"-12	36.82	48.50	31.75	27.38	1-7/8"	2-1/8"	2-1/8"	Imperial
DANPS4305-2424IN	1-1/2"-11-1/2	1-7/8"-12	34.30	48.51	31.75	33.32	1-7/8"	2-1/8"	2-1/8"	Imperial

DANPF4251

45° Elbow Connector NPTF Female - JIC Swivel Female 74°

D

A

NP

F

4

251

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

NPTF

Female

45° Elbow

JIC UNF Swivel Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DANPF4251

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


45° Elbow

Connection Type:

Female × Swivel Female

Thread Types:

NPTF × JIC UNF 74°

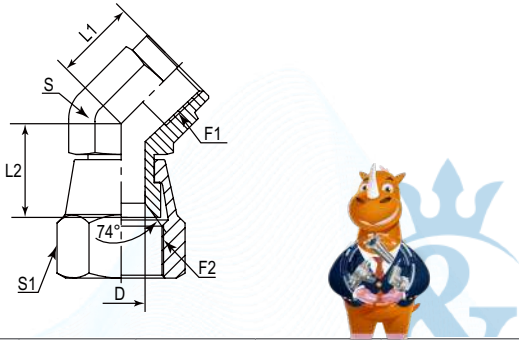

PART NUMBER	F1 (Thread)	F2 (Thread)	D	L1	L2	S	S1	Hex
#	NPTF	UNF	mm	mm	mm	-	-	-
DANPF4251-0404	1/4"-18	7/16"-20	7.54	21.08	15.75	19 mm	14 mm	Metric
DANPF4251-0406	1/4"-18	9/16"-18	7.54	19.05	15.75	19 mm	19 mm	Metric
DANPF4251-0404IN	1/4"-18	7/16"-20	7.54	21.08	15.75	3/4"	9/16"	Imperial
DANPF4251-0406IN	1/4"-18	9/16"-18	7.54	19.05	15.75	3/4"	11/16"	Imperial
DANPF4251-0606	3/8"-18	9/16"-18	7.54	19.05	18.92	22 mm	19 mm	Metric
DANPF4251-0608	3/8"-18	3/4"-16	9.93	19.05	21.79	22 mm	22 mm	Metric
DANPF4251-0606IN	3/8"-18	9/16"-18	7.54	19.05	18.92	7/8"	11/16"	Imperial
DANPF4251-0608IN	3/8"-18	3/4"-16	9.93	19.05	21.79	7/8"	7/8"	Imperial
DANPF4251-0808	1/2"-14	3/4"-16	9.93	21.77	21.79	27 mm	22 mm	Metric
DANPF4251-0808IN	1/2"-14	3/4"-16	9.93	21.77	21.79	1-1/8"	7/8"	Imperial
DANPF4251-1212	3/4"-14	1-1/16"-12	15.47	25.40	23.88	33 mm	32 mm	Metric
DANPF4251-1212IN	3/4"-14	1-1/16"-12	15.47	25.40	23.88	1-5/16"	1-1/4"	Imperial
DANPF4251-1616	1"-11-1/2	1-5/16"-12	21.44	30.22	29.36	41 mm	41 mm	Metric
DANPF4251-1616IN	1"-11-1/2	1-5/16"-12	21.44	30.22	29.36	1-5/8"	1-1/2"	Imperial
DANPF4251-2020	1-1/4"-11-1/2	1-5/8"-12	27.42	36.58	35.66	48 mm	50 mm	Metric
DANPF4251-2020IN	1-1/4"-11-1/2	1-5/8"-12	27.42	36.58	35.66	1-7/8"	2"	Imperial

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

SGS

DEKRA

DIN

SAE

MA

CE

UK CA

Powered by DME&JDE Group

DANPM928M

90° Elbow Connector NPTF Male 60° - NPTF Male 60°

D

A

NP

M

9

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

NPTF

Male

90° Elbow

NPTF

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DANPM928M

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


90° Elbow

Connection Type:

Male × Male

Thread Types:

NPTF 60° × NPTF 60°

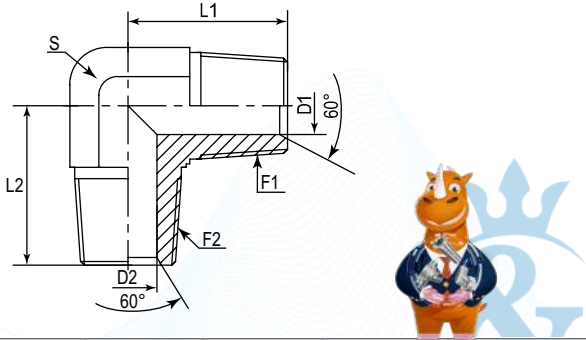

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	Hex
#	NPTF	NPTF	mm	mm	mm	mm	-	-
DANPM928M-0202	1/8"-27	1/8"-27	4.78	4.78	19.81	19.81	11 mm	Metric
DANPM928M-0202IN	1/8"-27	1/8"-27	4.78	4.78	19.81	19.81	7/16"	Imperial
DANPM928M-0402	1/4"-18	1/8"-27	7.14	4.78	27.70	22.40	14 mm	Metric
DANPM928M-0404	1/4"-18	1/4"-18	7.14	7.14	27.70	27.70	14 mm	Metric
DANPM928M-0402IN	1/4"-18	1/8"-27	7.14	4.78	27.70	22.40	9/16"	Imperial
DANPM928M-0404IN	1/4"-18	1/4"-18	7.14	7.14	27.70	27.70	9/16"	Imperial
DANPM928M-0604	3/8"-18	1/4"-18	10.31	7.14	30.99	30.99	19 mm	Metric
DANPM928M-0606	3/8"-18	3/8"-18	10.31	10.31	30.99	30.99	19 mm	Metric
DANPM928M-0604IN	3/8"-18	1/4"-18	10.31	7.14	30.99	30.99	3/4"	Imperial
DANPM928M-0606IN	3/8"-18	3/8"-18	10.31	10.31	30.99	30.99	3/4"	Imperial
DANPM928M-0804	1/2"-14	1/4"-18	13.49	7.14	37.30	32.50	22 mm	Metric
DANPM928M-0806	1/2"-14	3/8"-18	13.49	10.31	37.30	32.50	22 mm	Metric
DANPM928M-0808	1/2"-14	1/2"-14	13.49	13.49	37.30	37.30	22 mm	Metric
DANPM928M-0804IN	1/2"-14	1/4"-18	13.49	7.14	37.30	32.50	7/8"	Imperial
DANPM928M-0806IN	1/2"-14	3/8"-18	13.49	10.31	37.30	32.50	7/8"	Imperial
DANPM928M-0808IN	1/2"-14	1/2"-14	13.49	13.49	37.30	37.30	7/8"	Imperial
DANPM928M-1208	3/4"-14	1/2"-14	18.26	13.49	40.40	40.40	27 mm	Metric
DANPM928M-1212	3/4"-14	3/4"-14	18.26	18.26	40.40	40.40	27 mm	Metric
DANPM928M-1208IN	3/4"-14	1/2"-14	18.26	13.49	40.40	40.40	1-1/16"	Imperial
DANPM928M-1212IN	3/4"-14	3/4"-14	18.26	18.26	40.40	40.40	1-1/16"	Imperial
DANPM928M-1608	1"-11-1/2	1/2"-14	23.83	13.49	50.00	45.20	33 mm	Metric
DANPM928M-1612	1"-11-1/2	3/4"-14	23.83	18.26	50.00	45.20	33 mm	Metric
DANPM928M-1616	1"-11-1/2	1"-11-1/2	23.83	23.83	50.00	50.00	33 mm	Metric
DANPM928M-1608IN	1"-11-1/2	1/2"-14	23.83	13.49	50.00	45.20	1-5/16"	Imperial
DANPM928M-1612IN	1"-11-1/2	3/4"-14	23.83	18.26	50.00	45.20	1-5/16"	Imperial
DANPM928M-1616IN	1"-11-1/2	1"-11-1/2	23.83	23.83	50.00	50.00	1-5/16"	Imperial
DANPM928M-2016	1-1/4"-11-1/2	1"-11-1/2	31.75	23.83	60.50	59.70	41 mm	Metric
DANPM928M-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	31.75	31.75	60.50	60.50	41 mm	Metric
DANPM928M-2016IN	1-1/4"-11-1/2	1"-11-1/2	31.75	23.83	60.50	59.70	1-5/8"	Imperial
DANPM928M-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	31.75	31.75	60.50	60.50	1-5/8"	Imperial
DANPM928M-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	38.10	38.10	67.10	67.10	50 mm	Metric
DANPM928M-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	38.10	38.10	67.10	67.10	1-7/8"	Imperial
DANPM928M-3232	2"-11-1/2	2"-11-1/2	49.23	49.23	76.20	76.20	60 mm	Metric
DANPM928M-3232IN	2"-11-1/2	2"-11-1/2	49.23	49.23	76.20	76.20	2-1/2"	Imperial

Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

SGS

DEKRA

DIN

SAE

MA

CE

UK CA

Powered by DME&JDE Group

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



DANPM9305

90° Adjustable Elbow NPTF Male 60° - SAE Male O Ring

D

A

NP

M

9

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type



Adaptor

NPTF

Male

90° Elbow

SAE UNF

Male O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DANPM9305

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:

90° Elbow

Connection Type:


Male × Male

Thread Types:

NPTF 60° × SAE UNF + O Ring

Sealing Method:

O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	Hex
#	NPTF	UNF	mm	mm	mm	mm	-	-	-
DANPM9305-0204	1/8"-27	7/16"-20	19.80	26.2	4.78	4.37	11 mm	14 mm	Metric
DANPM9305-0205	1/8"-27	1/2"-20	19.80	28.70	4.78	5.94	14 mm	17 mm	Metric
DANPM9305-0204IN	1/8"-27	7/16"-20	19.80	26.2	4.78	4.37	7/16"	9/16"	Imperial
DANPM9305-0205IN	1/8"-27	1/2"-20	19.80	28.70	4.78	5.94	9/16"	5/8"	Imperial
DANPM9305-0404	1/4"-18	7/16"-20	27.70	30.20	7.14	4.37	14 mm	14 mm	Metric
DANPM9305-0405	1/4"-18	1/2"-20	27.70	28.70	7.14	5.94	14 mm	17 mm	Metric
DANPM9305-0406	1/4"-18	9/16"-18	27.70	31.80	7.14	7.54	14 mm	17 mm	Metric
DANPM9305-0404IN	1/4"-18	7/16"-20	27.70	30.20	7.14	4.37	9/16"	9/16"	Imperial
DANPM9305-0405IN	1/4"-18	1/2"-20	27.70	28.70	7.14	5.94	9/16"	5/8"	Imperial
DANPM9305-0406IN	1/4"-18	9/16"-18	27.70	31.80	7.14	7.54	9/16"	11/16"	Imperial
DANPM9305-0604	3/8"-18	7/16"-20	31.00	32.00	10.31	4.37	19 mm	14 mm	Metric
DANPM9305-0606	3/8"-18	9/16"-18	31.00	33.50	10.31	7.54	19 mm	17 mm	Metric
DANPM9305-0608	3/8"-18	3/4"-16	31.00	36.80	10.31	9.93	19 mm	22 mm	Metric
DANPM9305-0604IN	3/8"-18	7/16"-20	31.00	32.00	10.31	4.37	3/4"	9/16"	Imperial
DANPM9305-0606IN	3/8"-18	9/16"-18	31.00	33.50	10.31	7.54	3/4"	11/16"	Imperial
DANPM9305-0608IN	3/8"-18	3/4"-16	31.00	36.80	10.31	9.93	3/4"	7/8"	Imperial
DANPM9305-0808	1/2"-14	3/4"-16	37.30	39.10	13.49	9.93	22 mm	22 mm	Metric
DANPM9305-0810	1/2"-14	7/8"-14	37.30	43.20	13.49	12.29	22 mm	27 mm	Metric
DANPM9305-0808IN	1/2"-14	3/4"-16	37.30	39.10	13.49	9.93	7/8"	7/8"	Imperial
DANPM9305-0810IN	1/2"-14	7/8"-14	37.30	43.20	13.49	12.29	7/8"	1"	Imperial
DANPM9305-1210	3/4"-14	7/8"-14	40.40	45.20	18.26	12.29	27 mm	27 mm	Metric
DANPM9305-1212	3/4"-14	1-1/16"-12	40.40	49.30	18.26	15.47	27 mm	32 mm	Metric
DANPM9305-1214	3/4"-14	1-3/16"-12	42.00	50.80	18.26	18.26	33 mm	36 mm	Metric
DANPM9305-1216	3/4"-14	1-5/16"-12	42.90	52.10	18.26	21.44	33 mm	41 mm	Metric
DANPM9305-1210IN	3/4"-14	7/8"-14	40.40	45.20	18.26	12.29	1-1/16"	1"	Imperial
DANPM9305-1212IN	3/4"-14	1-1/16"-12	40.40	49.30	18.26	15.47	1-1/16"	1-1/4"	Imperial
DANPM9305-1214IN	3/4"-14	1-3/16"-12	42.00	50.80	18.26	18.26	1-5/16"	1-3/8"	Imperial
DANPM9305-1216IN	3/4"-14	1-5/16"-12	42.90	52.10	18.26	21.44	1-5/16"	1-1/2"	Imperial
DANPM9305-1612	1"-11-1/2	1-1/16"-12	50.00	52.10	23.83	15.47	33 mm	32 mm	Metric
DANPM9305-1616	1"-11-1/2	1-5/16"-12	50.00	52.10	23.83	21.44	33 mm	41 mm	Metric
DANPM9305-1612IN	1"-11-1/2	1-1/16"-12	50.00	52.10	23.83	15.47	1-5/16"	1-1/4"	Imperial
DANPM9305-1616IN	1"-11-1/2	1-5/16"-12	50.00	52.10	23.83	21.44	1-5/16"	1-1/2"	Imperial
DANPM9305-2020	1-1/4"-11-1/2	1-5/8"-12	60.50	57.20	31.75	27.38	41 mm	50 mm	Metric
DANPM9305-2020IN	1-1/4"-11-1/2	1-5/8"-12	60.50	57.20	31.75	27.38	1-5/8"	1-7/8"	Imperial
DANPM9305-2420	1-1/2"-11-1/2	1-5/8"-12	67.10	60.70	38.10	27.38	50 mm	50 mm	Metric
DANPM9305-2424	1-1/2"-11-1/2	1-7/8"-12	67.10	60.70	38.10	33.32	50 mm	55 mm	Metric
DANPM9305-2420IN	1-1/2"-11-1/2	1-5/8"-12	67.10	60.70	38.10	27.38	1-7/8"	1-7/8"	Imperial
DANPM9305-2424IN	1-1/2"-11-1/2	1-7/8"-12	67.10	60.70	38.10	33.32	1-7/8"	2-1/8"	Imperial
DANPM9305-3232	2"-11-1/2	2-1/2"-12	76.20	73.40	49.23	45.24	60 mm	70 mm	Metric
DANPM9305-3232IN	2"-11-1/2	2-1/2"-12	76.20	73.40	49.23	45.24	2-1/2"	2-3/4"	Imperial

Certificate:



DANPM928F

90° Elbow Connector NPTF Male 60° - NPTF Female

D

A

NP

M

9

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type



Adaptor

NPTF

Male

90° Elbow

NPTF

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DANPM928F

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


90° Elbow

Connection Type:

Male × Female

Thread Types:

NPTF 60° × NPTF

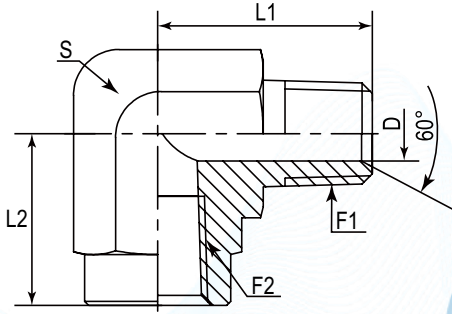

PART NUMBER	F1 (Thread)	F2 (Thread)	D	L1	L2	S	Hex
#	NPTF	NPTF	mm	mm	mm	-	-
DANPM928F-0202	1/8"-27	1/8"-27	4.78	19.80	16.80	14 mm	Metric
DANPM928F-0204	1/8"-27	1/4"-18	4.78	22.90	22.40	19 mm	Metric
DANPM928F-0206	1/8"-27	3/8"-18	4.78	26.50	25.90	22 mm	Metric
DANPM928F-0202IN	1/8"-27	1/8"-27	4.78	19.80	16.80	9/16"	Imperial
DANPM928F-0204IN	1/8"-27	1/4"-18	4.78	22.90	22.40	3/4"	Imperial
DANPM928F-0206IN	1/8"-27	3/8"-18	4.78	26.50	25.90	7/8"	Imperial
DANPM928F-0402	1/4"-18	1/8"-27	7.14	27.70	17.00	14 mm	Metric
DANPM928F-0404	1/4"-18	1/4"-18	7.14	27.70	22.40	19 mm	Metric
DANPM928F-0406	1/4"-18	3/8"-18	7.14	31.10	25.90	22 mm	Metric
DANPM928F-0408	1/4"-18	1/2"-14	7.14	32.50	31.20	27 mm	Metric
DANPM928F-0402IN	1/4"-18	1/8"-27	7.14	27.70	17.00	9/16"	Imperial
DANPM928F-0404IN	1/4"-18	1/4"-18	7.14	27.70	22.40	3/4"	Imperial
DANPM928F-0406IN	1/4"-18	3/8"-18	7.14	31.10	25.90	7/8"	Imperial
DANPM928F-0408IN	1/4"-18	1/2"-14	7.14	32.50	31.20	1-1/16"	Imperial
DANPM928F-0602	3/8"-18	1/8"-27	10.31	28.00	22.35	19 mm	Metric
DANPM928F-0604	3/8"-18	1/4"-18	10.31	31.10	25.70	22 mm	Metric
DANPM928F-0606	3/8"-18	3/8"-18	10.31	30.99	25.91	22 mm	Metric
DANPM928F-0608	3/8"-18	1/2"-14	10.31	32.50	31.20	27 mm	Metric
DANPM928F-0602IN	3/8"-18	1/8"-27	10.31	28.00	22.35	3/4"	Imperial
DANPM928F-0604IN	3/8"-18	1/4"-18	10.31	31.10	25.70	7/8"	Imperial

Certificate:



DANPP9091

90° Long Elbow Connector NPTF Male 60° - NPSM Swivel Female 60° Cone

D

A

NP

P

9

091

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

NPTF

Long +Male

90° Elbow

NPSM Swivel Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DANPP9091

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


90° Elbow

Connection Type:

Male × Swivel Female

Thread Types:

NPTF 60° × NPSM 60° Cone

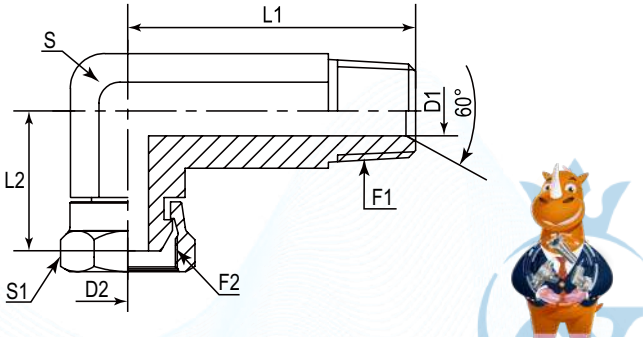

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S1
#	NPTF	NPSM	mm	mm	mm	mm	-	-	-
DANPP9091-0202	1/8"-27	1/8"-27	41.70	18.80	4.78	2.79	11 mm	14 mm	Metric
DANPP9091-0202IN	1/8"-27	1/8"-27	41.70	18.80	4.78	2.79	7/16"	9/16"	Imperial
DANPP9091-0404	1/4"-18	1/4"-18	7.14	5.33	57.15	23.88	14 mm	19 mm	Metric
DANPP9091-0404IN	1/4"-18	1/4"-18	7.14	5.33	57.15	23.88	9/16"	11/16"	Imperial
DANPP9091-0606	3/8"-18	3/8"-18	70.10	28.45	10.31	8.13	19 mm	22 mm	Metric
DANPP9091-0608	3/8"-18	1/2"-14	76.20	28.19	10.31	11.18	22 mm	27 mm	Metric
DANPP9091-0606IN	3/8"-18	3/8"-18	70.10	28.45	10.31	8.13	3/4"	7/8"	Imperial
DANPP9091-0608IN	3/8"-18	1/2"-14	76.20	28.19	10.31	11.18	7/8"	1"	Imperial
DANPP9091-0806	1/2"-14	3/8"-18	81.00	26.41	13.49	8.13	22 mm	22 mm	Metric
DANPP9091-0808	1/2"-14	1/2"-14	81.00	28.19	13.49	11.18	22 mm	27 mm	Metric
DANPP9091-0806IN	1/2"-14	3/8"-18	81.00	26.41	13.49	8.13	7/8"	7/8"	Imperial
DANPP9091-0808IN	1/2"-14	1/2"-14	81.00	28.19	13.49	11.18	7/8"	1"	Imperial
DANPP9091-1212	3/4"-14	3/4"-14	93.00	33.02	18.26	16.13	27 mm	32 mm	Metric
DANPP9091-1212IN	3/4"-14	3/4"-14	93.00	33.02	18.26	16.13	1-1/16"	1-1/4"	Imperial
DANPP9091-1616	1"-11-1/2	1"-11-1/2	110.00	39.12	23.83	19.81	33 mm	41 mm	Metric
DANPP9091-1616IN	1"-11-1/2	1"-11-1/2	110.00	39.12	23.83	19.81	1-5/16"	1-1/2"	Imperial



Certificate:



DANPM9091-LL

90° X-Long Elbow Connector NPTF Male 60° - NPSM Swivel Female 60° Cone

D

A

NP

M

9

091

LL

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Elbow Type

DME

Adaptor

NPTF

Male

90° Elbow

NPSM Swivel Female

X-Long

 German Technology Equipment



New-Standard

DME&JDE Code:

DANPM9091-LL

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


90° Elbow

Connection Type:

Male × Swivel Female

Thread Types:

NPTF 60° × NPSM 60° Cone

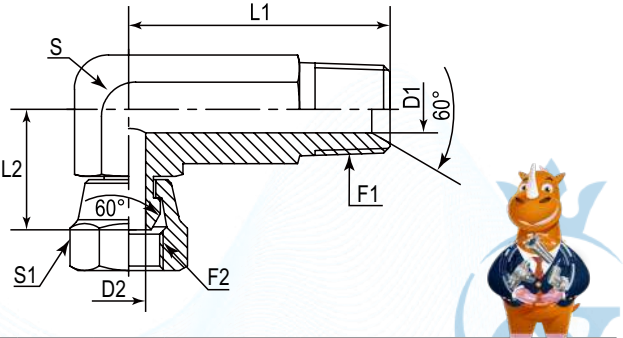

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	Cross Number	Revision History
#	NPTF	NPSM	mm	mm	mm	mm	mm	mm	-	
DANPM9091-LL-0202	1/8"-27	1/8"-27	4.78	2.79	41.66	18.80	11.10	14.27	1501-LL-0202	
DANPM9091-LL-0404	1/4"-18	1/4"-18	7.14	5.33	57.15	23.88	14.28	17.48	1501-LL-0404	
DANPM9091-LL-0606	3/8"-18	3/8"-18	10.31	8.13	70.10	28.45	19.05	22.23	1501-LL-0606	2024/6/4,Dimension S of item AR04585(1501-0606) has been changed from 11/16"/17.46(-0.8,0) mm to 3/4"/19.05(-0.76,0)mm
DANPM9091-LL-0608	3/8"-18	1/2"-14	10.31	11.18	76.20	28.19	22.22	25.40	1501-LL-0608	
DANPM9091-LL-0806	1/2"-14	3/8"-18	13.49	8.13	81.00	26.41	22.22	22.23	1501-LL-0806	
DANPM9091-LL-0808	1/2"-14	1/2"-14	13.49	11.18	81.00	28.19	22.22	25.40	1501-LL-0808	
DANPM9091-LL-1212	3/4"-14	3/4"-14	18.26	16.13	93.00	33.02	26.97	31.75	1501-LL-1212	
DANPM9091-LL-1616	1"-11-1/2	1"-11-1/2	23.83	19.81	110.00	39.12	33.32	38.10	1501-LL-1616	



Certificate:





DANPF9305

90° Adjustable Elbow NPTF Female - SAE Male + O Ring

D

A

NP

F

9

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Sealing Type

Adaptor

NPTF

Female

90° Elbow

SAE

Male + O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DANPF9305

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:

90° Elbow

Connection Type:


Adjustable Female × Male

Thread Types:

NPTF 60° × UNF + O Ring

Sealing Method:

O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D	S	S1	Hex
#	NPTF	UNF	mm	mm	mm	-	-	-
DANPF9305-0204IN	1/8"-27	7/16"-20	16.80	30.23	4.37	9/16"	9/16"	Imperial
DANPF9305-0205IN	1/8"-27	1/2"-20	16.80	30.2	5.94	9/16"	5/8"	Imperial
DANPF9305-0404IN	1/4"-18	7/16"-20	22.40	32	4.37	3/4"	9/16"	Imperial
DANPF9305-0406IN	1/4"-18	9/16"-18	22.40	33.5	7.54	3/4"	11/16"	Imperial
DANPF9305-0408IN	1/4"-18	3/4"-16	22.40	36.83	9.93	3/4"	7/8"	Imperial
DANPF9305-0410IN	1/4"-18	7/8"-14	25.9	43.2	12.29	7/8"	1"	Imperial
DANPF9305-0604IN	3/8"-18	7/16"-20	25.9	32	4.37	7/8"	9/16"	Imperial
DANPF9305-0606IN	3/8"-18	9/16"-18	25.9	35.8	7.54	7/8"	11/16"	Imperial
DANPF9305-0608IN	3/8"-18	3/4"-16	26	39.1	9.93	7/8"	7/8"	Imperial
DANPF9305-0610IN	3/8"-18	7/8"-14	25.9	43.2	12.29	7/8"	1"	Imperial
DANPF9305-0806IN	1/2"-14	9/16"-18	31.2	38	7.54	1-1/16"	11/16"	Imperial
DANPF9305-0808IN	1/2"-14	3/4"-16	31.2	41.1	9.93	1-1/16"	7/8"	Imperial
DANPF9305-0810IN	1/2"-14	7/8"-14	31.2	45.2	12.29	1-1/16"	1"	Imperial
DANPF9305-0812IN	1/2"-14	1-1/16"-12	31.2	49.3	15.47	1-1/16"	1-1/4"	Imperial
DANPF9305-0814IN	1/2"-14	1-3/16"-12	36.1	52.1	18.26	1-5/16"	1-3/8"	Imperial
DANPF9305-1208IN	3/4"-14	3/4"-16	27.94	49.3	9.93	1-5/16"	7/8"	Imperial
DANPF9305-1210IN	3/4"-14	7/8"-14	27.94	48	12.29	1-5/16"	1"	Imperial
DANPF9305-1212IN	3/4"-14	1-1/16"-12	27.94	52.1	15.47	1-5/16"	1-1/4"	Imperial
DANPF9305-1214IN	3/4"-14	1-3/16"-12	36.10	52.1	18.26	1-5/16"	1-3/8"	Imperial
DANPF9305-1216IN	3/4"-14	1-5/16"-12	34.50	52.1	21.44	1-5/16"	1-1/2"	Imperial
DANPF9305-1616IN	1"-11-1/2	1-5/16"-12	41.20	57.2	21.44	1-5/8"	1-1/2"	Imperial
DANPF9305-1620IN	1"-11-1/2	1-5/8"-12	41.15	57.15	27.38	1-5/8"	1-7/8"	Imperial
DANPF9305-2016IN	1-1/4"-11-1/2	1-5/16"-12	43.20	60.71	21.44	1-7/8"	1-1/2"	Imperial
DANPF9305-2020IN	1-1/4"-11-1/2	1-5/8"-12	43.20	60.7	27.38	1-7/8"	1-7/8"	Imperial
DANPF9305-2424IN	1-1/2"-11-1/2	1-7/8"-12	52.80	73.4	33.32	2-9/16"	2-1/8"	Imperial
DANPF9305-3232IN	2"-11-1/2	2-1/2"-12	60.70	77.8	45.24	2-13/16"	2-3/4"	Imperial

Certificate:

DANPS9305

90° Adjustable Elbow NPSM Swivel Female 60° - SAE Male O Ring

D

A

NPS

9

30

5

Company

Product Range

Thread Types

Adaptor Structure

Thread Types

Connection Type

Adaptor

NPSM

90° Elbow

SAE UNF

Male O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DANPS9305

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:

90° Elbow

Connection Type:


Adjustable Swivel Female × Male

Thread Types:

NPSM 60° × SAE UNF

Sealing Method:

O Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1	S2	Hex
#	NPSM	UNF	mm	mm	mm	mm	-	-	-	-
DANPS9305-0204	1/8"-27	7/16"-20	17.80	26.20	2.79	4.37	11 mm	14 mm	14 mm	Metric
DANPS9305-0204IN	1/8"-27	7/16"-20	17.80	26.20	2.79	4.37	7/16"	9/16"	9/16"	Imperial
DANPS9305-0404	1/4"-18	7/16"-20	20.14	30.20	5.33	4.37	14 mm	19 mm	14 mm	Metric
DANPS9305-0406	1/4"-18	9/16"-18	22.35	31.80	5.33	7.54	14 mm	19 mm	17 mm	Metric
DANPS9305-0408	1/4"-18	3/4"-16	24.63	36.80	5.33	9.93	19 mm	19 mm	22 mm	Metric
DANPS9305-0410	1/4"-18	7/8"-14	26.23	43.20	5.33	12.29	22 mm	19 mm	27 mm	Metric
DANPS9305-0404IN	1/4"-18	7/16"-20	20.14	30.20	5.33	4.37	9/16"	11/16"	9/16"	Imperial
DANPS9305-0406IN	1/4"-18	9/16"-18	22.35	31.80	5.33	7.54	9/16"	11/16"	11/16"	Imperial
DANPS9305-0408IN	1/4"-18	3/4"-16	24.63	36.80	5.33	9.93	3/4"	11/16"	7/8"	Imperial
DANPS9305-0410IN	1/4"-18	7/8"-14	26.23	43.20	5.33	12.29	7/8"	11/16"	1"	Imperial
DANPS9305-0604	3/8"-18	7/16"-20	24.20	32.00	8.13	4.37	19 mm	22 mm	14 mm	Metric
DANPS9305-0606	3/8"-18	9/16"-18	22.86	31.75	8.13	7.54	14 mm	22 mm	17 mm	Metric
DANPS9305-0608	3/8"-18	3/4"-16	25.20	36.80	8.13	9.93	19 mm	22 mm	22 mm	Metric
DANPS9305-0610	3/8"-18	7/8"-14	26.92	43.20	8.13	12.29	22 mm	22 mm	27 mm	Metric
DANPS9305-0612	3/8"-18	1-1/16"-12	32.00	49.30	8.13	15.47	27 mm	22 mm	32 mm	Metric
DANPS9305-0604IN	3/8"-18	7/16"-20	24.20	32.00	8.13	4.37	3/4"	7/8"	9/16"	Imperial
DANPS9305-0606IN	3/8"-18	9/16"-18	22.86	31.75	8.13	7.54	9/16"	7/8"	11/16"	Imperial
DANPS9305-0608IN	3/8"-18	3/4"-16	25.20	36.80	8.13	9.93	3/4"	7/8"	7/8"	Imperial
DANPS9305-0610IN	3/8"-18	7/8"-14	26.92	43.20	8.13	12.29	7/8"	7/8"	1"	Imperial
DANPS9305-0612IN	3/8"-18	1-1/16"-12	32.00	49.30	8.13	15.47	1-1/16"	7/8"	1-1/4"	Imperial

Certificate:



DME&JDE

GROUP

YOUR CONNECTORS & HOSES OEM SOLUTIONS

DANPS9305-0804	1/2"-14	7/16"-20	26.50	32.00	11.18	4.37	19 mm	27 mm	14 mm	Metric
DANPS9305-0806	1/2"-14	9/16"-18	26.42	35.81	11.18	7.54	19 mm	27 mm	17 mm	Metric
DANPS9305-0808	1/2"-14	3/4"-16	26.41	36.83	11.18	9.93	19 mm	27 mm	22 mm	Metric
DANPS9305-0810	1/2"-14	7/8"-14	28.19	43.20	11.18	12.29	22 mm	27 mm	27 mm	Metric
DANPS9305-0812	1/2"-14	1-1/16"-12	33.78	49.20	11.18	15.47	27 mm	27 mm	32 mm	Metric
DANPS9305-0804IN	1/2"-14	7/16"-20	26.50	32.00	11.18	4.37	3/4"	1"	9/16"	Imperial
DANPS9305-0806IN	1/2"-14	9/16"-18	26.42	35.81	11.18	7.54	3/4"	1"	11/16"	Imperial
DANPS9305-0808IN	1/2"-14	3/4"-16	26.41	36.83	11.18	9.93	3/4"	1"	7/8"	Imperial
DANPS9305-0810IN	1/2"-14	7/8"-14	28.19	43.20	11.18	12.29	7/8"	1"	1"	Imperial
DANPS9305-0812IN	1/2"-14	1-1/16"-12	33.78	49.20	11.18	15.47	1-1/16"	1"	1-1/4"	Imperial
DANPS9305-1208	3/4"-14	3/4"-16	33.02	41.20	15.49	9.93	27 mm	32 mm	22 mm	Metric
DANPS9305-1210	3/4"-14	7/8"-14	32.50	45.21	15.49	12.29	27 mm	32 mm	27 mm	Metric
DANPS9305-1212	3/4"-14	1-1/16"-12	33.30	49.20	15.49	15.47	27 mm	32 mm	32 mm	Metric
DANPS9305-1214	3/4"-14	1-3/16"-12	35.60	50.80	15.49	18.26	33 mm	32 mm	36 mm	Metric
DANPS9305-1216	3/4"-14	1-5/16"-12	35.50	52.10	15.49	21.44	33 mm	32 mm	41 mm	Metric
DANPS9305-1220	3/4"-14	1-5/8"-12	40.50	57.20	15.49	27.38	41 mm	32 mm	50 mm	Metric
DANPS9305-1208IN	3/4"-14	3/4"-16	33.02	41.20	15.49	9.93	1-1/16"	1-1/4"	7/8"	Imperial
DANPS9305-1210IN	3/4"-14	7/8"-14	32.50	45.21	15.49	12.29	1-1/16"	1-1/4"	1"	Imperial
DANPS9305-1212IN	3/4"-14	1-1/16"-12	33.30	49.20	15.49	15.47	1-1/16"	1-1/4"	1-1/4"	Imperial
DANPS9305-1214IN	3/4"-14	1-3/16"-12	35.60	50.80	15.49	18.26	1-5/16"	1-1/4"	1-3/8"	Imperial
DANPS9305-1216IN	3/4"-14	1-5/16"-12	35.50	52.10	15.49	21.44	1-5/16"	1-1/4"	1-1/2"	Imperial
DANPS9305-1220IN	3/4"-14	1-5/8"-12	40.50	57.20	15.49	27.38	1-5/8"	1-1/4"	1-7/8"	Imperial
DANPS9305-1612	1"-11-1/2	1-1/16"-12	39.12	52.10	19.81	15.47	33 mm	41 mm	32 mm	Metric
DANPS9305-1616	1"-11-1/2	1-5/16"-12	39.12	52.10	19.81	21.44	33 mm	41 mm	41 mm	Metric
DANPS9305-1620	1"-11-1/2	1-5/8"-12	44.50	57.20	19.81	27.38	41 mm	41 mm	50 mm	Metric
DANPS9305-1612IN	1"-11-1/2	1-1/16"-12	39.12	52.10	19.81	15.47	1-5/16"	1-1/2"	1-1/4"	Imperial
DANPS9305-1616IN	1"-11-1/2	1-5/16"-12	39.12	52.10	19.81	21.44	1-5/16"	1-1/2"	1-1/2"	Imperial
DANPS9305-1620IN	1"-11-1/2	1-5/8"-12	44.50	57.20	19.81	27.38	1-5/8"	1-1/2"	1-7/8"	Imperial
DANPS9305-2020	1-1/4"-11-1/2	1-5/8"-12	45.20	57.20	25.65	27.38	41 mm	50 mm	50 mm	Metric
DANPS9305-2020IN	1-1/4"-11-1/2	1-5/8"-12	45.20	57.20	25.65	27.38	1-5/8"	1-7/8"	1-7/8"	Imperial
DANPS9305-2424	1-1/2"-11-1/2	1-7/8"-12	48.01	60.70	31.75	33.32	50 mm	55 mm	55 mm	Metric
DANPS9305-2424IN	1-1/2"-11-1/2	1-7/8"-12	48.01	60.70	31.75	33.32	1-7/8"	2-1/8"	2-1/8"	Imperial
DANPS9305-3232	2"-11-1/2	2-1/2"-12	61.60	73.40	43.69	45.24	60 mm	65 mm	70 mm	Metric
DANPS9305-3232IN	2"-11-1/2	2-1/2"-12	61.60	73.40	43.69	45.24	2-1/2"	2-5/8"	2-3/4"	Imperial

Web: <https://www.dmejde.com>

E-mail: info@dmejde.com

DME

DME&JDE

GROUP

YOUR CONNECTORS & HOSES OEM SOLUTIONS

DANPS906Q

90° Adjustable Elbow NPSM Swivel Female 60° - BSPP Male + O Ring + Retaining Ring

D

A

NPS

9

06

0

Company

Product Range

Thread Types

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

NPSM

90° Elbow

BSPP

Male + O Ring + Retaining Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code: DANPS906Q

Product Type Hydraulic Adaptor


Standard: NPTF

Structure: 90° Elbow

Connection Type: Adjustable Swivel Female × Male

Thread Types: NPSM 60° × BSPP

Sealing Method: O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	S1
#	NPSM	BSPP	mm	mm	mm	mm	mm	mm	mm
DANPS906Q-0202	1/8"-27	1/8"-28	2.79	4.40	17.80	26.00	11.00	14.27	14.00
DANPS906Q-0204	1/8"-27	1/4"-19	2.79	7.50	20.60	31.50	14.00	14.27	19.00
DANPS906Q-0402	1/4"-18	1/8"-28	5.33	4.40	20.14	28.00	14.00	17.48	14.00
DANPS906Q-0404	1/4"-18	1/4"-19	5.33	7.50	20.14	31.50	14.00	17.48	19.00
DANPS906Q-0406	1/4"-18	3/8"-19	5.33	9.90	24.63	36.50	19.00	17.48	22.00
DANPS906Q-0604	3/8"-18	1/4"-19	8.13	7.50	22.86	31.50	14.00	22.23	19.00
DANPS906Q-0606	3/8"-18	3/8"-19	8.13	9.90	25.20	36.50	19.00	22.23	22.00
DANPS906Q-0806	1/2"-14	3/8"-19	11.18	9.90	26.41	36.50	19.00	25.40	22.00
DANPS906Q-0808	1/2"-14	1/2"-14	11.18	12.30	28.19	43.00	22.00	25.40	27.00
DANPS906Q-1208	3/4"-14	1/2"-14	15.49	12.30	32.50	45.50	27.00	31.75	27.00
DANPS906Q-1212	3/4"-14	3/4"-14	15.49	15.50	32.50	49.00	27.00	31.75	36.00
DANPS906Q-1612	1"-11-1/2	3/4"-14	19.81	15.50	39.12	52.00	33.00	38.10	36.00
DANPS906Q-1616	1"-11-1/2	1"-11	19.81	21.50	39.12	52.00	33.00	38.10	41.00
DANPS906Q-2016	1-1/4"-11-1/2	1"-11	25.65	21.50	45.20	57.00	41.00	47.63	41.00
DANPS906Q-2020	1-1/4"-11-1/2	1-1/4"-11	25.65	27.50	45.20	57.00	41.00	47.63	50.00
DANPS906Q-2420	1-1/2"-11-1/2	1-1/4"-11	31.75	27.50	48.00	61.00	48.00	53.98	50.00
DANPS906Q-2424	1-1/2"-11-1/2	1-1/2"-11	31.75	33.00	48.00	61.00	48.00	53.98	55.00
DANPS906Q-3224	2"-11-1/2	1-1/2"-11	43.69	33.00	61.60	75.00	63.50	66.68	55.00
DANPS906Q-3232	2"-11-1/2	2"-11	43.69	45.00	61.60	75.00	63.50	66.68	70.00

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

543

Powered by DME&JDE Group

Web: <https://www.dmejde.com>

E-mail: info@dmejde.com

DME

Web: <https://www.dmejde.com>

E-mail: info@dmejde.com

DME

544


DANPF928F

90° Elbow Connector NPTF Female - NPTF Female

D	A	NP	F	9	28	F
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	NPTF	Female	90° Elbow	NPTF	Female



DME&JDE Code:	DANPF928F
Product Type	Hydraulic Adaptor
Standard:	NPTF
Structure:	90° Elbow
Connection Type:	Female × Female
Thread Types:	NPTF × NPTF



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	S	Hex
#	NPTF	NPTF	mm	mm	-	-
DANPF928F-0202	1/8"-27	1/8"-27	16.80	16.80	14 mm	Metric
DANPF928F-0202IN	1/8"-27	1/8"-27	16.80	16.80	9/16"	Imperial
DANPF928F-0402	1/4"-18	1/8"-27	22.40	22.40	19 mm	Metric
DANPF928F-0404	1/4"-18	1/4"-18	22.40	22.40	19 mm	Metric
DANPF928F-0402IN	1/4"-18	1/8"-27	22.40	22.40	3/4"	Imperial
DANPF928F-0404IN	1/4"-18	1/4"-18	22.40	22.40	3/4"	Imperial
DANPF928F-0604	3/8"-18	1/4"-18	25.90	25.90	22 mm	Metric
DANPF928F-0606	3/8"-18	3/8"-18	25.90	25.90	22 mm	Metric
DANPF928F-0604IN	3/8"-18	1/4"-18	25.90	25.90	7/8"	Imperial
DANPF928F-0606IN	3/8"-18	3/8"-18	25.90	25.90	7/8"	Imperial
DANPF928F-0804	1/2"-14	1/4"-18	31.20	31.20	27 mm	Metric
DANPF928F-0806	1/2"-14	3/8"-18	31.20	25.70	27 mm	Metric
DANPF928F-0808	1/2"-14	3/8"-18	31.20	25.70	27 mm	Metric
DANPF928F-0804IN	1/2"-14	1/4"-18	31.20	31.20	1-1/16"	Imperial
DANPF928F-0806IN	1/2"-14	3/8"-18	31.20	31.20	1-1/16"	Imperial
DANPF928F-0808IN	1/2"-14	1/2"-14	31.20	31.20	1-1/16"	Imperial
DANPF928F-1206	3/4"-14	3/8"-18	34.50	34.20	33 mm	Metric
DANPF928F-1208	3/4"-14	1/2"-14	34.50	34.30	33 mm	Metric
DANPF928F-1212	3/4"-14	3/4"-14	34.50	34.50	33 mm	Metric
DANPF928F-1206IN	3/4"-14	3/8"-18	34.50	34.20	1-5/16"	Imperial
DANPF928F-1208IN	3/4"-14	1/2"-14	34.50	34.30	1-5/16"	Imperial
DANPF928F-1212IN	3/4"-14	3/4"-14	34.50	34.50	1-5/16"	Imperial
DANPF928F-1608	1"-11-1/2	1/2"-14	41.20	41.20	41 mm	Metric
DANPF928F-1612	1"-11-1/2	3/4"-14	41.20	41.20	41 mm	Metric
DANPF928F-1616	1"-11-1/2	1"-11-1/2	41.20	41.20	41 mm	Metric
DANPF928F-1608IN	1"-11-1/2	1/2"-14	41.20	41.20	1-5/8"	Imperial
DANPF928F-1612IN	1"-11-1/2	3/4"-14	41.20	41.20	1-5/8"	Imperial
DANPF928F-1616IN	1"-11-1/2	1"-11-1/2	41.20	41.20	1-5/8"	Imperial
DANPF928F-2012	1-1/4"-11-1/2	3/4"-14	43.20	38.50	50 mm	Metric
DANPF928F-2016	1-1/4"-11-1/2	1"-11-1/2	43.20	43.20	50 mm	Metric
DANPF928F-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	43.20	43.20	50 mm	Metric
DANPF928F-2012IN	1-1/4"-11-1/2	3/4"-14	43.20	38.50	1-7/8"	Imperial
DANPF928F-2016IN	1-1/4"-11-1/2	1"-11-1/2	43.20	43.20	1-7/8"	Imperial
DANPF928F-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	43.20	43.20	1-7/8"	Imperial
DANPF928F-2420	1-1/2"-11-1/2	1-1/4"-11-1/2	52.80	52.50	65 mm	Metric
DANPF928F-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	52.80	52.80	65 mm	Metric
DANPF928F-2420IN	1-1/2"-11-1/2	1-1/4"-11-1/2	52.80	52.50	2-9/16"	Imperial
DANPF928F-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	52.80	52.80	2-9/16"	Imperial
DANPF928F-3232	2"-11-1/2	2"-11-1/2	60.70	60.70	70 mm	Metric
DANPF928F-3232IN	2"-11-1/2	2"-11-1/2	60.70	60.70	2-13/16"	Imperial

Certificate:


DANPF9251

90° Elbow Connector NPTF Female - JIC Swivel Female 74°

D	A	NP	F	9	251
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	NPTF	Female	90° Elbow	JIC UNF Swivel Female



DME&JDE Code:	DANPF9251
Product Type	Hydraulic Adaptor
Standard:	NPTF
Structure:	90° Elbow
Connection Type:	Female × Swivel Female
Thread Types:	NPTF × JIC UNF 74°



PART NUMBER	F1 (Thread)	F2 (Thread)	D	L1	L2	S	S1	Hex
#	NPTF	UNF	mm	mm	mm	-	-	-
DANPF9251-0204	1/8"-27	7/16"-20	4.37	16.80	20.20	14 mm	14 mm	Metric
DANPF9251-0204IN	1/8"-27	7/16"-20	4.37	16.80	20.20	9/16"	9/16"	Imperial
DANPF9251-0402	1/4"-18	5/16"-24	1.57	22.35	21.53	19 mm	12 mm	Metric
DANPF9251-0404	1/4"-18	7/16"-20	4.37	22.40	21.50	19 mm	14 mm	Metric
DANPF9251-0406	1/4"-18	9/16"-18	7.54	22.40	22.22	19 mm	19 mm	Metric
DANPF9251-0402IN	1/4"-18	5/16"-24	1.57	22.35	21.53	3/4"	1/2"	Imperial
DANPF9251-0404IN	1/4"-18	7/16"-20	4.37	22.40	21.50	3/4"	9/16"	Imperial
DANPF9251-0406IN	1/4"-18	9/16"-18	7.54	22.40	22.22	3/4"	5/8"	Imperial
DANPF9251-0604	3/8"-18	7/16"-20	4.37	25.90	23.50	22 mm	14 mm	Metric
DANPF9251-0606	3/8"-18	9/16"-18	7.54	25.90	25.40	22 mm	19 mm	Metric
DANPF9251-0608	3/8"-18	3/4"-16	9.93	25.90	27.60	22 mm	22 mm	Metric
DANPF9251-0604IN	3/8"-18	7/16"-20	4.37	25.90	23.50	7/8"	9/16"	Imperial
DANPF9251-0606IN	3/8"-18	9/16"-18	7.54	25.90	25.40	7/8"	5/8"	Imperial
DANPF9251-0608IN	3/8"-18	3/4"-16	9.93	25.90	27.60	7/8"	7/8"	Imperial
DANPF9251-0806	1/2"-14	9/16"-18	7.54	31.20	27.10	27 mm	19 mm	Metric
DANPF9251-0808	1/2"-14	3/4"-16	9.93	31.20	28.41	27 mm	22 mm	Metric
DANPF9251-0810	1/2"-14	7/8"-14	12.29	31.24	28.45	27 mm	27 mm	Metric
DANPF9251-0806IN	1/2"-14	9/16"-18	7.54	31.20	27.10	1-1/8"	5/8"	Imperial
DANPF9251-0808IN	1/2"-14	3/4"-16	9.93	31.20	28.41	1-1/8"	7/8"	Imperial
DANPF9251-0810IN	1/2"-14	7/8"-14	12.29	31.24	28.45	1-1/8"	1"	Imperial
DANPF9251-1212	3/4"-14	1-1/16"-12	15.47	34.50	32.97	33 mm	32 mm	Metric
DANPF9251-1212IN	3/4"-14	1-1/16"-12	15.47	34.50	32.97	1-5/16"	1-1/4"	Imperial
DANPF9251-1616	1"-11-1/2	1-5/16"-12	21.44	41.20	42.00	41 mm	41 mm	Metric
DANPF9251-1616IN	1"-11-1/2	1-5/16"-12	21.44	41.20	42.00	1-1/2"	1-1/2"	Imperial
DANPF9251-2020	1-1/4"-11-1/2	1-5/8"-12	27.38	43.20	45.69	48 mm	50 mm	Metric
DANPF9251-2020IN	1-1/4"-11-1/2	1-5/8"-12	27.38	43.20	45.69	1-7/8"	2"	Imperial

Certificate:



DANPMT28M

Branch Tee Connector NPTF Male 60° – NPTF Male 60°

D

A

NP

M

T

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

NPTF

Male

Branch Tee

NPTF

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DANPMT28M

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


Branch Tee

Connection Type:

Male × Male × Male

Thread Types:

NPTF 60° × NPTF 60° × NPTF 60°

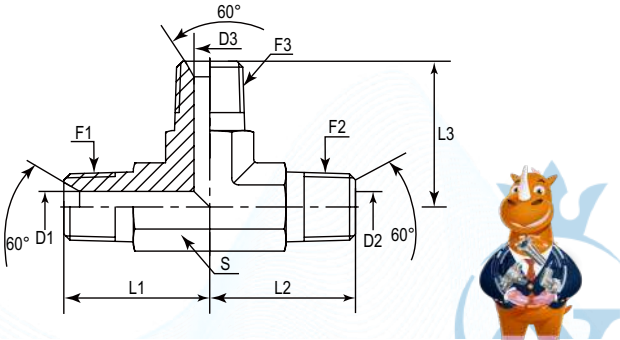

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	Hex
#	NPTF	NPTF	NPTF	mm	mm	mm	mm	mm	mm	-	-
DANPMT28M-0202	1/8"-27	1/8"-27	1/8"-27	19.80	19.80	19.80	4.78	4.78	4.78	11 mm	Metric
DANPMT28M-0202IN	1/8"-27	1/8"-27	1/8"-27	19.80	19.80	19.80	4.78	4.78	4.78	7/16"	Imperial
DANPMT28M-0404	1/4"-18	1/4"-18	1/4"-18	27.70	27.70	27.70	7.14	7.14	7.14	14 mm	Metric
DANPMT28M-0404IN	1/4"-18	1/4"-18	1/4"-18	27.70	27.70	27.70	7.14	7.14	7.14	9/16"	Imperial
DANPMT28M-0606	3/8"-18	3/8"-18	3/8"-18	31.00	31.00	31.00	10.31	10.31	10.31	19 mm	Metric
DANPMT28M-0606IN	3/8"-18	3/8"-18	3/8"-18	31.00	31.00	31.00	10.31	10.31	10.31	3/4"	Imperial
DANPMT28M-0808	1/2"-14	1/2"-14	1/2"-14	37.30	37.30	37.30	13.49	13.49	13.49	22 mm	Metric
DANPMT28M-0808IN	1/2"-14	1/2"-14	1/2"-14	37.30	37.30	37.30	13.49	13.49	13.49	7/8"	Imperial
DANPMT28M-1212	3/4"-14	3/4"-14	3/4"-14	40.40	40.40	40.40	18.26	18.26	18.26	27 mm	Metric
DANPMT28M-1212IN	3/4"-14	3/4"-14	3/4"-14	40.40	40.40	40.40	18.26	18.26	18.26	1-1/16"	Imperial
DANPMT28M-1616	1"-11-1/2	1"-11-1/2	1"-11-1/2	50.00	50.00	50.00	23.83	23.83	23.83	33 mm	Metric
DANPMT28M-1616IN	1"-11-1/2	1"-11-1/2	1"-11-1/2	50.00	50.00	50.00	23.83	23.83	23.83	1-5/16"	Imperial
DANPMT28M-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	60.50	60.50	60.50	31.75	31.75	31.75	41 mm	Metric
DANPMT28M-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	60.50	60.50	60.50	31.75	31.75	31.75	1-5/8"	Imperial
DANPMT28M-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	67.10	67.10	67.10	38.10	38.10	38.10	50 mm	Metric
DANPMT28M-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	67.10	67.10	67.10	38.10	38.10	38.10	1-7/8"	Imperial
DANPMT28M-3232	2"-11-1/2	2"-11-1/2	2"-11-1/2	76.10	76.10	76.10	49.23	49.23	49.23	60 mm	Metric
DANPMT28M-3232IN	2"-11-1/2	2"-11-1/2	2"-11-1/2	76.10	76.10	76.10	49.23	49.23	49.23	2-1/2"	Imperial

Certificate:

DANPMT25M

Branch Tee Connector NPTF Male 60° - JIC Male 74°

D

A

NP

M

T

25

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

NPTF

Male

Branch Tee

JIC UNF

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DANPMT25M

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


Branch Tee

Connection Type:

Male × Male

Thread Types:

NPTF 60° Cone × NPTF 60° Cone × JIC UNF 74° Cone

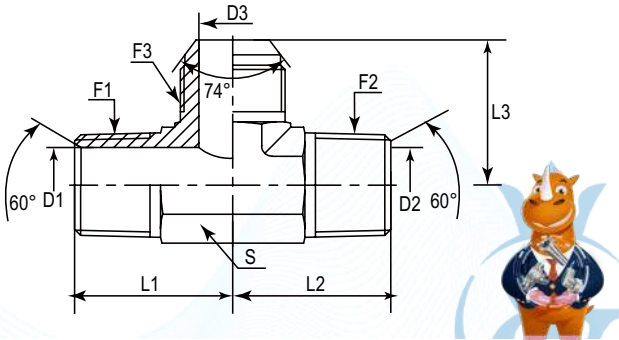

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	Hex
#	NPTF	NPTF	UNF	mm	mm	mm	mm	mm	mm	-	-
DANPMT25M-0404	1/4"-18	1/4"-18	7/16"-20	7.14	7.14	4.37	27.70	27.70	26.70	14 mm	Metric
DANPMT25M-0406	1/4"-18	1/4"-18	9/16"-20	7.14	7.14	7.54	27.70	27.70	26.90	14 mm	Metric
DANPMT25M-0404IN	1/4"-18	1/4"-18	7/16"-20	7.14	7.14	4.37	27.70	27.70	26.70	9/16"	Imperial
DANPMT25M-0406IN	1/4"-18	1/4"-18	9/16"-20	7.14	7.14	7.54	27.70	27.70	26.90	9/16"	Imperial
DANPMT25M-0606	3/8"-18	3/8"-18	9/16"-18	10.31	10.31	7.54	31.00	31.00	28.96	19 mm	Metric
DANPMT25M-0606IN	3/8"-18	3/8"-18	9/16"-18	10.31	10.31	7.54	31.00	31.00	28.96	3/4"	Imperial
DANPMT25M-0808	1/2"-14	1/2"-14	3/4"-16	13.49	13.49	9.93	37.34	37.34	33.80	22 mm	Metric
DANPMT25M-0810	1/2"-14	1/2"-14	7/8"-14	12.00	12.00	13.69	37.34	37.34	36.80	22 mm	Metric
DANPMT25M-0808IN	1/2"-14	1/2"-14	3/4"-16	13.49	13.49	9.93	37.34	37.34	33.80	7/8"	Imperial
DANPMT25M-0810IN	1/2"-14	1/2"-14	7/8"-14	12.00	12.00	13.69	37.34	37.34	36.80	7/8"	Imperial
DANPMT25M-1212	3/4"-14	3/4"-14	1-1/16"-12	18.26	18.26	15.47	40.40	40.40	42.20	27 mm	Metric
DANPMT25M-1216	3/4"-14	3/4"-14	1-5/16"-12	18.26	18.26	21.44	45.20	45.20	46.00	33 mm	Metric
DANPMT25M-1212IN	3/4"-14	3/4"-14	1-1/16"-12	18.26	18.26	15.47	40.40	40.40	42.20	1-1/8"	Imperial
DANPMT25M-1216IN	3/4"-14	3/4"-14	1-5/16"-12	18.26	18.26	21.44	45.20	45.20	46.00	1-5/16"	Imperial
DANPMT25M-1616	1"-11-1/2	1"-11-1/2	1-5/16"-12	23.83	23.83	21.44	50.00	50.00	46.00	33 mm	Metric
DANPMT25M-1616IN	1"-11-1/2	1"-11-1/2	1-5/16"-12	23.83	23.83	21.44	50.00	50.00	46.00	1-5/16"	Imperial

Certificate:



DANPFT25M

Branch Tee Connector NPTF Female - JIC Male 74°

D

A

NP

F

T

25

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

NPTF

Female

Branch Tee

JIC

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DANPFT25M

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


Branch Tee

Connection Type:

Female × Female × Male

Thread Types:

NPTF × NPTF × UNF 74° Cone



PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D	L1	L2	L3	S	Hex
#	NPTF	NPTF	UNF	mm	mm	mm	mm	-	-
DANPFT25M-0204	1/8"-27	1/8"-27	7/16"-20	4.37	16.80	16.80	27.40	14 mm	Metric
DANPFT25M-0204IN	1/8"-27	1/8"-27	7/16"-20	4.37	16.80	16.80	27.40	9/16"	Imperial
DANPFT25M-0406	1/4"-18	1/4"-18	9/16"-18	7.54	22.40	22.40	31.20	19 mm	Metric
DANPFT25M-0406IN	1/4"-18	1/4"-18	9/16"-18	7.54	22.40	22.40	31.20	3/4"	Imperial
DANPFT25M-0608	3/8"-18	3/8"-18	3/4"-16	9.93	25.90	25.90	36.10	22 mm	Metric
DANPFT25M-0608IN	3/8"-18	3/8"-18	3/4"-16	9.93	25.90	25.90	36.10	7/8"	Imperial
DANPFT25M-0808	1/2"-14	1/2"-14	3/4"-16	9.93	31.20	31.20	38.60	27 mm	Metric
DANPFT25M-0810	1/2"-14	1/2"-14	7/8"-14	12.29	31.20	31.20	41.70	27 mm	Metric
DANPFT25M-0808IN	1/2"-14	1/2"-14	3/4"-16	9.93	31.20	31.20	38.60	1-1/8"	Imperial
DANPFT25M-0810IN	1/2"-14	1/2"-14	7/8"-14	12.29	31.20	31.20	41.70	1-1/8"	Imperial
DANPFT25M-1212	3/4"-14	3/4"-14	1-1/16"-12	15.47	34.50	34.50	48.00	33 mm	Metric
DANPFT25M-1212IN	3/4"-14	3/4"-14	1-1/16"-12	15.47	34.50	34.50	48.00	1-5/16"	Imperial
DANPFT25M-1616	1"-11-1/2	1"-11-1/2	1-5/16"-12	21.44	41.15	41.15	55.12	41 mm	Metric
DANPFT25M-1616IN	1"-11-1/2	1"-11-1/2	1-5/16"-12	21.44	41.15	41.15	55.12	1-1/2"	Imperial

Certificate:

DANPFT28M

Branch Tee Connector NPTF Female - NPTF Male 60°

D

A

NP

F

T

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

NPTF

Female

Branch Tee

NPTF

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DANPFT28M

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


Branch Tee

Connection Type:

Female × Female × Male

Thread Types:

NPTF × NPTF × NPTF



PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D	S	Hex
#	NPTF	NPTF	NPTF	mm	mm	mm	mm	-	-
DANPFT28M-0202	1/8"-27	1/8"-27	1/8"-27	16.80	16.80	19.80	4.78	14 mm	Metric
DANPFT28M-0202IN	1/8"-27	1/8"-27	1/8"-27	16.80	16.80	19.80	4.78	9/16"	Imperial
DANPFT28M-0402	1/4"-18	1/4"-18	1/8"-27	27.70	27.70	17.00	7.14	19 mm	Metric
DANPFT28M-0404	1/4"-18	1/4"-18	1/4"-18	22.40	22.40	27.70	7.14	19 mm	Metric
DANPFT28M-0402IN	1/4"-18	1/4"-18	1/8"-27	27.70	27.70	17.00	7.14	3/4"	Imperial
DANPFT28M-0404IN	1/4"-18	1/4"-18	1/4"-18	22.40	22.40	27.70	7.14	3/4"	Imperial
DANPFT28M-0606	3/8"-18	3/8"-18	3/8"-18	25.90	25.90	31.00	10.31	22 mm	Metric
DANPFT28M-0606IN	3/8"-18	3/8"-18	3/8"-18	25.90	25.90	31.00	10.31	7/8"	Imperial
DANPFT28M-0808	1/2"-14	1/2"-14	1/2"-14	31.20	31.20	37.30	13.49	27 mm	Metric
DANPFT28M-0808IN	1/2"-14	1/2"-14	1/2"-14	31.20	31.20	37.30	13.49	1-1/16"	Imperial
DANPFT28M-1208	3/4"-14	3/4"-14	1/2"-14	40.40	40.40	31.20	18.26	27 mm	Metric
DANPFT28M-1212	3/4"-14	3/4"-14	3/4"-14	34.50	34.50	40.30	18.26	33 mm	Metric
DANPFT28M-1208IN	3/4"-14	3/4"-14	1/2"-14	40.40	40.40	31.20	18.26	1-1/16"	Imperial
DANPFT28M-1212IN	3/4"-14	3/4"-14	3/4"-14	34.50	34.50	40.30	18.26	1-5/16"	Imperial
DANPFT28M-1616	1"-11-1/2	1"-11-1/2	1"-11-1/2	41.20	41.20	50.00	23.83	41 mm	Metric
DANPFT28M-1616IN	1"-11-1/2	1"-11-1/2	1"-11-1/2	41.20	41.20	50.00	23.83	1-5/8"	Imperial
DANPFT28M-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	43.20	43.20	60.50	31.75	50 mm	Metric
DANPFT28M-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	43.20	43.20	60.50	31.75	1-7/8"	Imperial
DANPFT28M-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	52.80	52.80	67.10	38.10	65 mm	Metric
DANPFT28M-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	52.80	52.80	67.10	38.10	2-9/16"	Imperial
DANPFT28M-3232	2"-11-1/2	2"-11-1/2	2"-11-1/2	60.70	60.70	76.20	49.23	70 mm	Metric
DANPFT28M-3232IN	2"-11-1/2	2"-11-1/2	2"-11-1/2	60.70	60.70	76.20	49.23	2-13/16"	Imperial

Certificate:




DANPMT28F

(1)Branch Tee Connector NPTF Male 60° – NPTF Female

D	A	NP	M	T	28	F
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	NPTF	Male	Branch Tee	Female	Female



DME&JDE Code:	DANPMT28F
Product Type	Hydraulic Adaptor
Standard:	NPTF
Structure:	Branch Tee
Connection Type:	Male × Male × Female
Thread Types:	NPTF × NPTF × NPTF

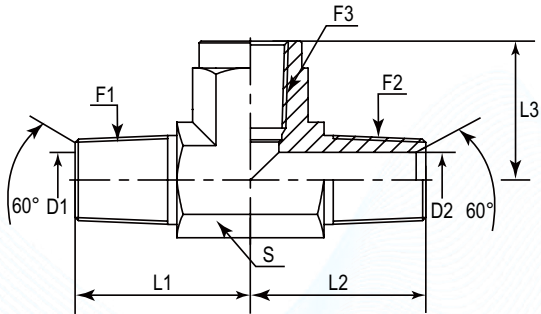

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	S	Hex
#	NPTF	NPTF	NPTF	mm	mm	mm	mm	mm	-	-
DANPMT28F-0202	1/8"-27	1/8"-27	1/8"-27	19.80	19.80	16.80	4.78	4.78	14 mm	Metric
DANPMT28F-0202IN	1/8"-27	1/8"-27	1/8"-27	19.80	19.80	16.80	4.78	4.78	9/16"	Imperial
DANPMT28F-0404	1/4"-18	1/4"-18	1/4"-18	27.70	27.70	22.40	7.14	7.14	19 mm	Metric
DANPMT28F-0404IN	1/4"-18	1/4"-18	1/4"-18	27.70	27.70	22.40	7.14	7.14	3/4"	Imperial
DANPMT28F-0606	3/8"-18	3/8"-18	3/8"-18	31.00	31.00	25.90	10.31	10.31	22 mm	Metric
DANPMT28F-0606IN	3/8"-18	3/8"-18	3/8"-18	31.00	31.00	25.90	10.31	10.31	7/8"	Imperial
DANPMT28F-0808	1/2"-14	1/2"-14	1/2"-14	37.30	37.30	31.20	13.49	13.49	27 mm	Metric
DANPMT28F-0808IN	1/2"-14	1/2"-14	1/2"-14	37.30	37.30	31.20	13.49	13.49	1-1/16"	Imperial
DANPMT28F-1212	3/4"-14	3/4"-14	3/4"-14	40.40	40.40	34.50	18.26	18.26	33 mm	Metric
DANPMT28F-1212IN	3/4"-14	3/4"-14	3/4"-14	40.40	40.40	34.50	18.26	18.26	1-5/16"	Imperial
DANPMT28F-1616	1"-11-1/2	1"-11-1/2	1"-11-1/2	50.00	50.00	41.20	23.83	23.83	41 mm	Metric
DANPMT28F-1616IN	1"-11-1/2	1"-11-1/2	1"-11-1/2	50.00	50.00	41.20	23.83	23.83	1-5/8"	Imperial
DANPMT28F-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	60.50	60.50	43.20	31.75	31.75	50 mm	Metric
DANPMT28F-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	60.50	60.50	43.20	31.75	31.75	1-7/8"	Imperial
DANPMT28F-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	67.10	67.10	52.80	38.10	38.10	65 mm	Metric
DANPMT28F-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	67.10	67.10	52.80	38.10	38.10	2-9/16"	Imperial


DANPFT28F

Branch Tee Connector NPTF Female - NPTF Female

D	A	NP	F	T	28	F
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	NPTF	Female	Branch Tee	NPTF	Female



DME&JDE Code:	DANPFT28F
Product Type	Hydraulic Adaptor
Standard:	NPTF
Structure:	Branch Tee
Connection Type:	Female × Female × Female
Thread Types:	NPTF × NPTF × NPTF

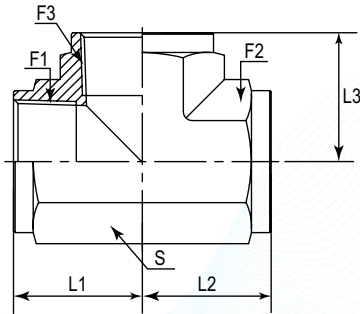

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	S	Hex
#	NPTF	NPTF	NPTF	mm	mm	mm	-	-
DANPFT28F-0202	1/8"-27	1/8"-27	1/8"-27	16.80	16.80	16.80	14 mm	Metric
DANPFT28F-0202IN	1/8"-27	1/8"-27	1/8"-27	16.80	16.80	16.80	9/16"	Imperial
DANPFT28F-0402	1/4"-18	1/4"-18	1/8"-27	22.35	22.35	22.35	19 mm	Metric
DANPFT28F-0404	1/4"-18	1/4"-18	1/4"-18	22.35	22.35	22.35	19 mm	Metric
DANPFT28F-0402IN	1/4"-18	1/4"-18	1/8"-27	22.35	22.35	22.35	3/4"	Imperial
DANPFT28F-0404IN	1/4"-18	1/4"-18	1/4"-18	22.35	22.35	22.35	3/4"	Imperial
DANPFT28F-0606	3/8"-18	3/8"-18	3/8"-18	25.91	25.91	25.91	22 mm	Metric
DANPFT28F-0606IN	3/8"-18	3/8"-18	3/8"-18	25.91	25.91	25.91	7/8"	Imperial
DANPFT28F-0808	1/2"-14	1/2"-14	1/2"-14	31.24	31.24	31.24	27 mm	Metric
DANPFT28F-0808IN	1/2"-14	1/2"-14	1/2"-14	31.24	31.24	31.24	1-1/16"	Imperial
DANPFT28F-1212	3/4"-14	3/4"-14	3/4"-14	34.54	34.54	34.54	33 mm	Metric
DANPFT28F-1212IN	3/4"-14	3/4"-14	3/4"-14	34.54	34.54	34.54	1-5/16"	Imperial
DANPFT28F-1616	1"-11-1/2	1"-11-1/2	1"-11-1/2	41.20	41.20	41.20	41 mm	Metric
DANPFT28F-1616IN	1"-11-1/2	1"-11-1/2	1"-11-1/2	41.20	41.20	41.20	1-5/8"	Imperial
DANPFT28F-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	43.20	43.20	43.20	50 mm	Metric
DANPFT28F-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	43.20	43.20	43.20	1-7/8"	Imperial
DANPFT28F-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	52.80	52.80	52.80	65 mm	Metric
DANPFT28F-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	52.80	52.80	52.80	2-9/16"	Imperial
DANPFT28F-3232	2"-11-1/2	2"-11-1/2	2"-11-1/2	60.70	60.70	60.70	70 mm	Metric
DANPFT28F-3232IN	2"-11-1/2	2"-11-1/2	2"-11-1/2	60.70	60.70	60.70	2-13/16"	Imperial






DANPST091

Branch Tee Connector NPSM Swivel Female 60° – NPSM Swivel Female 60°

D	A	NPS	T	091
Company	Product Range	Thread Types	Adaptor Structure	Connection Type
DME	Adaptor	NPSM	Branch Tee	NPSM Swivel Female



DME&JDE Code:	DANPST091
Product Type	Hydraulic Adaptor
Standard:	NPTF
Structure:	Branch Tee
Connection Type:	Swivel Female × Swivel Female × Swivel Female
Thread Types:	NPSM × NPSM × NPSM

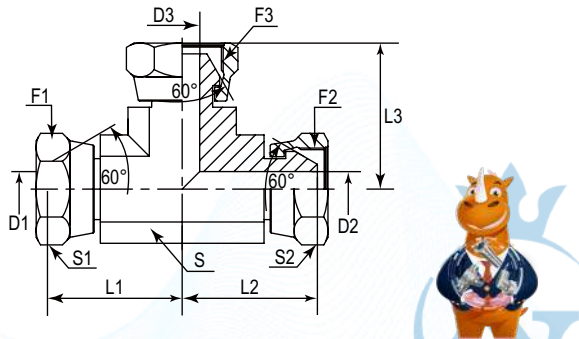

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1	S2	S3	Hex
#	NPSM	NPSM	NPSM	mm	mm	mm	mm	mm	mm	-	-	-	-	-
DANPST091-0202	1/8"-27	1/8"-27	1/8"-27	17.78	17.78	17.78	2.79	2.79	2.79	11 mm	14 mm	14 mm	14 mm	Metric
DANPST091-0202IN	1/8"-27	1/8"-27	1/8"-27	17.78	17.78	17.78	2.79	2.79	2.79	7/16"	9/16"	9/16"	9/16"	Imperial
DANPST091-0404	1/4"-18	1/4"-18	1/4"-18	22.35	22.35	22.35	5.33	5.33	5.33	14 mm	19 mm	19 mm	19 mm	Metric
DANPST091-0404IN	1/4"-18	1/4"-18	1/4"-18	22.35	22.35	22.35	5.33	5.33	5.33	9/16"	11/16"	11/16"	11/16"	Imperial
DANPST091-0606	3/8"-18	3/8"-18	3/8"-18	25.15	25.15	25.15	8.13	8.13	8.13	19 mm	22 mm	22 mm	22 mm	Metric
DANPST091-0606IN	3/8"-18	3/8"-18	3/8"-18	25.15	25.15	25.15	8.13	8.13	8.13	3/4"	7/8"	7/8"	7/8"	Imperial
DANPST091-0808	1/2"-14	1/2"-14	1/2"-14	28.20	28.20	28.20	11.18	11.18	11.18	22 mm	27 mm	27 mm	27 mm	Metric
DANPST091-0808IN	1/2"-14	1/2"-14	1/2"-14	28.20	28.20	28.20	11.18	11.18	11.18	7/8"	1"	1"	1"	Imperial
DANPST091-1212	3/4"-14	3/4"-14	3/4"-14	33.02	33.02	33.02	15.49	15.49	15.49	27 mm	32 mm	32 mm	32 mm	Metric
DANPST091-1212IN	3/4"-14	3/4"-14	3/4"-14	33.02	33.02	33.02	15.49	15.49	15.49	1-1/16"	1-1/4"	1-1/4"	1-1/4"	Imperial
DANPST091-1616	1"-11-1/2	1"-11-1/2	1"-11-1/2	38.60	38.60	38.60	19.81	19.81	19.81	33 mm	41 mm	41 mm	41 mm	Metric
DANPST091-1616IN	1"-11-1/2	1"-11-1/2	1"-11-1/2	38.60	38.60	38.60	19.81	19.81	19.81	1-5/16"	1-1/2"	1-1/2"	1-1/2"	Imperial
DANPST091-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	46.00	46.00	46.00	25.65	25.65	25.65	41 mm	50 mm	50 mm	50 mm	Metric
DANPST091-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	46.00	46.00	46.00	25.65	25.65	25.65	1-5/8"	1-7/8"	1-7/8"	1-7/8"	Imperial




DANPST28F

Branch Tee Connector NPSM Swivel Female 60° – NPTF Female

D	A	NPS	T	28	F
Company	Product Range	Thread Types	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	NPSM	Branch Tee	NPTF	Female



DME&JDE Code:	DANPST28F
Product Type	Hydraulic Adaptor
Standard:	NPTF
Structure:	Branch Tee
Connection Type:	Swivel Female × Swivel Female × Female
Thread Types:	NPSM × NPSM × NPTF

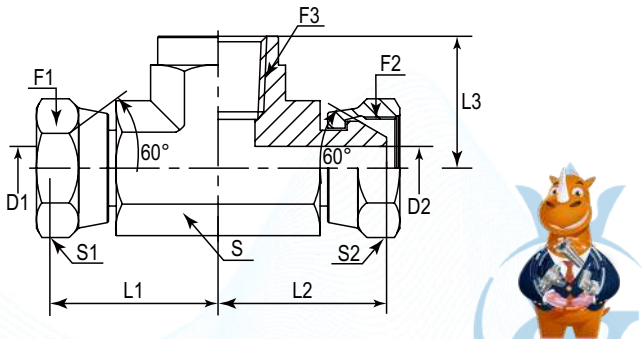

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	S	S1	S2	Hex
#	NPSM	NPSM	NPTF	mm	mm	mm	mm	mm	-	-	-	-
DANPST28F-0404	1/4"-18	1/4"-18	1/4"-18	23.50	23.50	22.40	5.33	5.33	19 mm	19 mm	19 mm	Metric
DANPST28F-0406	1/4"-18	1/4"-18	3/8"-18	25.90	25.90	25.91	5.33	5.33	22 mm	19 mm	19 mm	Metric
DANPST28F-0404IN	1/4"-18	1/4"-18	1/4"-18	23.50	23.50	22.40	5.33	5.33	3/4"	11/16"	11/16"	Imperial
DANPST28F-0406IN	1/4"-18	1/4"-18	3/8"-18	25.90	25.90	25.91	5.33	5.33	7/8"	11/16"	11/16"	Imperial
DANPST28F-0604	3/8"-18	3/8"-18	1/4"-18	25.65	25.65	22.40	8.13	8.13	19 mm	22 mm	22 mm	Metric
DANPST28F-0606	3/8"-18	3/8"-18	3/8"-18	26.00	26.00	25.90	8.13	8.13	22 mm	22 mm	22 mm	Metric
DANPST28F-0608	3/8"-18	3/8"-18	1/2"-14	29.72	29.72	31.24	8.13	8.13	27 mm	22 mm	22 mm	Metric
DANPST28F-0604IN	3/8"-18	3/8"-18	1/4"-18	25.65	25.65	22.40	8.13	8.13	3/4"	7/8"	7/8"	Imperial
DANPST28F-0606IN	3/8"-18	3/8"-18	3/8"-18	26.00	26.00	25.90	8.13	8.13	7/8"	7/8"	7/8"	Imperial
DANPST28F-0608IN	3/8"-18	3/8"-18	1/2"-14	29.72	29.72	31.24	8.13	8.13	1-1/16"	7/8"	7/8"	Imperial
DANPST28F-0808	1/2"-14	1/2"-14	1/2"-14	31.20	31.20	31.20	11.18	11.18	27 mm	27 mm	27 mm	Metric
DANPST28F-0812	1/2"-14	1/2"-14	3/4"-14	37.30	37.30	34.50	11.18	11.18	33 mm	27 mm	27 mm	Metric
DANPST28F-0808IN	1/2"-14	1/2"-14	1/2"-14	31.20	31.20	31.20	11.18	11.18	1-1/16"	1"	1"	Imperial
DANPST28F-0812IN	1/2"-14	1/2"-14	3/4"-14	37.30	37.30	34.50	11.18	11.18	1-5/16"	1"	1"	Imperial
DANPST28F-1212	3/4"-14	3/4"-14	3/4"-14	35.31	35.31	34.50	15.49	15.49	33 mm	32 mm	32 mm	Metric
DANPST28F-1216	3/4"-14	3/4"-14	1"-11-1/2	40.26	40.26	41.15	15.49	15.49	41 mm	32 mm	32 mm	Metric
DANPST28F-1212IN	3/4"-14	3/4"-14	3/4"-14	35.31	35.31	34.50	15.49	15.49	1-5/16"	1-1/4"	1-1/4"	Imperial
DANPST28F-1216IN	3/4"-14	3/4"-14	1"-11-1/2	40.26	40.26	41.15	15.49	15.49	1-5/8"	1-1/4"	1-1/4"	Imperial
DANPST28F-1612	1"-11-1/2	1"-11-1/2	3/4"-14	37.30	37.30	34.54	19.81	19.81	33 mm	32 mm	32 mm	Metric
DANPST28F-1616	1"-11-1/2	1"-11-1/2	1"-11-1/2	43.90	43.90	41.20	19.81	19.81	41 mm	41 mm	41 mm	Metric
DANPST28F-1612IN	1"-11-1/2	1"-11-1/2	3/4"-14	37.30	37.30	34.54	19.81	19.81	1-5/16"	1-1/4"	1-1/4"	Imperial
DANPST28F-1616IN	1"-11-1/2	1"-11-1/2	1"-11-1/2	43.90	43.90	41.20	19.81	19.81	1-5/8"	1-1/2"	1-1/2"	Imperial
DANPST28F-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	46.48	46.48	43.18	25.65	25.65	50 mm	50 mm	50 mm	Metric
DANPST28F-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	46.48	46.48	43.18	25.65	25.65	1-7/8"	1-7/8"	1-7/8"	Imperial
DANPST28F-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	61.21	61.21	52.8	31.75	31.75	65 mm	55 mm	55 mm	Metric
DANPST28F-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	61.21	61.21	52.8	31.75	31.75	2-9/16"	2-1/8"	2-1/8"	Imperial



DANPST28M

Branch Tee Connector NPSM Swivel Female 60° – NPTF Male 60°

D

A

NPS

T

28

M

Company

Product Range

Thread Types

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

NPSM

Branch Tee

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code: DANPST28M


Product Type Hydraulic Adaptor

Standard: NPTF

Structure: Branch Tee

Connection Type: Swivel Female × Swivel Female × Female

Thread Types: NPSM × NPSM × NPTF

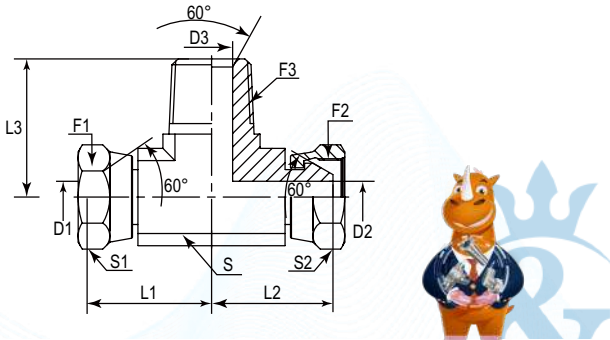

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1	S2	Hex
#	NPSM	NPSM	NPTF	mm	mm	mm	mm	mm	mm	-	-	-	-
DANPST28M-0202	1/8"-27	1/8"-27	1/8"-27	17.80	17.80	18.30	2.79	2.79	4.78	11 mm	14 mm	14 mm	Metric
DANPST28M-0202IN	1/8"-27	1/8"-27	1/8"-27	17.80	17.80	18.30	2.79	2.79	4.78	7/16"	9/16"	9/16"	Imperial
DANPST28M-0404	1/4"-18	1/4"-18	1/4"-18	22.35	22.35	27.70	5.33	5.33	7.14	14 mm	19 mm	19 mm	Metric
DANPST28M-0406	1/4"-18	1/4"-18	3/8"-18	24.00	24.00	31.00	5.33	5.33	10.31	19 mm	19 mm	19 mm	Metric
DANPST28M-0408	1/4"-18	1/4"-18	1/2"-14	24.30	24.30	37.30	5.33	5.33	13.49	22 mm	19 mm	19 mm	Metric
DANPST28M-0404IN	1/4"-18	1/4"-18	1/4"-18	22.35	22.35	27.70	5.33	5.33	7.14	9/16"	11/16"	11/16"	Imperial
DANPST28M-0406IN	1/4"-18	1/4"-18	3/8"-18	24.00	24.00	31.00	5.33	5.33	10.31	3/4"	11/16"	11/16"	Imperial
DANPST28M-0408IN	1/4"-18	1/4"-18	1/2"-14	24.30	24.30	37.30	5.33	5.33	13.49	7/8"	11/16"	11/16"	Imperial
DANPST28M-0604	3/8"-18	3/8"-18	1/4"-18	25.00	25.00	31.00	8.13	8.13	7.14	19 mm	22 mm	22 mm	Metric
DANPST28M-0606	3/8"-18	3/8"-18	3/8"-18	22.60	22.60	31.00	8.13	8.13	10.31	19 mm	22 mm	22 mm	Metric
DANPST28M-0608	3/8"-18	3/8"-18	1/2"-14	26.41	26.41	37.30	8.13	8.13	13.49	22 mm	22 mm	22 mm	Metric
DANPST28M-0604IN	3/8"-18	3/8"-18	1/4"-18	25.00	25.00	31.00	8.13	8.13	7.14	3/4"	7/8"	7/8"	Imperial
DANPST28M-0606IN	3/8"-18	3/8"-18	3/8"-18	22.60	22.60	31.00	8.13	8.13	10.31	3/4"	7/8"	7/8"	Imperial
DANPST28M-0608IN	3/8"-18	3/8"-18	1/2"-14	26.41	26.41	37.30	8.13	8.13	13.49	7/8"	7/8"	7/8"	Imperial
DANPST28M-0806	1/2"-14	1/2"-14	3/8"-18	28.19	28.19	37.30	11.18	11.18	10.31	22 mm	27 mm	27 mm	Metric
DANPST28M-0808	1/2"-14	1/2"-14	1/2"-14	28.20	28.20	37.30	11.18	11.18	13.49	22 mm	27 mm	27 mm	Metric
DANPST28M-0812	1/2"-14	1/2"-14	3/4"-14	33.78	33.78	40.40	11.18	11.18	18.26	27 mm	27 mm	27 mm	Metric
DANPST28M-0806IN	1/2"-14	1/2"-14	3/8"-18	28.19	28.19	37.30	11.18	11.18	10.31	7/8"	1"	1"	Imperial
DANPST28M-0808IN	1/2"-14	1/2"-14	1/2"-14	28.20	28.20	37.30	11.18	11.18	13.49	7/8"	1"	1"	Imperial
DANPST28M-0812IN	1/2"-14	1/2"-14	3/4"-14	33.78	33.78	40.40	11.18	11.18	18.26	1-1/16"	1"	1"	Imperial
DANPST28M-1212	3/4"-14	3/4"-14	3/4"-14	33.00	33.00	40.40	15.49	15.49	18.26	27 mm	32 mm	32 mm	Metric
DANPST28M-1216	3/4"-14	3/4"-14	1"-11-1/2	36.30	36.30	50.00	15.49	15.49	23.83	33 mm	32 mm	32 mm	Metric
DANPST28M-1212IN	3/4"-14	3/4"-14	3/4"-14	33.00	33.00	40.40	15.49	15.49	18.26	1-1/16"	1-1/4"	1-1/4"	Imperial
DANPST28M-1216IN	3/4"-14	3/4"-14	1"-11-1/2	36.30	36.30	50.00	15.49	15.49	23.83	1-5/16"	1-1/4"	1-1/4"	Imperial
DANPST28M-1612	1"-11-1/2	1"-11-1/2	3/4"-14	39.62	39.62	50.00	19.81	19.81	18.26	33 mm	41 mm	41 mm	Metric
DANPST28M-1616	1"-11-1/2	1"-11-1/2	1"-11-1/2	39.12	39.12	50.00	19.81	19.81	23.83	33 mm	41 mm	41 mm	Metric
DANPST28M-1612IN	1"-11-1/2	1"-11-1/2	3/4"-14	39.62	39.62	50.00	19.81	19.81	18.26	1-5/16"	1-1/2"	1-1/2"	Imperial
DANPST28M-1616IN	1"-11-1/2	1"-11-1/2	1"-11-1/2	39.12	39.12	50.00	19.81	19.81	23.83	1-5/16"	1-1/2"	1-1/2"	Imperial
DANPST28M-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	43.90	43.90	60.50	25.65	25.65	31.75	41 mm	50 mm	50 mm	Metric
DANPST28M-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	43.90	43.90	60.50	25.65	25.65	31.75	1-5/8"	1-7/8"	1-7/8"	Imperial
DANPST28M-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	48.01	48.01	67.10	31.75	31.75	38.10	50 mm	55 mm	55 mm	Metric
DANPST28M-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	48.01	48.01	67.10	31.75	31.75	38.10	1-7/8"	2-1/8"	2-1/8"	Imperial

Certificate:



DANPML25M

Run Tee Connector NPTF Male 60° – JIC Male 74°

D

A

NP

M

L

25

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

NPTF

Male

Run Tee

JIC UNF

Male

 German Technology Equipment



New-Standard

DME&JDE Code: DANPML25M


Product Type Hydraulic Adaptor

Standard: NPTF

Structure: Run Tee

Connection Type: Male × Male × Male

Thread Types: NPTF × UNF × NPTF

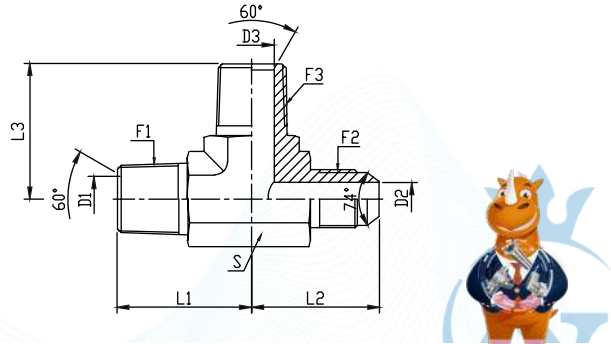

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	Hex
#	NPTF	UNF	NPTF	mm	mm	mm	mm	mm	mm	-	-
DANPML25M-0204	1/8"-27	7/16"-20	1/8"-27	4.78	4.37	4.78	19.80	22.60	19.80	11 mm	Metric
DANPML25M-0204IN	1/8"-27	7/16"-20	1/8"-27	4.78	4.37	4.78	19.80	22.60	19.80	7/16"	Imperial
DANPML25M-0406	1/4"-18	9/16"-18	1/4"-18	7.14	7.54	7.14	27.70	26.90	27.70	14 mm	Metric
DANPML25M-0406IN	1/4"-18	9/16"-18	1/4"-18	7.14	7.54	7.14	27.70	26.90	27.70	9/16"	Imperial
DANPML25M-0606	3/8"-18	9/16"-18	3/8"-18	10.31	7.54	10.31	31.00	28.96	31.00	19 mm	Metric
DANPML25M-0608	3/8"-18	3/4"-16	3/8"-18	10.31	9.93	10.31	31.00	31.80	31.00	19 mm	Metric
DANPML25M-0606IN	3/8"-18	9/16"-18	3/8"-18	10.31	7.54	10.31	31.00	28.96	31.00	3/4"	Imperial
DANPML25M-0608IN	3/8"-18	3/4"-16	3/8"-18	10.31	9.93	10.31	31.00	31.80	31.00	3/4"	Imperial
DANPML25M-0808	1/2"-14	3/4"-16	1/2"-14	13.49	9.93	13.49	37.30	31.80	37.30	22 mm	Metric
DANPML25M-0810	1/2"-14	7/8"-14	1/2"-14	13.49	12.29	13.49	37.30	36.80	37.30	22 mm	Metric
DANPML25M-0808IN	1/2"-14	3/4"-16	1/2"-14	13.49	9.93	13.49	37.30	31.80	37.30	7/8"	Imperial
DANPML25M-0810IN	1/2"-14	7/8"-14	1/2"-14	13.49	12.29	13.49	37.30	36.80	37.30	7/8"	Imperial
DANPML25M-1212	3/4"-14	1-1/16"-12	3/4"-14	18.26	15.47	18.26	40.39	42.16	40.39	27 mm	Metric
DANPML25M-1212IN	3/4"-14	1-1/16"-12	3/4"-14	18.26	15.47	18.26	40.39	42.16	40.39	1-1/8"	Imperial
DANPML25M-1616	1"-11-1/2	1-5/16"-12	1"-11-1/2	23.83	21.44	23.83	50.04	45.97	50.04	33 mm	Metric
DANPML25M-1616IN	1"-11-1/2	1-5/16"-12	1"-11-1/2	23.83	21.44	23.83	50.04	45.97	50.04	1-5/16"	Imperial
DANPML25M-2020	1-1/4"-11-1/2	1-5/8"-12	1-1/4"-11-1/2	31.75	27.38	31.75	60.45	52.32	60.45	41 mm	Metric
DANPML25M-2020IN	1-1/4"-11-1/2	1-5/8"-12	1-1/4"-11-1/2	31.75	27.38	31.75	60.45	52.32	60.45	1-1/2"	Imperial
DANPML25M-2424	1-1/2"-11-1/2	1-7/8"-12	1-1/2"-11-1/2	38.10	33.32	38.10	67.10	59.20	67.10	48 mm	Metric
DANPML25M-2424IN	1-1/2"-11-1/2	1-7/8"-12	1-1/2"-11-1/2	38.10	33.32	38.10	67.10	59.20	67.10	1-7/8"	Imperial

Certificate:




DANPFL25M

Run Tee Connector NPTF Female – JIC Male 74°

D	A	NP	F	L	25	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	NPTF	Female	Run Tee	JIC UNF	Male



DME&JDE Code:	DANPFL25M
Product Type	Hydraulic Adaptor
Standard:	NPTF
Structure:	Run Tee
Connection Type:	Male × Female × Female
Thread Types:	NPTF × UNF × NPTF

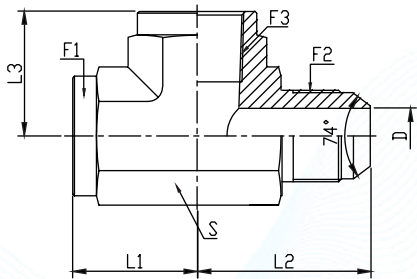

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D	L1	L2	L3	S	Hex
#	NPTF	UNF	NPTF	mm	mm	mm	mm	-	-
DANPFL25M-0204	1/8"-28	7/16"-20	1/8"-28	4.37	16.80	27.40	16.80	14 mm	Metric
DANPFL25M-0204IN	1/8"-28	7/16"-20	1/8"-28	4.37	16.80	27.40	16.80	9/16"	Imperial
DANPFL25M-0404	1/4"-18	7/16"-20	1/4"-18	4.37	22.35	31.00	22.35	19 mm	Metric
DANPFL25M-0406	1/4"-18	9/16"-18	1/4"-18	7.54	22.40	31.20	22.40	19 mm	Metric
DANPFL25M-0404IN	1/4"-18	7/16"-20	1/4"-18	4.37	22.35	31.00	22.35	3/4"	Imperial
DANPFL25M-0406IN	1/4"-18	9/16"-18	1/4"-18	7.54	22.40	31.20	22.40	3/4"	Imperial
DANPFL25M-0608	3/8"-18	3/4"-16	3/8"-18	9.93	25.90	36.10	25.90	22 mm	Metric
DANPFL25M-0608IN	3/8"-18	3/4"-16	3/8"-18	9.93	25.90	36.10	25.90	7/8"	Imperial
DANPFL25M-0808	1/2"-14	3/4"-16	1/2"-14	9.93	31.24	38.61	31.24	27 mm	Metric
DANPFL25M-0810	1/2"-14	7/8"-14	1/2"-14	12.29	31.20	41.70	31.20	27 mm	Metric
DANPFL25M-0808IN	1/2"-14	3/4"-16	1/2"-14	9.93	31.24	38.61	31.24	1-1/8"	Imperial
DANPFL25M-0810IN	1/2"-14	7/8"-14	1/2"-14	12.29	31.20	41.70	31.20	1-1/8"	Imperial
DANPFL25M-1212	3/4"-14	1-1/16"-12	3/4"-14	15.47	34.50	48.00	34.50	33 mm	Metric
DANPFL25M-1212IN	3/4"-14	1-1/16"-12	3/4"-14	15.47	34.50	48.00	34.50	1-5/16"	Imperial
DANPFL25M-1616	1"-11-1/2	1-5/16"-12	1"-11-1/2	21.44	41.15	55.12	41.15	41 mm	Metric
DANPFL25M-1616IN	1"-11-1/2	1-5/16"-12	1"-11-1/2	21.44	41.15	55.12	41.15	1-1/2"	Imperial
DANPFL25M-2020	1-1/4"-11-1/2	1-5/8"-12	1"1/4-11-1/2	27.38	43.20	59.20	43.20	48 mm	Metric
DANPFL25M-2020IN	1-1/4"-11-1/2	1-5/8"-12	1"1/4-11-1/2	27.38	43.20	59.20	43.20	1-7/8"	Imperial
DANPFL25M-2424	1-1/2"-11-1/2	1-7/8"-12	1"1/2-11-1/2	33.32	52.80	73.40	52.80	65 mm	Metric
DANPFL25M-2424IN	1-1/2"-11-1/2	1-7/8"-12	1"1/2-11-1/2	33.32	52.80	73.40	52.80	2-5/8"	Imperial


DANPFL28M

Run Tee Connector NPTF Female – NPTF Male 60°

D	A	NP	F	L	28	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	NPTF	Female	Run Tee	NPTF	Male



DME&JDE Code:	DANPFL28M
Product Type	Hydraulic Adaptor
Standard:	NPTF
Structure:	Run Tee
Connection Type:	Female × Male × Male
Thread Types:	NPTF × NPTF × NPTF

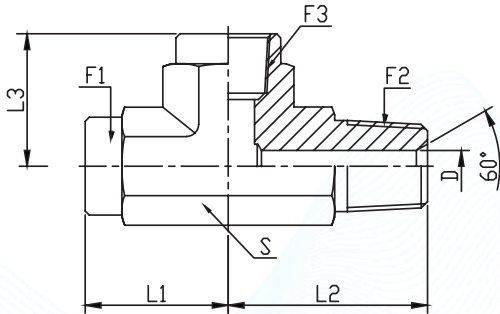

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L2	L1	L3	D	S	Hex
#	NPTF	NPTF	NPTF	mm	mm	mm	mm	-	-
DANPFL28M-0202	1/8"-27	1/8"-27	1/8"-27	19.80	16.80	16.80	4.78	14 mm	Metric
DANPFL28M-0204	1/4"-18	1/8"-27	1/4"-18	22.86	22.35	22.35	4.78	19 mm	Metric
DANPFL28M-0202IN	1/8"-27	1/8"-27	1/8"-27	19.80	16.80	16.80	4.78	9/16"	Imperial
DANPFL28M-0204IN	1/4"-18	1/8"-27	1/4"-18	22.86	22.35	22.35	4.78	3/4"	Imperial
DANPFL28M-0404	1/4"-18	1/4"-18	1/4"-18	27.69	22.35	22.35	7.14	19 mm	Metric
DANPFL28M-0404IN	1/4"-18	1/4"-18	1/4"-18	27.69	22.35	22.35	7.14	3/4"	Imperial
DANPFL28M-0606	3/8"-18	3/8"-18	3/8"-18	30.99	25.91	25.91	10.31	22 mm	Metric
DANPFL28M-0606IN	3/8"-18	3/8"-18	3/8"-18	30.99	25.91	25.91	10.31	7/8"	Imperial
DANPFL28M-0808	1/2"-14	1/2"-14	1/2"-14	37.34	31.24	31.24	13.49	27 mm	Metric
DANPFL28M-0808IN	1/2"-14	1/2"-14	1/2"-14	37.34	31.24	31.24	13.49	1-1/16"	Imperial
DANPFL28M-1212	3/4"-14	3/4"-14	3/4"-14	40.39	34.54	34.54	18.26	33 mm	Metric
DANPFL28M-1212IN	3/4"-14	3/4"-14	3/4"-14	40.39	34.54	34.54	18.26	1-5/16"	Imperial
DANPFL28M-1616	1"-11-1/2	1"-11-1/2	1"-11-1/2	50.00	41.20	41.20	23.83	41 mm	Metric
DANPFL28M-1616IN	1"-11-1/2	1"-11-1/2	1"-11-1/2	50.00	41.20	41.20	23.83	1-5/8"	Imperial
DANPFL28M-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	60.50	43.20	43.20	31.75	50 mm	Metric
DANPFL28M-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	60.50	43.20	43.20	31.75	1-7/8"	Imperial
DANPFL28M-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	67.10	52.80	52.80	38.10	65 mm	Metric
DANPFL28M-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	67.10	52.80	52.80	38.10	2-9/16"	Imperial
DANPFL28M-3232	2"-11-1/2	2"-11-1/2	2"-11-1/2	76.20	60.70	60.70	49.23	70 mm	Metric
DANPFL28M-3232IN	2"-11-1/2	2"-11-1/2	2"-11-1/2	76.20	60.70	60.70	49.23	2-13/16"	Imperial

DANPML28F

Run Tee Connector NPTF Male 60° – NPTF Female

D

A

NP

M

L

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

NPTF

Male

Run Tee

NPTF

Female

German Technology Equipment

New-Standard

DME&JDE Code:

DANPML28F

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


Run Tee

Connection Type:

Male × Female × Male

Thread Types:

NPTF × NPTF × NPTF

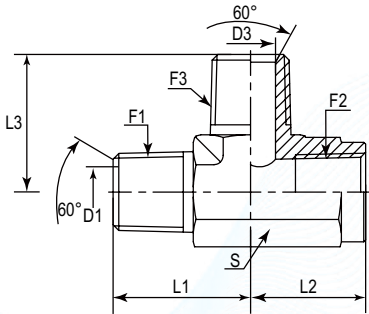

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D3	S	Hex
#	NPTF	NPTF	NPTF	mm	mm	mm	mm	mm	-	-
DANPML28F-0202	1/8"-27	1/8"-27	1/8"-27	19.80	16.80	19.80	4.78	4.78	14 mm	Metric
DANPML28F-0202IN	1/8"-27	1/8"-27	1/8"-27	19.80	16.80	19.80	4.78	4.78	9/16"	Imperial
DANPML28F-0404	1/4"-18	1/4"-18	1/4"-18	27.70	22.40	27.70	7.14	7.14	19 mm	Metric
DANPML28F-0404IN	1/4"-18	1/4"-18	1/4"-18	27.70	22.40	27.70	7.14	7.14	3/4"	Imperial
DANPML28F-0606	3/8"-18	3/8"-18	3/8"-18	31.00	25.90	31.00	10.31	10.31	22 mm	Metric
DANPML28F-0606IN	3/8"-18	3/8"-18	3/8"-18	31.00	25.90	31.00	10.31	10.31	7/8"	Imperial
DANPML28F-0808	1/2"-14	1/2"-14	1/2"-14	37.30	31.20	37.30	13.49	13.49	27 mm	Metric
DANPML28F-0808IN	1/2"-14	1/2"-14	1/2"-14	37.30	31.20	37.30	13.49	13.49	1-1/16"	Imperial
DANPML28F-1212	3/4"-14	3/4"-14	3/4"-14	40.40	34.50	40.40	18.26	18.26	33 mm	Metric
DANPML28F-1212IN	3/4"-14	3/4"-14	3/4"-14	40.40	34.50	40.40	18.26	18.26	1-5/16"	Imperial
DANPML28F-1616	1"-11-1/2	1"-11-1/2	1"-11-1/2	50.00	41.20	50.00	23.83	23.83	41 mm	Metric
DANPML28F-1616IN	1"-11-1/2	1"-11-1/2	1"-11-1/2	50.00	41.20	50.00	23.83	23.83	1-5/8"	Imperial
DANPML28F-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	60.50	43.20	60.50	31.75	31.75	50 mm	Metric
DANPML28F-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	60.50	43.20	60.50	31.75	31.75	1-7/8"	Imperial
DANPML28F-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	67.10	52.80	67.10	38.10	38.10	65 mm	Metric
DANPML28F-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	67.10	52.80	67.10	38.10	38.10	2-9/16"	Imperial
DANPML28F-3232	2"-11-1/2	2"-11-1/2	2"-11-1/2	76.20	60.70	76.20	49.23	49.23	70 mm	Metric
DANPML28F-3232IN	2"-11-1/2	2"-11-1/2	2"-11-1/2	76.20	60.70	76.20	49.23	49.23	2-13/16"	Imperial

Certificate:

DANPFX28F

Cross Connector NPTF Female

D

A

NP

F

X

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Adaptor

NPTF

Female

Cross

NPTF

Female

German Technology Equipment

New-Standard

DME&JDE Code:

DANPFX28F

Product Type

Hydraulic Adaptor

Standard:

NPTF

Structure:


Cross

Connection Type:

Female × Female × Female × Female

Thread Types:

NPTF × NPTF × NPTF × NPTF

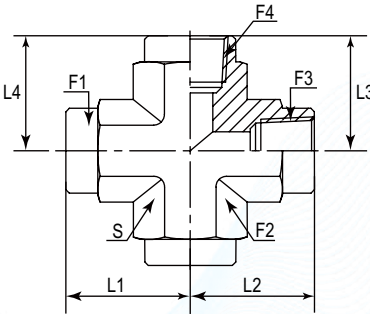

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	F4 (Thread)	L1	L2	L3	L4	S	Hex
#	NPTF	NPTF	NPTF	NPTF	mm	mm	mm	mm	-	-
DANPFX28F-0202	1/8"-27	1/8"-27	1/8"-27	1/8"-27	16.80	16.80	16.80	16.80	14 mm	Metric
DANPFX28F-0202IN	1/8"-27	1/8"-27	1/8"-27	1/8"-27	16.80	16.80	16.80	16.80	9/16"	Imperial
DANPFX28F-0404	1/4"-18	1/4"-18	1/4"-18	1/4"-18	22.40	22.40	22.40	22.40	19 mm	Metric
DANPFX28F-0404IN	1/4"-18	1/4"-18	1/4"-18	1/4"-18	22.40	22.40	22.40	22.40	3/4"	Imperial
DANPFX28F-0606	3/8"-18	3/8"-18	3/8"-18	3/8"-18	25.90	25.90	25.90	25.90	22 mm	Metric
DANPFX28F-0606IN	3/8"-18	3/8"-18	3/8"-18	3/8"-18	25.90	25.90	25.90	25.90	7/8"	Imperial
DANPFX28F-0808	1/2"-14	1/2"-14	1/2"-14	1/2"-14	31.20	31.20	31.20	31.20	27 mm	Metric
DANPFX28F-0808IN	1/2"-14	1/2"-14	1/2"-14	1/2"-14	31.20	31.20	31.20	31.20	1-1/16"	Imperial
DANPFX28F-1212	3/4"-14	3/4"-14	3/4"-14	3/4"-14	34.50	34.50	34.50	34.50	33 mm	Metric
DANPFX28F-1212IN	3/4"-14	3/4"-14	3/4"-14	3/4"-14	34.50	34.50	34.50	34.50	1-5/16"	Imperial
DANPFX28F-1616	1"-11-1/2	1"-11-1/2	1"-11-1/2	1"-11-1/2	41.20	41.20	41.20	41.20	41 mm	Metric
DANPFX28F-1616IN	1"-11-1/2	1"-11-1/2	1"-11-1/2	1"-11-1/2	41.20	41.20	41.20	41.20	1-5/8"	Imperial
DANPFX28F-2020	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	43.20	43.20	43.20	43.20	48 mm	Metric
DANPFX28F-2020IN	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	1-1/4"-11-1/2	43.20	43.20	43.20	43.20	1-7/8"	Imperial
DANPFX28F-2424	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	52.80	52.80	52.80	52.80	65 mm	Metric
DANPFX28F-2424IN	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	1-1/2"-11-1/2	52.80	52.80	52.80	52.80	2-9/16"	Imperial
DANPFX28F-3232	2"-11-1/2	2"-11-1/2	2"-11-1/2	2"-11-1/2	60.70	60.70	60.70	60.70	71 mm	Metric
DANPFX28F-3232IN	2"-11-1/2	2"-11-1/2	2"-11-1/2	2"-11-1/2	60.70	60.70	60.70	60.70	2-13/16"	Imperial

Certificate:




Hydraulic Adaptors

DIN 2353 »




Certificate:

DU
P567




Straight Connector

DU-LH
P568




Straight Connector Large Hexagon

DL
P569




Connector 90° Elbow

DUR
P570




Straight Connector

DUR-LH
P571




Reducing Straight Connector Large Hexagon

DT
P572




Connector Tee

DC
P573




Connector Cross

DTR
P574




Reducing Tee

DBU
P576




Bulkhead Connector

DBL
P577




Bulkhead Connector Elbow

DOM-U
P578




Male Connector (JIC Male) with O Ring

DOM-M
P580




DIN2353 Male Connector Metric Male with O Ring

DMC-G
P581




Bulkhead Connector

DMC-G-60
P583




Male Connector (BSPP Male) with 60° Cone Seal

DMC-R
P584



Male Connector (BSPT 60° Male) with Form C Stud End


DMC-M
P586



Metric Male Connector with Cutting Face

DMC-N


P587



Male Connector (NPTF 60° Male)
with Form C Stud End

DMC-JC


P589



Male Connector (JIC male)

DMC-FS


P591



DIN2353 Male Connector ORFS
Male

DMC-GQ


P592



DIN 2353 Male Connector (BSPP
Male) with O Ring and Retaining
Ring

DMC-MQ


P593



DIN 2353 Male Connector Metric
Male with O Ring and Retaining
Ring

DMCQ-JC


P594



DIN 2353 Male Connector O Ring
and Retaining Ring (JIC male)

DMC-GED


P596



Male Connector (BSPP Male)
with ED Ring

DMC-MED


P598



Metric Male Connector with ED
Ring

DBMC-GED


P600

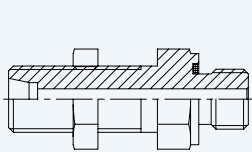

Male Bulkhead Connector (BSPP)
with ED Ring

DLM-G


P601



DIN 2353 90° Elbow BSPP Male

DLM-R


P602



90° Elbow BSPT Male

DLM-N


P603



90° Elbow NPTF Male

DFC-N


P604



Female Connector NPTF Female

DFC-G


P605



Female Connector BSPP Female

DFC-M


P606



Female Connector Metric
Female

DQFC-N


P607



Male Connector (NPTF Male)
with Form X Tapped Holes

DLA


P608



Adjustable 90° Elbow with
Standard Pipe

DED


P609



Swivel Female Connector with
24° Cone

DEW


P610



Swivel Adjustable 90° Elbow
With 24° Cone

DEV


P611



DIN 2353 Adjustable 45° Male
Stud Elbow

DET


P612



Swivel Adjustable Branch Tee
with 24° Cone

DEL


P613



Swivel Adjustable Run Tee with
24° Cone

DR


P614



Reducer Straight Adapter Male
24° - Standpipe

DRED-L


P615



Swivel Reducing Connector with
24° Cone L Series

DRED-S


P616



Swivel Reducing Connector with
24° Cone S Series

DEGE-G


P617



Swivel Female Connector (BSPP
Male) with 24° Cone and ED Ring

DEGE-M


P618



Swivel Female Connector (Metric
Male) with 24° Cone and ED Ring

DEGE-U


P619



DIN 2353 Swivel Female
Connector SAE MALE with O Ring

DUE


P620



Swivel Female Connector with
24° Cone

DUER


P621



DIN 2353 Swivel Female
Reducing Coupling with 24° Cone

DAS


P622



Welding Connector

DAK


P623



Welding Nipple with O Ring

MFAD-ED


P624



Male Female Bushing Connector
BSPP with ED Ring

MFAE-ED


P625



Male Female Connector BSPP
with ED Ring

DVSTI-GED


P626



Blanking Plug BSPP for Port
with ED Ring

DVSTI-MED


P627



Blanking Plug Metric for Port
with ED Ring

DSVW-G


P628



Banjo Coupling BSPP with ED
Ring

DSVW-M


P629



Banjo Coupling Metric with ED
Ring

DVKA


P630



Blank Plug with O Ring Port with
ED Ring

DCA


P631



Tube Cap

DN


P632



Tube Nut

DS


P633



Cutting Ring

DL4-GQ


P634



DIN 2353 Adjustable Elbow 45° BSPP
Male O Ring and Retaining Ring

DL4-MQ


P635



DIN 2353 Adjustable Elbow 45° Metric
Male O Ring and Retaining Ring

DL-GQ


P636



Adjustable Elbow BSPP Male
ORB

DL-MQ

P637



Adjustable Elbow Metric Male
ORB

DLN


P638



Bulkhead Nut

DBUW


P639



Long Hexagon Metric Male

DGC


P640



Female Connector Metric
Female With DKl

MJ-BJBP


P641



Straight Connector JIC Male -
Banjo BSP

DA-J


P642



Welding Elbows

DEGE-JC


P643



Swivel Female Connector JIC
Male with 24° Cone

DEGE-GQ


P644



Swivel Female Connector BSPP
Male with 24° Cone and O Ring
+ Retaining Ring

DEGE-N


P645



Swivel Female Connector (NPTF
Male) with 24° Cone

DEWGE


P646



DIN 2353 Swivel Adjustable
90° Elbow JIC Male

DGE


P647



Swivel Connector (Metric
Female) with 24° Cone and DKl

DLS


P648



Welding Elbows

DTLM


P649



Adjustable Run Tee with BSPT
Male

DTL-MQ


P650



DIN 2353 Adjustable Run Tee with
Metric Male O Ring and Retaining Ring

DTL-GQ


P651



DIN 2353 Adjustable Run Tee with BSPP
Male + O Ring + Retaining Ring

DTT-MQ


P652



DIN 2353 Adjustable Branch Tee
with Metric Male O Ring and
Retaining Ring

DTT-GQ


P653



DIN 2353 Adjustable Branch
Tee with BSPP Male + O Ring +
Retaining Ring

DTTM

P654




Adjustable Branch Tee with
BSPT Male

DU

Straight Connector



- DME&JDE Code: DU
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Thread Types: Metric x Metric




Filter the F1 Thread through selecting the -XX options								
PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DU-06L	M12X1.5	M12X1.5	10.00	10.00	4.00	4.00	24.00	12.00
DU-06LL	M10X1	M10X1	8.00	8.00	4.50	4.50	20.00	11.00
DU-06S	M14X1.5	M14X1.5	12.00	12.00	4.00	4.00	30.00	14.00
DU-08L	M14X1.5	M14X1.5	10.00	10.00	6.00	6.00	25.00	14.00
DU-08LL	M12X1	M12X1	9.00	9.00	6.00	6.00	23.00	12.00
DU-08S	M16X1.5	M16X1.5	12.00	12.00	5.00	5.00	32.00	17.00
DU-10L	M16X1.5	M16X1.5	11.00	11.00	8.00	8.00	27.00	17.00
DU-10S	M18X1.5	M18X1.5	12.00	12.00	7.00	7.00	32.00	19.00
DU-12L	M18X1.5	M18X1.5	11.00	11.00	10.00	10.00	28.00	19.00
DU-12S	M20X1.5	M20X1.5	12.00	12.00	8.00	8.00	34.00	22.00
DU-14S	M22X1.5	M22X1.5	14.00	14.00	10.00	10.00	38.00	24.00
DU-15L	M22X1.5	M22X1.5	12.00	12.00	12.00	12.00	30.00	24.00
DU-16S	M24X1.5	M24X1.5	14.00	14.00	12.00	12.00	38.00	27.00
DU-18L	M26X1.5	M26X1.5	12.00	12.00	15.00	15.00	31.00	27.00
DU-20S	M30X2	M30X2	16.00	16.00	16.00	16.00	44.00	32.00
DU-22L	M30X2	M30X2	14.00	14.00	19.00	19.00	35.00	32.00
DU-25S	M36X2	M36X2	18.00	18.00	20.00	20.00	50.00	41.00
DU-28L	M36X2	M36X2	14.00	14.00	24.00	24.00	36.00	41.00
DU-30S	M42X2	M42X2	20.00	20.00	25.00	25.00	54.00	46.00
DU-38S	M52X2	M52X2	22.00	22.00	32.00	32.00	61.00	55.00

DU-LH

Straight Connector Large Hexagon



- DME&JDE Code: DU-LH
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Thread Types: Metric x Metric
- Other Features: Hexagon

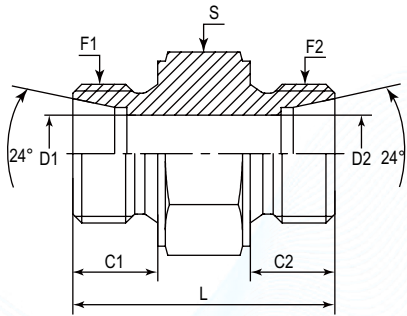


PART NUMBER	F1/F2 (Thread)	C1/C2	D1/D2	L	S
#	Metric	mm	mm	mm	mm
DU-LH-04LL	M8X1	8.00	8.00	24.00	12.00
DU-LH-06L	M12X1.5	10.00	4.00	30.00	17.00
DU-LH-08L	M14X1.5	10.00	6.00	30.00	19.00
DU-LH-10L	M16X1.5	11.00	8.00	32.00	22.00
DU-LH-12L	M18X1.5	11.00	10.00	34.00	24.00
DU-LH-12S	M20X1.5	12.00	8.00	36.50	27.00
DU-LH-15L	M22X1.5	12.00	12.00	37.00	27.00
DU-LH-16S	M24X1.5	14.00	12.00	40.00	30.00
DU-LH-18L	M26X1.5	12.00	15.00	39.00	32.00
DU-LH-22L	M30X2	14.00	19.00	42.00	36.00
DU-LH-25S	M36X2	18.00	20.00	53.00	46.00
DU-LH-28L	M36X2	14.00	24.00	44.50	46.00
DU-LH-30A	M30X1.5	14.00	19.00	44.00	36.00
DU-LH-30S	M42X2	20.00	25.00	56.00	50.00
DU-LH-35L	M45X2	16.00	30.00	52.00	55.00
DU-LH-M27	M27X2	12.00	15.00	39.00	32.00
DU-LH-M27A	M27X1.5	12.00	15.00	39.00	32.00

DL

Connector 90° Elbow



- DME&JDE Code:DL
- Product TypeHydraulic adaptor
- Standard:DIN 2353
- Structure:90° Elbow
- Thread Types:Metric × Metric




PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S
#	Metric	Metric	mm	mm	mm	mm	mm
DL-04LL	M8X1	M8X1	15.10	15.10	3.00	3.00	9.00
DL-06L	M12X1.5	M12X1.5	19.00	19.00	4.00	4.00	12.00
DL-06LL	M10X1	M10X1	15.00	15.00	4.50	4.50	9.00
DL-06S	M14X1.5	M14X1.5	23.00	23.00	4.00	4.00	12.00
DL-08L	M14X1.5	M14X1.5	21.00	21.00	6.00	6.00	12.00
DL-08LL	M12X1	M12X1	17.00	17.00	6.00	6.00	12.00
DL-08S	M16X1.5	M16X1.5	24.00	24.00	5.00	5.00	14.00
DL-10L	M16X1.5	M16X1.5	22.00	22.00	8.00	8.00	14.00
DL-10S	M18X1.5	M18X1.5	25.00	25.00	7.00	7.00	17.00
DL-12L	M18X1.5	M18X1.5	24.00	24.00	10.00	10.00	17.00
DL-12S	M20X1.5	M20X1.5	29.00	29.00	8.00	8.00	17.00
DL-14S	M22X1.5	M22X1.5	30.00	30.00	10.00	10.00	19.00
DL-15L	M22X1.5	M22X1.5	28.00	28.00	12.00	12.00	19.00
DL-16S	M24X1.5	M24X1.5	33.00	33.00	12.00	12.00	24.00
DL-18L	M26X1.5	M26X1.5	31.00	31.00	15.00	15.00	24.00
DL-20S	M30X2	M30X2	37.00	37.00	16.00	16.00	27.00
DL-22L	M30X2	M30X2	35.00	35.00	19.00	19.00	27.00
DL-25S	M36X2	M36X2	42.00	42.00	20.00	20.00	36.00
DL-28L	M36X2	M36X2	38.00	38.00	24.00	24.00	36.00
DL-30S	M42X2	M42X2	49.00	49.00	25.00	25.00	41.00
DL-35L	M45X2	M45X2	45.00	45.00	30.00	30.00	41.00
DL-38S	M52X2	M52X2	57.00	57.00	32.00	32.00	50.00
DL-42L	M52X2	M52X2	51.00	51.00	36.00	36.00	50.00

DUR

Straight Connector



- DME&JDE Code:DUR
- Product TypeHydraulic adaptor
- Standard:DIN 2353
- Structure:Straight
- Thread Types:Metric × Metric




PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DUR-08L-06L	M14X1.5	M12X1.5	10.00	10.00	6.00	4.00	25.00	14.00
DUR-10L-06L	M16X1.5	M12X1.5	11.00	10.00	8.00	4.00	26.00	17.00
DUR-10L-08L	M16X1.5	M14X1.5	11.00	10.00	6.00	6.00	26.00	17.00
DUR-12L-06L	M18X1.5	M12X1.5	11.00	10.00	10.00	4.00	27.00	19.00
DUR-12L-08L	M18X1.5	M14X1.5	11.00	10.00	10.00	6.00	27.00	19.00
DUR-12L-10L	M18X1.5	M16X1.5	11.00	11.00	8.00	8.00	28.00	19.00
DUR-12S-08S	M20X1.5	M16X1.5	12.00	12.00	8.00	5.00	34.00	22.00
DUR-12S-10S	M20X1.5	M18X1.5	12.00	12.00	7.00	7.00	34.00	24.00
DUR-12S-12L	M20X1.5	M18X1.5	12.00	11.00	8.00	10.00	33.00	22.00
DUR-14S-10S	M22X1.5	M18X1.5	14.00	12.00	10.00	7.00	36.00	24.00
DUR-14S-12S	M22X1.5	M20X1.5	14.00	12.00	8.00	8.00	36.00	24.00
DUR-15L-08L	M22X1.5	M14X1.5	12.00	10.00	12.00	6.00	28.00	24.00
DUR-15L-10L	M22X1.5	M16X1.5	12.00	11.00	12.00	8.00	29.00	24.00
DUR-15L-12L	M22X1.5	M18X1.5	12.00	11.00	12.00	10.00	29.00	24.00
DUR-16S-12S	M24X1.5	M20X1.5	14.00	12.00	12.00	8.00	36.00	27.00
DUR-16S-14S	M24X1.5	M22X1.5	14.00	14.00	12.00	10.00	38.00	27.00
DUR-16S-15L	M24X1.5	M22X1.5	14.00	12.00	12.00	12.00	36.00	27.00
DUR-18L-10L	M26X1.5	M16X1.5	12.00	11.00	15.00	8.00	30.00	27.00
DUR-18L-12L	M26X1.5	M18X1.5	12.00	11.00	15.00	10.00	30.00	27.00
DUR-18L-15L	M26X1.5	M22X1.5	12.00	12.00	12.00	12.00	31.00	27.00
DUR-18L-16S	M26X1.5	M24X1.5	12.00	14.00	15.00	12.00	36.00	27.00
DUR-20S-10S	M30X2	M18X1.5	16.00	12.00	7.00	7.00	40.00	32.00
DUR-20S-12S	M30X2	M20X1.5	16.00	12.00	16.00	8.00	40.00	32.00
DUR-20S-16S	M30X2	M24X1.5	16.00	14.00	16.00	12.00	42.00	32.00
DUR-22L-12L	M30X2	M18X1.5	14.00	11.00	10.00	10.00	32.00	32.00
DUR-22L-15L	M30X2	M22X1.5	14.00	12.00	19.00	12.00	33.00	32.00
DUR-22L-18L	M30X2	M26X1.5	14.00	12.00	15.00	15.00	33.00	32.00
DUR-25S-16S	M36X2	M24X1.5	18.00	14.00	20.00	12.00	46.00	41.00
DUR-25S-20S	M36X2	M30X2	18.00	16.00	16.00	16.00	48.00	41.00
DUR-28L-18L	M36X2	M26X1.5	14.00	12.00	24.00	15.00	34.00	41.00
DUR-28L-22L	M36X2	M30X2	14.00	14.00	24.00	19.00	36.00	41.00
DUR-30S-20S	M42X2	M30X2	20.00	16.00	25.00	16.00	50.00	46.00
DUR-30S-25S	M42X2	M36X2	20.00	18.00	20.00	20.00	52.00	46.00
DUR-35L-22L	M45X2	M30X2	16.00	14.00	19.00	19.00	39.00	46.00
DUR-35L-28L	M45X2	M36X2	16.00	14.00	30.00	24.00	39.00	46.00
DUR-38S-25S	M52X2	M36X2	22.00	18.00	32.00	20.00	57.00	55.00
DUR-38S-30S	M52X2	M42X2	22.00	20.00	32.00	25.00	59.00	55.00
DUR-42L-28L	M52X2	M36X2	16.00	14.00	36.00	24.00	44.50	55.00

DUR-LH

Reducing Straight Connector Large Hexagon



- DME&JDE Code: DUR-LH
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Thread Types: Metric x Metric
- Other Features: Hexagon

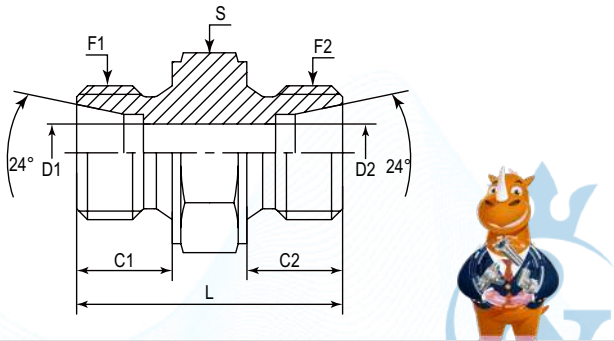


PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DUR-LH-08L-06L	M14X1.5	M12X1.5	10.00	10.00	6.00	4.00	30.00	19.00
DUR-LH-10L-08L	M16X1.5	M14X1.5	11.00	10.00	8.00	6.00	31.00	22.00
DUR-LH-12L-08L	M18X1.5	M14X1.5	11.00	10.00	10.00	6.00	33.00	24.00
DUR-LH-12L-10L	M18X1.5	M16X1.5	11.00	11.00	10.00	8.00	34.00	24.00
DUR-LH-12S-08L	M20X1.5	M14X1.5	12.00	10.00	8.00	6.00	34.00	27.00
DUR-LH-12S-10L	M20X1.5	M16X1.5	12.00	11.00	8.00	8.00	35.50	27.00
DUR-LH-12S-12L	M20X1.5	M18X1.5	12.00	11.00	8.00	10.00	35.50	27.00
DUR-LH-15L-08L	M22X1.5	M14X1.5	12.00	10.00	12.00	6.00	34.50	27.00
DUR-LH-15L-10L	M22X1.5	M16X1.5	12.00	11.00	12.00	8.00	35.50	27.00
DUR-LH-15L-12L	M22X1.5	M18X1.5	12.00	11.00	12.00	10.00	35.00	27.00
DUR-LH-15L-12S	M22X1.5	M20X1.5	12.00	12.00	12.00	8.00	36.50	27.00
DUR-LH-16S-12L	M24X1.5	M18X1.5	14.00	11.00	12.00	10.00	37.00	30.00
DUR-LH-16S-15L	M24X1.5	M22X1.5	14.00	12.00	12.00	12.00	38.00	30.00
DUR-LH-18L-12L	M26X1.5	M18X1.5	12.00	11.00	15.00	10.00	38.00	32.00
DUR-LH-18L-15L	M26X1.5	M22X1.5	12.00	12.00	15.00	12.00	39.00	32.00
DUR-LH-25S-22L	M36X2	M30X2	18.00	14.00	19.00	19.00	50.00	46.00
DUR-LH-28L-22L	M36X2	M30X2	14.00	14.00	24.00	19.00	46.00	46.00

DT

Connector Tee



- DME&JDE Code: DT
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Tee
- Thread Types: Metric x Metric x Metric

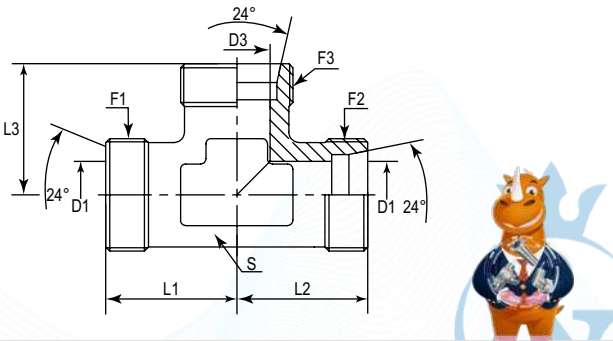


PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S
#	METRIC	METRIC	METRIC	mm	mm	mm	mm	mm	mm	mm
DT-04LL	M8X1	M8X1	M8X1	3.00	3.00	3.00	15.00	15.00	15.00	9
DT-06LL	M10X1	M10X1	M10X1	4.50	4.50	4.50	15.00	15.00	15.00	9
DT-06S	M14X1.5	M14X1.5	M14X1.5	4.00	4.00	4.00	23.00	23.00	23.00	12
DT-06L	M12X1.5	M12X1.5	M12X1.5	4.00	4.00	4.00	19.00	19.00	19.00	12
DT-08LL	M12X1	M12X1	M12X1	6.00	6.00	6.00	17.50	17.50	17.50	12
DT-08L	M14X1.5	M14X1.5	M14X1.5	6.00	6.00	6.00	21.00	21.00	21.00	12
DT-08S	M16X1.5	M16X1.5	M16X1.5	5.00	5.00	5.00	24.00	24.00	24.00	14
DT-10L	M16X1.5	M16X1.5	M16X1.5	8.00	8.00	8.00	22.00	22.00	22.00	14
DT-10S	M18X1.5	M18X1.5	M18X1.5	7.00	7.00	7.00	25.00	25.00	25.00	17
DT-12L	M18X1.5	M18X1.5	M18X1.5	10.00	10.00	10.00	24.00	24.00	24.00	17
DT-12S	M20X1.5	M20X1.5	M20X1.5	8.00	8.00	8.00	29.00	29.00	29.00	17
DT-14S	M22X1.5	M22X1.5	M22X1.5	10.00	10.00	10.00	30.00	30.00	30.00	19
DT-15L	M22X1.5	M22X1.5	M22X1.5	12.00	12.00	12.00	28.00	28.00	28.00	19
DT-16S	M24X1.5	M24X1.5	M24X1.5	12.00	12.00	12.00	33.00	33.00	33.00	24
DT-18L	M26X1.5	M26X1.5	M26X1.5	15.00	15.00	15.00	31.00	31.00	31.00	24
DT-20S	M30X2	M30X2	M30X2	16.00	16.00	16.00	37.00	37.00	37.00	27
DT-22L	M30X2	M30X2	M30X2	19.00	19.00	19.00	35.00	35.00	35.00	27
DT-25S	M36X2	M36X2	M36X2	20.00	20.00	20.00	42.00	42.00	42.00	36
DT-28L	M36X2	M36X2	M36X2	24.00	24.00	24.00	38.00	38.00	38.00	36
DT-30S	M42X2	M42X2	M42X2	25.00	25.00	25.00	49.00	49.00	49.00	41
DT-35L	M45X2	M45X2	M45X2	30.00	30.00	30.00	45.00	45.00	45.00	41
DT-38S	M52X2	M52X2	M52X2	32.00	32.00	32.00	57.00	57.00	57.00	50
DT-42L	M52X2	M52X2	M52X2	36.00	36.00	36.00	51.00	51.00	51.00	50



DC


Connector Cross

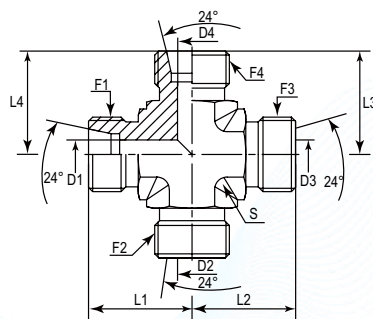

Part Number	F1 (Thread)	F2 (Thread)	F3 (Thread)	F4 (Thread)	D1	D2	D3	D4	L1	L2	L3	L4	S
#	Metric	Metric	Metric	Metric	mm	mm	mm	mm	mm	mm	mm	mm	mm
DC-06L	M12X1.5	M12X1.5	M12X1.5	M12X1.5	4.00	4.00	4.00	4.00	19.00	19.00	19.00	19.00	14
DC-06S	M14X1.5	M14X1.5	M14X1.5	M14X1.5	4.00	4.00	4.00	4.00	23.00	23.00	23.00	23.00	14
DC-08L	M14X1.5	M14X1.5	M14X1.5	M14X1.5	6.00	6.00	6.00	6.00	21.00	21.00	21.00	21.00	14
DC-08S	M16X1.5	M16X1.5	M16X1.5	M16X1.5	5.00	5.00	5.00	5.00	24.00	24.00	24.00	24.00	19
DC-10L	M16X1.5	M16X1.5	M16X1.5	M16X1.5	8.00	8.00	8.00	8.00	22.00	22.00	22.00	22.00	19
DC-10S	M18X1.5	M18X1.5	M18X1.5	M18X1.5	7.00	7.00	7.00	7.00	25.00	25.00	25.00	25.00	19
DC-12L	M18X1.5	M18X1.5	M18X1.5	M18X1.5	10.00	10.00	10.00	10.00	24.00	24.00	24.00	24.00	19
DC-12S	M20X1.5	M20X1.5	M20X1.5	M20X1.5	8.00	8.00	8.00	8.00	29.00	29.00	29.00	29.00	19
DC-14S	M22X1.5	M22X1.5	M22X1.5	M22X1.5	10.00	10.00	10.00	10.00	30.00	30.00	30.00	30.00	19
DC-15L	M22X1.5	M22X1.5	M22X1.5	M22X1.5	12.00	12.00	12.00	12.00	28.00	28.00	28.00	28.00	19
DC-16S	M24X1.5	M24X1.5	M24X1.5	M24X1.5	12.00	12.00	12.00	12.00	33.00	33.00	33.00	33.00	27
DC-18L	M26X1.5	M26X1.5	M26X1.5	M26X1.5	15.00	15.00	15.00	15.00	31.00	31.00	31.00	31.00	27
DC-20S	M30X2	M30X2	M30X2	M30X2	16.00	16.00	16.00	16.00	37.00	37.00	37.00	37.00	27
DC-22L	M30X2	M30X2	M30X2	M30X2	19.00	19.00	19.00	19.00	35.00	35.00	35.00	35.00	30
DC-25S	M36X2	M36X2	M36X2	M36X2	20.00	20.00	20.00	20.00	42.00	42.00	42.00	42.00	36
DC-28L	M36X2	M36X2	M36X2	M36X2	24.00	24.00	24.00	24.00	38.00	38.00	38.00	38.00	36
DC-30S	M42X2	M42X2	M42X2	M42X2	25.00	25.00	25.00	25.00	49.00	49.00	49.00	49.00	41
DC-35L	M45X2	M45X2	M45X2	M45X2	30.00	30.00	30.00	30.00	45.00	45.00	45.00	45.00	41
DC-38S	M52X2	M52X2	M52X2	M52X2	32.00	32.00	32.00	32.00	57.00	57.00	57.00	57.00	50
DC-42L	M52X2	M52X2	M52X2	M52X2	36.00	36.00	36.00	36.00	51.00	51.00	51.00	51.00	50

DTR

Reducing Tee

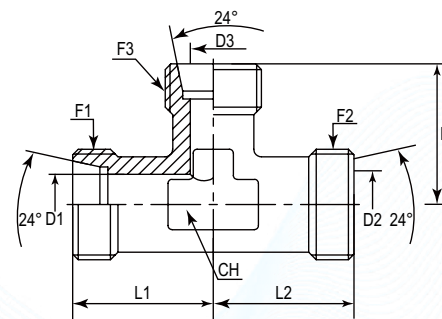


PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	CH
#	METRIC	METRIC	METRIC	mm	mm	mm	mm	mm	mm	mm
DTR-06L-08L-06L	M12X1.5	M14X1.5	M12X1.5	4	6	4	21	21	21	12
DTR-06L-10L-06L	M12X1.5	M16X1.5	M12X1.5	4	8	4	21	22	21	14
DTR-08L-06L-08L	M14X1.5	M12X1.5	M14X1.5	6	4	6	21	21	21	12
DTR-08L-10L-08L	M14X1.5	M16X1.5	M14X1.5	6	8	6	21	22	21	14
DTR-08L-12L-08L	M14X1.5	M18X1.5	M14X1.5	8	10	8	23	24	23	17
DTR-10L-06L-10L	M16X1.5	M12X1.5	M16X1.5	8	4	8	22	21	22	14
DTR-10L-08L-10L	M16X1.5	M14X1.5	M16X1.5	8	6	8	22	21	22	14
DTR-10L-10L-06L	M16X1.5	M16X1.5	M12X1.5	8	8	4	22	22	21	14
DTR-10L-15L-10L	M16X1.5	M22X1.5	M16X1.5	8	12	8	27	28	27	19
DTR-10S-06S-10S	M18X1.5	M14X1.5	M18X1.5	7	4	7	25	25	25	17
DTR-12L-06L-12L	M18X1.5	M12X1.5	M18X1.5	10	4	10	24	23	24	17
DTR-12L-08L-08L	M18X1.5	M14X1.5	M14X1.5	10	8	8	24	23	23	17
DTR-12L-08L-12L	M18X1.5	M14X1.5	M18X1.5	10	8	10	24	23	24	17
DTR-12L-10L-10L	M18X1.5	M16X1.5	M16X1.5	10	8	8	24	24	24	17
DTR-12L-10L-12L	M18X1.5	M16X1.5	M18X1.5	10	8	10	24	24	24	17
DTR-12L-12L-10L	M18X1.5	M18X1.5	M16X1.5	10	10	8	24	24	24	17
DTR-12L-15L-12L	M18X1.5	M22X1.5	M18X1.5	10	12	10	27	28	27	19
DTR-12L-18L-12L	M22X1.5	M26X1.5	M22X1.5	12	15	12	31	31	30	24
DTR-12S-08S-08S	M20X1.5	M16X1.5	M16X1.5	8	5	5	25	25	25	17
DTR-12S-08S-12S	M20X1.5	M16X1.5	M20X1.5	8	5	8	29	25	29	17
DTR-12S-10S-12S	M20X1.5	M18X1.5	M20X1.5	8	7	8	29	25	29	17

DBL

Bulkhead Connector Elbow



DME&JDE Code:	DBL
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	90° Elbow
Connection Type:	Male
Thread Types:	Metric
Other Features:	Bulkhead




PART NUMBER	F1/F2 (Thread)	D1/D2	L1	L2	S	S1
#	Metric	mm	mm	mm	mm	mm
DBL-06L	M12X1.5	4.00	19.00	48.00	12.00	17.00
DBL-06S	M14X1.5	4.00	23.00	53.00	12.00	19.00
DBL-08L	M14X1.5	6.00	21.00	51.00	12.00	19.00
DBL-08S	M16X1.5	5.00	24.00	54.00	14.00	22.00
DBL-10L	M16X1.5	8.00	22.00	53.00	14.00	22.00
DBL-10S	M18X1.5	7.00	25.00	57.00	17.00	24.00
DBL-12L	M18X1.5	10.00	24.00	56.00	17.00	24.00
DBL-12S	M20X1.5	8.00	29.00	59.00	17.00	27.00
DBL-14S	M22X1.5	10.00	30.00	63.00	19.00	30.00
DBL-15L	M22X1.5	12.00	28.00	61.00	19.00	30.00
DBL-16S	M24X1.5	12.00	33.00	64.00	24.00	32.00
DBL-18L	M26X1.5	15.00	31.00	64.00	24.00	36.00
DBL-20S	M30X2	16.00	37.00	74.00	27.00	41.00
DBL-22L	M30X2	19.00	35.00	72.00	27.00	41.00
DBL-25S	M36X2	20.00	42.00	81.00	36.00	46.00
DBL-28L	M36X2	24.00	38.00	77.00	36.00	46.00
DBL-30S	M42X2	25.00	49.00	90.00	41.00	50.00
DBL-35L	M45X2	30.00	45.00	86.00	48.00	55.00
DBL-38S	M52X2	32.00	57.00	96.00	50.00	65.00
DBL-42L	M52X2	36.00	51.00	90.00	50.00	65.00

DOM-U

Male Connector(JIC Male) with O Ring



DME&JDE Code:	DOM-U
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	Straight
Connection Type:	Male
Thread Type:	Matric × UNF
Sealing Type:	O Ring

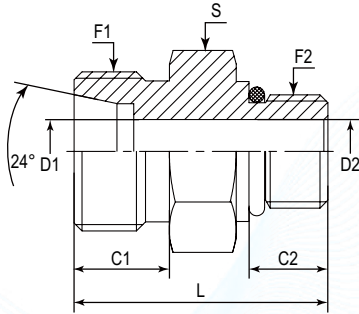


PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	UNF	mm	mm	mm	mm	mm	mm
DOM-06L-04U	M12X1.5	7/16"-20	10.00	9.14	4.00	4.00	26.00	14
DOM-06L-06U	M12X1.5	9/16"-18	10.00	9.93	4.00	7.54	29.50	17
DOM-06S-05U	M14X1.5	1/2"-20	12.00	9.14	4.00	5.94	29.00	17
DOM-08L-04U	M14X1.5	7/16"-20	10.00	9.14	6.00	4.37	26.00	14
DOM-08L-05U	M14X1.5	1/2"-20	10.00	9.14	5.94	5.94	26.70	17
DOM-08L-06U	M14X1.5	9/16"-18	10.00	9.93	6.00	6.00	27.50	17
DOM-08L-08U	M14X1.5	3/4"-16	10.00	11.13	6.00	9.93	30.00	22
DOM-08S-04U	M16X1.5	7/16"-20	12.00	9.14	4.37	4.37	31.00	17
DOM-08S-05U	M16X1.5	1/2"-20	12.00	9.14	5.94	5.94	31.00	17
DOM-08S-06U	M16X1.5	9/16"-18	12.00	9.93	5.00	7.54	31.00	19
DOM-10L-04U	M16X1.5	7/16"-20	11.00	9.14	4.37	4.37	27.00	17
DOM-10L-05U	M16X1.5	1/2"-20	11.00	9.14	8.00	5.94	27.00	17
DOM-10L-06U	M16X1.5	9/16"-18	11.00	9.93	8.00	8.00	31.00	19
DOM-10L-08U	M16X1.5	3/4"-16	11.00	11.13	8.00	8.00	30.00	24
DOM-10L-10U	M16X1.5	7/8"-14	11.00	12.70	8.00	8.00	34.00	27
DOM-10S-06U	M18X1.5	9/16"-18	12.00	10.00	7.00	7.00	32.00	19
DOM-10S-08U	M18X1.5	3/4"-16	12.00	11.13	7.00	9.93	36.00	22
DOM-12L-04U	M18X1.5	7/16"-20	11.00	9.14	10.00	4.37	27.50	19
DOM-12L-06U	M18X1.5	9/16"-18	11.00	9.93	7.54	7.54	28.00	19
DOM-12L-08U	M18X1.5	3/4"-16	11.00	11.13	10.00	10.00	31.00	24
DOM-12L-10U	M18X1.5	7/8"-14	11.00	12.70	10.00	10.00	34.00	27
DOM-12S-04U	M20X1.5	7/16"-20	12.00	9.14	8.00	4.37	31.00	22

DMC-G

Male Connector (BSPP Male) with Cutting Face



- DME&JDE Code: DMC-G
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Male x Male
- Thread Types: Metric x BSPP + Cutting Face

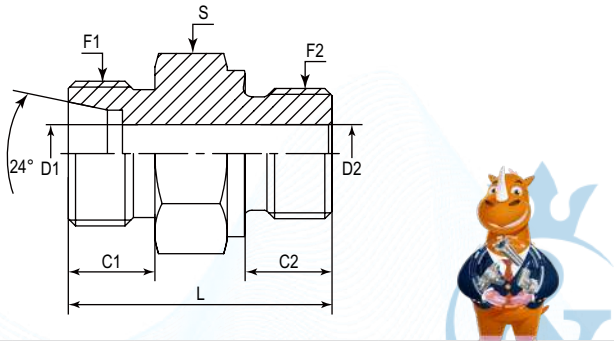

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	Metric	BSPP	mm	mm	mm	mm	mm	mm
DMC-06L-01G	M12X1.5	1/8"-28	10.00	8.00	4.00	4.00	23.50	14.00
DMC-06L-02G	M12X1.5	1/4"-19	10.00	12.00	4.00	7.50	29.00	19.00
DMC-06L-03G	M12X1.5	3/8"-19	10.00	12.00	4.00	9.90	30.50	22.00
DMC-06S-02G	M14X1.5	1/4"-19	12.00	12.00	4.00	7.50	32.00	19.00
DMC-08L-01G	M14X1.5	1/8"-28	10.00	8.00	6.00	4.00	25.00	14.00
DMC-08L-02G	M14X1.5	1/4"-19	10.00	12.00	6.00	6.00	29.00	19.00
DMC-08L-03G	M14X1.5	3/8"-19	10.00	12.00	6.00	6.00	30.50	22.00
DMC-08L-04G	M14X1.5	1/2"-14	10.00	14.00	6.00	12.00	33.00	27.00
DMC-08S-02G	M16X1.5	1/4"-19	12.00	12.00	5.00	7.50	34.00	19.00
DMC-10L-01G	M16X1.5	1/8"-28	11.00	8.00	8.00	4.00	26.00	17.00
DMC-10L-02G	M16X1.5	1/4"-19	11.00	12.00	7.50	7.50	30.00	19.00
DMC-10L-03G	M16X1.5	3/8"-19	11.00	12.00	8.00	8.00	31.50	22.00
DMC-10L-04G	M16X1.5	1/2"-14	11.00	14.00	8.00	8.00	34.00	27.00
DMC-10S-02G	M18X1.5	1/4"-19	12.00	12.00	7.00	7.00	34.00	19.00
DMC-10S-04G	M18X1.5	1/2"-14	12.00	14.00	7.00	7.00	39.00	27.00
DMC-12L-02G	M18X1.5	1/4"-19	11.00	12.00	10.00	7.50	31.00	19.00
DMC-12L-03G	M18X1.5	3/8"-19	11.00	12.00	9.00	9.00	31.50	22.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



DMC-12L-04G	M18X1.5	1/2"-14	11.00	14.00	10.00	10.00	34.00	27.00
DMC-12S-03G	M20X1.5	3/8"-19	12.00	12.00	8.00	8.00	36.50	22.00
DMC-12S-04G	M20X1.5	1/2"-14	12.00	14.00	8.00	12.30	39.00	27.00
DMC-14S-04G	M22X1.5	1/2"-14	14.00	14.00	10.00	10.00	41.00	27.00
DMC-15L-03G	M22X1.5	3/8"-19	12.00	12.00	12.00	9.90	32.50	24.00
DMC-15L-04G	M22X1.5	1/2"-14	12.00	14.00	12.00	12.00	35.00	27.00
DMC-15L-06G	M22X1.5	3/4"-14	12.00	16.00	12.00	15.50	38.00	32.00
DMC-16S-03G	M24X1.5	3/8"-19	14.00	12.00	12.00	9.00	39.00	27.00
DMC-16S-04G	M24X1.5	1/2"-14	14.00	14.00	12.00	12.00	41.00	27.00
DMC-16S-06G	M24X1.5	3/4"-14	14.00	16.00	12.00	15.50	45.00	32.00
DMC-18L-04G	M26X1.5	1/2"-14	12.00	14.00	15.00	12.30	36.00	27.00
DMC-18L-06G	M26X1.5	3/4"-14	12.00	16.00	15.00	15.00	38.00	32.00
DMC-20S-04G	M30X2	1/2"-14	16.00	14.00	16.00	12.30	45.00	32.00
DMC-20S-06G	M30X2	3/4"-14	16.00	16.00	15.50	15.50	47.00	32.00
DMC-20S-08G	M30X2	1"-11	16.00	18.00	16.00	21.50	51.00	41.00
DMC-22L-04G	M30X2	1/2"-14	14.00	14.00	19.00	12.30	38.00	32.00
DMC-22L-06G	M30X2	3/4"-14	14.00	16.00	19.00	15.50	40.00	32.00
DMC-22L-08G	M30X2	1"-11	14.00	18.00	19.00	23.00	43.00	41.00
DMC-25S-04G	M36X2	1/2"-14	18.00	14.00	20.00	12.00	49.00	41.00
DMC-25S-06G	M36X2	3/4"-14	18.00	16.00	20.00	15.50	51.00	41.00
DMC-25S-08G	M36X2	1"-11	18.00	18.00	20.00	20.00	53.00	41.00
DMC-28L-06G	M36X2	3/4"-14	14.00	16.00	24.00	15.50	41.00	41.00
DMC-28L-08G	M36X2	1"-11	14.00	18.00	24.00	21.50	43.00	41.00
DMC-30S-06G	M42X2	3/4"-14	20.00	16.00	25.00	15.50	53.00	46.00
DMC-30S-08G	M42X2	1"-11	20.00	18.00	25.00	21.50	55.00	46.00
DMC-35L-08G	M45X2	1"-11	16.00	18.00	30.00	21.50	47.00	46.00
DMC-35L-10G	M45X2	1 1/4"-11	16.00	20.00	30.00	30.00	48.00	50.00
DMC-38S-08G	M52X2	1"-11	22.00	18.00	32.00	21.50	60.00	55.00
DMC-38S-10G	M52X2	1-1/4"-11	22.00	20.00	32.00	25.00	62.00	55.00
DMC-38S-12G	M52X2	1-1/2"-11	22.00	22.00	32.00	32.00	64.00	55.00
DMC-42L-12G	M52X2	1-1/2"-11	16.00	22.00	36.00	36.00	52.00	55.00



Web: <https://www.dmejde.com>
E-mail: info@dmejde.com




DMC-G-60

Male Connector (BSPP Male) with 60° Cone Seal



- DME&JDE Code: DMC-G-60
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Male x Male
- Thread Types: Metric x BSPP 60° Cone

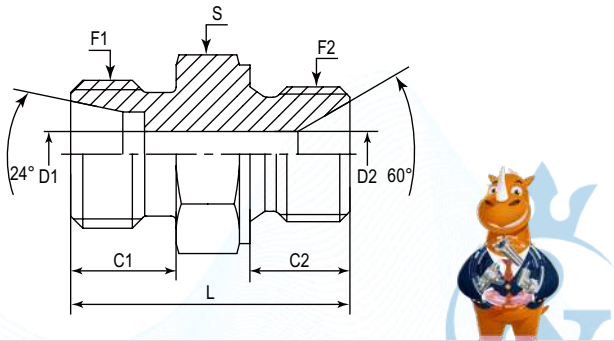


PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	Metric	BSPP	mm	mm	mm	mm	mm	mm
DMC-06L-01G-60	M12X1.5	1/8"-28	10.00	8.00	3.50	3.50	23.00	14.00
DMC-06L-02G-60	M12X1.5	1/4"-19	10.00	9.00	3.50	3.50	26.00	19.00
DMC-08L-02G-60	M14X1.5	1/4"-19	10.00	9.00	3.50	6.00	26.00	19.00
DMC-08L-03G-60	M14X1.5	3/8"-19	10.00	12.00	6.00	6.00	30.00	22.00
DMC-10L-03G-60	M16X1.5	3/8"-19	11.00	12.00	8.00	8.00	31.00	22.00
DMC-10S-04G-60	M18X1.5	1/2"-14	12.00	14.00	11.10	7.00	36.00	27.00
DMC-12L-04G-60	M18X1.5	1/2"-14	11.00	14.00	10.00	10.00	35.00	27.00
DMC-12S-04G-60	M20X1.5	1/2"-14	12.00	14.00	11.10	8.00	36.00	27.00
DMC-16S-03G-60	M24X1.5	3/8"-19	14.00	12.00	7.90	12.00	36.00	27.00
DMC-16S-04G-60	M24X1.5	1/2"-14	14.00	14.00	11.10	11.10	38.00	27.00
DMC-18L-04G-60	M26X1.5	1/2"-14	12.00	14.00	11.10	15.00	39.00	27.00
DMC-20S-06G-60	M30X2	3/4"-14	16.00	16.00	16.00	16.00	43.00	32.00

DMC-R

Male Connector (BSPT 60°Male) with Form C Stud End



- DME&JDE Code: DMC-R
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Male x Male
- Thread Type: Metric x BSPT 60°

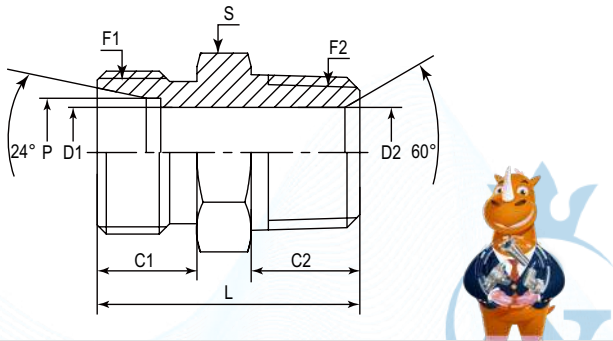

PART NUMBER	F1 (Thread)	F2 (Thread)	P	C1	C2	D1	D2	L	S
#	Metric	BSPT	mm	mm	mm	mm	mm	mm	mm
DMC-04LL-01R	M8X1	1/8"-28	4.10	8.00	10.00	3.00	4.50	23.50	12.00
DMC-06L-01R	M12X1.5	1/8"-28	6.00	10.00	10.00	4.00	4.00	24.00	12.00
DMC-06L-02R	M12X1.5	1/4"-19	6.00	10.00	14.00	4.00	6.00	28.00	17.00
DMC-06L-03R	M12X1.5	3/8"-19	6.00	10.00	15.00	4.00	9.00	32.00	19.00
DMC-06LL-01R	M10X1	1/8"-28	6.00	8.00	8.00	4.50	4.50	20.00	11.00
DMC-06S-01R	M14X1.5	1/8"-28	6.00	12.00	10.00	4.00	4.00	28.00	14.00
DMC-06S-02R	M14X1.5	1/4"-19	6.00	12.00	14.00	4.00	5.94	33.00	17.00
DMC-08L-01R	M14X1.5	1/8"-28	8.00	10.00	10.00	6.00	4.50	26.00	14.00
DMC-08L-02R	M14X1.5	1/4"-19	8.00	10.00	14.00	5.94	5.94	30.00	17.00
DMC-08L-03R	M14X1.5	3/8"-19	8.00	10.00	15.00	6.00	9.00	32.50	19.00
DMC-08L-04R	M14X1.5	1/2"-14	8.00	10.00	19.00	6.00	12.00	36.00	22.00
DMC-08LL-01R	M12X1	1/8"-28	8.00	9.00	10.00	4.50	4.50	25.00	12.00
DMC-08S-02R	M16X1.5	1/4"-19	8.00	12.00	14.00	5.00	5.00	32.00	17.00
DMC-10L-01R	M16X1.5	1/8"-28	10.00	11.00	10.00	8.00	4.50	26.00	17.00
DMC-10L-02R	M16X1.5	1/4"-19	10.00	11.00	14.00	6.00	6.00	28.50	17.00
DMC-10L-03R	M16X1.5	3/8"-19	10.00	11.00	14.00	8.00	8.00	31.00	19.00
DMC-10L-04R	M16X1.5	1/2"-14	10.00	11.00	14.00	8.00	12.00	32.00	22.00

DMC-10S-02R	M18X1.5	1/4"-19	10.00	12.00	14.00	6.00	6.00	34.00	19.00
DMC-10S-03R	M18X1.5	3/8"-19	10.00	12.00	15.00	7.00	7.00	35.00	19.00
DMC-10S-04R	M18X1.5	1/2"-14	10.00	12.00	19.00	7.00	12.00	41.00	22.00
DMC-12L-02R	M18X1.5	1/4"-19	12.00	11.00	12.50	10.00	6.00	30.00	19.00
DMC-12L-03R	M18X1.5	3/8"-19	12.00	11.00	12.00	9.00	9.00	30.00	19.00
DMC-12L-04R	M18X1.5	1/2"-14	12.00	11.00	16.00	10.00	10.00	33.00	24.00
DMC-12S-02R	M20X1.5	1/4"-19	12.00	12.00	14.00	8.00	6.00	36.00	22.00
DMC-12S-03R	M20X1.5	3/8"-19	12.00	12.00	15.00	8.00	8.00	35.00	22.00
DMC-12S-04R	M20X1.5	1/2"-14	12.00	12.00	14.00	8.00	12.00	36.00	22.00
DMC-14S-03R	M22X1.5	3/8"-19	14.00	14.00	15.00	9.00	9.00	38.00	24.00
DMC-14S-04R	M22X1.5	1/2"-14	14.00	14.00	19.00	10.00	12.00	43.00	24.00
DMC-15L-04R	M22X1.5	1/2"-14	15.00	12.00	16.00	12.00	12.00	34.00	24.00
DMC-16S-03R	M24X1.5	3/8"-19	16.00	14.00	15.00	12.00	9.00	39.50	27.00
DMC-16S-04R	M24X1.5	1/2"-14	16.00	14.00	16.00	12.00	12.00	40.00	27.00
DMC-18L-04R	M26X1.5	1/2"-14	18.00	12.00	19.00	15.00	12.00	38.50	27.00
DMC-18L-06R	M26X1.5	3/4"-14	18.00	12.00	16.00	15.00	15.00	35.00	32.00
DMC-20S-04R	M30X2	1/2"-14	20.00	16.00	19.00	16.00	12.00	46.00	32.00
DMC-20S-06R	M30X2	3/4"-14	20.00	16.00	20.00	16.00	16.00	48.00	32.00
DMC-22L-06R	M30X2	3/4"-14	22.00	14.00	20.00	16.70	16.70	41.00	32.00
DMC-25S-04R	M36X2	1/2"-14	25.00	18.00	19.00	20.00	12.00	50.00	41.00
DMC-25S-06R	M36X2	3/4"-14	25.00	18.00	20.00	20.00	16.70	51.00	41.00
DMC-25S-08R	M36X2	1"-11	25.00	18.00	24.00	20.00	22.20	56.00	41.00
DMC-28L-08R	M36X2	1"-11	28.00	14.00	24.00	23.00	23.00	48.00	41.00
DMC-30S-08R	M42X2	1"-11	30.00	20.00	24.00	25.00	22.20	58.00	46.00
DMC-30S-10R	M42X2	1-1/4"-11	30.00	20.00	25.00	25.00	28.60	60.00	46.00
DMC-35L-10R	M45X2	1-1/4"-11	35.30	16.00	25.00	28.60	28.60	51.00	46.00
DMC-38S-12R	M52X2	1-1/2"-11	38.30	22.00	25.00	32.00	32.00	64.00	55.00
DMC-42L-12R	M52X2	1-1/2"-11	42.30	16.00	25.00	36.00	33.30	52.00	55.00


DMC-M

Metric Male Connector with Cutting Face



New-Standard

DME&JDE Code:	DMC-M
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	Straight
Connection Type:	Male × Male
Thread Type:	Metric × Metric

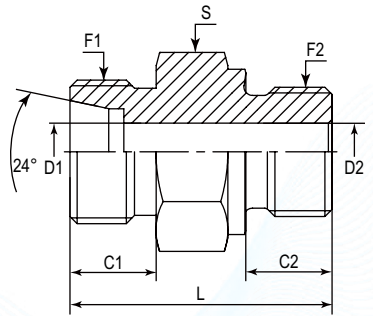

Filter the F1 Thread through selecting the -XX options


Part Number	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DMC-06L-M10	M12X1.5	M10X1	10.00	8.00	4.00	4.00	23.50	14.00
DMC-06S-M12	M14X1.5	M12X1.5	12.00	12.00	4.00	4.00	32.00	17.00
DMC-08L-M12	M14X1.5	M12X1.5	10.00	12.00	6.00	6.00	29.00	17.00
DMC-08L-M14	M14X1.5	M14X1.5	10.00	12.00	6.00	6.00	29.00	19.00
DMC-08L-M16	M14X1.5	M16X1.5	10.00	12.00	6.00	8.00	30.00	22.00
DMC-08L-M18	M14X1.5	M18X1.5	10.00	12.00	6.00	8.00	30.50	24.00
DMC-08L-M22	M14X1.5	M22X1.5	10.00	14.00	6.00	14.00	33.00	27.00
DMC-08S-M14	M16X1.5	M14X1.5	12.00	12.00	5.00	5.00	34.00	19.00
DMC-10L-M14	M16X1.5	M14X1.5	11.00	12.00	6.00	6.00	30.00	19.00
DMC-10L-M16	M16X1.5	M16X1.5	11.00	12.00	8.00	8.00	31.00	22.00
DMC-10L-M18	M16X1.5	M18X1.5	11.00	12.00	8.00	8.00	31.50	24.00
DMC-10L-M22	M16X1.5	M22X1.5	11.00	14.00	8.00	14.00	35.00	27.00
DMC-10S-M16	M18X1.5	M16X1.5	12.00	12.00	7.00	7.00	34.50	22.00
DMC-12L-M14	M18X1.5	M14X1.5	11.00	12.00	10.00	7.50	30.00	19.00
DMC-12L-M16	M18X1.5	M16X1.5	11.00	12.00	8.00	8.00	31.50	22.00
DMC-12L-M18	M18X1.5	M18X1.5	11.00	12.00	10.00	10.00	31.50	24.00
DMC-12L-M22	M18X1.5	M22X1.5	11.00	14.00	10.00	10.00	35.00	27.00
DMC-12S-M18	M20X1.5	M18X1.5	12.00	12.00	8.00	8.00	36.50	24.00
DMC-14S-M20	M22X1.5	M20X1.5	14.00	14.00	10.00	10.00	41.00	27.00
DMC-15L-M18	M22X1.5	M18X1.5	12.00	12.00	10.00	10.00	32.50	24.00
DMC-15L-M22	M22X1.5	M22X1.5	12.00	14.00	12.00	12.00	36.00	27.00
DMC-16S-M22	M24X1.5	M22X1.5	14.00	14.00	12.00	12.00	41.00	27.00
DMC-18L-M22	M26X1.5	M22X1.5	12.00	14.00	15.00	15.00	36.00	27.00
DMC-18L-M26	M26X1.5	M26X1.5	12.00	16.00	15.00	15.00	38.00	32.00
DMC-20S-M27	M30X2	M27X2	16.00	16.00	16.00	16.00	47.00	32.00
DMC-25S-M33	M36X2	M33X2	18.00	18.00	20.00	20.00	53.00	41.00
DMC-22L-M26	M30X2	M26X1.5	14.00	16.00	17.00	17.00	40.00	32.00
DMC-28L-M33	M36X2	M33X2	14.00	18.00	23.00	23.00	43.00	41.00
DMC-30S-M42	M42X2	M42X2	20.00	20.00	25.00	25.00	57.00	50.00
DMC-35L-M42	M45X2	M42X2	16.00	20.00	30.00	30.00	48.00	50.00
DMC-38S-M48	M52X2	M48X2	22.00	22.00	32.00	32.00	64.00	55.00
DMC-42L-M48	M52X2	M48X2	16.00	22.00	36.00	36.00	52.00	55.00

DMC-N

Male Connector (NPTF 60°Male) with Form C Stud End



DME&JDE Code:	DMC-N
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	Metric × NPTF 60°

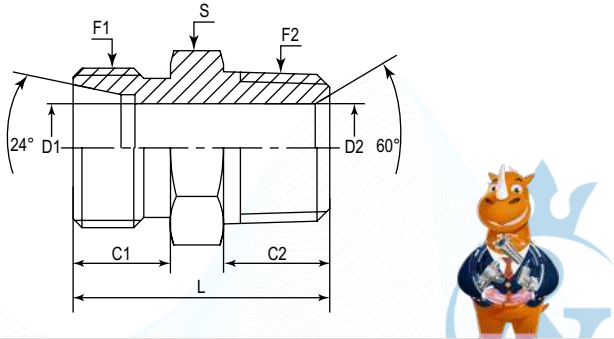

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	Metric	NPTF	mm	mm	mm	mm	mm	mm
DMC-04LL-01N	M8X1	1/8"-27	8.00	9.65	3.00	3.00	23.50	12.00
DMC-06L-01N	M12X1.5	1/8"-27	10.00	9.65	4.00	4.00	24.00	12.00
DMC-06L-02N	M12X1.5	1/4"-18	10.00	14.22	4.00	7.14	31.50	14.00
DMC-06LL-01N	M10X1	1/8"-27	8.00	9.65	4.50	4.50	22.00	11.00
DMC-06LL-02N	M10X1	1/4"-18	8.00	14.22	4.50	7.14	29.50	14.00
DMC-06S-02N	M14X1.5	1/4"-18	12.00	14.22	4.00	7.14	34.50	17.00
DMC-08L-01N	M14X1.5	1/8"-27	10.00	9.65	6.00	4.00	26.00	14.00
DMC-08L-02N	M14X1.5	1/4"-18	10.00	14.22	6.00	7.14	30.00	17.00
DMC-08L-03N	M14X1.5	3/8"-18	10.00	14.22	6.00	10.31	32.00	19.00
DMC-08L-04N	M14X1.5	1/2"-14	10.00	19.05	6.00	13.49	36.00	22.00
DMC-08LL-01N	M12X1	1/8"-27	9.00	9.65	4.78	4.78	25.00	12.00
DMC-08S-02N	M16X1.5	1/4"-18	12.00	14.22	5.00	7.14	32.00	17.00
DMC-08S-03N	M16X1.5	3/8"-18	12.00	14.22	5.00	10.31	36.00	19.00
DMC-08S-04N	M16X1.5	1/2"-14	12.00	19.05	5.00	13.49	41.00	22.00
DMC-10L-01N	M16X1.5	1/8"-27	11.00	9.65	8.00	4.00	26.00	17.00
DMC-10L-02N	M16X1.5	1/4"-18	11.00	14.22	8.00	7.14	31.00	17.00
DMC-10L-03N	M16X1.5	3/8"-18	11.00	14.22	8.00	10.31	32.00	19.00
DMC-10L-04N	M16X1.5	1/2"-14	11.00	19.05	8.00	13.49	37.00	22.00
DMC-10S-02N	M18X1.5	1/4"-18	12.00	14.22	7.00	7.00	34.00	19.00
DMC-10S-03N	M18X1.5	3/8"-18	12.00	14.22	7.00	10.31	35.00	19.00
DMC-10S-04N	M18X1.5	1/2"-14	12.00	19.05	7.00	13.49	41.00	22.00
DMC-12L-02N	M18X1.5	1/4"-18	11.00	14.22	10.00	7.14	32.00	19.00
DMC-12L-03N	M18X1.5	3/8"-18	11.00	14.22	10.00	10.00	32.00	19.00
DMC-12L-04N	M18X1.5	1/2"-14	11.00	19.05	10.00	13.49	37.00	22.00



DMC-12L-06N	M18X1.5	3/4"-14	11.00	19.05	10.00	18.26	38.00	27.00
DMC-12S-02N	M20X1.5	1/4"-18	12.00	14.22	7.14	7.14	37.00	22.00
DMC-12S-03N	M20X1.5	3/8"-18	12.00	14.22	8.00	10.31	37.20	22.00
DMC-12S-04N	M20X1.5	1/2"-14	12.00	19.05	8.00	13.49	42.00	22.00
DMC-12S-06N	M20X1.5	3/4"-14	12.00	19.05	8.00	18.26	40.00	27.00
DMC-14S-03N	M22X1.5	3/8"-18	14.00	14.22	10.00	10.00	38.00	24.00
DMC-14S-04N	M22X1.5	1/2"-14	14.00	19.05	10.00	13.49	44.00	24.00
DMC-15L-03N	M22X1.5	3/8"-18	12.00	14.22	12.00	10.31	33.00	24.00
DMC-15L-04N	M22X1.5	1/2"-14	12.00	19.05	12.00	12.00	38.00	24.00
DMC-15L-06N	M22X1.5	3/4"-14	12.00	19.05	12.00	18.26	39.00	30.00
DMC-16S-03N	M24X1.5	3/8"-18	14.00	14.22	12.00	10.31	39.00	27.00
DMC-16S-04N	M24X1.5	1/2"-14	14.00	19.05	12.00	13.49	44.00	27.00
DMC-16S-06N	M24X1.5	3/4"-14	14.00	19.05	12.00	18.26	46.00	32.00
DMC-16S-08N	M24X1.5	1"-11-1/2	4.00	23.88	12.00	23.83	52.00	36.00
DMC-18L-03N	M26X1.5	3/8"-18	12.00	14.22	15.00	10.31	37.00	27.00
DMC-18L-04N	M26X1.5	1/2"-14	12.00	19.05	15.00	13.49	41.00	27.00
DMC-18L-06N	M26X1.5	3/4"-14	12.00	19.05	15.00	18.26	38.00	27.00
DMC-20S-04N	M30X2	1/2"-14	16.00	19.05	13.50	13.50	46.00	32.00
DMC-20S-06N	M30X2	3/4"-14	16.00	19.05	16.00	18.26	48.00	32.00
DMC-20S-08N	M30X2	1"-11-1/2	16.00	23.88	16.00	21.00	51.50	36.00
DMC-22L-04N	M30X2	1/2"-14	14.00	19.05	19.00	13.49	41.00	32.00
DMC-22L-06N	M30X2	3/4"-14	14.00	19.05	18.26	18.26	41.00	32.00
DMC-22L-08N	M30X2	1"-11-1/2	14.00	23.88	19.00	19.00	49.50	36.00
DMC-25S-06N	M36X2	3/4"-14	18.00	19.05	20.00	18.26	51.00	41.00
DMC-25S-08N	M36X2	1"-11-1/2	18.00	23.88	20.00	23.83	56.00	41.00
DMC-25S-10N	M36X2	1-1/4"-11-1/2	18.00	24.64	20.00	31.75	56.50	46.00
DMC-25S-12N	M36X2	1-1/2"-11-1/2	18.00	25.40	20.00	38.10	60.50	50.00
DMC-28L-06N	M36X2	3/4"-14	14.00	19.05	24.00	18.26	42.00	41.00
DMC-28L-08N	M36X2	1"-11-1/2	14.00	23.88	23.83	23.83	48.00	41.00
DMC-28L-10N	M36X2	1-1/4"-11-1/2	14.00	24.64	24.00	31.75	48.00	46.00
DMC-30S-06N	M42X2	3/4"-14	20.00	19.05	25.00	18.26	53.00	46.00
DMC-30S-08N	M42X2	1"-11-1/2	20.00	23.88	25.00	23.83	58.00	46.00
DMC-30S-10N	M42X2	1-1/4"-11-1/2	20.00	25.50	25.00	25.00	60.00	46.00
DMC-30S-12N	M42X2	1-1/2"-11-1/2	20.00	25.40	25.00	38.10	62.00	50.80
DMC-35L-08N	M45X2	1"-11-1/2	16.00	23.88	30.00	23.83	49.00	46.00
DMC-35L-10N	M45X2	1-1/4"-11-1/2	16.00	24.64	30.00	30.00	51.00	46.00
DMC-38S-10N	M52X2	1-1/4"-11-1/2	22.00	24.64	31.75	31.75	64.00	55.00
DMC-38S-12N	M52X2	1-1/2"-11-1/2	22.00	25.40	32.00	38.10	64.50	55.00
DMC-42L-10N	M52X2	1-1/4"-11-1/2	16.00	24.64	36.00	31.75	55.00	55.00
DMC-42L-12N	M52X2	1-1/2"-11-1/2	16.00	25.40	36.00	38.10	52.50	55.00




DMC-JC

Male Connector (JIC male)



DME&JDE Code:	DMC-JC
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	Metric × UNF

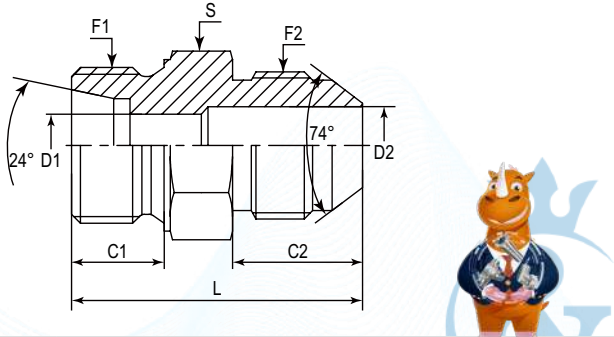

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	Metric	UNF	mm	mm	mm	mm	mm	mm
DMC-04LL-04JC	M8X1	7/16"-20	8.00	13.97	3.00	4.37	29.00	12.00
DMC-06L-04JC	M12X1.5	7/16"-20	10.00	13.97	4.00	4.00	30.00	14.00
DMC-06S-04JC	M14X1.5	7/16"-20	12.00	13.97	4.00	4.00	33.00	19.00
DMC-06S-06JC	M14X1.5	9/16"-18	12.00	14.12	4.00	7.54	35.00	19.00
DMC-08L-04JC	M14X1.5	7/16"-20	10.00	13.97	6.00	4.37	30.00	14.00
DMC-08L-06JC	M14X1.5	9/16"-18	10.00	14.22	6.00	7.54	31.00	15.88
DMC-08LL-04JC	M12X1	7/16"-20	9.00	13.97	4.37	4.37	31.00	17.00
DMC-08LL-06JC	M12X1	9/16"-18	9.00	14.12	6.00	7.54	31.00	17.00
DMC-08S-04JC	M16X1.5	7/16"-20	12.00	13.97	4.37	4.37	36.00	22.00
DMC-08S-06JC	M16X1.5	9/16"-18	12.00	14.12	5.00	7.54	36.00	22.00
DMC-10L-04JC	M16X1.5	7/16"-20	11.00	13.97	8.00	4.37	32.00	22.00
DMC-10L-06JC	M16X1.5	9/16"-18	11.00	14.12	7.54	7.54	32.50	17.00
DMC-10L-08JC	M16X1.5	3/4"-16	11.00	16.69	8.00	9.93	37.50	22.00
DMC-10LL-04JC	M14X1.5	7/16"-20	11.00	13.97	8.00	4.37	32.00	19.00
DMC-10S-04JC	M18X1.5	7/16"-20	12.00	13.97	7.00	4.37	35.00	24.00
DMC-10S-06JC	M18X1.5	9/16"-18	12.00	14.12	7.00	7.00	35.00	24.00
DMC-10S-08JC	M18X1.5	3/4"-16	12.00	16.69	7.00	9.93	38.00	24.00
DMC-12L-06JC	M18X1.5	9/16"-18	11.00	14.12	10.00	7.54	32.00	19.00
DMC-12L-08JC	M18X1.5	3/4"-16	11.00	16.69	9.93	9.93	39.00	24.00


DMC-12S-06JC	M20X1.5	9/16"-18	12.00	14.12	7.54	7.54	36.10	22.00
DMC-12S-08JC	M20X1.5	3/4"-16	12.00	16.69	8.00	9.93	38.50	22.00
DMC-12S-10JC	M20X1.5	7/8"-14	12.00	19.25	8.00	12.29	41.50	27.00
DMC-14S-06JC	M22X1.5	9/16"-18	14.00	14.12	10.00	7.54	40.00	27.00
DMC-14S-08JC	M22X1.5	3/4"-16	14.00	16.69	9.93	9.93	41.00	27.00
DMC-14S-10JC	M22X1.5	7/8"-14	14.00	19.25	10.00	12.29	43.50	27.00
DMC-15L-06JC	M22X1.5	9/16"-18	12.00	14.12	12.00	7.54	36.00	27.00
DMC-15L-08JC	M22X1.5	3/4"-16	12.00	16.69	12.00	9.93	39.00	27.00
DMC-15L-10JC	M22X1.5	7/8"-14	12.00	19.25	12.00	12.00	38.50	24.00
DMC-15L-12JC	M22X1.5	1-1/16"-12	12.00	21.95	12.00	15.47	44.50	27.00
DMC-16L-12JC	M24X1.5	1-1/16"-12	12.00	21.95	12.00	15.47	45.00	30.00
DMC-16S-08JC	M24X1.5	3/4"-16	14.00	16.69	12.00	9.93	42.00	30.00
DMC-16S-10JC	M24X1.5	7/8"-14	14.00	19.25	12.00	12.00	45.50	30.00
DMC-16S-12JC	M24X1.5	1-1/16"-12	14.00	21.95	12.00	15.47	47.50	30.00
DMC-18L-08JC	M26X1.5	3/4"-16	12.00	16.69	15.00	9.93	41.00	32.00
DMC-18L-10JC	M26X1.5	7/8"-14	12.00	19.25	15.00	12.29	43.50	32.00
DMC-18L-12JC	M26X1.5	1-1/16"-12	12.00	21.95	15.00	15.00	48.00	32.00
DMC-20S-10JC	M30X2	7/8"-14	16.00	19.25	16.00	12.29	49.00	36.00
DMC-20S-12JC	M30X2	1-1/16"-12	16.00	21.95	15.47	15.47	50.00	36.00
DMC-22L-12JC	M30X2	1-1/16"-12	14.00	21.95	19.00	15.47	47.80	36.00
DMC-22L-16JC	M30X2	1-5/16"-12	14.00	23.14	19.00	21.44	49.00	36.00
DMC-25S-12JC	M36X2	1-1/16"-12	18.00	21.95	20.00	15.47	54.00	41.00
DMC-25S-16JC	M36X2	1-5/16"-12	18.00	23.14	20.00	20.00	53.50	41.00
DMC-25S-20JC	M36X2	1-5/8"-12	18.00	24.33	20.00	27.38	54.50	46.00
DMC-27L-20JC	M38X1.5	1-5/8"-12	14.00	24.33	23.00	23.00	52.00	46.00
DMC-27L-24JC	M38X1.5	1-7/8"-12	14.00	27.51	23.00	33.32	56.00	50.00
DMC-28L-16JC	M36X2	1-5/16"-12	14.00	23.14	24.00	21.44	51.00	41.00
DMC-30S-16JC	M42X2	1-5/16"-12	20.00	23.14	25.00	21.44	58.00	50.00
DMC-35L-20JC	M45X2	1-5/8"-12	16.00	24.33	30.00	27.38	57.00	55.00
DMC-38S-20JC	M52X2	1-5/8"-12	22.00	24.33	32.00	27.38	64.00	60.00
DMC-38S-32JC	M52X2	2-1/2"-12	22.00	33.86	32.00	45.25	74.50	65.00
DMC-42L-20JC	M52X2	1-5/8"-12	16.00	24.33	36.00	27.38	58.00	60.00

DMC-FS

DIN2353 Male Connector ORFS Male



DME&JDE Code:	DMC-FS
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	Metric × UNF

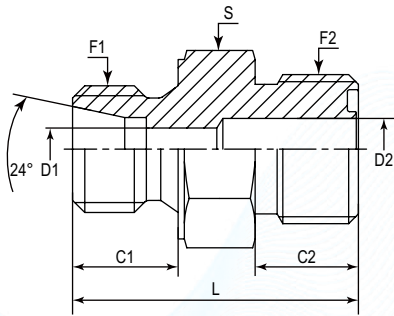


PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	UNF	mm	mm	mm	mm	mm	mm
DMC-06L-04FS	M12 × 1.5	9/16"-18	10.00	9.80	4.00	4.00	30.00	17
DMC-06S-04FS	M14 × 1.5	9/16"-18	12.00	9.80	4.00	4.00	32.50	19
DMC-08L-04FS	M14 × 1.5	9/16"-18	10.00	9.80	4.37	4.37	30.00	19
DMC-08L-06FS	M14 × 1.5	11/16"-16	10.00	11.20	6.00	6.00	31.50	19
DMC-08S-04FS	M16 × 1.5	9/16"-18	12.00	9.80	4.37	4.37	32.50	22
DMC-08S-06FS	M16 × 1.5	11/16"-16	12.00	11.20	5.00	5.00	34.00	22
DMC-10L-06FS	M16 × 1.5	11/16"-16	11.00	11.20	6.71	6.71	32.00	22
DMC-10L-08FS	M16 × 1.5	13/16"-16	11.00	12.80	8.00	8.00	34.00	22
DMC-10S-06FS	M18 × 1.5	11/16"-16	12.00	11.20	6.71	6.71	34.00	24
DMC-12L-06FS	M18 × 1.5	11/16"-16	11.00	11.20	10.00	6.71	32.50	24
DMC-12L-08FS	M18 × 1.5	13/16"-16	11.00	12.80	9.60	9.60	34.00	24
DMC-12L-12FS	M18 × 1.5	13/16"-12	11.00	17.02	10.00	15.47	41.50	32
DMC-12S-08FS	M20 × 1.5	13/16"-16	12.00	12.80	8.00	8.00	37.00	27
DMC-12S-10FS	M20 × 1.5	1"-14	12.00	15.49	8.00	12.29	39.50	27
DMC-14S-08FS	M22 × 1.5	13/16"-16	14.00	12.80	9.60	9.60	39.00	27
DMC-14S-10FS	M22 × 1.5	1"-14	14.00	15.50	10.00	12.50	44.00	27
DMC-15L-08FS	M22 × 1.5	13/16"-16	12.00	12.80	12.00	9.60	37.00	27
DMC-15L-10FS	M22 × 1.5	1"-14	12.00	15.50	12.00	12.00	39.00	27
DMC-16S-10FS	M24 × 1.5	1"-14	14.00	15.50	12.00	12.00	44.00	27
DMC-18L-08FS	M26 × 1.5	13/16"-16	12.00	13.00	15.00	9.50	42.00	32
DMC-18L-12FS	M26 × 1.5	13/16"-12	12.00	17.02	15.00	15.00	42.00	32
DMC-20S-12FS	M30 × 2	13/16"-12	16.00	17.02	15.47	15.47	47.00	36
DMC-22L-12FS	M30 × 2	13/16"-12	14.00	17.02	19.00	15.47	45.00	36
DMC-22L-16FS	M30 × 2	17/16"-12	14.00	17.50	19.00	19.00	46.00	38
DMC-25S-12FS	M36 × 2	13/16"-12	18.00	17.02	20.00	15.47	52.00	42
DMC-25S-16FS	M36 × 2	17/16"-12	18.00	17.50	20.00	20.00	52.50	42
DMC-28L-12FS	M36 × 2	13/16"-12	14.00	17.02	24.00	15.47	48.00	42
DMC-28L-16FS	M36 × 2	17/16"-12	14.00	17.50	24.00	20.60	48.50	42
DMC-28L-20FS	M36 × 2	111/16"-12	14.00	17.50	24.00	26.00	48.00	46
DMC-30S-16FS	M42 × 2	17/16"-12	20.00	17.50	25.00	20.60	54.50	50
DMC-30S-20FS	M42 × 2	111/16"-12	20.00	17.50	25.00	25.00	54.00	46
DMC-35L-16FS	M45 × 2	17/16"-12	16.00	17.50	30.00	20.60	53.50	55
DMC-35L-24FS	M45 × 2	2"-12	16.00	17.50	30.00	32.00	51.50	55
DMC-38S-24FS	M52 × 2	2"-12	22.00	17.50	32.00	32.00	57.50	55
DMC-42L-24FS	M52 × 2	2"-12	16.00	17.50	36.00	32.00	51.50	55

DMC-GQ

DIN 2353 Male Connector (BSPP Male) with O Ring and Retaining Ring



DME&JDE Code:	DMC-GQ
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	Straight
Connection Type:	Male × Male
Thread Type:	Metric × BSPP
Sealing Method:	O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	BSPP	mm	mm	mm	mm	mm	mm
DMC-06L-01GQ	M12X1.5	1/8"-28	10.00	7.60	4.00	4.00	22.50	14
DMC-06L-02GQ	M12X1.5	1/4"-19	10.00	11.20	4.00	7.50	30.00	19
DMC-06S-02GQ	M14X1.5	1/4"-19	12.00	11.20	4.00	6.50	30.00	19
DMC-08L-02GQ	M14X1.5	1/4"-19	10.00	11.20	6.00	6.00	27.00	19
DMC-08L-03GQ	M14X1.5	3/8"-19	10.00	11.20	6.00	6.00	30.00	22
DMC-08S-02GQ	M16X1.5	1/4"-19	12.00	11.20	5.00	7.50	32.00	19
DMC-10L-02GQ	M16X1.5	1/4"-19	11.00	11.20	7.50	7.50	29.00	19
DMC-10L-03GQ	M16X1.5	3/8"-19	11.00	11.20	8.00	8.00	30.00	22
DMC-10L-04GQ	M16X1.5	1/2"-14	11.00	14.50	8.00	12.00	34.00	27
DMC-10S-02GQ	M18X1.5	1/4"-19	12.00	11.20	7.00	7.00	32.00	19
DMC-10S-03GQ	M18X1.5	3/8"-19	12.00	11.20	7.00	9.90	32.50	22
DMC-12L-03GQ	M18X1.5	3/8"-19	11.00	11.20	9.90	9.90	30.00	22
DMC-12L-04GQ	M18X1.5	1/2"-14	11.00	14.50	10.00	12.00	34.50	27
DMC-12S-03GQ	M20X1.5	3/8"-19	12.00	11.20	8.00	8.00	36.00	22
DMC-12S-04GQ	M20X1.5	1/2"-14	12.00	14.50	8.00	12.00	39.00	27
DMC-14S-04GQ	M22X1.5	1/2"-14	14.00	14.50	10.00	12.00	39.00	27
DMC-15L-03GQ	M22X1.5	3/8"-19	12.00	11.20	12.00	7.50	31.00	24
DMC-15L-04GQ	M22X1.5	1/2"-14	12.00	14.50	12.00	12.00	34.50	27
DMC-16S-04GQ	M24X1.5	1/2"-14	14.00	14.50	12.00	12.00	38.50	27
DMC-18L-04GQ	M26X1.5	1/2"-14	12.00	14.50	15.00	12.00	36.00	27
DMC-18L-06GQ	M26X1.5	3/4"-14	12.00	14.50	15.00	15.00	37.50	36
DMC-20S-06GQ	M30X2	3/4"-14	16.00	15.50	16.00	16.00	45.00	36
DMC-22L-06GQ	M30X2	3/4"-14	14.00	15.50	19.00	15.50	39.50	36
DMC-25S-06GQ	M36X2	3/4"-14	18.00	15.50	20.00	15.50	49.50	41
DMC-25S-08GQ	M36X2	1"-11	18.00	18.60	20.00	20.00	50.50	41
DMC-28L-08GQ	M36X2	1"-11	14.00	18.60	24.00	21.50	41.00	41
DMC-30S-10GQ	M42X2	11/4"-11	20.00	18.60	25.00	27.50	53.10	50
DMC-35L-10GQ	M45X2	11/4"-11	16.00	18.60	30.00	27.50	48.00	50
DMC-38S-12GQ	M52X2	11/2"-11	22.00	18.60	32.00	32.00	58.10	55
DMC-42L-12GQ	M52X2	11/2"-11	16.00	18.60	36.00	33.00	49.50	55

DMC-MQ


DIN 2353 Male Connector Metric Male with O Ring and Retaining Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DMC-MQ
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Male x Male
- Thread Types: Metricx Metric
- Sealing Method: O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	METRIC	mm	mm	mm	mm	mm	mm
DMC-06L-M10Q	M12X1.5	M10X1	10.00	8.00	4.00	4.00	23.50	14
DMC-06S-M12Q	M14X1.5	M12X1.5	12.00	11.00	4.00	6.00	29.50	17
DMC-08L-M12Q	M14X1.5	M12X1.5	10.00	11.00	6.00	6.00	26.50	17
DMC-08S-M14Q	M16X1.5	M14X1.5	12.00	11.00	5.00	5.00	31.50	19
DMC-10L-M14Q	M16X1.5	M14X1.5	11.00	11.00	7.50	7.50	30.00	19
DMC-10L-M22Q	M16X1.5	M22X1.5	11.00	13.00	8.00	14.00	34.50	27
DMC-10S-M16Q	M18X1.5	M16X1.5	12.00	11.50	7.00	9.00	33.50	22
DMC-12L-M16Q	M18X1.5	M16X1.5	11.00	11.50	10.00	7.00	31.00	22
DMC-12L-M22Q	M18X1.5	M22X1.5	11.00	13.00	10.00	14.00	34.50	27
DMC-12S-M18Q	M20X1.5	M18X1.5	12.00	14.00	8.00	8.00	36.00	24
DMC-14S-M20Q	M22X1.5	M20X1.5	14.00	14.00	10.00	12.00	39.50	27
DMC-15L-M18Q	M22X1.5	M18X1.5	12.00	12.00	10.00	10.00	33.00	24
DMC-15L-M22Q	M22X1.5	M22X1.5	12.00	13.00	12.00	12.00	35.00	27
DMC-16S-M22Q	M24X1.5	M22X1.5	14.00	13.00	12.00	12.00	37.00	27
DMC-18L-M22Q	M26X1.5	M22X1.5	12.00	13.00	14.00	14.00	35.00	27
DMC-20S-M27Q	M30X2	M27X2	16.00	18.50	16.00	16.00	47.00	32
DMC-22L-M22Q	M30X2	M22X1.5	14.00	13.00	19.00	14.00	38.00	32
DMC-22L-M26Q	M30X2	M26X1.5	14.00	16.00	19.00	17.00	40.50	32
DMC-22L-M27Q	M30X2	M27X2	14.00	18.00	18.00	13.00	40.50	32
DMC-25S-M33Q	M36X2	M33X2	18.00	18.50	20.00	20.00	51.50	41
DMC-28L-M33Q	M36X2	M33X2	14.00	16.00	23.00	23.00	41.00	41
DMC-30S-M42Q	M42X2	M42X2	20.00	16.00	25.00	30.00	54.00	50
DMC-35L-M42Q	M45X2	M42X2	16.00	16.00	30.00	30.00	45.00	50
DMC-38S-M48Q	M52X2	M48X2	22.00	17.50	32.00	36.00	61.50	55
DMC-42L-M48Q	M52X2	M48X2	16.00	17.50	36.00	36.00	49.50	55

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DMCQ-JC


DIN 2353 Male Connector O Ring and Retaining Ring (JIC male)

 German Technology Equipment



New-Standard

- DME&JDE Code: DMCQ-JC
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Male x Male
- Thread Type: Metric x UNF
- Sealing Method: O Ring + Retaining Ring

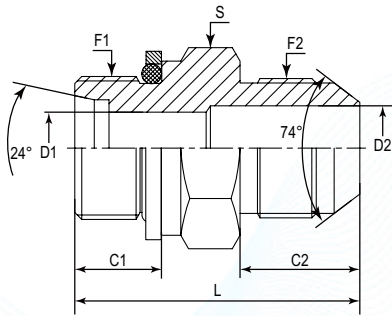

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	UNF	mm	mm	mm	mm	mm	mm
DMCQ-06LL-04JC	M10X1	7/16"-20	8.00	13.97	4.37	4.37	30.50	14
DMCQ-06L-04JC	M12X1.5	7/16"-20	11.00	13.97	4.00	4.00	35.00	19
DMCQ-06S-04JC	M14X1.5	7/16"-20	12.00	13.97	4.00	4.00	34.00	17
DMCQ-08LL-04JC	M12X1	7/16"-20	11.00	13.97	5.30	4.37	32.50	17
DMCQ-08LL-06JC	M12X1	9/16"-18	11.00	14.12	5.30	7.54	33.00	17
DMCQ-08L-04JC	M14X1.5	7/16"-20	11.00	13.97	6.00	4.37	35.00	19
DMCQ-08L-06JC	M14X1.5	9/16"-18	11.00	14.12	6.00	7.54	35.00	19
DMCQ-08S-04JC	M16X1.5	7/16"-20	12.00	13.97	4.37	4.37	34.00	17
DMCQ-08S-06JC	M16X1.5	9/16"-18	11.50	14.12	5.00	5.00	34.50	22
DMCQ-10LL-04JC	M14X1.5	7/16"-20	11.00	13.97	8.00	4.37	33.50	19
DMCQ-10L-06JC	M16X1.5	9/16"-18	11.00	14.12	7.54	7.54	35.00	22
DMCQ-10L-08JC	M16X1.5	3/4"-16	11.00	16.69	8.00	8.00	38.00	22
DMCQ-10S-06JC	M18X1.5	9/16"-18	12.50	14.12	7.00	7.00	35.50	24
DMCQ-10S-08JC	M18X1.5	3/4"-16	12.00	16.69	7.00	9.93	38.00	22
DMCQ-12L-06JC	M18X1.5	9/16"-18	12.00	14.12	10.00	7.54	37.50	24
DMCQ-12L-08JC	M18X1.5	3/4"-16	11.00	16.69	9.93	9.93	37.00	24

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:




DMCQ-12S-06JC	M20X1.5	9/16"-18	12.50	14.12	7.54	7.54	36.00	27
DMCQ-12S-08JC	M20X1.5	3/4"-16	12.50	16.69	8.00	9.93	38.50	27
DMCQ-12S-10JC	M20X1.5	7/8"-14	12.50	19.25	8.00	12.29	42.50	27
DMCQ-14S-06JC	M22X1.5	9/16"-18	14.00	14.12	10.00	7.54	37.00	27
DMCQ-14S-10JC	M22X1.5	7/8"-14	14.00	19.25	10.00	12.29	44.00	24
DMCQ-15L-06JC	M22X1.5	9/16"-18	14.00	14.12	12.00	7.54	39.50	27
DMCQ-15L-08JC	M22X1.5	3/4"-16	12.00	16.69	12.00	9.93	39.00	27
DMCQ-15L-10JC	M22X1.5	7/8"-14	13.00	19.25	12.00	12.00	44.50	27
DMCQ-15L-12JC	M22X1.5	11/16"-12	13.00	21.95	12.00	15.47	47.00	27
DMCQ-16S-08JC	M24X1.5	3/4"-16	14.00	16.69	12.00	9.93	43.50	32
DMCQ-16S-10JC	M24X1.5	7/8"-14	14.00	19.25	12.00	12.00	46.00	30
DMCQ-16S-12JC	M24X1.5	11/16"-12	14.00	21.95	12.00	15.47	49.50	32
DMCQ-18L-10JC	M26X1.5	7/8"-14	14.00	19.25	15.00	12.29	46.50	32
DMCQ-18L-12JC	M26X1.5	11/16"-12	14.00	21.95	15.00	15.00	49.50	32
DMCQ-18L-16JC	M26X1.5	15/16"-12	14.00	23.14	15.00	21.44	53.50	36
DMCQ-20S-12JC	M30X2	11/16"-12	16.00	21.95	15.47	15.47	52.00	36
DMCQ-20S-16JC	M30X2	15/16"-12	16.00	23.14	16.00	21.44	51.50	36
DMCQ-22L-12JC	M30X2	11/16"-12	16.00	21.95	19.00	15.47	52.00	36
DMCQ-25S-12JC	M36X2	11/16"-12	17.00	21.95	20.00	15.47	50.00	41
DMCQ-25S-16JC	M36X2	15/16"-12	17.00	23.14	20.00	21.44	53.00	41
DMCQ-28L-16JC	M36X2	15/16"-12	14.00	23.14	24.00	21.44	53.50	41
DMCQ-30S-16JC	M42X2	15/16"-12	17.50	23.14	25.00	21.44	54.50	50
DMCQ-30S-20JC	M42X2	15/8"-12	17.50	24.33	25.00	27.38	56.00	50
DMCQ-35L-20JC	M45X2	15/8"-12	16.00	24.33	30.00	27.38	51.00	46
DMCQ-38S-20JC	M52X2	15/8"-12	22.00	24.33	32.00	27.38	67.00	60
DMCQ-38S-24JC	M52X2	21/2"-12	22.00	27.50	32.00	32.00	70.00	60
DMCQ-42L-24JC	M52X2	17/8"-12	16.00	27.50	36.00	33.32	58.50	55

DMC-GED

Male Connector (BSPP Male) with ED Ring

DME&JDE Code:	DMC-GED
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	Metric × BSPP + ED Ring
Sealing Method:	ED Rings

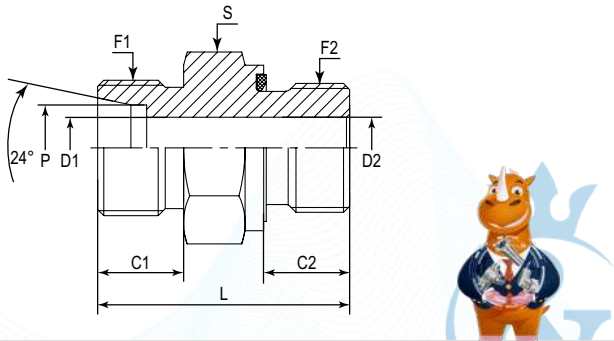


PART NUMBER	F1 (Thread)	F2 (Thread)	P	C1	C2	D1	D2	L	S
#	Metric	BSPP	mm	mm	mm	mm	mm	mm	mm
DMC-04LL-01GED	M8X1	1/8"-28	4.10	8.00	8.00	3.00	3.00	21.50	14.00
DMC-06L-01GED	M12X1.5	1/8"-28	6.00	10.00	8.00	4.00	4.00	23.50	14.00
DMC-06L-02GED	M12X1.5	1/4"-19	6.00	10.00	12.00	4.00	6.00	29.00	19.00
DMC-06L-03GED	M12X1.5	3/8"-19	6.00	10.00	12.00	4.00	9.00	30.50	22.00
DMC-06LL-01GED	M10X1	1/8"-28	6.00	8.00	8.00	4.00	4.00	21.50	14.00
DMC-06S-02GED	M14X1.5	1/4"-19	6.00	12.00	12.00	4.00	7.50	32.00	19.00
DMC-08L-01GED	M14X1.5	1/8"-28	8.00	10.00	8.00	6.00	4.00	24.50	14.00
DMC-08L-02GED	M14X1.5	1/4"-19	8.00	10.00	12.00	6.00	6.00	29.00	19.00
DMC-08L-03GED	M14X1.5	3/8"-19	8.00	10.00	12.00	6.00	9.00	30.50	22.00
DMC-08L-04GED	M14X1.5	1/2"-14	8.00	10.00	14.00	6.00	12.00	33.00	27.00
DMC-08LL-01GED	M12X1	1/8"-28	8.00	9.00	8.00	6.00	4.00	23.50	14.00
DMC-08S-02GED	M16X1.5	1/4"-19	8.00	12.00	12.00	5.00	5.00	34.00	19.00
DMC-08S-03GED	M16X1.5	3/8"-19	8.00	12.00	12.00	5.00	9.00	34.50	22.00
DMC-10L-01GED	M16X1.5	1/8"-28	10.00	11.00	8.00	8.00	4.40	26.00	17.00
DMC-10L-02GED	M16X1.5	1/4"-19	10.00	11.00	12.00	6.00	6.00	30.00	19.00
DMC-10L-03GED	M16X1.5	3/8"-19	10.00	11.00	12.00	8.00	8.00	31.50	22.00
DMC-10L-04GED	M16X1.5	1/2"-14	10.00	11.00	14.00	8.00	12.00	34.00	27.00
DMC-10S-02GED	M18X1.5	1/4"-19	10.00	12.00	12.00	7.00	5.00	34.00	19.00
DMC-10S-03GED	M18X1.5	3/8"-19	10.00	12.00	12.00	7.00	9.90	34.50	22.00
DMC-10S-04GED	M18X1.5	1/2"-14	10.00	12.00	14.00	7.00	12.30	39.00	27.00
DMC-12L-02GED	M18X1.5	1/4"-19	12.00	11.00	12.00	7.50	7.50	31.00	19.00
DMC-12L-03GED	M18X1.5	3/8"-19	12.00	11.00	12.00	10.00	10.00	31.50	22.00
DMC-12L-04GED	M18X1.5	1/2"-14	12.00	11.00	14.00	10.00	10.00	34.00	27.00
DMC-12L-06GED	M18X1.5	3/4"-14	12.00	11.00	16.00	10.00	16.70	37.00	32.00
DMC-12S-02GED	M20X1.5	1/4"-19	12.00	12.00	12.00	6.00	6.00	36.00	22.00
DMC-12S-03GED	M20X1.5	3/8"-19	12.00	12.00	12.00	8.00	8.00	36.50	22.00

DMC-12L-M22ED	M18X1.5	M22X1.5	12.00	11.00	14.00	10.00	10.00	35.00	27.00
DMC-12S-M14ED	M20X1.5	M14X1.5	12.00	12.00	12.00	8.00	7.00	35.00	22.00
DMC-12S-M16ED	M20X1.5	M16X1.5	12.00	12.00	12.00	8.00	8.00	35.00	22.00
DMC-12S-M18ED	M20X1.5	M18X1.5	12.00	12.00	12.00	8.00	8.00	36.50	24.00
DMC-12S-M20ED	M20X1.5	M20X1.5	12.00	12.00	14.00	8.00	10.00	39.00	27.00
DMC-12S-M22ED	M20X1.5	M22X1.5	12.00	12.00	14.00	8.00	12.00	39.00	27.00
DMC-14S-M20ED	M22X1.5	M20X1.5	14.00	14.00	14.00	10.00	10.00	41.00	27.00
DMC-15L-M12ED	M22X1.5	M12X1.5	15.00	12.00	12.00	12.00	5.00	32.00	24.00
DMC-15L-M14ED	M22X1.5	M14X1.5	15.00	12.00	12.00	12.00	7.00	33.00	24.00
DMC-15L-M16ED	M22X1.5	M16X1.5	15.00	12.00	12.00	12.00	8.00	32.50	24.00
DMC-15L-M18ED	M22X1.5	M18X1.5	15.00	12.00	12.00	10.00	10.00	32.50	24.00
DMC-15L-M22ED	M22X1.5	M22X1.5	15.00	12.00	14.00	12.00	12.00	36.00	27.00
DMC-16L-M22ED	M22X1.5	M22X1.5	16.00	12.00	14.00	12.00	12.00	36.00	27.00
DMC-16L-M27ED	M22X1.5	M27X2	16.00	12.00	16.00	12.00	15.50	41.00	32.00
DMC-16S-M18ED	M24X1.5	M18X1.5	16.00	14.00	12.00	10.00	10.00	38.50	27.00
DMC-16S-M22ED	M24X1.5	M22X1.5	16.00	14.00	14.00	12.00	12.00	41.00	27.00
DMC-18L-M18ED	M26X1.5	M18X1.5	18.00	12.00	12.00	15.00	9.00	34.50	27.00
DMC-18L-M22ED	M26X1.5	M22X1.5	18.00	12.00	14.00	14.00	14.00	36.00	27.00
DMC-18L-M26ED	M26X1.5	M26X1.5	18.00	12.00	16.00	15.00	15.00	38.00	32.00
DMC-20S-M22ED	M30X2	M22X1.5	20.00	16.00	14.00	13.00	13.00	45.00	32.00
DMC-20S-M27ED	M30X2	M27X2	20.00	16.00	16.00	15.50	15.50	47.00	32.00
DMC-22L-M22ED	M30X2	M22X1.5	22.00	14.00	14.00	19.00	12.00	38.00	32.00
DMC-22L-M26ED	M30X2	M26X1.5	22.00	14.00	16.00	18.00	18.00	40.00	32.00
DMC-25S-M27ED	M36X2	M27X2	25.00	18.00	16.00	20.00	15.50	51.00	41.00
DMC-28L-M33ED	M36X2	M33X2	28.00	14.00	18.00	24.00	24.00	43.00	41.00
DMC-30S-M33ED	M42X2	M33X2	30.00	20.00	18.00	25.00	20.00	55.00	46.00
DMC-30S-M42ED	M42X2	M42X2	30.00	20.00	20.00	25.00	25.00	57.00	50.00
DMC-35L-M42ED	M45X2	M42X2	35.30	16.00	20.00	30.00	30.00	48.00	50.00
DMC-38S-M48ED	M52X2	M48X2	38.30	22.00	22.00	32.00	32.00	64.00	55.00
DMC-42L-M48ED	M52X2	M48X2	42.30	16.00	22.00	36.00	36.00	52.00	55.00

DBMC-GED

Male Bulkhead Connector (BSPP) with ED Ring

DME&JDE Code:	DBMC-GED
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	Metric × BSPP
Sealing Method:	ED Rings
Other Features:	Bulkhead

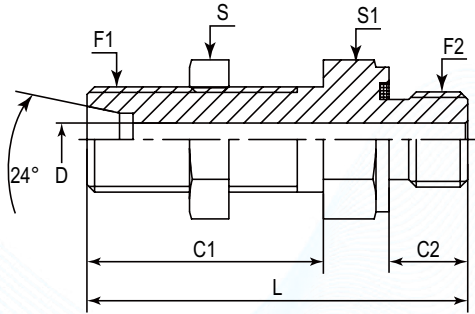

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D	L	S	S1
#	Metric	BSPP	mm	mm	mm	mm	mm	mm
DBMC-10S-03GED	M18X1.5	3/8"-19	37.00	12.00	7.00	59.50	24.00	24.00
DBMC-12S-04GED	M20X1.5	1/2"-14	38.00	14.00	8.00	64.00	27.00	27.00
DBMC-35L-10GED	M45X2	1-1/4"-11	47.00	20.00	30.00	82.00	50.00	55.00

DLM-G


DIN 2353 90° Elbow BSPP Male

 German Technology Equipment



New-Standard

- DME&JDE Code: DLM-G
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: 90° Elbow
- Connection Type: Male × Male
- Thread Type: Metric × BSPP



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S
#	METRIC	BSPP	mm	mm	mm	mm	mm
DLM-04LL-01G	M8X1	1/8"-28	3.00	4.00	15.00	17.00	9
DLM-06LL-01G	M10X1	1/8"-28	4.00	3.50	19.00	20.00	11
DLM-06L-01G	M12X1.5	1/8"-28	4.00	3.50	19.00	22.50	12
DLM-06L-02G	M12X1.5	1/4"-19	4.00	4.70	21.00	24.00	12
DLM-06S-02G	M14X1.5	1/4"-19	4.00	4.70	23.00	26.00	12
DLM-08LL-01G	M12X1	1/8"-28	6.00	3.50	17.00	20.00	12
DLM-08L-01G	M14X1.5	1/8"-28	6.00	3.50	21.00	22.50	12
DLM-08L-02G	M14X1.5	1/4"-19	6.00	4.70	21.00	24.00	12
DLM-08L-03G	M14X1.5	3/8"-19	6.00	7.90	24.00	28.00	17
DLM-08L-04G	M14X1.5	1/2"-14	6.00	11.10	24.00	34.00	19
DLM-08S-02G	M16X1.5	1/4"-19	5.00	4.70	24.00	27.00	14
DLM-10L-03G	M16X1.5	3/8"-19	8.00	7.90	25.00	28.00	17
DLM-10L-04G	M16X1.5	1/2"-14	8.00	11.10	24.00	34.00	19
DLM-10S-03G	M18X1.5	3/8"-19	7.00	7.90	25.00	28.00	17
DLM-12L-03G	M18X1.5	3/8"-19	10.00	7.90	24.00	28.00	17
DLM-12L-04G	M18X1.5	1/2"-14	10.00	11.10	24.00	30.00	22
DLM-12S-03G	M20X1.5	3/8"-19	8.00	7.90	29.00	28.00	19
DLM-12S-04G	M20X1.5	1/2"-14	8.00	11.10	29.00	32.00	19
DLM-14S-03G	M22X1.5	3/8"-19	10.00	7.90	30.00	30.00	19
DLM-14S-04G	M22X1.5	1/2"-14	10.00	11.10	30.00	34.00	19
DLM-15L-04G	M22X1.5	1/2"-14	12.00	11.10	28.00	34.00	19
DLM-15L-06G	M22X1.5	3/4"-14	12.00	16.70	33.00	38.00	27
DLM-16S-04G	M24X1.5	1/2"-14	12.00	11.10	33.00	36.00	24
DLM-16S-06G	M24X1.5	3/4"-14	12.00	16.70	33.00	40.00	27
DLM-18L-04G	M26X1.5	1/2"-14	15.00	11.10	31.00	36.00	24
DLM-18L-06G	M26X1.5	3/4"-14	15.00	16.70	34.00	42.00	27
DLM-20S-04G	M30X2	1/2"-14	16.00	11.10	37.00	41.00	27
DLM-20S-06G	M30X2	3/4"-14	16.00	16.70	37.00	42.00	27
DLM-22L-06G	M30X2	3/4"-14	19.00	16.70	35.00	38.50	27
DLM-25S-08G	M36X2	1"-11	20.00	22.20	42.00	48.00	36
DLM-28L-08G	M36X2	1"-11	24.00	22.20	38.00	48.00	36
DLM-30S-10G	M42X2	1 1/4"-11	25.00	28.60	49.00	55.00	41
DLM-35L-10G	M45X2	1 1/4"-11	30.00	28.60	45.00	55.00	41
DLM-38S-12G	M52X2	1 1/2"-11	32.00	33.30	57.00	61.00	50
DLM-42L-12G	M52X2	1 1/2"-11	36.00	33.30	51.00	61.00	50

Certificate:



DLM-R


90° Elbow BSPT Male

 German Technology Equipment



New-Standard

- DME&JDE Code: DLM-R
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: 90° Elbow
- Connection Type: Male × Male
- Thread Types: Metric × BSPT



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S
#	Metric	BSPT	mm	mm	mm	mm	mm
DLM-04LL-01R	M8X1	1/8"-28	15.00	17.00	3.00	4.00	9.00
DLM-06L-01R	M12X1.5	1/8"-28	19.00	20.00	4.00	4.50	12.00
DLM-06L-02R	M12X1.5	1/4"-19	21.00	26.00	4.00	6.00	12.00
DLM-06L-01R	M10X1	1/8"-28	15.00	17.00	4.50	4.50	9.00
DLM-06S-02R	M14X1.5	1/4"-19	23.00	26.00	4.00	6.00	12.00
DLM-08L-01R	M14X1.5	1/8"-28	21.00	26.00	6.00	4.50	12.00
DLM-08L-02R	M14X1.5	1/4"-19	21.00	26.00	6.00	6.00	12.00
DLM-08L-03R	M14X1.5	3/8"-19	24.00	28.00	6.00	9.00	17.00
DLM-08L-04R	M14X1.5	1/2"-14	24.00	34.00	6.00	12.00	19.00
DLM-08LL-01R	M12X1	1/8"-28	17.00	20.00	6.00	4.50	12.00
DLM-08S-02R	M16X1.5	1/4"-19	24.00	27.00	5.00	6.00	14.00
DLM-10L-01R	M16X1.5	1/8"-28	22.00	27.00	8.00	4.50	14.00
DLM-10L-02R	M16X1.5	1/4"-19	22.00	27.00	8.00	6.00	14.00
DLM-10L-03R	M16X1.5	3/8"-19	24.00	28.00	8.00	9.00	17.00
DLM-10L-04R	M16X1.5	1/2"-14	24.00	34.00	8.00	12.00	19.00
DLM-10S-03R	M18X1.5	3/8"-19	25.00	28.00	7.00	9.00	17.00
DLM-12L-02R	M18X1.5	1/4"-19	24.00	28.00	10.00	6.00	17.00
DLM-12L-03R	M18X1.5	3/8"-19	24.00	28.00	10.00	9.00	17.00
DLM-12L-04R	M18X1.5	1/2"-14	24.00	32.00	10.00	12.00	22.00
DLM-12S-03R	M20X1.5	3/8"-19	29.00	28.00	8.00	9.00	19.00
DLM-12S-04R	M20X1.5	1/2"-14	29.00	32.00	8.00	12.00	19.00
DLM-14S-03R	M22X1.5	3/8"-19	30.00	30.00	10.00	9.00	19.00
DLM-14S-04R	M22X1.5	1/2"-14	30.00	34.00	10.00	12.00	19.00
DLM-15L-03R	M22X1.5	3/8"-19	28.00	30.00	12.00	9.00	19.00
DLM-15L-04R	M22X1.5	1/2"-14	28.00	34.00	12.00	12.00	19.00
DLM-16S-03R	M24X1.5	3/8"-19	33.00	37.00	12.00	9.00	24.00
DLM-16S-04R	M24X1.5	1/2"-14	33.00	36.00	12.00	12.00	24.00
DLM-18L-04R	M26X1.5	1/2"-14	31.00	36.00	15.00	12.00	24.00
DLM-18L-06R	M26X1.5	3/4"-14	34.00	42.00	15.00	16.70	27.00
DLM-20S-04R	M30X2	1/2"-14	37.00	41.00	16.00	12.00	27.00
DLM-20S-06R	M30X2	3/4"-14	37.00	42.00	16.00	16.70	27.00
DLM-22L-06R	M30X2	3/4"-14	35.00	42.00	19.00	16.70	27.00
DLM-25S-06R	M36X2	3/4"-14	42.00	45.00	20.00	16.70	36.00
DLM-25S-08R	M36X2	1"-11	42.00	48.00	20.00	22.20	36.00
DLM-28L-08R	M36X2	1"-11	38.00	48.00	24.00	22.20	36.00
DLM-30S-08R	M42X2	1"-11	49.00	55.00	25.00	22.20	41.00
DLM-30S-10R	M42X2	1-1/4"-11	49.00	55.00	25.00	28.60	41.00
DLM-35L-10R	M45X2	1-1/4"-11	45.00	55.00	30.00	28.60	41.00
DLM-38S-12R	M52X2	1-1/2"-11	57.00	61.00	32.00	33.30	50.00
DLM-42L-12R	M52X2	1-1/2"-11	51.00	61.00	36.00	33.30	50.00

Certificate:





DLM-N


90° Elbow NPTF Male

 German Technology Equipment



New-Standard

DME&JDE Code:	DLM-N
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	90° Elbow
Connection Type:	Male × Male
Thread Type:	Metric × NPTF



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S
#	Metric	NPTF	mm	mm	mm	mm	mm
DLM-04LL-01N	M8X1	1/8"-27	15.00	17.00	3.00	4.00	9.00
DLM-06L-01N	M12X1.5	1/8"-27	19.00	20.00	4.00	4.78	12.00
DLM-06L-02N	M12X1.5	1/4"-18	21.00	26.00	4.00	7.14	12.00
DLM-06L-03N	M12X1.5	3/8"-18	24.00	28.00	4.00	10.31	17.00
DLM-06LL-01N	M10X1	1/8"-27	15.00	17.00	4.00	4.78	9.00
DLM-06S-02N	M14X1.5	1/4"-18	23.00	26.00	4.00	7.14	12.00
DLM-08L-01N	M14X1.5	1/8"-27	21.00	26.00	6.00	4.78	12.00
DLM-08L-02N	M14X1.5	1/4"-18	21.00	26.00	6.00	7.14	12.00
DLM-08L-03N	M14X1.5	3/8"-18	24.00	28.00	6.00	10.31	17.00
DLM-08L-04N	M14X1.5	1/2"-14	24.00	34.00	6.00	13.49	19.00
DLM-08S-02N	M16X1.5	1/4"-18	24.00	27.00	5.00	7.14	14.00
DLM-10L-01N	M16X1.5	1/8"-27	22.00	27.00	8.00	4.78	14.00
DLM-10L-02N	M16X1.5	1/4"-18	22.00	27.00	8.00	7.14	14.00
DLM-10L-03N	M16X1.5	3/8"-18	25.00	28.00	8.00	10.31	17.00
DLM-10L-04N	M16X1.5	1/2"-14	24.00	34.00	8.00	13.49	19.00
DLM-10S-03N	M18X1.5	3/8"-18	25.00	28.00	7.00	10.31	17.00
DLM-12L-02N	M18X1.5	1/4"-18	24.00	28.00	10.00	7.14	17.00
DLM-12L-03N	M18X1.5	3/8"-18	24.00	28.00	10.00	10.31	17.00
DLM-12L-04N	M18X1.5	1/2"-14	24.00	34.00	10.00	13.49	22.00
DLM-12S-02N	M20X1.5	1/4"-18	29.00	29.00	8.00	7.14	19.00
DLM-12S-03N	M20X1.5	3/8"-18	29.00	28.00	8.00	10.31	19.00
DLM-12S-04N	M20X1.5	1/2"-14	29.00	36.00	8.00	13.49	19.00
DLM-12S-06N	M20X1.5	3/4"-14	29.00	40.40	8.00	16.70	27.00
DLM-14S-03N	M22X1.5	3/8"-18	30.00	30.00	10.00	10.31	19.00
DLM-14S-04N	M22X1.5	1/2"-14	30.00	34.00	10.00	13.49	19.00
DLM-15L-03N	M22X1.5	3/8"-18	28.00	30.00	12.00	10.31	19.00
DLM-15L-04N	M22X1.5	1/2"-14	28.00	34.00	12.00	13.49	19.00
DLM-15L-06N	M22X1.5	3/4"-14	34.00	38.50	12.00	16.70	27.00
DLM-16S-03N	M24X1.5	3/8"-18	33.00	34.00	12.00	10.31	24.00
DLM-16S-04N	M24X1.5	1/2"-14	33.00	36.00	12.00	13.49	24.00
DLM-16S-06N	M24X1.5	3/4"-14	33.00	40.40	12.00	18.26	27.00
DLM-18L-04N	M26X1.5	1/2"-14	31.00	36.00	15.00	13.49	24.00
DLM-18L-06N	M26X1.5	3/4"-14	34.00	42.00	15.00	18.26	27.00
DLM-20S-04N	M30X2	1/2"-14	37.00	42.00	16.00	13.49	27.00
DLM-20S-06N	M30X2	3/4"-14	37.00	40.40	16.00	18.26	27.00
DLM-20S-08N	M30X2	1"-1-1/2	42.00	48.00	16.00	23.83	36.00
DLM-22L-06N	M30X2	3/4"-14	35.00	38.50	19.00	18.26	27.00
DLM-25S-04N	M36X2	1/2"-14	42.00	45.00	20.00	13.49	36.00
DLM-25S-06N	M36X2	3/4"-14	42.00	45.00	20.00	18.26	36.00
DLM-25S-08N	M36X2	1"-11-1/2	42.00	48.00	20.00	23.83	36.00
DLM-28L-08N	M36X2	1"-11-1/2	38.00	48.00	24.00	22.20	36.00
DLM-30S-08N	M42X2	1"-11-1/2	49.00	55.00	25.00	23.83	41.00
DLM-30S-10N	M42X2	1-1/4"-11-1/2	49.00	55.00	25.00	31.75	41.00
DLM-35L-10N	M45X2	1-1/4"-11-1/2	45.00	55.00	30.00	31.75	41.00
DLM-38S-12N	M52X2	1-1/2"-11-1/2	57.00	61.00	32.00	38.10	50.00
DLM-42L-12N	M52X2	1-1/2"-11-1/2	51.00	61.00	36.00	38.10	50.00

Certificate:             

DFC-N


Female Connector NPTF Female

 German Technology Equipment



New-Standard

DME&JDE Code:	DFC-N
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	Straight
Connection Type:	Female × Female
Thread Types:	Metric × NPTF

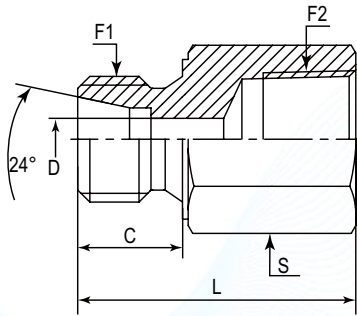

PART NUMBER	F1(Thread)	F2(Thread)	C	D	L	S
#	Metric	NPTF	mm	mm	mm	mm
DFC-06L-01N	M12X1.5	1/8"-27	10.00	4.00	26.00	14.00
DFC-06L-02N	M12X1.5	1/4"-18	10.00	4.00	30.00	19.00
DFC-06L-03N	M12X1.5	3/8"-18	10.00	4.00	30.00	22.00
DFC-08L-02N	M14X1.5	1/4"-18	10.00	6.00	31.00	19.00
DFC-10L-02N	M16X1.5	1/4"-18	11.00	8.00	31.00	19.00
DFC-12L-04N	M18X1.5	1/2"-14	11.00	10.00	38.00	27.00
DFC-12S-02N	M20X1.5	1/4"-18	12.00	8.00	33.00	22.00
DFC-15L-06N	M22X1.5	3/4"-14	12.00	12.00	42.00	36.00
DFC-18L-06N	M26X1.5	3/4"-14	12.00	15.00	42.00	36.00

Certificate:             




DFC-G

Female Connector BSPP Female



- DME&JDE Code: DFC-G
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Female x Female
- Thread Type: Metric x BSPP



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	Metric	BSPP	mm	mm	mm	mm
DFC-06L-01G	M12X1.5	1/8"-28	10.00	4.00	26.00	14.00
DFC-06L-02G	M12X1.5	1/4"-19	10.00	4.00	31.00	19.00
DFC-06L-03G	M12X1.5	3/8"-19	10.00	4.00	32.00	22.00
DFC-06S-02G	M14X1.5	1/4"-19	12.00	4.00	33.00	19.00
DFC-06S-04G	M14X1.5	1/2"-14	12.00	4.00	38.00	27.00
DFC-08L-02G	M14X1.5	1/4"-19	10.00	6.00	31.00	19.00
DFC-08L-03G	M14X1.5	3/8"-19	10.00	6.00	32.00	22.00
DFC-08L-04G	M14X1.5	1/2"-14	10.00	6.00	36.00	27.00
DFC-08S-02G	M16X1.5	1/4"-19	12.00	5.00	33.00	19.00
DFC-08S-04G	M16X1.5	1/2"-14	12.00	5.00	37.00	27.00
DFC-10L-02G	M16X1.5	1/4"-19	11.00	8.00	32.00	19.00
DFC-10L-03G	M16X1.5	3/8"-19	11.00	8.00	33.00	22.00
DFC-10L-04G	M16X1.5	1/2"-14	11.00	8.00	37.00	27.00
DFC-10S-03G	M18X1.5	3/8"-19	12.00	7.00	34.00	22.00
DFC-10S-04G	M18X1.5	1/2"-14	12.00	7.00	38.00	27.00
DFC-12L-02G	M18X1.5	1/4"-19	11.00	10.00	32.00	19.00
DFC-12L-03G	M18X1.5	3/8"-19	11.00	10.00	33.00	22.00
DFC-12L-04G	M18X1.5	1/2"-14	11.00	10.00	37.00	27.00
DFC-12S-03G	M20X1.5	3/8"-19	12.00	8.00	34.00	24.00
DFC-12S-04G	M20X1.5	1/2"-14	12.00	8.00	38.00	27.00
DFC-14S-04G	M22X1.5	1/2"-14	14.00	10.00	40.00	30.00
DFC-15L-02G	M22X1.5	1/4"-19	12.00	12.00	33.00	24.00
DFC-15L-03G	M22X1.5	3/8"-19	12.00	12.00	34.00	24.00
DFC-15L-04G	M22X1.5	1/2"-14	12.00	12.00	38.00	27.00
DFC-16S-04G	M24X1.5	1/2"-14	14.00	12.00	40.00	30.00
DFC-18L-04G	M26X1.5	1/2"-14	12.00	15.00	38.00	27.00
DFC-20S-06G	M30X2	3/4"-14	16.00	16.00	45.00	36.00
DFC-22L-06G	M30X2	3/4"-14	14.00	19.00	43.00	36.00
DFC-25S-08G	M36X2	1"-11	18.00	20.00	49.00	41.00
DFC-28L-08G	M36X2	1"-11	14.00	24.00	45.50	41.00
DFC-30S-10G	M42X2	1-1/4"-11	20.00	25.00	55.50	55.00
DFC-35L-10G	M45X2	1-1/4"-11	16.00	30.00	51.50	55.00
DFC-38S-12G	M52X2	1-1/2"-11	22.00	32.00	60.00	60.00
DFC-42L-12G	M52X2	1-1/2"-11	16.00	36.00	53.50	60.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com




DFC-M

Female Connector Metric Female



- DME&JDE Code: DFC-M
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Female x Female
- Thread Types: Metric x Metric



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	Metric	Metric	mm	mm	mm	mm
DFC-06L-M10	M12X1.5	M10X1	10.00	4.00	26.00	14.00
DFC-06S-M12	M14X1.5	M12X1.5	12.00	4.00	33.00	17.00
DFC-08L-M12	M14X1.5	M12X1.5	10.00	6.00	31.00	17.00
DFC-08S-M14	M16X1.5	M14X1.5	12.00	5.00	33.00	19.00
DFC-10L-M14	M16X1.5	M14X1.5	11.00	6.00	32.00	19.00
DFC-10S-M16	M18X1.5	M16X1.5	12.00	7.00	34.00	22.00
DFC-12L-M16	M18X1.5	M16X1.5	11.00	8.00	33.00	22.00
DFC-12S-M18	M20X1.5	M18X1.5	12.00	8.00	34.00	24.00
DFC-14S-M20	M22X1.5	M20X1.5	14.00	10.00	40.00	27.00
DFC-15L-M18	M22X1.5	M18X1.5	12.00	10.00	38.00	24.00
DFC-16S-M22	M24X1.5	M22X1.5	14.00	12.00	40.00	30.00
DFC-18L-M22	M26X1.5	M22X1.5	12.00	14.00	38.00	30.00
DFC-20S-M27	M30X2	M27X2	16.00	15.00	45.00	36.00
DFC-22L-M26	M30X2	M26X1.5	14.00	17.00	42.00	32.00
DFC-25S-M33	M36X2	M33X2	18.00	20.00	49.00	41.00
DFC-28L-M33	M36X2	M33X2	14.00	23.00	45.00	41.00
DFC-30S-M42	M42X2	M42X2	20.00	25.00	56.00	55.00
DFC-35L-M42	M45X2	M42X2	16.00	30.00	51.00	55.00
DFC-38S-M48	M52X2	M48X2	22.00	32.00	60.00	60.00
DFC-42L-M48	M52X2	M48X2	16.00	36.00	54.00	60.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com




DQFC-N

Male Connector (NPTF Male) with Form X Tapped Holes



- DME&JDE Code: DQFC-N
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Male x Male
- Thread Type: Metric x NPTF

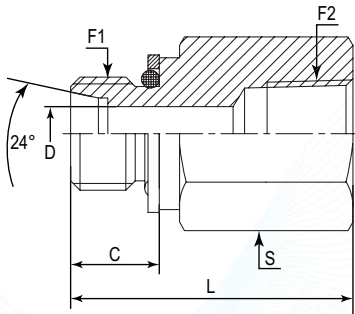

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	METRIC	NPTF	mm	mm	mm	mm
DANPF152Q-0212DU	M12X1.5	1/8"-27	11.00	4.00	30.50	17
DANPF152Q-0216DU	M16X1.5	1/8"-27	11.50	8.00	32.00	22
DANPF152Q-0410DU	M10X1	1/4"-18	8.00	4.50	30.00	19
DANPF152Q-0412DU	M12X1.5	1/4"-18	11.00	4.00	32.90	19
DANPF152Q-0414DU	M14X1.5	1/4"-18	11.00	6.00	35.00	19
DANPF152Q-0416DU	M16X1.5	1/4"-18	11.50	8.00	37.50	22
DANPF152Q-0418DU	M18X1.5	1/4"-18	12.50	10.00	38.50	24
DANPF152Q-0612DU	M12X1.5	3/8"-18	11.00	4.00	38.00	22
DANPF152Q-0614DU	M14X1.5	3/8"-18	11.00	6.00	38.00	22
DANPF152Q-0616DU	M16X1.5	3/8"-18	11.50	8.00	38.50	22
DANPF152Q-0618DU	M18X1.5	3/8"-18	12.50	10.00	40.50	24
DANPF152Q-0620DU	M20X1.5	3/8"-18	12.50	8.00	40.50	24
DANPF152Q-0622DU	M22X1.5	3/8"-18	14.00	12.00	38.50	27
DANPF152Q-0816DU	M16X1.5	1/2"-14	11.50	8.00	40.00	27
DANPF152Q-0818DU	M18X1.5	1/2"-14	12.50	10.00	41.50	27
DANPF152Q-0822DU	M22X1.5	1/2"-14	14.00	12.00	42.50	27
DANPF152Q-1222DU	M22X1.5	3/4"-14	14.00	12.00	46.50	36
DANPF152Q-1226DU	M26X1.5	3/4"-14	16.00	15.00	46.00	36
DANPF152Q-1227DU	M27X2	3/4"-14	16.00	15.00	48.00	36
DANPF152Q-1230DU	M30X2	3/4"-14	16.00	19.00	45.30	36
DANPF152Q-1633DU	M33X2	1"-11-1/2	16.00	20.00	53.50	41

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com




DLA

Adjustable 90°Elbow with Standard Pipe



- DME&JDE Code: DLA
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: 90° Elbow
- Connection Type: Adjustable Male
- Thread Types: Metric



PART NUMBER	F1 (Thread)	L1	L2	D1	D2	S
#	Metric	mm	mm	mm	mm	mm
DLA-06L	M12X1.5	19.00	26.00	4.00	3.50	12.00
DLA-06S	M14X1.5	23.00	27.00	4.00	3.00	12.00
DLA-08L	M14X1.5	21.00	27.50	6.00	5.50	12.00
DLA-08S	M16X1.5	24.00	27.50	5.00	4.00	14.00
DLA-10L	M16X1.5	22.00	29.00	8.00	6.00	14.00
DLA-10S	M18X1.5	25.00	30.00	7.00	7.00	17.00
DLA-12L	M18X1.5	24.00	29.50	10.00	8.00	17.00
DLA-12S	M20X1.5	29.00	31.00	8.00	8.00	17.00
DLA-14S	M22X1.5	30.00	35.00	10.00	9.00	19.00
DLA-15L	M22X1.5	28.00	32.50	12.00	12.00	19.00
DLA-16S	M24X1.5	33.00	36.50	12.00	10.00	24.00
DLA-18L	M26X1.5	31.00	35.50	15.00	14.00	24.00
DLA-20S	M30X2	37.00	44.50	16.00	14.00	27.00
DLA-22L	M30X2	35.00	38.50	19.00	18.00	27.00
DLA-25S	M36X2	42.00	50.00	20.00	19.00	36.00
DLA-28L	M36X2	38.00	41.50	24.00	23.00	36.00
DLA-30S	M42X2	49.00	61.50	25.00	25.00	41.00
DLA-35L	M45X2	45.00	51.00	30.00	30.00	41.00
DLA-38S	M52X2	57.00	73.50	32.00	32.00	50.00
DLA-42L	M52X2	51.00	60.00	36.00	36.00	50.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com




DED

Swivel Female Connector with 24° Cone



DME&JDE Code:	DED
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	Straight
Connection Type:	Swivel Female × Male
Thread Type:	Metric × Metric 24° Cone

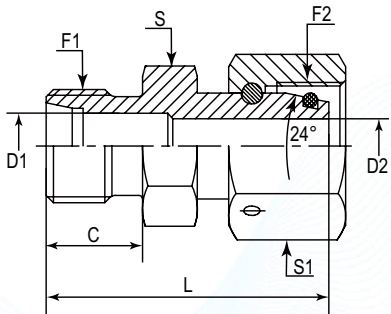


PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DED-06L	M12X1.5	M12X1.5	10.00	3.00	3.00	31.00	12.00	14.00
DED-08L	M14X1.5	M14X1.5	10.00	6.00	4.00	32.50	17.00	17.00
DED-08S	M16X1.5	M16X1.5	12.00	4.00	4.00	34.50	17.00	19.00
DED-10L	M16X1.5	M16X1.5	11.00	8.00	6.00	33.50	17.00	19.00
DED-10S	M18X1.5	M18X1.5	12.00	7.00	5.00	35.50	19.00	22.00
DED-12L	M18X1.5	M18X1.5	11.00	10.00	7.50	34.50	19.00	22.00
DED-12S	M20X1.5	M20X1.5	12.00	8.00	8.00	37.50	22.00	24.00
DED-15L	M22X1.5	M22X1.5	12.00	12.00	10.00	36.50	24.00	27.00
DED-16S	M24X1.5	M24X1.5	14.00	12.00	10.00	40.50	27.00	30.00
DED-18L	M26X1.5	M26X1.5	12.00	15.00	12.50	38.00	27.00	32.00
DED-20S	M30X2	M30X2	16.00	16.00	14.00	47.50	32.00	36.00
DED-22L	M30X2	M30X2	14.00	19.00	14.00	45.00	32.00	36.00
DED-25S	M36X2	M36X2	18.00	20.00	18.00	55.50	41.00	46.00
DED-30S	M42X2	M42X2	20.00	25.00	22.00	57.50	46.00	50.00
DED-38S	M52X2	M52X2	22.00	32.00	30.00	66.00	55.00	60.00

DEW

Swivel Adjustable 90° Elbow With 24° Cone



DME&JDE Code:	DEW
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	90° Elbow
Connection Type:	Adjustable Swivel Female × Male
Thread Types:	Metric × Metric 24° Cone

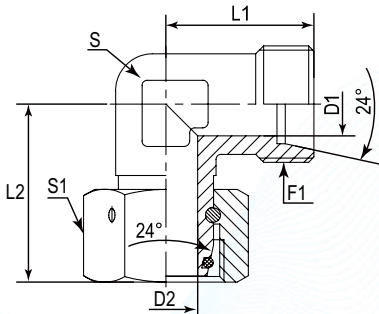

PART NUMBER	F1/F2 (Thread)	L1	L2	D1	D2	S	S1
#	Metric	mm	mm	mm	mm	mm	mm
DEW-06L	M12X1.5	19.00	25.00	4.00	3.00	12.00	14.00
DEW-06S	M14X1.5	23.00	25.50	4.00	3.00	12.00	17.00
DEW-08L	M14X1.5	21.00	25.50	6.00	4.00	12.00	17.00
DEW-08S	M16X1.5	24.00	27.00	5.00	4.00	14.00	19.00
DEW-10L	M16X1.5	22.00	27.00	8.00	6.00	14.00	19.00
DEW-10S	M18X1.5	25.00	30.00	7.00	6.00	17.00	22.00
DEW-12L	M18X1.5	24.00	28.50	10.00	7.50	17.00	22.00
DEW-12S	M20X1.5	29.00	31.00	8.00	8.00	17.00	24.00
DEW-14S	M22X1.5	30.00	34.00	10.00	10.00	19.00	27.00
DEW-15L	M22X1.5	28.00	32.50	12.00	10.00	19.00	27.00
DEW-16S	M24X1.5	33.00	34.50	12.00	10.00	24.00	30.00
DEW-18L	M26X1.5	31.00	33.50	15.00	12.50	24.00	32.00
DEW-20S	M30X2	37.00	42.00	16.00	14.00	27.00	36.00
DEW-22L	M30X2	35.00	37.00	19.00	17.00	27.00	36.00
DEW-25S	M36X2	42.00	48.00	20.00	18.00	36.00	46.00
DEW-28L	M36X2	38.00	40.00	24.00	22.00	36.00	41.00
DEW-30S	M42X2	49.00	52.50	25.00	22.00	41.00	50.00
DEW-35L	M45X2	45.00	51.00	30.00	28.00	41.00	50.00
DEW-38S	M52X2	57.00	63.00	32.00	29.00	50.00	60.00
DEW-42L	M52X2	51.00	56.50	36.00	34.00	50.00	60.00

DEV

DIN 2353 Adjustable 45° Male Stud Elbow

German Technology Equipment

SHIELD FLEX

New-Standard

- DME&JDE Code:

DEV
- Product Type


Hydraulic adaptor
- Standard:

DIN 2353
- Structure:

45° Elbow
- Connection Type:

Adjustable male × Female
- Thread Type:

Metric × Metric

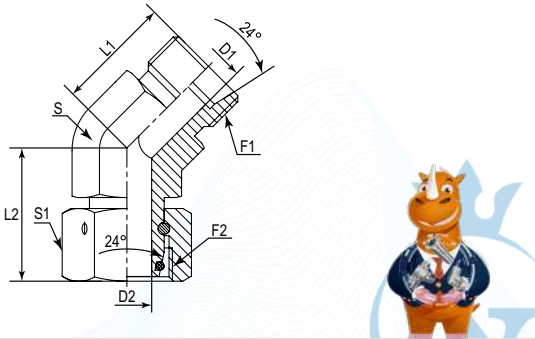

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	METRIC	METRIC	mm	mm	mm	mm	mm	mm
DEV-06L	M12X1.5	M12X1.5	4.00	3.00	24.00	23.50	14	14
DEV-06S	M14X1.5	M14X1.5	4.00	3.00	16.00	24.50	14	17
DEV-08L	M14X1.5	M14X1.5	6.00	4.00	19.00	26.00	14	17
DEV-08S	M16X1.5	M16X1.5	5.00	4.00	19.00	25.00	19	19
DEV-10L	M16X1.5	M16X1.5	8.00	6.00	19.00	27.00	19	19
DEV-10S	M18X1.5	M18X1.5	7.00	6.00	21.00	27.50	19	22
DEV-12L	M18X1.5	M18X1.5	10.00	7.50	21.00	29.50	19	22
DEV-12S	M20X1.5	M20X1.5	8.00	8.00	24.00	28.50	19	24
DEV-14S	M22X1.5	M22X1.5	10.00	10.00	24.00	31.00	19	27
DEV-15L	M22X1.5	M22X1.5	12.00	10.00	22.00	33.10	22	27
DEV-16S	M24X1.5	M24X1.5	12.00	10.00	24.00	34.00	19	30
DEV-18L	M26X1.5	M26X1.5	15.00	12.50	24.00	33.00	27	32
DEV-20S	M30X2	M30X2	16.00	14.00	26.50	42.00	27	36
DEV-22L	M30X2	M30X2	19.00	17.00	26.00	36.00	30	36
DEV-25S	M36X2	M36X2	20.00	18.00	30.50	47.50	36	46
DEV-28L	M36X2	M36X2	24.00	22.00	30.50	39.00	36	41
DEV-30S	M42X2	M42X2	25.00	22.00	37.00	52.50	50	50
DEV-35L	M45X2	M45X2	20.00	28.00	37.00	48.50	50	50
DEV-38S	M52X2	M52X2	32.00	29.00	37.00	60.50	50	50
DEV-42L	M52X2	M52X2	36.00	34.00	37.00	53.50	50	60

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

PC

DEKRA

DIN

SAE

MA

CE

UK CA

DET

Swivel Adjustable Branch Tee with 24° Cone

German Technology Equipment

SHIELD FLEX

New-Standard

- DME&JDE Code:

DET
- Product Type


Hydraulic adaptor
- Standard:

DIN 2353
- Structure:

Branch Tee
- Connection Type:

Adjustable Male × Male × Swivel Female
- Thread Types:

Metric 24° Cone × Metric 24° Cone × Metric 24° Cone

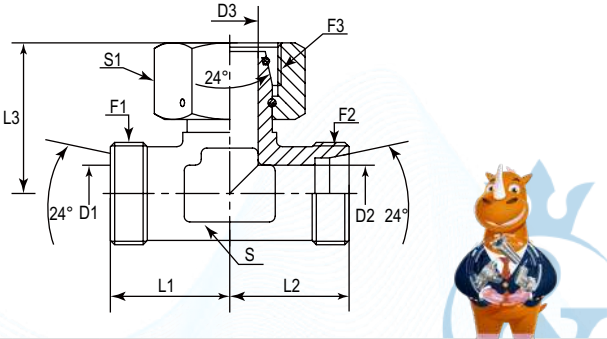

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	S	S1
#	METRIC	METRIC	METRIC	mm	mm	mm	mm	mm	mm	mm	mm
DET-06L	M12X1.5	M12X1.5	M12X1.5	19.00	19.00	25.00	4.00	4.00	3.00	12	14
DET-06S	M14X1.5	M14X1.5	M14X1.5	23.00	23.00	25.50	4.00	4.00	3.00	12	17
DET-08L	M14X1.5	M14X1.5	M14X1.5	21.00	21.00	25.50	6.00	6.00	4.00	12	17
DET-08S	M16X1.5	M16X1.5	M16X1.5	24.00	24.00	27.00	5.00	5.00	4.00	14	19
DET-10L	M16X1.5	M16X1.5	M16X1.5	22.00	22.00	27.00	8.00	8.00	6.00	14	19
DET-10S	M18X1.5	M18X1.5	M18X1.5	25.00	25.00	30.00	7.00	7.00	6.00	17	22
DET-12L	M18X1.5	M18X1.5	M18X1.5	24.00	24.00	28.50	10.00	10.00	7.50	17	22
DET-12S	M20X1.5	M20X1.5	M20X1.5	29.00	29.00	31.00	8.00	8.00	8.00	17	24
DET-14S	M22X1.5	M22X1.5	M22X1.5	30.00	30.00	34.00	10.00	10.00	10.00	19	27
DET-15L	M22X1.5	M22X1.5	M22X1.5	28.00	28.00	32.50	12.00	12.00	10.00	19	27
DET-16S	M24X1.5	M24X1.5	M24X1.5	33.00	33.00	34.50	12.00	12.00	11.00	24	30
DET-18L	M26X1.5	M26X1.5	M26X1.5	31.00	31.00	33.00	15.00	15.00	12.50	24	32
DET-20S	M30X2	M30X2	M30X2	37.00	37.00	42.00	16.00	16.00	14.00	27	36
DET-22L	M30X2	M30X2	M30X2	35.00	35.00	38.50	19.00	19.00	17.00	27	36
DET-25S	M36X2	M36X2	M36X2	42.00	42.00	50.00	20.00	20.00	20.00	36	46
DET-28L	M36X2	M36X2	M36X2	38.00	38.00	40.00	24.00	24.00	22.00	36	41
DET-30S	M42X2	M42X2	M42X2	49.00	49.00	52.50	25.00	25.00	22.00	41	50
DET-35L	M45X2	M45X2	M45X2	45.00	45.00	51.00	30.00	30.00	28.00	48	50
DET-38S	M52X2	M52X2	M52X2	57.00	57.00	63.00	32.00	32.00	29.00	50	60
DET-42L	M52X2	M52X2	M52X2	51.00	51.00	56.50	36.00	36.00	34.00	50	60

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

PC

DEKRA

DIN

SAE

MA

CE


UK CA

DEL

Swivel Adjustable Run Tee with 24° Cone



- DME&JDE Code: DEL
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Run Tee
- Connection Type: Adjustable Male × Swivel Female × Male
- Thread Type: Metric 24° Cone × Metric 24° Cone × Metric 24° Cone

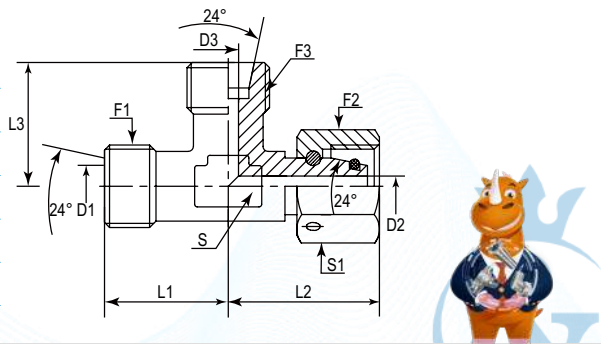


PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	L1	L2	L3	D1	D2	D3	D2	D3
#	METRIC	METRIC	METRIC	mm	mm	mm	mm	mm	mm	mm	mm
DEL-06L	M12 × 1.5	M12 × 1.5	M12 × 1.5	19.00	25.00	19.00	4.00	3.00	4.00	12	14
DEL-06S	M14 × 1.5	M14 × 1.5	M14 × 1.5	23.00	25.50	23.00	4.00	3.00	4.00	12	17
DEL-08L	M14 × 1.5	M14 × 1.5	M14 × 1.5	21.00	25.50	21.00	6.00	4.00	6.00	12	17
DEL-08S	M16 × 1.5	M16 × 1.5	M16 × 1.5	24.00	27.00	24.00	5.00	4.00	5.00	14	19
DEL-10L	M16 × 1.5	M16 × 1.5	M16 × 1.5	22.00	27.00	22.00	8.00	6.00	8.00	14	19
DEL-10S	M18 × 1.5	M18 × 1.5	M18 × 1.5	25.00	30.00	25.00	7.00	6.00	7.00	17	22
DEL-12L	M18 × 1.5	M18 × 1.5	M18 × 1.5	24.00	28.50	24.00	10.00	7.50	10.00	17	22
DEL-12S	M20 × 1.5	M20 × 1.5	M20 × 1.5	29.00	31.00	29.00	8.00	8.00	8.00	17	24
DEL-14S	M22 × 1.5	M22 × 1.5	M22 × 1.5	30.00	34.00	30.00	10.00	10.00	10.00	19	27
DEL-15L	M22 × 1.5	M22 × 1.5	M22 × 1.5	28.00	32.50	28.00	12.00	10.00	12.00	19	27
DEL-16S	M24 × 1.5	M24 × 1.5	M24 × 1.5	33.00	34.50	33.00	12.00	11.00	12.00	24	30
DEL-18L	M26 × 1.5	M26 × 1.5	M26 × 1.5	31.00	33.00	31.00	15.00	12.50	15.00	24	32
DEL-20S	M30 × 2	M30 × 2	M30 × 2	37.00	42.00	37.00	16.00	14.00	16.00	27	36
DEL-22L	M30 × 2	M30 × 2	M30 × 2	35.00	37.00	35.00	19.00	17.00	19.00	27	36
DEL-25S	M36 × 2	M36 × 2	M36 × 2	42.00	50.00	42.00	20.00	20.00	20.00	36	46
DEL-28L	M36 × 2	M36 × 2	M36 × 2	38.00	40.00	38.00	24.00	22.00	24.00	36	41
DEL-30S	M42 × 2	M42 × 2	M42 × 2	49.00	52.50	49.00	25.00	22.00	25.00	41	50
DEL-35L	M45 × 2	M45 × 2	M45 × 2	45.00	51.00	45.00	30.00	28.00	30.00	41	50
DEL-38S	M52 × 2	M52 × 2	M52 × 2	57.00	63.00	57.00	32.00	29.00	32.00	50	60
DEL-42L	M52 × 2	M52 × 2	M52 × 2	51.00	56.50	51.00	36.00	34.00	36.00	50	60

DR

Reducer Straight Adapter Male 24° - Standpipe



- DME&JDE Code: DR
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Male
- Thread Types: Metric

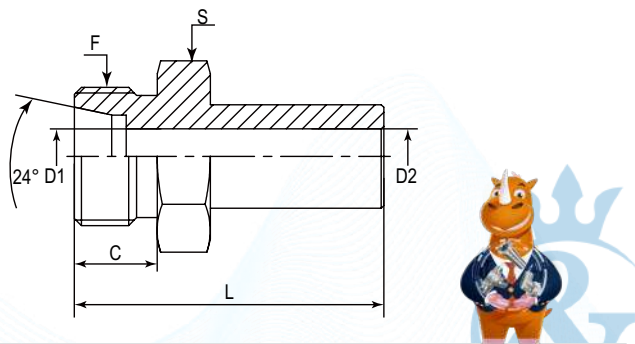


PART NUMBER	F (Thread)	D1	D2	C	L	S
#	Metric	mm	mm	mm	mm	mm
DR-08L-06L	M14X1.5	6	6	10	30.5	14
DR-08S-06S	M16X1.5	5	6	12	35	17
DR-10L-08L	M16X1.5	8	8	11	34.5	17
DR-10S-08S	M18X1.5	7	8	12	38	19
DR-12L-10L	M18X1.5	10	10	11	35.5	19
DR-12S-10S	M20X1.5	8	10	12	39.5	22
DR-14S-12S	M22X1.5	10	12	14	44	24
DR-15L-12L	M22X1.5	12	12	12	37	22
DR-16S-14S	M24X1.5	12	14	14	48	27
DR-18L-15L	M26X1.5	15	15	12	40.5	27
DR-20S-16S	M30X2	16	16	16	54	32
DR-22L-18L	M30X2	19	18	14	42	32
DR-25S-20S	M36X2	20	20	18	60	36
DR-28L-22L	M36X2	24	22	14	44	36
DR-30S-25S	M42X2	25	25	20	66.5	46
DR-35L-28L	M45X2	30	28	16	52.5	46
DR-38S-30S	M52X2	32	30	22	74.5	55
DR-42L-35L	M52X2	36	35	16	54.5	55

DRED-L

Swivel Reducing Connector with 24° Cone L Series



- DME&JDE Code: DRED-L
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Swivel Female x Male
- Thread Type: Metric 24° Cone x Metric 24° Cone

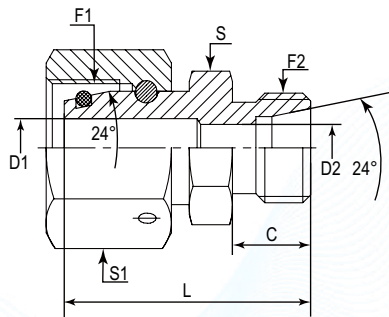


PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DRED-06L-04LL	M12X1.5	M8X1	8.00	29.00	3.00	3.00	14.00	14.00
DRED-06L-06LL	M12X1.5	M10X1	8.00	29.00	3.00	4.50	12.00	14.00
DRED-08L-06L	M14X1.5	M12X1.5	10.00	29.00	4.00	4.00	12.00	17.00
DRED-10L-06L	M16X1.5	M12X1.5	10.00	30.50	4.00	4.00	14.00	19.00
DRED-10L-08L	M16X1.5	M14X1.5	10.00	31.00	6.00	6.00	17.00	19.00
DRED-12L-06L	M18X1.5	M12X1.5	10.00	32.00	7.50	4.00	17.00	22.00
DRED-12L-08L	M18X1.5	M14X1.5	10.00	31.00	7.50	6.00	17.00	22.00
DRED-12L-10L	M18X1.5	M16X1.5	11.00	33.00	7.50	7.50	17.00	22.00
DRED-15L-06L	M22X1.5	M12X1.5	10.00	34.00	10.00	4.00	19.00	27.00
DRED-15L-08L	M22X1.5	M14X1.5	10.00	34.00	10.00	6.00	19.00	27.00
DRED-15L-10L	M22X1.5	M16X1.5	11.00	35.50	10.00	8.00	19.00	27.00
DRED-15L-12L	M22X1.5	M18X1.5	11.00	35.50	10.00	10.00	19.00	27.00
DRED-18L-06L	M26X1.5	M12X1.5	10.00	36.00	12.50	4.00	24.00	32.00
DRED-18L-08L	M26X1.5	M14X1.5	10.00	36.00	12.50	6.00	27.00	32.00
DRED-18L-10L	M26X1.5	M16X1.5	11.00	37.00	12.50	8.00	24.00	32.00
DRED-18L-12L	M26X1.5	M18X1.5	11.00	37.50	12.50	10.00	24.00	32.00
DRED-18L-15L	M26X1.5	M22X1.5	12.00	36.50	12.00	12.00	24.00	32.00
DRED-22L-08L	M30X2	M14X1.5	10.00	37.50	17.00	6.00	27.00	36.00
DRED-22L-10L	M30X2	M16X1.5	11.00	38.00	14.00	8.00	27.00	36.00
DRED-22L-12L	M30X2	M18X1.5	11.00	39.00	14.00	10.00	27.00	36.00
DRED-22L-15L	M30X2	M22X1.5	12.00	39.00	17.00	12.00	27.00	36.00
DRED-22L-18L	M30X2	M26X1.5	12.00	41.00	15.00	15.00	27.00	36.00
DRED-28L-08L	M36X2	M14X1.5	10.00	40.50	22.00	6.00	36.00	41.00
DRED-28L-10L	M36X2	M16X1.5	11.00	41.50	22.00	8.00	36.00	41.00
DRED-28L-12L	M36X2	M18X1.5	11.00	41.50	22.00	10.00	36.00	41.00
DRED-28L-15L	M36X2	M22X1.5	12.00	42.50	22.00	12.00	36.00	41.00
DRED-28L-18L	M36X2	M26X1.5	12.00	42.50	22.00	15.00	36.00	41.00
DRED-28L-22L	M36X2	M30X2	14.00	44.50	22.00	19.00	36.00	41.00
DRED-35L-15L	M45X2	M22X1.5	12.00	46.00	28.00	12.00	41.00	50.00
DRED-35L-18L	M45X2	M26X1.5	12.00	46.00	28.00	15.00	41.00	50.00
DRED-35L-22L	M45X2	M30X2	14.00	47.50	28.00	19.00	46.00	50.00
DRED-35L-28L	M45X2	M36X2	14.00	46.00	28.00	24.00	41.00	50.00
DRED-42L-10L	M52X2	M16X1.5	11.00	47.50	34.00	8.00	50.00	60.00
DRED-42L-12L	M52X2	M18X1.5	11.00	47.50	34.00	10.00	50.00	60.00
DRED-42L-15L	M52X2	M22X1.5	12.00	48.50	34.00	12.00	50.00	60.00
DRED-42L-18L	M52X2	M26X1.5	12.00	48.50	34.00	15.00	50.00	60.00
DRED-42L-22L	M52X2	M30X2	14.00	50.00	34.00	19.00	50.00	60.00
DRED-42L-28L	M52X2	M36X2	14.00	50.00	34.00	24.00	50.00	60.00
DRED-42L-35L	M52X2	M45X2	16.00	52.00	34.00	30.00	50.00	60.00

DRED-S

Swivel Reducing Connector with 24°Cone S Series



- DME&JDE Code: DRED-S
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Swivel Female x Male
- Thread Types: Metric 24° Cone x Metric 24° Cone

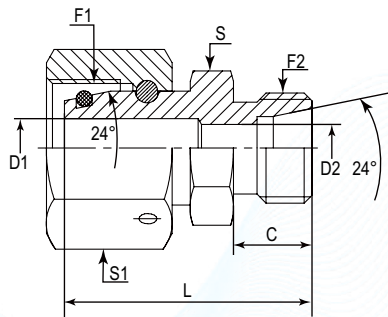

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DRED-08S-06S	M16X1.5	M14X1.5	12.00	34.00	4.00	4.00	14.00	19.00
DRED-10S-06S	M18X1.5	M14X1.5	12.00	35.50	5.00	4.00	17.00	22.00
DRED-10S-08S	M18X1.5	M16X1.5	12.00	35.50	5.00	5.00	17.00	22.00
DRED-12S-06S	M20X1.5	M14X1.5	12.00	34.50	8.00	4.00	17.00	24.00
DRED-12S-08S	M20X1.5	M16X1.5	12.00	34.50	8.00	5.00	17.00	24.00
DERD-12S-10S	M20X1.5	M18X1.5	12.00	35.50	8.00	7.00	19.00	24.00
DRED-14S-06S	M22X1.5	M14X1.5	12.00	38.50	8.00	4.00	19.00	27.00
DRED-14S-08S	M22X1.5	M16X1.5	12.00	38.50	8.00	5.00	19.00	27.00
DERD-14S-10S	M22X1.5	M18X1.5	12.00	38.00	7.00	7.00	19.00	27.00
DRED-14S-12S	M22X1.5	M20X1.5	12.00	43.00	8.00	8.00	22.00	27.00
DRED-16S-08S	M24X1.5	M16X1.5	12.00	36.50	10.00	5.00	22.00	30.00
DERD-16S-10S	M24X1.5	M18X1.5	12.00	36.50	10.00	7.00	22.00	30.00
DRED-16S-12S	M24X1.5	M20X1.5	12.00	37.00	10.00	8.00	22.00	30.00
DRED-16S-14S	M24X1.5	M22X1.5	14.00	43.00	10.00	10.00	24.00	30.00
DRED-20S-08S	M30X2	M16X1.5	12.00	42.00	14.00	5.00	27.00	36.00
DERD-20S-10S	M30X2	M18X1.5	12.00	42.00	14.00	7.00	27.00	36.00
DRED-20S-12S	M30X2	M20X1.5	12.00	40.00	14.00	8.00	27.00	36.00
DRED-20S-14S	M30X2	M22X1.5	14.00	42.00	14.00	10.00	27.00	36.00
DRED-20S-16S	M30X2	M24X1.5	14.00	42.00	14.00	12.00	27.00	36.00
DRED-25S-08S	M36X2	M16X1.5	12.00	45.50	18.00	5.00	32.00	46.00
DERD-25S-10S	M36X2	M18X1.5	12.00	46.50	18.00	7.00	32.00	46.00
DRED-25S-12S	M36X2	M20X1.5	12.00	46.50	18.00	8.00	32.00	46.00
DRED-25S-14S	M36X2	M22X1.5	14.00	48.00	18.00	10.00	32.00	46.00
DRED-25S-20S	M36X2	M30X2	16.00	50.00	18.00	16.00	32.00	46.00
DRED-30S-08S	M42X2	M16X1.5	12.00	47.00	22.00	5.00	41.00	50.00
DRED-30S-12S	M42X2	M20X1.5	12.00	45.50	22.00	8.00	41.00	50.00
DRED-30S-20S	M42X2	M30X2	16.00	49.50	22.00	16.00	41.00	50.00
DRED-30S-25S	M42X2	M36X2	18.00	51.50	22.00	20.00	41.00	50.00
DRED-38S-12S	M52X2	M20X1.5	12.00	54.50	30.00	8.00	50.00	60.00
DRED-38S-14S	M52X2	M22X1.5	14.00	56.50	30.00	10.00	50.00	60.00
DRED-38S-16S	M52X2	M24X1.5	14.00	56.50	30.00	12.00	50.00	60.00
DRED-38S-20S	M52X2	M30X2	16.00	58.50	30.00	16.00	50.00	60.00
DRED-38S-25S	M52X2	M36X2	18.00	60.50	30.00	20.00	50.00	60.00
DRED-38S-30S	M52X2	M42X2	20.00	60.50	30.00	25.00	50.00	60.00

DEGE-G


Swivel Female Connector (BSPP Male) with 24°Cone and ED Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DEGE-G
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Swivel Female × Male
- Thread Type: Metric 24° Cone × BSPP
- Sealing Method: ED Rings

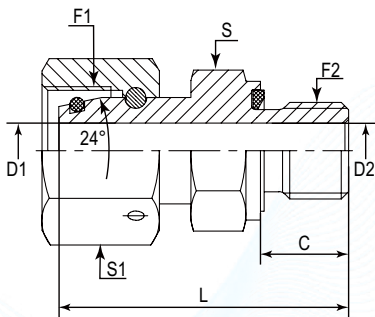

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	Metric	BSPP	mm	mm	mm	mm	mm	mm
DEGE-06L-01G	M12X1.5	1/8"-28	8.00	30.50	3.00	3.00	14.00	14.00
DEGE-06L-02G	M12X1.5	1/4"-19	12.00	37.00	3.00	3.00	19.00	14.00
DEGE-06S-02G	M14X1.5	1/4"-19	12.00	36.50	3.00	3.00	19.00	17.00
DEGE-08L-02G	M14X1.5	1/4"-19	12.00	41.50	4.00	4.00	19.00	17.00
DEGE-08S-02G	M16X1.5	1/4"-19	12.00	41.50	4.00	4.00	19.00	19.00
DEGE-10L-02G	M16X1.5	1/4"-19	12.00	39.50	6.00	6.00	19.00	19.00
DEGE-10S-02G	M18X1.5	1/4"-19	12.00	38.50	6.00	6.00	19.00	22.00
DEGE-10S-03G	M18X1.5	3/8"-19	12.00	42.50	6.00	9.90	22.00	22.00
DEGE-12L-02G	M18X1.5	1/4"-19	12.00	39.50	7.50	7.50	19.00	22.00
DEGE-12L-03G	M18X1.5	3/8"-19	12.00	46.00	7.50	7.50	22.00	22.00
DEGE-12L-04G	M18X1.5	1/2"-14	14.00	43.50	8.00	8.00	27.00	22.00
DEGE-12S-03G	M20X1.5	3/8"-19	12.00	44.00	8.00	8.00	22.00	24.00
DEGE-12S-04G	M20X1.5	1/2"-14	14.00	40.50	8.00	12.00	27.00	24.00
DEGE-14S-04G	M22X1.5	1/2"-14	14.00	44.50	10.00	10.00	27.00	27.00
DEGE-15L-04G	M22X1.5	1/2"-14	14.00	46.00	12.00	12.00	27.00	27.00
DEGE-16S-04G	M24X1.5	1/2"-14	14.00	49.00	10.00	10.00	27.00	30.00
DEGE-18L-04G	M26X1.5	1/2"-14	14.00	45.50	12.50	12.50	27.00	32.00
DEGE-20S-06G	M30X2	3/4"-14	16.00	50.00	14.00	14.00	32.00	36.00
DEGE-20S-08G	M30X2	1"-11	18.00	56.50	14.00	20.00	41.00	36.00
DEGE-22L-04G	M30X2	1/2"-14	14.00	44.50	17.00	12.50	27.00	36.00
DEGE-22L-06G	M30X2	3/4"-14	16.00	47.50	17.00	17.00	32.00	36.00
DEGE-25S-08G	M36X2	1"-11	18.00	60.00	18.00	18.00	41.00	46.00
DEGE-28L-08G	M36X2	1"-11	18.00	53.00	22.00	22.00	41.00	41.00
DEGE-30S-10G	M42X2	1-1/4"-11	20.00	65.50	22.00	27.50	50.00	50.00
DEGE-35L-10G	M45X2	1-1/4"-11	20.00	60.00	27.50	27.50	50.00	50.00
DEGE-38S-12G	M52X2	1-1/2"-11	22.00	82.00	29.00	29.00	55.00	60.00
DEGE-42L-12G	M52X2	1-1/2"-11	22.00	63.00	34.00	29.00	55.00	60.00

DEGE-M


Swivel Female Connector (Metric Male) with 24° Cone and ED Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DEGE-M
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Swivel Female × Male
- Thread Types: Metric 24° Cone × Metric
- Sealing Method: ED Rings

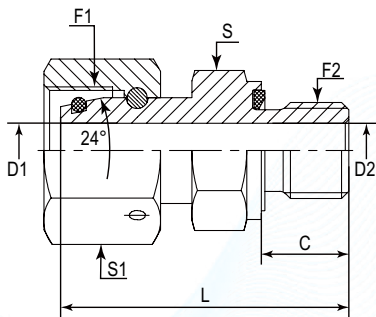

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DEGE-06L-M10	M12X1.5	M10X1	8.00	30.50	3.00	3.00	14.00	14.00
DEGE-06S-M12	M14X1.5	M12X1.5	12.00	37.00	3.00	3.00	17.00	17.00
DEGE-08L-M12	M14X1.5	M12X1.5	12.00	38.50	4.00	4.00	17.00	17.00
DEGE-08S-M14	M16X1.5	M14X1.5	12.00	36.50	4.00	4.00	19.00	19.00
DEGE-10L-M14	M16X1.5	M14X1.5	12.00	39.50	6.00	6.00	19.00	19.00
DEGE-10S-M16	M18X1.5	M16X1.5	12.00	39.00	6.00	6.00	22.00	22.00
DEGE-12S-M18	M20X1.5	M18X1.5	12.00	44.00	8.00	8.00	24.00	24.00
DEGE-15L-M18	M22X1.5	M18X1.5	12.00	43.50	11.00	11.00	24.00	27.00
DEGE-18L-M22	M26X1.5	M22X1.5	14.00	45.50	12.00	12.00	27.00	32.00
DEGE-20S-M27	M30X2	M27X2	16.00	57.00	14.00	14.00	32.00	36.00
DEGE-28L-M33	M36X2	M33X2	18.00	53.00	22.00	20.00	41.00	41.00
DEGE-35L-M42	M45X2	M42X2	20.00	60.00	28.00	28.00	50.00	50.00
DEGE-38S-M48	M52X2	M48X2	22.00	79.50	30.00	30.00	55.00	60.00
DEGE-42L-M48	M52X2	M48X2	22.00	64.00	32.00	32.00	55.00	60.00




DEGE-U

DIN 2353 Swivel Female Connector SAE MALE with O Ring



- DME&JDE Code: DEGE-M
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Swivel Female x Male
- Thread Type: Metric x UNF
- Sealing Method: O Ring

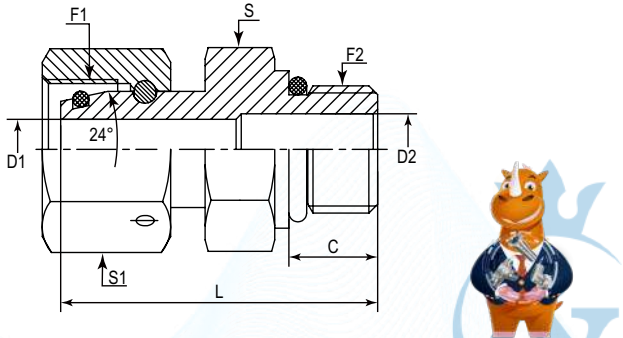

Technical Data of DEGE-U								
PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	METRIC	UNF	mm	mm	mm	mm	mm	mm
DEGE-06L-04U	M12 x 1.5	7/16"-20	9.14	3	3	30	14	14
DEGE-06L-05U	M12 x 1.5	1/2"-20	9.14	3	5.94	30	14	14
DEGE-06S-04U	M14 x 1.5	7/16"-20	9.14	3	4.37	31	14	17
DEGE-08L-04U	M14 x 1.5	7/16"-20	9.14	4	4	30	14	17
DEGE-08L-06U	M14 x 1.5	9/16"-18	9.93	4	7.54	31	17	17
DEGE-08S-04U	M16 x 1.5	7/16"-20	9.14	4	4	31	14	19
DEGE-08S-06U	M16 x 1.5	9/16"-18	9.93	4	7.54	32	17	19
DEGE-10L-05U	M16 x 1.5	1/2"-20	9.14	5.94	5.94	31	17	19
DEGE-10L-06U	M16 x 1.5	9/16"-18	9.93	6	7.54	32	17	19
DEGE-10L-08U	M16 x 1.5	3/4"-16	11.13	6	9.93	35.5	19	19
DEGE-10S-06U	M18 x 1.5	9/16"-18	9.93	6	6	33	19	22
DEGE-10S-08U	M18 x 1.5	3/4"-16	11.13	6	9.93	35	19	22
DEGE-12L-06U	M18 x 1.5	9/16"-18	9.93	7.5	7.5	35	19	22
DEGE-12L-08U	M18 x 1.5	3/4"-16	11.13	7.5	9.93	37.5	19	22
DEGE-12S-06U	M20 x 1.5	9/16"-18	9.93	7.54	7.54	36	19	24
DEGE-12S-08U	M20 x 1.5	3/4"-16	11.13	8	9.93	37	19	24
DEGE-14S-10U	M22 x 1.5	7/8"-14	12.7	8	12.29	43	24	27
DEGE-15L-06U	M22 x 1.5	9/16"-18	9.93	10	7.54	36	22	27
DEGE-15L-08U	M22 x 1.5	3/4"-16	11.13	9.93	9.93	36.5	19	27
DEGE-15L-10U	M22 x 1.5	7/8"-14	12.7	10	12.29	42	24	27
DEGE-16S-08U	M24 x 1.5	3/4"-16	11.13	9.93	9.93	38	22	30
DEGE-16S-10U	M24 x 1.5	7/8"-14	12.7	10	12.29	42	24	30
DEGE-16S-12U	M24 x 1.5	1"1/16-12	15.09	10	15.47	45	27	30
DEGE-18L-08U	M26 x 1.5	3/4"-16	11.13	9.93	9.93	40	27	32
DEGE-18L-10U	M26 x 1.5	7/8"-14	12.7	12.29	12.29	42	27	32
DEGE-18L-12U	M26 x 1.5	1"1/16-12	15.09	12.5	15.47	45	30	32
DEGE-20S-10U	M30 x 2	7/8"-14	12.7	12.29	12.29	46	30	36
DEGE-20S-12U	M30 x 2	1"1/16-12	15.09	14	14	49	30	36
DEGE-22L-12U	M30 x 2	1"1/16-12	15.09	15.47	15.47	47	32	36
DEGE-22L-16U	M30 x 2	1"5/16-12	15.09	17	21.44	55	36	36
DEGE-25S-16U	M36 x 2	1"5/16-12	15.09	18	21.44	55	36	46
DEGE-28L-16U	M36 x 2	1"5/16-12	15.09	21.44	21.44	53	41	41
DEGE-28L-20U	M36 x 2	1"5/8-12	15.09	22	27.38	54.5	41	41
DEGE-30S-12U	M42 x 2	1"1/16-12	15.09	22	15.47	53.5	41	50
DEGE-30S-20U	M42 x 2	1"5/8-12	15.09	22	27.38	57	46	50
DEGE-30S-24U	M42 x 2	1"7/8-12	15.09	22	33.32	62	50	50
DEGE-35L-20U	M45 x 2	1"5/8-12	15.09	27.38	27.38	54.5	46	50
DEGE-35L-24U	M45 x 2	1"7/8-12	15.09	28	33.32	60	50	50
DEGE-38S-24U	M52 x 2	1"7/8-12	15.09	30	33.32	75	50	50
DEGE-38S-32U	M52 x 2	2"1/2-12	15.09	30	45.25	79	65	60
DEGE-42L-24U	M52 x 2	1"7/8-12	15.09	33.32	33.32	60	55	60
DEGE-42L-32U	M52 x 2	2"1/2-12	15.09	34	45.25	70	65	60




DUE

Swivel Female Connector with 24° Cone



- DME&JDE Code: DUE
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Swivel Female x Swivel Female
- Thread Types: Metric 24° Cone x Metric 24° Cone
- Sealing Method: ED Rings

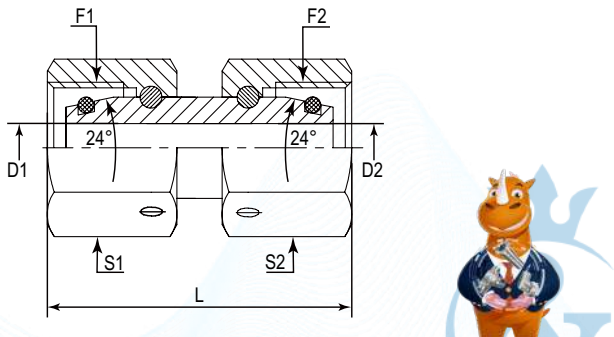

PART NUMBER	F1/F2 (Thread)	D1/D2	L	S1/S2
#	Metric	mm	mm	mm
DUE-06L	M12X1.5	3.00	30.00	14.00
DUE-06S	M14X1.5	3.00	32.00	17.00
DUE-08L	M14X1.5	4.00	33.00	17.00
DUE-08S	M16X1.5	4.00	33.00	19.00
DUE-10L	M16X1.5	6.00	33.00	19.00
DUE-10S	M18X1.5	6.00	33.00	22.00
DUE-12L	M18X1.5	7.50	33.00	22.00
DUE-12S	M20X1.5	8.00	37.00	24.00
DUE-14S	M22X1.5	8.00	39.00	27.00
DUE-15L	M22X1.5	10.00	37.00	27.00
DUE-16S	M24X1.5	10.00	39.00	30.00
DUE-18L	M26X1.5	12.50	36.00	32.00
DUE-20S	M30X2	14.00	53.50	36.00
DUE-22L	M30X2	17.00	42.00	36.00
DUE-25S	M36X2	18.00	55.00	46.00
DUE-28L	M36X2	22.00	45.00	41.00
DUE-30S	M42X2	22.00	52.00	50.00
DUE-35L	M45X2	28.00	48.00	50.00
DUE-38S	M52X2	30.00	61.00	60.00
DUE-42L	M52X2	34.00	48.00	60.00





DUER


DIN 2353 Swivel Female Reducing Coupling with 24° Cone

 German Technology Equipment



New-Standard

- DME&JDE Code: DUER
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Swivel Female × Swivel Female
- Thread Type: Metric 24° Cone × Metric 24° Cone

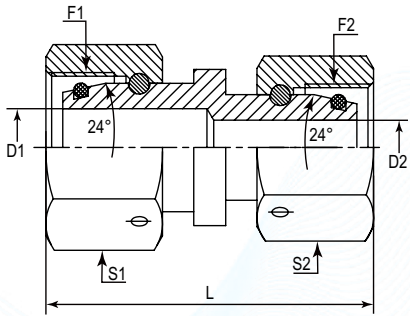

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L	S1	S2
#	METRIC	METRIC	mm	mm	mm	mm	mm
DUER-08L-06L	M14X1.5	M12X1.5	3	3	32.5	17	14
DUER-08S-06S	M16X1.5	M14X1.5	3	3	33.5	19	17
DUER-10L-06L	M16X1.5	M12X1.5	6	3	33	19	14
DUER-10L-08L	M16X1.5	M14X1.5	6	4	32.5	19	17
DUER-10S-06S	M18X1.5	M14X1.5	6	3	34.5	22	17
DUER-10S-08S	M18X1.5	M16X1.5	6	4	34.5	22	19
DUER-12L-06L	M18X1.5	M12X1.5	7.5	3	36	22	14
DUER-12L-08L	M18X1.5	M14X1.5	7.5	4	35.5	22	17
DUER-12L-10L	M18X1.5	M16X1.5	6	6	36	22	19
DUER-12S-06S	M20X1.5	M14X1.5	8	3	37	24	17
DUER-12S-08S	M20X1.5	M16X1.5	8	4	36.5	24	19
DUER-12S-10S	M20X1.5	M18X1.5	8	6	37.5	24	22
DUER-15L-08L	M22X1.5	M14X1.5	10	4	36	27	17
DUER-15L-10L	M22X1.5	M16X1.5	10	6	36.5	27	19
DUER-15L-12L	M22X1.5	M18X1.5	10	7.5	39.5	27	22
DUER-16S-10S	M24X1.5	M18X1.5	10	6	38	30	22
DUER-16S-12S	M24X1.5	M20X1.5	10	8	40	30	24
DUER-18L-10L	M26X1.5	M16X1.5	12.5	6	37	32	19
DUER-18L-12L	M26X1.5	M18X1.5	12.5	7.5	40	32	22
DUER-18L-15L	M26X1.5	M22X1.5	12.5	10	40	32	27
DUER-20S-12S	M30X2	M20X1.5	14	8	41	36	24
DUER-20S-16S	M30X2	M24X1.5	14	10	41	36	30
DUER-22L-12L	M30X2	M18X1.5	17	7.5	41.5	36	22
DUER-22L-15L	M30X2	M22X1.5	17	10	41.5	36	27
DUER-22L-18L	M30X2	M26X1.5	17	12.5	41.5	36	32
DUER-25S-16S	M36X2	M24X1.5	18	10	47.5	46	30
DUER-25S-20S	M36X2	M30X2	18	14	48.5	46	36
DUER-28L-15L	M36X2	M22X1.5	22	10	43.5	41	27
DUER-28L-18L	M36X2	M26X1.5	22	12.5	43.5	41	32
DUER-28L-22L	M36X2	M30X2	22	17	45	41	36
DUER-30S-16S	M42X2	M24X1.5	22	10	46.5	50	30
DUER-30S-20S	M42X2	M30X2	22	14	47.5	50	36
DUER-30S-25S	M42X2	M36X2	22	18	54	50	46
DUER-35L-18L	M45X2	M26X1.5	28	12.5	45	50	32
DUER-35L-22L	M45X2	M30X2	28	17	46.5	50	36
DUER-35L-28L	M45X2	M36X2	28	22	48.5	50	41
DUER-38S-20S	M52X2	M30X2	30	14	54	60	36
DUER-38S-25S	M52X2	M36X2	30	18	60.5	60	46
DUER-38S-30S	M52X2	M42X2	30	22	59.5	60	50
DUER-42L-22L	M52X2	M30X2	34	17	48	60	36
DUER-42L-28L	M52X2	M36X2	34	22	50	60	41
DUER-42L-35L	M52X2	M45X2	34	28	51.5	60	50

Certificate:



DAS


Welding Connector

 German Technology Equipment



New-Standard

- DME&JDE Code: DAS
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Male
- Thread Types: Metric
- Sealing Method: Welding

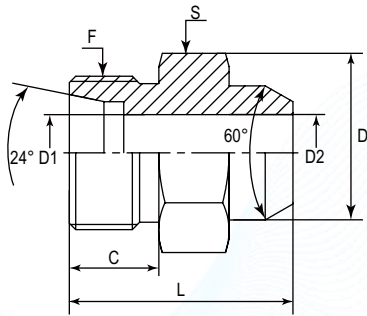

PART NUMBER	F (Thread)	C	D	D1/D2	L	S
#	Metric	mm	mm	mm	mm	mm
DAS-06L	M12X1.5	10.00	10.00	4.00	21.00	12.00
DAS-06S	M14X1.5	12.00	11.00	4.00	26.00	14.00
DAS-08L	M14X1.5	10.00	12.00	6.00	23.00	14.00
DAS-08S	M16X1.5	12.00	13.00	5.00	28.00	17.00
DAS-10L	M16X1.5	11.00	14.00	8.00	25.00	17.00
DAS-12L	M18X1.5	11.00	16.00	10.00	25.00	19.00
DAS-12S	M20X1.5	12.00	17.00	8.00	32.00	22.00
DAS-15L	M22X1.5	12.00	19.00	12.00	29.00	22.00
DAS-16S	M24X1.5	14.00	21.00	12.00	35.00	27.00
DAS-18L	M26X1.5	12.00	22.00	15.00	31.00	27.00
DAS-20S	M30X2	16.00	26.00	16.00	40.00	32.00
DAS-22L	M30X2	14.00	27.00	19.00	36.00	32.00
DAS-25S	M36X2	18.00	31.00	20.00	44.00	41.00
DAS-30S	M42X2	20.00	36.00	25.00	49.00	46.00
DAS-35L	M45X2	16.00	40.00	30.00	43.00	46.00
DAS-38S	M52X2	22.00	44.00	32.00	54.00	55.00
DAS-42L	M52X2	16.00	46.00	36.00	46.00	55.00

Certificate:





DAK


Welding Nipple with O Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DAK
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Sealing Method: Welding and O Rings

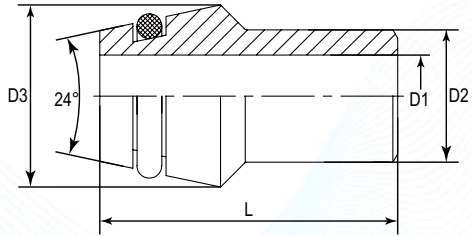

PART NUMBER	L	D1	D2	D3
#	mm	mm	mm	mm
DAK-06L	31.00	3.00	6.00	9.00
DAK-06S	31.00	2.50	6.00	9.00
DAK-08L	31.00	5.00	8.00	11.00
DAK-08S	31.00	4.00	8.00	11.00
DAK-10L	32.50	7.00	10.00	14.00
DAK-10S	32.50	6.00	10.00	14.00
DAK-12L	32.50	8.00	12.00	16.00
DAK-12S	32.50	7.00	12.00	16.00
DAK-15L	34.00	10.00	15.00	18.00
DAK-16S	39.00	11.00	16.00	20.00
DAK-18L	35.50	13.00	18.00	21.00
DAK-20S	45.00	14.00	20.00	24.00
DAK-22L	38.50	17.00	22.00	25.00
DAK-28L	41.50	23.00	28.00	31.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



MFAD-ED


Male Female Bushing Connector BSPP with ED Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: MFAD-ED
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Male × Female
- Thread Types: BSPP × BSPP
- Sealing Method: ED Rings



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	BSPP	BSPP	mm	mm	mm	mm
MFAD-03ED-01G	3/8"-19	1/8"-28	12.00	8.00	22.50	22.00
MFAD-04ED-01G	1/2"-14	1/8"-28	14.00	8.57	24.00	27.00
MFAD-04ED-02G	1/2"-14	1/4"-19	14.00	11.45	24.00	27.00
MFAD-06ED-02G	3/4"-14	1/4"-19	16.00	11.45	26.00	32.00
MFAD-06ED-03G	3/4"-14	3/8"-19	16.00	14.95	26.00	32.00
MFAD-08ED-02G	1"-11	1/4"-19	18.00	11.45	29.00	41.00
MFAD-08ED-03G	1"-11	3/8"-19	18.00	14.95	29.00	41.00
MFAD-08ED-04G	1"-11	1/2"-14	18.00	18.63	29.00	41.00
MFAD-10ED-04G	1-1/4"-11	1/2"-14	20.00	18.63	32.00	50.00
MFAD-10ED-06G	1-1/4"-11	3/4"-14	20.00	24.12	32.00	50.00
MFAD-12ED-04G	1-1/2"-11	1/2"-14	22.00	18.63	36.00	55.00
MFAD-12ED-06G	1-1/2"-11	3/4"-14	22.00	24.12	36.00	55.00
MFAD-12ED-08G	1-1/2"-11	1"-11	22.00	30.29	36.00	55.00
MFAD-16ED-08G	2"-11	1"-11	22.00	30.29	41.00	70.00
MFAD-16ED-10G	2"-11	1-1/4"-11	22.00	38.96	41.00	70.00

Certificate:



Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



MFAE-ED


Male Female Connector BSPP with ED Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: MFAE-ED
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Male × Female
- Thread Types: Metric × BSPP
- Sealing Method: ED Rings



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	Metric	BSPP	mm	mm	mm	mm
MFAE-01ED-01G	1/8"-28	1/8"-28	8.00	4.00	23.50	14.00
MFAE-01ED-02G	1/8"-28	1/4"-19	8.00	4.00	31.00	19.00
MFAE-01ED-03G	1/8"-28	3/8"-19	8.00	4.00	32.00	24.00
MFAE-02ED-01G	1/4"-19	1/8"-28	12.00	5.00	28.00	19.00
MFAE-02ED-02G	1/4"-19	1/4"-19	12.00	5.00	35.50	19.00
MFAE-02ED-03G	1/4"-19	3/8"-19	12.00	6.00	36.00	24.00
MFAE-02ED-04G	1/4"-19	1/2"-14	12.00	5.00	40.00	27.00
MFAE-02ED-06G	1/4"-19	3/4"-14	12.00	5.00	43.00	36.00
MFAE-03ED-02G	3/8"-19	1/4"-19	12.00	8.00	36.00	22.00
MFAE-03ED-04G	3/8"-19	1/2"-14	12.00	8.00	41.00	30.00
MFAE-03ED-06G	3/8"-19	3/4"-14	12.00	8.00	44.00	36.00
MFAE-04ED-03G	1/2"-14	3/8"-19	14.00	12.30	36.00	27.00
MFAE-04ED-04G	1/2"-14	1/2"-14	14.00	12.00	39.00	27.00
MFAE-04ED-06G	1/2"-14	3/4"-14	14.00	12.00	46.00	36.00
MFAE-04ED-08G	1/2"-14	1"-11	14.00	12.00	49.00	41.00
MFAE-06ED-04G	3/4"-14	1/2"-14	16.00	16.00	41.00	32.00
MFAE-06ED-06G	3/4"-14	3/4"-14	16.00	16.00	48.00	32.00
MFAE-06ED-10G	3/4"-14	1-1/4"-11	16.00	16.00	55.00	55.00
MFAE-06ED-12G	3/4"-14	1-1/2"-11	16.00	16.00	57.00	60.00
MFAE-08ED-06G	1"-11	3/4"-14	18.00	20.00	47.00	41.00
MFAE-08ED-10G	1"-11	1-1/4"-11	18.00	20.00	57.00	55.00
MFAE-08ED-12G	1"-11	1-1/2"-11	18.00	20.00	59.00	60.00
MFAE-10ED-06G	1-1/4"-11	3/4"-14	20.00	25.00	50.00	50.00
MFAE-10ED-08G	1-1/4"-11	1"-11	20.00	25.00	52.00	50.00
MFAE-10ED-12G	1-1/4"-11	1-1/2"-11	20.00	25.00	60.00	60.00
MFAE-12ED-10G	1-1/2"-11	1-1/4"-11	22.00	32.00	58.00	55.00
MFAE-12ED-16G	1-1/2"-11	2"-11	22.00	32.00	66.00	70.00

DVSTI-GED


Blanking Plug BSPP for Port with ED Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DVSTI-GED
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Sealing Method: ED Rings
- Other Features: Nut/Plug



PART NUMBER	F (Thread)	D	L1	L	H
#	BSPP	mm	mm	mm	mm
DVSTI-01GED	1/8"-28	14.00	8.00	12.00	5.00
DVSTI-02GED	1/4"-19	19.00	12.00	17.00	6.00
DVSTI-03GED	3/8"-19	22.00	12.00	17.00	8.00
DVSTI-04GED	1/2"-14	27.00	14.00	19.00	10.00
DVSTI-06GED	3/4"-14	32.00	16.00	21.00	12.00
DVSTI-08GED	1"-11	39.90	16.00	22.50	17.00
DVSTI-10GED	1-1/4"-11	49.90	16.00	22.50	22.00
DVSTI-12GED	1-1/2"-11	55.00	16.00	22.50	24.00
DVSTI-16GED	2"-11	70.50	20.00	29.00	32.00



DVSTI-MED


Blanking Plug Metric for Port with ED Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DVSTI-MED
- Product Type Hydraulic adaptor
- Adaptor Standard: DIN 2353
- Thread Types: Metric
- Sealing Method: ED Rings
- Other Features: Nut/Plug



PART NUMBER	F (Thread)	D	L1	L	H	Revision History
#	Metric	mm	mm	mm	mm	
DVSTI-M08ED	M8X1	12.00	8.00	12.00	4.00	
DVSTI-M10ED	M10X1	14.00	8.00	12.00	5.00	
DVSTI-M12ED	M12X1.5	17.00	12.00	17.00	6.00	
DVSTI-M14ED	M14X1.5	19.00	12.00	17.00	6.00	
DVSTI-M16ED	M16X1.5	21.90	12.00	17.00	8.00	
DVSTI-M18ED	M18X1.5	23.90	12.00	17.00	8.00	
DVSTI-M22ED	M22X1.5	27.00	14.00	19.00	10.00	
DVSTI-M24ED	M24X1.5	29.80	14.00	19.30	10.00	
DVSTI-M27ED	M27X2	31.90	16.00	21.00	12.00	
DVSTI-M30ED	M30X2	39.90	16.00	22.50	17.00	
DVSTI-M33ED	M33X2	39.90	16.00	22.50	17.00	
DVSTI-M48ED	M48X2	55.00	16.00	22.50	24.00	
DVSTI-M60ED	M60X2	70.00	18.00	25.00	27.00	

2024/6/4,Unit weight of item AT03006(DVSTI-M14ED) has been changed from 0.159Kg to 0.02Kg

DSVW-G


Banjo Coupling BSPP with ED Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DSVW-G
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Connection Type: Male x Male
- Thread Types: Metric x BSPP
- Sealing Method: ED Rings
- Other Features: Banjo

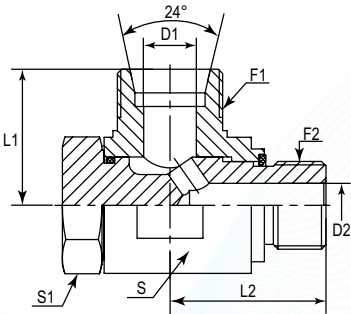

PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S1	S2
#	Metric	BSPP	mm	mm	mm	mm	mm	mm
DSVW-06L-01G	M12X1.5	1/8"-28	19	18.5	4	4	17	17
DSVW-06S-02G	M14X1.5	1/4"-19	23.5	26	4	5	22	19
DSVW-08L-02G	M14X1.5	1/4"-19	21.5	26	6	6	22	19
DSVW-08S-02G	M16X1.5	1/4"-19	23.5	26	5	5	22	19
DSVW-10L-02G	M16X1.5	1/4"-19	22.5	26	8	6	22	19
DSVW-10S-03G	M18X1.5	3/8"-19	26	28.5	7	8	27	24
DSVW-12L-03G	M18X1.5	3/8"-19	25	28.5	10	9	27	24
DSVW-12S-03G	M20X1.5	3/8"-19	26	28.5	8	8	27	24
DSVW-14S-04G	M22X1.5	1/2"-14	31	35.5	10	12	32	30
DSVW-15L-04G	M22X1.5	1/2"-14	29	35.5	12	12	32	30
DSVW-16S-04G	M24X1.5	1/2"-14	31	35.5	12	12	32	30
DSVW-18L-04G	M26X1.5	1/2"-14	29	35.5	15	12	32	30
DSVW-20S-06G	M30X2	3/4"-14	36	40	16	16	41	36
DSVW-22L-06G	M30X2	3/4"-14	34	40	19	18	41	36
DSVW-25S-08G	M36X2	1"-11	42.5	48.5	20	20	50	46
DSVW-28L-08G	M36X2	1"-11	38.5	48.5	24	23	50	46
DSVW-30S-10G	M42X2	1-1/4"-11	49.5	55.5	25	25	60	55
DSVW-35L-10G	M45X2	1-1/4"-11	45.5	55.5	30	30	60	55
DSVW-38S-12G	M52X2	1-1/2"-11	56.5	62.5	32	32	70	60
DSVW-42L-12G	M52X2	1-1/2"-11	50.5	62.5	36	36	70	60

Certificate:





DSVW-M

Banjo Coupling Metric with ED Ring

 German Technology Equipment



New-Standard

- DME&JDE Code:

DSVW-M
- Product Type

Hydraulic adaptor
- Standard:


DIN 2353
- Adaptor Connection Type:

Male x Male
- Thread Types:

Metric x Metric
- Sealing Method:

ED Rings
- Other Features:

Banjo

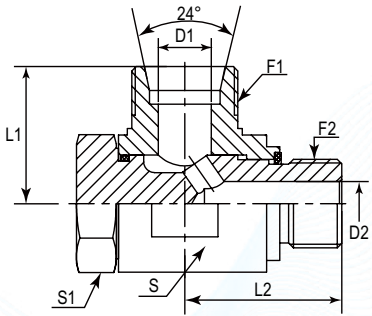

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DSVW-08L-M12	M14X1.5	M12X1.5	23.10	26.00	6.00	7.00	22.00	19.00
DSVW-10L-M14	M16X1.5	M14X1.5	23.10	26.00	8.00	7.00	22.00	19.00
DSVW-12L-M16	M18X1.5	M16X1.5	25.00	28.50	10.00	9.00	27.00	24.00



DVKA

Blank Plug with O Ring Port with ED Ring

 German Technology Equipment



New-Standard


- DME&JDE Code:

DVKA
- Product Type

Hydraulic adaptor
- Standard:

DIN 2353
- Sealing Method:

ED Rings, O Rings

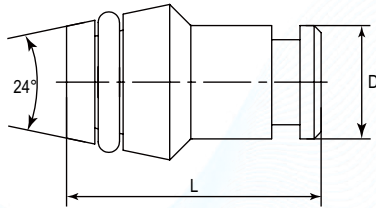

PART NUMBER	D	L
#	mm	mm
DVKA-06L/S	6.00	18.50
DVKA-08L/S	8.00	18.50
DVKA-10L/S	10.00	20.00
DVKA-12L/S	12.00	20.50
DVKA-14S	14.00	20.50
DVKA-15L	15.00	20.50
DVKA-16S	16.00	23.50
DVKA-18L	18.00	22.50
DVKA-20S	20.00	28.50
DVKA-22L	22.00	25.00
DVKA-25S	25.00	29.00
DVKA-28L	28.00	25.50
DVKA-30S	30.00	30.50
DVKA-35L	35.00	30.00
DVKA-38S	38.00	33.00
DVKA-42L	42.00	30.00



DCA


Tube Cap


German Technology Equipment



New-Standard

- DME&JDE Code: DCA
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Connection Type: Male
- Thread types: Metric
- Other Features: Nut/Plug



PART NUMBER	F (Thread)	C	D	L	S
#	Metric	mm	mm	mm	mm
DCA-06L	M12X1.5	10.00	4.00	14.00	12.00
DCA-06S	M14X1.5	12.00	4.00	18.00	14.00
DCA-08L	M14X1.5	10.00	6.00	15.00	14.00
DCA-08S	M16X1.5	12.00	5.00	20.00	17.00
DCA-10L	M16X1.5	11.00	8.00	16.00	17.00
DCA-10S	M18X1.5	12.00	7.00	20.00	19.00
DCA-12L	M18X1.5	11.00	10.00	17.00	19.00
DCA-12S	M20X1.5	12.00	8.00	22.00	22.00
DCA-14S	M22X1.5	14.00	10.00	24.00	24.00
DCA-15L	M22X1.5	12.00	12.00	18.00	24.00
DCA-16S	M24X1.5	14.00	12.00	24.00	27.00
DCA-18L	M26X1.5	12.00	15.00	19.00	27.00
DCA-20S	M30X2	16.00	16.00	28.00	32.00
DCA-22L	M30X2	14.00	19.00	21.00	32.00
DCA-25S	M36X2	18.00	20.00	32.00	41.00
DCA-28L	M36X2	14.00	24.00	22.00	41.00
DCA-30S	M42X2	20.00	25.00	34.00	46.00
DCA-35L	M45X2	16.00	30.00	25.00	46.00
DCA-38S	M52X2	22.00	32.00	39.00	55.00
DCA-42L	M52X2	16.00	36.00	27.00	55.00



DN


Tube Nut


German Technology Equipment



New-Standard

- DME&JDE Code: DN
- Product Type Hydraulic adaptor
- Adaptor Standard: DIN 2353
- Thread Types: Metric
- Other Features: Nut/Plug



Technical Data of DN			
PART NUMBER	F (Thread)	L	S
#	Metric	mm	mm
DN-06L	M12 × 1.5	15.50	14.00
DN-06LL	M10 × 1	12.50	12.00
DN-06S	M14 × 1.5	16.50	17.00
DN-08L	M14 × 1.5	14.50	17.00
DN-08LL	M12 × 1	13.00	14.00
DN-08S	M16 × 1.5	16.50	19.00
DN-10L	M16 × 1.5	15.50	19.00
DN-10S	M18 × 1.5	17.50	22.00
DN-12L	M18 × 1.5	16.50	22.00
DN-12S	M20 × 1.5	17.50	24.00
DN-14S	M22 × 1.5	20.50	27.00
DN-15L	M22 × 1.5	17.00	27.00
DN-16S	M24 × 1.5	20.50	30.00
DN-18L	M26 × 1.5	18.00	32.00
DN-20S	M30 × 2	25.00	36.00
DN-22L	M30 × 2	20.00	36.00
DN-25S	M36 × 2	27.00	46.00
DN-28L	M36 × 2	21.00	41.00
DN-30S	M42 × 2	29.00	50.00
DN-35L	M45 × 2	24.00	50.00
DN-38S	M52 × 2	32.50	60.00
DN-42L	M52 × 2	24.00	60.00



DS

Cutting Ring

 German Technology Equipment




New-Standard

DME&JDE Code: DS

Product Type Hydraulic adaptor

Standard: DIN 2353



PART NUMBER	L	D
#	mm	mm
DS-06L/S	9.00	8.00
DS-08L/S	9.50	10.10
DS-10L/S	10.00	12.10
DS-12L/S	10.20	14.20
DS-15L	10.50	17.35
DS-16S	10.50	18.35
DS-18L	11.00	20.35
DS-20S	12.50	22.80
DS-22L	11.00	24.35
DS-25S	13.00	27.90
DS-28L	11.50	30.35
DS-30S	13.00	32.90
DS-35L	13.50	37.80
DS-38S	13.50	40.90
DS-42L	13.50	44.90

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DL4-GQ

DIN 2353 Adjustable Elbow 45° BSPP Male O Ring and Retaining Ring

 German Technology Equipment



New-Standard

DME&JDE Code: DL4-GQ

Product Type Hydraulic adaptor


Standard: DIN 2353

Structure: 45° Elbow

Connection Type: Male × Male

Thread Types: Metric 24° Cone × BSPP

Sealing Method: O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	METRIC	BSPP	mm	mm	mm	mm	mm	mm
DL4-06L-01GQ	M12X1.5	1/8"-28	4	4.4	17	27	14	14
DL4-06L-02GQ	M12X1.5	1/4"-19	4	7.5	24	29	14	19
DL4-06S-02GQ	M14X1.5	1/4"-19	4	7.5	16	27	14	14
DL4-08L-02GQ	M14X1.5	1/4"-19	6	7.5	19	29	14	19
DL4-08L-03GQ	M14X1.5	3/8"-19	6	9.9	19	33	19	22
DL4-08S-02GQ	M16X1.5	1/4"-19	5	7.5	19	29	14	19
DL4-10L-02GQ	M16X1.5	1/4"-19	8	7.5	19	29	14	19
DL4-10L-03GQ	M16X1.5	3/8"-19	8	9.9	20	33	19	22
DL4-10L-04GQ	M16X1.5	1/2"-14	10	12.3	19	38.5	22	27
DL4-10S-02GQ	M18X1.5	1/4"-19	7	7.5	21	29	14	19
DL4-10S-03GQ	M18X1.5	3/8"-19	7	9.9	20	33	19	22
DL4-12L-03GQ	M18X1.5	3/8"-19	10	9.9	21	33	19	22
DL4-12L-04GQ	M18X1.5	1/2"-14	12	12.3	21	38.5	22	27
DL4-12S-03GQ	M20X1.5	3/8"-19	8	9.9	24	33	19	22
DL4-12S-04GQ	M20X1.5	1/2"-14	8	12.3	24	38.5	22	27
DL4-14S-04GQ	M22X1.5	1/2"-14	10	10.5	24	38.5	22	27
DL4-15L-03GQ	M22X1.5	3/8"-19	12	9.9	22	33	19	22
DL4-15L-04GQ	M22X1.5	1/2"-14	12	12.3	22	38.5	22	27
DL4-16S-04GQ	M24X1.5	1/2"-14	12	12.3	24	38.5	22	27
DL4-18L-04GQ	M26X1.5	1/2"-14	15	12.3	24	38.5	22	27
DL4-18L-06GQ	M26X1.5	3/4"-14	15	15.5	24	44	27	36
DL4-20S-06GQ	M30X2	3/4"-14	16	15.5	26.5	44	27	36
DL4-22L-06GQ	M30X2	3/4"-14	19	15.5	26	46	27	36
DL4-25S-06GQ	M36X2	3/4"-14	20	15.5	30.5	46	27	36
DL4-25S-08GQ	M36X2	1"-11	20	21.5	30.5	52	36	41
DL4-28L-08GQ	M36X2	1"-11	24	21.5	30.5	52	36	41
DL4-30S-08GQ	M42X2	1"-11	25	21.5	37	54	36	41
DL4-30S-10GQ	M42X2	1 1/4"-11	25	27.5	37	48.5	41	50
DL4-35L-10GQ	M45X2	1 1/4"-11	20	27.5	37	48.5	41	50
DL4-38S-10GQ	M52X2	1 1/4"-11	32	27.5	37	48.5	41	50
DL4-38S-12GQ	M52X2	1 1/2"-11	32	33	37	49	48	55
DL4-42L-12GQ	M52X2	1 1/2"-11	36	33	37	49	48	55

Certificate:



Web: <https://www.dmejde.com>
E-mail: info@dmejde.com




DL4-MQ

DIN 2353 Adjustable Elbow 45° Metric Male O Ring and Retaining Ring



- DME&JDE Code: DL4-MQ
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: 45° Elbow
- Connection Type: Adjustable × Male
- Thread Type: Metric 24° Cone × Metric
- Sealing Method: O Ring + Retaining Ring




PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	METRIC	METRIC	mm	mm	mm	mm	mm	mm
DL4-06L-M10Q	M12X1.5	M10X1	4	4.5	17	27	14	14
DL4-06L-M14Q	M12X1.5	M14X1.5	4	7.5	24	29	14	19
DL4-06S-M12Q	M14X1.5	M12X1.5	4	4	16	27	14	17
DL4-06S-M14Q	M14X1.5	M14X1.5	4	6	16	27	14	19
DL4-08L-M12Q	M14X1.5	M12X1.5	6	4	19	27	14	17
DL4-08L-M14Q	M14X1.5	M14X1.5	6	7.5	19	29	14	19
DL4-08L-M16Q	M14X1.5	M16X1.5	6	9	19	33	19	22
DL4-08S-M14Q	M16X1.5	M14X1.5	5	6	19	29	14	19
DL4-10L-M14Q	M16X1.5	M14X1.5	8	7.5	19	29	14	19
DL4-10L-M16Q	M16X1.5	M16X1.5	8	9	20	33	19	27
DL4-10L-M22Q	M16X1.5	M22X1.5	10	14	19	38.5	22	27
DL4-10S-M14Q	M18X1.5	M14X1.5	7	6	21	29	14	19
DL4-10S-M16Q	M18X1.5	M16X1.5	7	7	20	33	19	22
DL4-12L-M16Q	M18X1.5	M16X1.5	10	9	21	33	19	22
DL4-12L-M22Q	M18X1.5	M22X1.5	12	14	21	38.5	22	27
DL4-12S-M16Q	M20X1.5	M16X1.5	8	7	24	33	19	22
DL4-12S-M18Q	M20X1.5	M18X1.5	8	9	21	33	22	24
DL4-12S-M22Q	M20X1.5	M22X1.5	8	12	24	38.5	22	27
DL4-14S-M20Q	M22X1.5	M20X1.5	10	10	24	39	22	27
DL4-15L-M16Q	M22X1.5	M16X1.5	12	9	22	33	19	22
DL4-15L-M18Q	M22X1.5	M18X1.5	12	11	24	36	22	24
DL4-15L-M22Q	M22X1.5	M22X1.5	12	14	24	42	27	27
DL4-16S-M22Q	M24X1.5	M22X1.5	12	12	24	38.5	22	27
DL4-18L-M22Q	M26X1.5	M22X1.5	15	14	24	38.5	22	27
DL4-18L-M27Q	M26X1.5	M27X2	15	18	24	44	27	32
DL4-20S-M27Q	M30X2	M27X2	16	15	26.5	44	27	32
DL4-22L-M27Q	M30X2	M27X2	19	18	26	46	27	32
DL4-25S-M27Q	M36X2	M27X2	20	15	30.5	46	27	32
DL4-25S-M33Q	M36X2	M33X2	20	20	30.5	52	36	41
DL4-28L-M33Q	M36X2	M33X2	24	23	30.5	52	36	41
DL4-30S-M33Q	M42X2	M33X2	25	20	37	54	36	41
DL4-30S-M42Q	M42X2	M42X2	25	26	37	48.5	41	50
DL4-35L-M42Q	M45X2	M42X2	20	30	37	48.5	41	50
DL4-38S-M42Q	M52X2	M42X2	32	26	37	48.5	41	50
DL4-38S-M48Q	M52X2	M48X2	32	32	37	49	48	55
DL4-42L-M48Q	M52X2	M48X2	36	36	37	49	48	55

DL-GQ

Adjustable Elbow BSPP Male ORB



- DME&JDE Code: DL-GQ
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: 90° Elbow
- Connection Type: Adjustable Male × Male
- Thread Types: Metric × BSPP + O Ring + Retaining Ring
- Sealing Method: O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	Metric	BSPP	mm	mm	mm	mm	mm	mm
DL-06L-01GQ	M12X1.5	1/8"-28	19.00	26.00	4.00	4.40	12.00	14.00
DL-06S-02GQ	M14X1.5	1/4"-19	23.00	32.00	4.00	6.00	14.00	19.00
DL-08L-02GQ	M14X1.5	1/4"-19	21.00	32.00	6.00	7.50	14.00	19.00
DL-08L-03GQ	M14X1.5	3/8"-19	24.00	37.00	6.00	9.90	19.00	22.00
DL-08S-02GQ	M16X1.5	1/4"-19	24.00	32.00	5.00	7.50	14.00	19.00
DL-08S-03GQ	M16X1.5	3/8"-19	24.00	37.00	5.00	9.90	19.00	22.00
DL-10L-02GQ	M16X1.5	1/4"-19	22.00	32.00	8.00	7.50	14.00	19.00
DL-10L-03GQ	M16X1.5	3/8"-19	26.00	37.00	8.00	9.90	19.00	22.00
DL-10S-03GQ	M18X1.5	3/8"-19	25.00	37.00	7.00	9.90	19.00	22.00
DL-12L-02GQ	M18X1.5	1/4"-19	24.00	37.00	10.00	7.50	19.00	22.00
DL-12L-03GQ	M18X1.5	3/8"-19	24.00	37.00	10.00	9.90	19.00	22.00
DL-12L-04GQ	M18X1.5	1/2"-14	27.00	44.00	10.00	12.30	22.00	27.00
DL-12S-03GQ	M20X1.5	3/8"-19	29.00	37.00	8.00	9.90	22.00	22.00
DL-12S-04GQ	M20X1.5	1/2"-14	29.00	43.00	8.00	12.30	22.00	27.00
DL-14S-04GQ	M22X1.5	1/2"-14	30.00	44.00	10.00	10.50	22.00	27.00
DL-15L-03GQ	M22X1.5	3/8"-19	28.00	39.00	12.00	9.90	22.00	22.00
DL-15L-04GQ	M22X1.5	1/2"-14	28.00	44.00	12.00	12.30	22.00	27.00
DL-16S-04GQ	M24X1.5	1/2"-14	33.00	47.00	12.00	12.30	27.00	27.00
DL-18L-04GQ	M26X1.5	1/2"-14	33.00	47.00	15.00	12.30	27.00	27.00
DL-18L-06GQ	M26X1.5	3/4"-14	33.00	47.00	15.00	15.00	27.00	36.00
DL-20S-06GQ	M30X2	3/4"-14	37.00	51.00	16.00	15.50	30.00	36.00
DL-22L-06GQ	M30X2	3/4"-14	35.50	49.00	19.00	15.50	30.00	36.00
DL-25S-08GQ	M36X2	1"-11	42.00	59.00	20.00	21.50	36.00	41.00
DL-28L-08GQ	M36X2	1"-11	40.00	59.00	24.00	21.50	36.00	41.00
DL-30S-10GQ	M42X2	1-1/4"-11	49.00	59.00	25.00	27.50	41.00	50.00
DL-35L-10GQ	M45X2	1-1/4"-11	49.00	61.00	30.00	27.50	48.00	50.00
DL-38S-12GQ	M52X2	1-1/2"-11	57.00	66.00	32.00	33.00	55.00	55.00
DL-42L-12GQ	M52X2	1-1/2"-11	51.00	66.00	36.00	33.00	55.00	55.00

DL-MQ


Adjustable Elbow Metric Male ORB

 German Technology Equipment



New-Standard

DME&JDE Code:	DL-MQ
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	90° Elbow
Connection Type:	Adjustable Male × Male
Thread Type:	Metric × Metric + O Ring + Retaining Ring
Sealing Method:	O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	L1	L2	D1	D2	S	S1
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DL-06L-M10Q	M12X1.5	M10X1	20.00	28.50	4.00	4.00	14.00	14.00
DL-06S-M12Q	M14X1.5	M12X1.5	23.00	32.00	4.00	4.00	14.00	17.00
DL-08L-M12Q	M14X1.5	M12X1.5	22.00	32.00	6.00	4.00	14.00	17.00
DL-08S-M14Q	M16X1.5	M14X1.5	25.00	36.00	5.00	6.00	19.00	19.00
DL-10L-M14Q	M16X1.5	M14X1.5	24.00	36.00	8.00	6.00	19.00	19.00
DL-10S-M16Q	M18X1.5	M16X1.5	25.00	38.00	7.00	7.00	19.00	22.00
DL-12L-M16Q	M18X1.5	M16X1.5	24.00	38.00	10.00	9.00	19.00	22.00
DL-12S-M18Q	M20X1.5	M18X1.5	29.00	40.00	8.00	9.00	22.00	24.00
DL-14S-M20Q	M22X1.5	M20X1.5	30.00	44.00	10.00	10.00	22.00	27.00
DL-15L-M18Q	M22X1.5	M18X1.5	28.00	40.00	12.00	11.00	22.00	24.00
DL-16S-M22Q	M24X1.5	M22X1.5	33.00	43.00	12.00	12.00	27.00	27.00
DL-18L-M22Q	M26X1.5	M22X1.5	31.00	46.00	15.00	14.00	27.00	27.00
DL-20S-M27Q	M30X2	M27X2	37.00	55.00	16.00	17.00	32.00	32.00
DL-22L-M27Q	M30X2	M27X2	35.50	50.50	19.00	15.00	30.00	32.00
DL-25S-M33Q	M36X2	M33X2	42.00	56.50	20.00	20.00	36.00	41.00
DL-28L-M33Q	M36X2	M33X2	40.00	56.50	24.00	23.00	36.00	41.00
DL-30S-M42Q	M42X2	M42X2	49.00	60.00	25.00	26.00	41.00	50.00
DL-35L-M42Q	M45X2	M42X2	49.00	62.00	30.00	30.00	48.00	50.00
DL-38S-M48Q	M52X2	M48X2	57.00	70.00	32.00	32.00	55.00	55.00
DL-42L-M48Q	M52X2	M48X2	52.00	70.00	36.00	36.00	55.00	55.00

DLN


Bulkhead Nut

 German Technology Equipment



New-Standard

DME&JDE Code:	DLN
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Other Features:	Bulkhead



PART NUMBER	F (Thread)	L	S
#	Metric	mm	mm
DLN-06L	M12X1.5	6.00	17.00
DLN-10L-08S	M16X1.5	6.00	22.00
DLN-12L-10S	M18X1.5	6.00	24.00
DLN-12S	M20X1.5	6.00	27.00
DLN-15L-14S	M22X1.5	7.00	30.00
DLN-16S	M24X1.5	7.00	32.00
DLN-18L	M26X1.5	8.00	36.00
DLN-22L H41	M30X2	8.00	41.00
DLN-22L-20S	M30X2	8.00	41.00
DLN-28L-25S	M36X2	9.00	46.00
DLN-30S	M42X2	9.00	50.00
DLN-35L	M45X2	9.00	55.00

DBUW


Long Hexagon Metric Male

 German Technology Equipment



New-Standard

- DME&JDE Code: DBUW
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Male
- Thread types: Metric
- Other Features: Hexagon

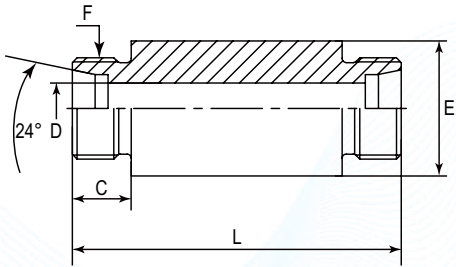

PART NUMBER	F (Thread)	C	D	E	L
#	Metric	mm	mm	mm	mm
DBUW-06L	M12X1.5	10.00	4.00	18.00	70.00
DBUW-08L	M14X1.5	10.00	6.00	20.00	70.00
DBUW-10L	M16X1.5	11.00	8.00	22.00	72.00
DBUW-12L	M18X1.5	11.00	10.00	25.00	72.00
DBUW-12S	M20X1.5	12.00	8.00	28.00	74.00
DBUW-15L	M22X1.5	12.00	12.00	28.00	84.00
DBUW-16S	M24X1.5	14.00	12.00	35.00	88.00
DBUW-20S	M30X2	16.00	16.00	38.00	92.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DGC


Female Connector Metric Female With DK1

 German Technology Equipment



New-Standard

- DME&JDE Code: DGC
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Female x Female
- Thread Types: Metric x BSPP



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	Metric	BSPP	mm	mm	mm	mm
DGC-06L-02G	M12X1.5	1/4"-19	10.00	4.00	28.00	19.00
DGC-06S-04G	M14X1.5	1/2"-14	12.00	4.00	38.00	27.00
DGC-08L-02G	M14X1.5	1/4"-19	10.00	6.00	28.00	19.00
DGC-08S-04G	M16X1.5	1/2"-14	12.00	5.00	38.00	27.00
DGC-10L-02G	M16X1.5	1/4"-19	11.00	8.00	29.00	19.00
DGC-10S-04G	M18X1.5	1/2"-14	12.00	7.00	38.00	27.00
DGC-12L-02G	M18X1.5	1/4"-19	11.00	10.00	30.00	19.00
DGC-12S-04G	M20X1.5	1/2"-14	12.00	8.00	38.00	27.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



MJ-BJBP


Straight Connector JIC Male - Banjo BSP

 German Technology Equipment



New-Standard

- DME&JDE Code: MJ-BJBP
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Male
- Thread types: UNF
- Other Features: Banjo

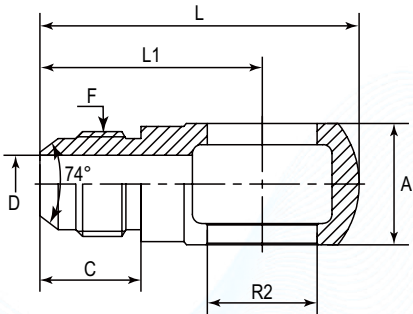

PART NUMBER	F (Thread)	A	C	D	R2	L1	L
#	UNF	mm	mm	mm	mm	mm	mm
MJ-BJBP-0402	7/16"-20	10.20	13.97	4.37	9.90	26.00	34.50
MJ-BJBP-0404	7/16"-20	15.00	13.97	4.37	13.30	29.00	41.00
MJ-BJBP-0504	1/2"-20	15.00	13.97	5.94	13.30	29.00	41.00
MJ-BJBP-0604	9/16"-18	15.00	14.12	7.54	13.30	29.00	41.00
MJ-BJBP-0606	9/16"-18	20.00	14.12	7.54	16.70	31.60	46.10
MJ-BJBP-0808	3/4"-16	25.00	16.69	9.93	21.00	41.70	58.70
MJ-BJBP-1008	7/8"-14	25.00	19.25	12.29	21.00	42.00	61.00
MJ-BJBP-1012	7/8"-14	31.00	19.25	12.29	26.50	45.00	69.00
MJ-BJBP-1212	1-1/16"-12	31.00	21.95	15.47	26.50	48.00	72.00
MJ-BJBP-1216	1-1/16"-12	42.00	21.95	15.47	33.30	57.00	87.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DA-J


Welding Elbows

 German Technology Equipment



New-Standard

- DME&JDE Code: DA-J
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: straight
- Connection Type: Male
- Thread types: UNF
- Sealing Method: Welding

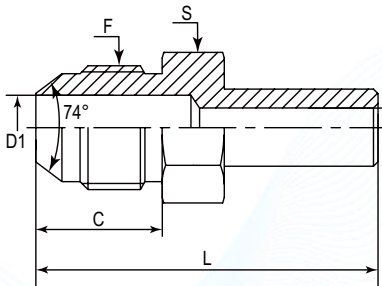

PART NUMBER	F (Thread)	C	D1	D2	L	S
#	UNF	mm	mm	mm	mm	mm
DA-06L-04J	7/16"-20	13.97	4.37	3.50	39.00	12.70
DA-08L-04J	7/16"-20	13.97	4.37	4.37	40.50	12.70
DA-08L-06J	9/16"-18	14.12	7.54	4.50	42.00	15.88
DA-10L-04J	7/16"-20	13.97	4.37	6.00	41.00	12.70
DA-10L-06J	9/16"-18	14.12	7.54	6.00	42.00	15.88
DA-10L-08J	3/4"-16	16.69	9.93	6.00	45.00	20.64
DA-12L-05J	1/2"-20	13.97	5.94	8.00	46.50	14.28
DA-12L-06J	9/16"-18	14.12	7.54	7.54	47.20	15.88
DA-12L-08J	3/4"-16	16.69	9.93	8.00	50.00	20.64
DA-15L-08J	3/4"-16	16.69	9.93	11.00	47.50	20.64
DA-15L-10J	7/8"-14	19.25	11.00	11.00	51.00	23.83
DA-18L-10J	7/8"-14	19.25	12.29	14.00	49.00	23.83
DA-18L-12J	1-1/16"-12	21.95	15.47	14.00	52.50	28.58
DA-22L-12J	1-1/16"-12	21.95	15.47	18.00	55.50	28.58
DA-22L-16J	1-5/16"-12	23.14	21.44	18.00	56.50	34.93
DA-28L-16J	1-5/16"-12	23.14	21.44	23.00	57.10	34.93
DA-35L-20J	1-5/8"-12	24.33	27.38	29.50	67.80	42.86
DA-35L-24J	1-7/8"-12	27.51	33.32	29.50	72.00	50.80

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:




DEGE-JC

Swivel Female Connector JIC Male with 24° Cone



- DME&JDE Code: DEGE-JC
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Swivel Female × Male
- Thread Types: Metric × JIC UNF 24° Cone

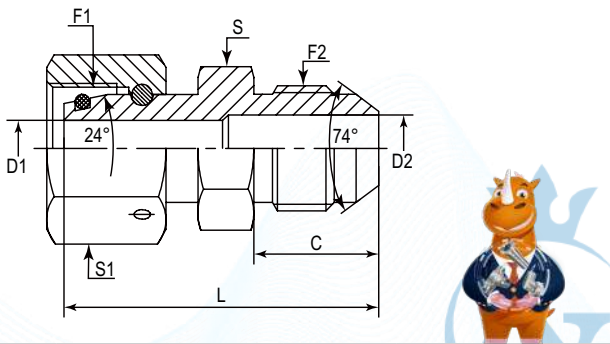


PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	Metric	UNF	mm	mm	mm	mm	mm	mm
DEGE-06L-04JC	M12X1.5	7/16"-20	13.97	3.00	3.00	35.00	14.00	14.00
DEGE-06L-05JC	M12X1.5	1/2"-20	13.97	3.00	5.94	35.00	14.00	14.00
DEGE-06S-04JC	M14X1.5	7/16"-20	13.97	3.00	4.37	36.00	14.00	17.00
DEGE-08L-04JC	M14X1.5	7/16"-20	13.97	4.00	4.00	35.00	14.00	17.00
DEGE-08L-06JC	M14X1.5	9/16"-18	14.12	4.00	7.54	36.00	17.00	17.00
DEGE-08S-04JC	M16X1.5	7/16"-20	13.97	4.00	4.00	36.00	14.00	19.00
DEGE-08S-06JC	M16X1.5	9/16"-18	14.12	4.00	7.54	37.00	17.00	19.00
DEGE-10L-05JC	M16X1.5	1/2"-20	13.97	5.94	5.94	36.00	17.00	19.00
DEGE-10L-06JC	M16X1.5	9/16"-18	14.12	6.00	7.54	37.00	17.00	19.00
DEGE-10L-08JC	M16X1.5	3/4"-16	16.69	6.00	9.93	40.50	19.00	19.00
DEGE-10S-06JC	M18X1.5	9/16"-18	14.12	6.00	6.00	38.00	19.00	22.00
DEGE-10S-08JC	M18X1.5	3/4"-16	16.69	6.00	9.93	40.50	19.00	22.00
DEGE-12L-06JC	M18X1.5	9/16"-18	14.12	7.50	7.50	40.00	19.00	22.00
DEGE-12L-08JC	M18X1.5	3/4"-16	16.69	7.50	9.93	42.50	19.00	22.00
DEGE-12S-06JC	M20X1.5	9/16"-18	14.12	7.54	7.54	41.00	19.00	24.00
DEGE-12S-08JC	M20X1.5	3/4"-16	16.69	8.00	9.93	43.50	19.00	24.00
DEGE-14S-10JC	M22X1.5	7/8"-14	19.25	8.00	12.29	48.50	24.00	27.00
DEGE-15L-06JC	M22X1.5	9/16"-18	14.12	10.00	7.54	41.00	22.00	27.00
DEGE-15L-08JC	M22X1.5	3/4"-16	16.69	9.93	9.93	41.50	19.00	27.00
DEGE-15L-10JC	M22X1.5	7/8"-14	19.25	10.00	12.29	47.00	24.00	27.00
DEGE-16S-08JC	M24X1.5	3/4"-16	16.69	9.93	9.93	43.00	22.00	30.00
DEGE-16S-10JC	M24X1.5	7/8"-14	19.25	10.00	12.29	47.50	24.00	30.00
DEGE-16S-12JC	M24X1.5	1-1/16"-12	21.95	10.00	15.47	50.00	27.00	30.00
DEGE-18L-08JC	M26X1.5	3/4"-16	16.69	9.93	9.93	45.00	27.00	32.00
DEGE-18L-10JC	M26X1.5	7/8"-14	19.25	12.29	12.29	47.50	27.00	32.00
DEGE-18L-12JC	M26X1.5	1-1/16"-12	21.95	12.50	15.47	50.00	30.00	32.00
DEGE-20S-10JC	M30X2	7/8"-14	19.25	12.29	12.29	51.50	30.00	36.00
DEGE-20S-12JC	M30X2	1-1/16"-12	21.95	14.00	14.00	54.50	30.00	36.00
DEGE-22L-12JC	M30X2	1-1/16"-12	21.95	15.47	15.47	53.00	32.00	36.00
DEGE-22L-16JC	M30X2	1-5/16"-12	23.14	17.00	21.44	55.50	36.00	36.00
DEGE-25S-16J	M36X2	1-5/16"-12	23.14	18.00	21.44	60.50	36.00	46.00
DEGE-28L-20JC	M36X2	1-5/8"-12	24.33	22.00	27.38	59.50	41.27	41.00
DEGE-30S-12JC	M42X2	1-1/16"-12	21.95	22.00	15.47	58.50	41.00	50.00
DEGE-30S-20JC	M42X2	1-5/8"-12	24.33	22.00	27.38	62.00	46.00	50.00
DEGE-30S-24JC	M42X2	1-7/8"-12	27.51	22.00	33.32	67.00	50.00	50.00
DEGE-35L-20JC	M45X2	1-5/8"-12	24.33	27.38	27.38	59.50	46.00	50.00
DEGE-35L-24JC	M45X2	1-7/8"-12	27.51	28.00	33.32	65.50	50.00	50.00
DEGE-38S-32JC	M52X2	2-1/2"-12	33.86	30.00	45.25	87.50	65.00	60.00
DEGE-42L-24JC	M52X2	1-7/8"-12	27.51	33.32	33.32	65.50	55.00	60.00
DEGE-42L-32JC	M52X2	2-1/2"-12	33.86	34.00	45.25	75.50	65.00	60.00

DEGE-GQ

Swivel Female Connector BSPP Male with 24° Cone and O Ring +Retaining Ring



- DME&JDE Code: DEGE-GQ
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: straight
- Connection Type: Swivel Female × Male
- Thread types: Metric × BSPP 24° Cone+ O Ring + Retaining Ring
- Sealing Method: O Ring + Retaining Ring

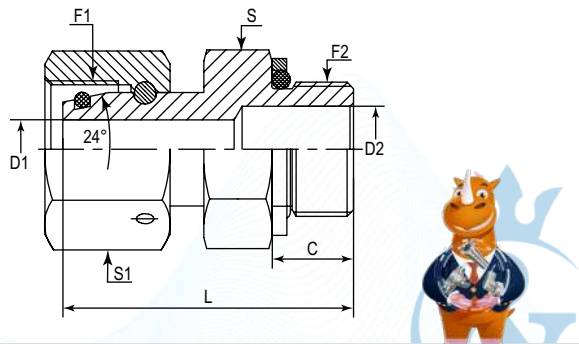

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	Metric	BSPP	mm	mm	mm	mm	mm	mm
DEGE-10L-03GQ	M16X1.5	3/8"-19	11.20	6.00	9.90	33.50	22.00	19.00
DEGE-10S-02GQ	M18X1.5	1/4"-19	11.20	6.00	7.50	35.00	19.00	22.00
DEGE-12S-04GQ	M20X1.5	1/2"-14	14.50	8.00	12.30	40.00	30.00	24.00

DEGE-N


Swivel Female Connector (NPTF Male) with 24° Cone

 German Technology Equipment



New-Standard

- DME&JDE Code: DEGE-N
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Swivel Female × Male
- Thread Types: Metric × NPTF 24° Cone

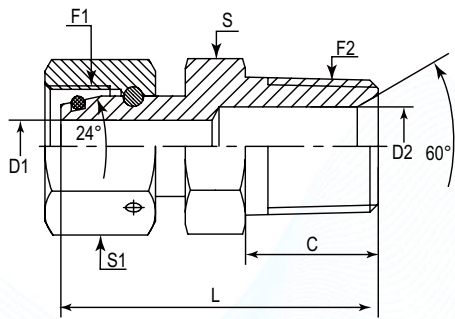

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	Metric	NPTF	mm	mm	mm	mm	mm	mm
DEGE-06L-01N	M12X1.5	1/8"-27	9.65	3.00	4.78	31.00	14.00	14.00
DEGE-06S-02N	M14X1.5	1/4"-18	14.22	3.00	7.14	37.00	17.00	17.00
DEGE-08L-02N	M14X1.5	1/4"-18	14.22	4.00	7.14	37.00	17.00	17.00
DEGE-08S-02N	M16X1.5	1/4"-18	14.22	4.00	7.14	36.00	14.00	19.00
DEGE-10L-02N	M16X1.5	1/4"-18	14.22	6.00	6.00	38.50	17.00	19.00
DEGE-10S-03N	M18X1.5	3/8"-18	14.22	6.00	10.31	38.00	19.00	22.00
DEGE-12L-02N	M18X1.5	1/4"-18	14.22	7.14	7.14	40.00	19.00	22.00
DEGE-12L-03N	M18X1.5	3/8"-18	14.22	7.50	10.31	40.00	19.00	22.00
DEGE-12S-03N	M20X1.5	3/8"-18	14.22	8.00	10.31	41.00	19.00	24.00
DEGE-14S-04N	M22X1.5	1/2"-14	19.05	8.00	13.49	47.50	22.00	27.00
DEGE-15L-04N	M22X1.5	1/2"-14	19.05	10.00	13.49	46.00	22.20	27.00
DEGE-16S-04N	M24X1.5	1/2"-14	19.05	10.00	13.49	46.00	22.00	30.00
DEGE-18L-04N	M26X1.5	1/2"-14	19.05	12.50	12.50	48.00	27.00	32.00
DEGE-20S-06N	M30X2	3/4"-14	19.05	14.00	18.26	51.50	30.00	36.00
DEGE-22L-06N	M30X2	3/4"-14	19.05	17.00	17.00	50.00	31.75	36.00
DEGE-25S-08N	M36X2	1"-11-1/2	23.88	18.00	23.83	61.20	36.00	46.00
DEGE-28L-08N	M36X2	1"-11-1/2	23.88	22.00	23.83	58.50	36.00	41.00
DEGE-30S-10N	M42X2	1-1/4"-11-1/2	24.64	22.00	31.75	62.00	46.00	50.00
DEGE-35L-10N	M45X2	1-1/4"-11-1/2	24.64	28.00	31.75	60.00	46.00	50.00
DEGE-38S-12N	M52X2	1-1/2"-11-1/2	25.40	30.00	38.10	79.50	50.00	60.00
DEGE-42L-12N	M52X2	1-1/2"-11-1/2	25.40	34.00	38.10	64.00	55.00	60.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DEWGE


DIN 2353 Swivel Adjustable 90°Elbow JIC Male

 German Technology Equipment



New-Standard

- DME&JDE Code: DEWGE
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: 90° Elbow
- Connection Type: Adjustable Swivel Female × Male
- Thread types: Metric × UNF



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	METRIC	UNF	mm	mm	mm	mm	mm	mm
DEWGE-06L-04JC	M12X1.5	7/16"-20	3	4.37	23.5	22.61	11.1	14
DEWGE-06S-04JC	M14X1.5	7/16"-20	3	4.37	24	22.61	11	17
DEWGE-08S-06JC	M16X1.5	9/16"-18	4	7.54	27	27	14	19
DEWGE-08L-06JC	M14X1.5	9/16"-18	4	7.54	25.5	27	14	17
DEWGE-10S-06JC	M18X1.5	9/16"-18	6	7.54	30	29	19	22
DEWGE-10L-06JC	M16X1.5	9/16"-18	6	7.54	27	27	14	19
DEWGE-12L-08JC	M18X1.5	3/4"-16	7.5	9.93	28.5	31.5	19	22
DEWGE-12S-08JC	M20X1.5	3/4"-16	8	9.93	31	31.5	19	24
DEWGE-15L-10JC	M22X1.5	7/8"-14	10	12.29	33	36.5	22	27
DEWGE-16S-10JC	M24X1.5	7/8"-14	10	12.29	34.5	36.5	22	30
DEWGE-18L-12JC	M26X1.5	1-1/16"-12	12.5	15.47	36	42	27	32
DEWGE-20S-12JC	M30X2	1-1/16"-12	14	15.47	42	42	27	36
DEWGE-30S-20JC	M42X2	1-5/8"-12	22	27.38	52.5	52	41	50
DEWGE-22L-16JC	M30X2	1-5/16"-12	17	21.44	40.5	46	33	36
DEWGE-25S-16JC	M36X2	1-5/16"-12	18	21.44	47	46	33	46
DEWGE-28L-16JC	M36X2	1-5/16"-12	22	21.44	42	46	33	41
DEWGE-35L-20JC	M45X2	1-5/8"-12	28	27.38	51	52	41	50
DEWGE-42L-24JC	M52X2	1-7/8"-12	34	33.32	55.5	59	48	60

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DGE


Swivel Connector (Metric Female) with 24°Cone and DK1

 German Technology Equipment



New-Standard

- DME&JDE Code: DGE
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Straight
- Connection Type: Swivel Female × Swivel Female
- Thread Types: Metric 24° Cone × BSPP

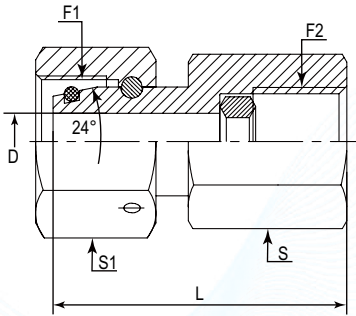

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	Metric	BSPP	mm	mm	mm	mm
DGE-06L-02G	M12X1.5	1/4"-19	3.00	35.00	19.00	14.00
DGE-08L-02G	M14X1.5	1/4"-19	4.00	36.00	19.00	17.00
DGE-08S-02G	M16X1.5	1/4"-19	4.00	36.00	19.00	19.00
DGE-08S-04G	M16X1.5	1/2"-14	4.00	42.50	27.00	19.00
DGE-10L-02G	M16X1.5	1/4"-19	6.00	35.00	19.00	19.00
DGE-10S-04G	M18X1.5	1/2"-14	6.00	42.50	27.00	22.00
DGE-12L-02G	M18X1.5	1/4"-19	5.50	36.50	19.00	22.00
DGE-12S-04G	M20X1.5	1/2"-14	8.00	45.00	27.00	24.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DLS


Welding Elbows

 German Technology Equipment



New-Standard

- DME&JDE Code: DLS
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Adaptor structure: 90° Elbow
- Adaptor Connection Type: Male
- Thread Types: Metric
- Sealing Method: Welding

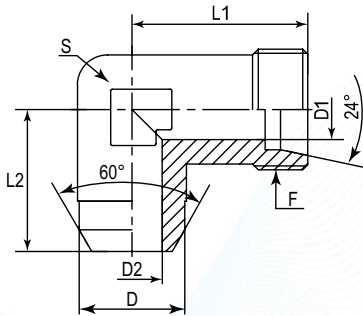

PART NUMBER	F (Thread)	L1	L2	D1	D2	D	S
#	Metric	mm	mm	mm	mm	mm	mm
DLS-08L	M14X1.5	21.00	23.00	6.00	6.00	12.00	12.00
DLS-10L	M16X1.5	22.00	22.00	8.00	8.00	14.00	14.00
DLS-12S	M20X1.5	29.00	29.00	8.00	8.00	17.00	17.00
DLS-15L	M22X1.5	28.00	28.00	12.00	12.00	19.00	19.00
DLS-16S	M24X1.5	32.00	25.00	12.00	12.00	21.00	22.00
DLS-20S	M30X2	37.00	37.00	16.00	16.00	26.00	27.00
DLS-22L	M30X2	35.00	35.00	19.00	19.00	27.00	27.00
DLS-25S	M36X2	42.00	42.00	20.00	20.00	31.00	36.00
DLS-30S	M42X2	49.00	49.00	25.00	25.00	36.00	41.00
DLS-42L	M52X2	51.00	51.00	36.00	36.00	46.00	50.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:




DTLM

Adjustable Run Tee with BSPT Male



DME&JDE Code:	DTLM
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	Run Tee
Connection Type:	Adjustable male × Male × male
Thread types:	Metric × BSPT × Metric

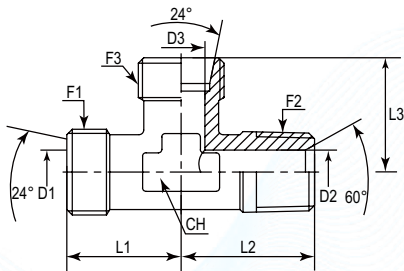


PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	CH
#	METRIC	BSPT	METRIC	mm	mm	mm	mm	mm	mm	mm
DTLM-06L-01R	M12X1.5	1/8"-28	M12X1.5	4.00	4.50	4.00	19.00	20.00	19.00	12.00
DTLM-06L-02R	M12X1.5	1/4"-19	M12X1.5	4.00	6.00	4.00	21.00	26.00	21.00	12.00
DTLM-06S-02R	M14X1.5	1/4"-19	M14X1.5	4.00	6.00	4.00	23.00	26.00	23.00	12.00
DTLM-08L-02R	M14X1.5	1/4"-19	M14X1.5	6.00	6.00	6.00	21.00	26.00	21.00	12.00
DTLM-08L-03R	M14X1.5	3/8"-19	M14X1.5	6.00	9.00	6.00	24.00	28.00	24.00	17.00
DTLM-08S-02R	M16X1.5	1/4"-19	M16X1.5	5.00	6.00	5.00	24.00	27.00	24.00	14.00
DTLM-10L-02R	M16X1.5	1/4"-19	M16X1.5	8.00	6.00	8.00	22.00	27.00	22.00	14.00
DTLM-10L-03R	M16X1.5	3/8"-19	M16X1.5	8.00	9.00	8.00	24.00	28.00	24.00	17.00
DTLM-10L-04R	M16X1.5	1/2"-14	M16X1.5	8.00	12.00	8.00	24.00	34.00	24.00	19.00
DTLM-10S-03R	M18X1.5	3/8"-19	M18X1.5	7.00	9.00	7.00	25.00	28.00	25.00	17.00
DTLM-12L-03R	M18X1.5	3/8"-19	M18X1.5	10.00	9.00	10.00	24.00	28.00	24.00	17.00
DTLM-12L-04R	M18X1.5	1/2"-14	M18X1.5	10.00	12.00	10.00	24.00	32.00	24.00	22.00
DTLM-12S-03R	M20X1.5	3/8"-19	M20X1.5	8.00	9.00	8.00	29.00	29.00	29.00	17.00
DTLM-12S-04R	M20X1.5	1/2"-14	M20X1.5	8.00	12.00	8.00	29.00	32.00	29.00	19.00
DTLM-14S-03R	M22X1.5	3/8"-19	M22X1.5	10.00	9.00	10.00	30.00	30.00	30.00	19.00
DTLM-14S-04R	M22X1.5	1/2"-14	M22X1.5	10.00	12.00	10.00	30.00	34.00	30.00	19.00
DTLM-15L-03R	M22X1.5	3/8"-19	M22X1.5	12.00	9.00	12.00	28.00	30.00	28.00	19.00
DTLM-15L-04R	M22X1.5	1/2"-14	M22X1.5	12.00	12.00	12.00	28.00	34.00	28.00	19.00
DTLM-16S-03R	M24X1.5	3/8"-19	M24X1.5	12.00	9.00	12.00	33.00	37.00	33.00	24.00
DTLM-16S-04R	M24X1.5	1/2"-14	M24X1.5	12.00	12.00	12.00	33.00	36.00	33.00	24.00
DTLM-18L-04R	M26X1.5	1/2"-14	M26X1.5	15.00	12.00	15.00	31.00	36.00	31.00	24.00
DTLM-18L-06R	M26X1.5	3/4"-14	M26X1.5	15.00	16.70	15.00	34.00	42.00	34.00	27.00
DTLM-20S-04R	M30X2	1/2"-14	M30X2	16.00	12.00	16.00	37.00	41.00	37.00	27.00
DTLM-20S-06R	M30X2	3/4"-14	M30X2	16.00	16.70	16.00	37.00	42.00	37.00	27.00
DTLM-22L-06R	M30X2	3/4"-14	M30X2	19.00	16.70	19.00	35.00	42.00	35.00	27.00
DTLM-25S-06R	M36X2	3/4"-14	M36X2	20.00	16.70	20.00	42.00	46.00	42.00	36.00
DTLM-25S-08R	M36X2	1"-11	M36X2	20.00	22.20	20.00	42.00	48.00	42.00	36.00
DTLM-28L-08R	M36X2	1"-11	M36X2	24.00	22.20	24.00	38.00	48.00	38.00	36.00
DTLM-30S-08R	M42X2	1"-11	M42X2	25.00	22.20	25.00	49.00	55.00	49.00	41.00
DTLM-30S-10R	M42X2	1-1/4"-11	M42X2	25.00	28.60	25.00	49.00	55.00	49.00	41.00
DTLM-35L-10R	M45X2	1-1/4"-11	M45X2	30.00	28.60	30.00	45.00	55.00	45.00	41.00
DTLM-38S-12R	M52X2	1-1/2"-11	M52X2	32.00	33.30	32.00	57.00	61.00	57.00	50.00
DTLM-42L-12R	M52X2	1-1/2"-11	M52X2	36.00	33.30	36.00	51.00	61.00	51.00	50.00

DTL-MQ

DIN 2353 Adjustable Run Tee with Metric Male O Ring and Retaining Ring



DME&JDE Code:	DTL-MQ
Product Type	Hydraulic adaptor
Standard:	DIN 2353
Structure:	Run Tee
Connection Type:	Adjustable Male × Male × Male
Thread Types:	Metric × Metric × Metric
Sealing Method:	O Ring + Retaining Ring

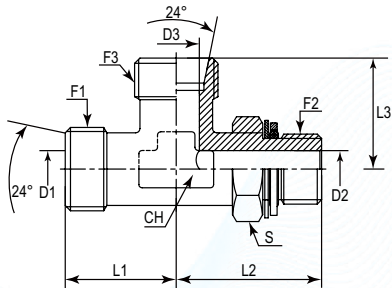

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	CH	S
#	METRIC	METRIC	METRIC	mm	mm	mm	mm	mm	mm	mm	mm
DTL-06L-M10Q	M12X1.5	M10X1	M12X1.5	4.00	4.40	4.00	19.00	26.00	19.00	12.00	14
DTL-06S-M12Q	M14X1.5	M12X1.5	M14X1.5	4.00	6.00	4.00	23.00	31.00	23.00	14.00	17
DTL-06S-M14Q	M14X1.5	M14X1.5	M14X1.5	4.00	7.50	4.00	23.00	32.00	23.00	14.00	19
DTL-08L-M12Q	M14X1.5	M12X1.5	M14X1.5	6.00	6.00	6.00	21.00	31.00	21.00	14.00	17
DTL-08L-M14Q	M14X1.5	M14X1.5	M14X1.5	6.00	7.50	6.00	21.00	32.00	21.00	14.00	19
DTL-08L-M16Q	M14X1.5	M16X1.5	M14X1.5	6.00	9.90	6.00	24.00	37.00	24.00	19.00	22
DTL-08S-M14Q	M16X1.5	M14X1.5	M16X1.5	5.00	7.50	5.00	24.00	32.00	24.00	19.00	19
DTL-08S-M16Q	M16X1.5	M16X1.5	M16X1.5	5.00	9.90	5.00	24.00	37.00	24.00	19.00	22
DTL-10L-M14Q	M16X1.5	M14X1.5	M16X1.5	8.00	7.50	8.00	22.00	32.00	22.00	14.00	19
DTL-10L-M16Q	M16X1.5	M16X1.5	M16X1.5	8.00	9.90	8.00	26.00	37.00	26.00	19.00	22
DTL-10L-M20Q	M16X1.5	M20X1.5	M16X1.5	8.00	12.30	8.00	27.00	44.00	27.00	22.00	27
DTL-10S-M16Q	M18X1.5	M16X1.5	M18X1.5	7.00	9.90	7.00	25.00	37.00	25.00	19.00	22
DTL-12L-M14Q	M18X1.5	M14X1.5	M18X1.5	10.00	7.50	10.00	24.00	37.00	24.00	19.00	19
DTL-12L-M16Q	M18X1.5	M16X1.5	M18X1.5	10.00	9.90	10.00	24.00	37.00	24.00	19.00	22
DTL-12L-M20Q	M18X1.5	M20X1.5	M18X1.5	10.00	12.30	10.00	27.00	44.00	27.00	22.00	27
DTL-12S-M16Q	M20X1.5	M16X1.5	M20X1.5	8.00	9.90	8.00	29.00	37.00	29.00	22.00	22
DTL-12S-M18Q	M20X1.5	M18X1.5	M20X1.5	8.00	9.00	8.00	29.00	38.00	29.00	19.00	24
DTL-12S-M20Q	M20X1.5	M20X1.5	M20X1.5	8.00	12.30	8.00	29.00	43.00	29.00	22.00	27
DTL-14S-M20Q	M20X1.5	M22X1.5	M20X1.5	10.00	12.30	10.00	30.00	44.00	30.00	22.00	27
DTL-15L-M16Q	M22X1.5	M16X1.5	M22X1.5	12.00	9.90	12.00	28.00	39.00	28.00	22.00	22
DTL-15L-M18Q	M22X1.5	M18X1.5	M22X1.5	12.00	9.00	12.00	28.00	40.00	28.00	24.00	27
DTL-15L-M20Q	M22X1.5	M20X1.5	M22X1.5	12.00	12.30	12.00	28.00	44.00	28.00	22.00	27
DTL-16S-M16Q	M24X1.5	M16X1.5	M24X1.5	12.00	9.90	12.00	33.00	41.50	33.00	27.00	22
DTL-16S-M20Q	M24X1.5	M20X1.5	M24X1.5	12.00	12.30	12.00	33.00	47.00	33.00	27.00	27
DTL-16S-M22Q	M24X1.5	M22X1.5	M24X1.5	12.00	12.00	12.00	33.00	48.00	33.00	27.00	27
DTL-18L-M20Q	M26X1.5	M20X1.5	M26X1.5	15.00	12.30	15.00	31.00	47.00	31.00	27.00	27
DTL-18L-M22Q	M26X1.5	M22X1.5	M26X1.5	15.00	12.00	15.00	31.00	46.00	31.00	27.00	27
DTL-18L-M26Q	M26X1.5	M26X1.5	M26X1.5	15.00	15.00	15.00	33.00	47.00	33.00	27.00	36
DTL-20S-M26Q	M30X2	M26X1.5	M30X2	16.00	15.50	16.00	37.00	51.00	37.00	30.00	36
DTL-20S-M27Q	M30X2	M27X2	M30X2	16.00	15.00	16.00	37.00	50.50	37.00	27.00	32
DTL-22L-M26Q	M30X2	M26X1.5	M30X2	19.00	15.50	19.00	35.50	49.00	35.50	30.00	36
DTL-22L-M27Q	M30X2	M27X2	M30X2	19.00	15.00	19.00	35.00	50.50	35.00	27.00	32
DTL-22L-M33Q	M30X2	M33X2	M30X2	19.00	21.50	19.00	40.00	59.00	40.00	36.00	41
DTL-25S-M26Q	M36X2	M26X1.5	M36X2	20.00	15.50	20.00	42.00	57.50	42.00	36.00	36
DTL-25S-M33Q	M36X2	M33X2	M36X2	20.00	21.50	20.00	42.00	56.00	42.00	36.00	41
DTL-28L-M33Q	M36X2	M33X2	M36X2	24.00	21.50	24.00	40.00	59.00	40.00	36.00	41
DTL-28L-M42Q	M36X2	M42X2	M36X2	24.00	27.50	24.00	44.50	60.50	44.50	41.00	50
DTL-30S-M33Q	M42X2	M33X2	M42X2	25.00	21.50	25.00	49.00	57.00	49.00	41.00	41
DTL-30S-M42Q	M42X2	M42X2	M42X2	25.00	27.50	25.00	49.00	65.00	49.00	48.00	50
DTL-35L-M42Q	M45X2	M42X2	M45X2	30.00	27.50	30.00	45.00	65.00	45.00	48.00	50
DTL-38S-M48Q	M52X2	M48X2	M52X2	32.00	33.00	32.00	57.00	66.00	57.00	55.00	55
DTL-42L-M48Q	M52X2	M48X2	M52X2	36.00	33.00	36.00	51.00	66.00	51.00	55.00	55



DTL-GQ


DIN 2353 Adjustable Run Tee with BSPP Male + O Ring + Retaining Ring

**German Technology Equipment**



New-Standard

- DME&JDE Code: DTL-GQ
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Run Tee
- Connection Type: Adjustable Male × Male × Male
- Thread types: Metric × BSPP × Metric
- Sealing Method: O Ring + Retaining Ring

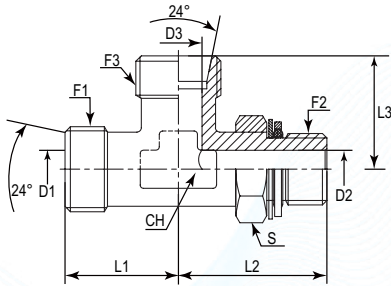

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	CH	S
#	METRIC	METRIC	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DTT-06L-01GQ	M12X1.5	M12X1.5	1/8"-28	4.00	4.00	4.40	19.00	19.00	26.00	12.00	14
DTT-06S-02GQ	M14X1.5	M14X1.5	1/4"-19	4.00	4.00	7.50	23.00	23.00	32.00	14.00	19
DTT-08L-02GQ	M14X1.5	M14X1.5	1/4"-19	6.00	6.00	7.50	21.00	21.00	32.00	14.00	19
DTT-08L-03GQ	M14X1.5	M14X1.5	3/8"-19	6.00	6.00	9.90	24.00	24.00	37.00	19.00	22
DTT-08S-02GQ	M16X1.5	M16X1.5	1/4"-19	5.00	5.00	7.50	24.00	24.00	32.00	19.00	19
DTT-08S-03GQ	M16X1.5	M16X1.5	3/8"-19	5.00	5.00	9.90	24.00	24.00	37.00	19.00	22
DTT-10L-02GQ	M16X1.5	M16X1.5	1/4"-19	8.00	8.00	7.50	22.00	22.00	32.00	19.00	19
DTT-10L-03GQ	M16X1.5	M16X1.5	3/8"-19	8.00	8.00	9.90	26.00	26.00	37.00	19.00	22
DTT-10L-04GQ	M16X1.5	M16X1.5	1/2"-14	8.00	8.00	12.30	27.00	27.00	44.00	22.00	27
DTT-10S-03GQ	M18X1.5	M18X1.5	3/8"-19	7.00	7.00	9.90	25.00	25.00	37.00	19.00	22
DTT-12L-02GQ	M18X1.5	M18X1.5	1/4"-19	10.00	10.00	7.50	24.00	24.00	37.00	19.00	19
DTT-12L-03GQ	M18X1.5	M18X1.5	3/8"-19	10.00	10.00	9.90	24.00	24.00	37.00	19.00	22
DTT-12L-04GQ	M18X1.5	M18X1.5	1/2"-14	10.00	10.00	12.30	27.00	27.00	44.00	22.00	27
DTT-12S-03GQ	M20X1.5	M20X1.5	3/8"-19	8.00	8.00	9.90	29.00	29.00	37.00	22.00	22
DTT-12S-04GQ	M20X1.5	M20X1.5	1/2"-14	8.00	8.00	12.30	29.00	29.00	43.00	22.00	27
DTT-14S-04GQ	M22X1.5	M22X1.5	1/2"-14	10.00	10.00	12.30	30.00	30.00	44.00	22.00	27
DTT-15L-03GQ	M22X1.5	M22X1.5	3/8"-19	12.00	12.00	9.90	28.00	28.00	39.00	22.00	22
DTT-15L-04GQ	M22X1.5	M22X1.5	1/2"-14	12.00	12.00	12.30	28.00	28.00	44.00	22.00	27
DTT-16S-03GQ	M24X1.5	M24X1.5	3/8"-19	12.00	12.00	9.90	33.00	33.00	41.50	27.00	22
DTT-16S-04GQ	M24X1.5	M24X1.5	1/2"-14	12.00	12.00	12.30	33.00	33.00	47.00	27.00	27
DTT-18L-04GQ	M26X1.5	M26X1.5	1/2"-14	15.00	15.00	12.30	31.00	31.00	47.00	27.00	27
DTT-18L-06GQ	M26X1.5	M26X1.5	3/4"-14	15.00	15.00	15.00	33.00	33.00	47.00	27.00	36
DTT-20S-06GQ	M30X2	M30X2	3/4"-14	16.00	16.00	15.50	37.00	37.00	51.00	30.00	36
DTT-22L-06GQ	M30X2	M30X2	3/4"-14	19.00	19.00	15.50	35.00	35.00	51.00	30.00	36
DTT-22L-08GQ	M36X2	M36X2	1"-11	24.00	24.00	21.50	40.00	40.00	59.00	36.00	41
DTT-25S-06GQ	M36X2	M36X2	3/4"-14	20.00	20.00	15.50	42.00	42.00	57.50	36.00	36
DTT-25S-08GQ	M36X2	M36X2	1"-11	20.00	20.00	21.50	42.00	42.00	56.00	36.00	41
DTT-28L-08GQ	M36X2	M36X2	1"-11	24.00	24.00	21.50	38.00	38.00	56.00	36.00	41
DTT-28L-10GQ	M36X2	M36X2	1-1/4"-11	24.00	24.00	27.50	44.50	44.50	60.50	41.00	50
DTT-30S-08GQ	M42X2	M42X2	1"-11	25.00	25.00	21.50	49.00	49.00	57.00	41.00	41
DTT-30S-10GQ	M42X2	M42X2	1-1/4"-11	25.00	25.00	27.50	49.00	49.00	59.00	41.00	50
DTT-35L-10GQ	M45X2	M45X2	1-1/4"-11	30.00	30.00	27.50	45.00	45.00	65.00	48.00	50
DTT-38S-12GQ	M52X2	M52X2	1-1/2"-11	32.00	32.00	33.00	57.00	57.00	66.00	55.00	55
DTT-42L-12GQ	M52X2	M52X2	1-1/2"-11	36.00	36.00	33.00	51.00	51.00	66.00	55.00	55

Certificate:              

DTT-MQ


DIN 2353 Adjustable Branch Tee with Metric Male O Ring and Retaining Ring

**German Technology Equipment**



New-Standard

- DME&JDE Code: DTT-MQ
- Product Type Hydraulic adaptor
- Standard: DIN 2353
- Structure: Branch Tee
- Connection Type: Adjustable Male × Male × Male
- Thread Types: Metric × Metric × Metric
- Sealing Method: O Ring + Retaining Ring

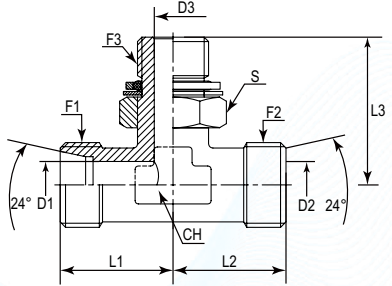

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	CH	S
#	METRIC	METRIC	METRIC	mm	mm	mm	mm	mm	mm	mm	mm
DTT-06L-M10Q	M12X1.5	M12X1.5	M10X1	4	4	4.4	19	19	26	12	14
DTT-06S-M12Q	M14X1.5	M14X1.5	M12X1.5	4	4	6	23	23	31	14	17
DTT-06S-M14Q	M14X1.5	M14X1.5	M14X1.5	4	4	7.5	23	23	32	14	19
DTT-08L-M12Q	M14X1.5	M14X1.5	M12X1.5	6	6	6	21	21	31	14	17
DTT-08L-M14Q	M14X1.5	M14X1.5	M14X1.5	6	6	7.5	21	21	32	14	19
DTT-08L-M16Q	M14X1.5	M14X1.5	M16X1.5	6	6	9.9	24	24	37	19	22
DTT-08S-M14Q	M16X1.5	M16X1.5	M14X1.5	5	5	7.5	24	24	32	19	19
DTT-08S-M16Q	M16X1.5	M16X1.5	M16X1.5	5	5	9.9	24	24	37	19	22
DTT-10L-M14Q	M16X1.5	M16X1.5	M14X1.5	8	8	7.5	22	22	32	14	19
DTT-10L-M16Q	M16X1.5	M16X1.5	M16X1.5	8	8	9.9	26	26	37	19	22
DTT-10L-M20Q	M16X1.5	M16X1.5	M20X1.5	8	8	12.3	27	27	44	22	27
DTT-10S-M16Q	M18X1.5	M18X1.5	M16X1.5	7	7	9.9	25	25	37	19	22
DTT-12L-M14Q	M18X1.5	M18X1.5	M14X1.5	10	10	7.5	24	24	37	19	19
DTT-12L-M16Q	M18X1.5	M18X1.5	M16X1.5	10	10	9.9	24	24	37	19	22
DTT-12L-M20Q	M18X1.5	M18X1.5	M20X1.5	10	10	12.3	27	27	44	22	27
DTT-12S-M16Q	M20X1.5	M20X1.5	M16X1.5	8	8	9.9	29	29	37	22	22
DTT-12S-M18Q	M20X1.5	M20X1.5	M18X1.5	8	8	9	29	29	38	19	24
DTT-12S-M20Q	M20X1.5	M20X1.5	M20X1.5	8	8	12.3	29	29	43	22	27
DTT-14S-M20Q	M22X1.5	M22X1.5	M20X1.5	10	10	12.3	30	30	44	22	27
DTT-15L-M16Q	M22X1.5	M22X1.5	M16X1.5	12	12	9.9	28	28	39	22	22
DTT-15L-M18Q	M22X1.5	M22X1.5	M18X1.5	12	12	9	28	28	40	24	27
DTT-15L-M20Q	M22X1.5	M22X1.5	M20X1.5	12	12	12.3	28	28	44	22	27
DTT-16S-M16Q	M24X1.5	M24X1.5	M16X1.5	12	12	9.9	33	33	41.5	27	22
DTT-16S-M20Q	M24X1.5	M24X1.5	M20X1.5	12	12	12.3	33	33	47	27	27
DTT-16S-M22Q	M24X1.5	M24X1.5	M22X1.5	12	12	12	33	33	48	27	27
DTT-18L-M20Q	M26X1.5	M26X1.5	M20X1.5	15	15	12.3	31	31	47	27	27
DTT-18L-M22Q	M26X1.5	M26X1.5	M22X1.5	15	15	12	31	31	46	27	27
DTT-18L-M26Q	M26X1.5	M26X1.5	M26X1.5	15	15	15	33	33	47	27	36
DTT-20S-M26Q	M30X2	M30X2	M26X1.5	16	16	15.5	37	37	51	30	36
DTT-20S-M27Q	M30X2	M30X2	M27X2	16	16	15	37	37	50.5	27	32
DTT-22L-M26Q	M30X2	M30X2	M26X1.5	19	19	15.5	35.5	35.5	49	30	36
DTT-22L-M27Q	M30X2	M30X2	M27X2	19	19	15	35	35	50.5	27	32
DTT-22L-M33Q	M30X2	M30X2	M33X2	19	19	21.5	40	40	59	36	41
DTT-25S-M26Q	M36X2	M36X2	M26X1.5	20	20	15.5	42	42	57.5	36	36
DTT-25S-M33Q	M36X2	M36X2	M33X2	20	20	21.5	42	42	56	36	41
DTT-28L-M33Q	M36X2	M36X2	M33X2	24	24	21.5	40	40	59	36	41
DTT-28L-M42Q	M36X2	M36X2	M42X2	24	24	27.5	44.5	44.5	60.5	41	50
DTT-30S-M33Q	M42X2	M42X2	M33X2	25	25	21.5	49	49	57	41	41
DTT-30S-M42Q	M42X2	M42X2	M42X2	25	25	27.5	49	49	65	48	50
DTT-35L-M42Q	M45X2	M45X2	M42X2	30	30	27.5	45	45	65	48	50
DTT-38S-M48Q	M52X2	M52X2	M48X2	32	32	33	57	57	66	55	55
DTT-42L-M48Q	M52X2	M52X2	M48X2	36	36	33	51	51	66	55	55

Certificate:              




DTT-GQ

DIN 2353 Adjustable Branch Tee with BSPP Male + O Ring + Retaining Ring



- DME&JDE Code: DTT-GQ
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Branch Tee
- Connection Type: Adjustable Male x Male x Male
- Thread types: Metric x Metric x BSPP
- Sealing Method: O Ring + Retaining Ring

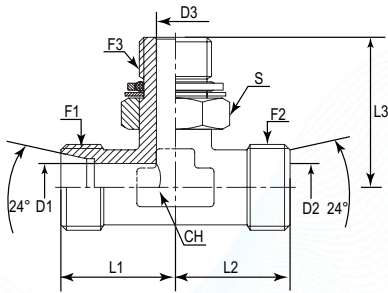

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	CH	S
#	METRIC	METRIC	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DTT-06L-01GQ	M12X1.5	M12X1.5	1/8"-28	4	4	4.4	19	19	26	12	14
DTT-06S-02GQ	M14X1.5	M14X1.5	1/4"-19	4	4	7.5	23	23	32	14	19
DTT-08L-02GQ	M14X1.5	M14X1.5	1/4"-19	6	6	7.5	21	21	32	14	19
DTT-08L-03GQ	M14X1.5	M14X1.5	3/8"-19	6	6	9.9	24	24	37	19	22
DTT-08S-02GQ	M16X1.5	M16X1.5	1/4"-19	5	5	7.5	24	24	32	19	19
DTT-08S-03GQ	M16X1.5	M16X1.5	3/8"-19	5	5	9.9	24	24	37	19	22
DTT-10L-02GQ	M16X1.5	M16X1.5	1/4"-19	8	8	7.5	22	22	32	19	19
DTT-10L-03GQ	M16X1.5	M16X1.5	3/8"-19	8	8	9.9	26	26	37	19	22
DTT-10L-04GQ	M16X1.5	M16X1.5	1/2"-14	8	8	12.3	27	27	44	22	27
DTT-10S-03GQ	M18X1.5	M18X1.5	3/8"-19	7	7	9.9	25	25	37	19	22
DTT-12L-02GQ	M18X1.5	M18X1.5	1/4"-19	10	10	7.5	24	24	37	19	19
DTT-12L-03GQ	M18X1.5	M18X1.5	3/8"-19	10	10	9.9	24	24	37	19	22
DTT-12L-04GQ	M18X1.5	M18X1.5	1/2"-14	10	10	12.3	27	27	44	22	27
DTT-12S-03GQ	M20X1.5	M20X1.5	3/8"-19	8	8	9.9	29	29	37	22	22
DTT-12S-04GQ	M20X1.5	M20X1.5	1/2"-14	8	8	12.3	29	29	43	22	27
DTT-14S-04GQ	M22X1.5	M22X1.5	1/2"-14	10	10	12.3	30	30	44	22	27
DTT-15L-03GQ	M22X1.5	M22X1.5	3/8"-19	12	12	9.9	28	28	39	22	22
DTT-15L-04GQ	M22X1.5	M22X1.5	1/2"-14	12	12	12.3	28	28	44	22	27
DTT-16S-03GQ	M24X1.5	M24X1.5	3/8"-19	12	12	9.9	33	33	41.5	27	22
DTT-16S-04GQ	M24X1.5	M24X1.5	1/2"-14	12	12	12.3	33	33	47	27	27
DTT-18L-04GQ	M26X1.5	M26X1.5	1/2"-14	15	15	12.3	31	31	47	27	27
DTT-18L-06GQ	M26X1.5	M26X1.5	3/4"-14	15	15	15	33	33	47	27	36
DTT-20S-06GQ	M30X2	M30X2	3/4"-14	16	16	15.5	37	37	51	30	36
DTT-22L-06GQ	M30X2	M30X2	3/4"-14	19	19	15.5	35	35	51	30	36
DTT-22L-08GQ	M36X2	M36X2	1"-11	24	24	21.5	40	40	59	36	41
DTT-25S-06GQ	M36X2	M36X2	3/4"-14	20	20	15.5	42	42	57.5	36	36
DTT-25S-08GQ	M36X2	M36X2	1"-11	20	20	21.5	42	42	56	36	41
DTT-28L-08GQ	M36X2	M36X2	1"-11	24	24	21.5	38	38	56	36	41
DTT-28L-10GQ	M36X2	M36X2	1 1/4"-11	24	24	27.5	44.5	44.5	60.5	41	50
DTT-30S-08GQ	M42X2	M42X2	1"-11	25	25	21.5	49	49	57	41	41
DTT-30S-10GQ	M42X2	M42X2	1 1/4"-11	25	25	27.5	49	49	59	41	50
DTT-35L-10GQ	M45X2	M45X2	1 1/4"-11	30	30	27.5	45	45	65	48	50
DTT-38S-12GQ	M52X2	M52X2	1 1/2"-11	32	32	33	57	57	66	55	55
DTT-42L-12GQ	M52X2	M52X2	1 1/2"-11	36	36	33	51	51	66	55	55

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com




DTTM

Adjustable Branch Tee with BSPT Male



- DME&JDE Code: DTTM
- Product Type: Hydraulic adaptor
- Standard: DIN 2353
- Structure: Branch Tee
- Connection Type: Adjustable Male x Male x Male
- Thread Types: Metric x Metric x BSPT

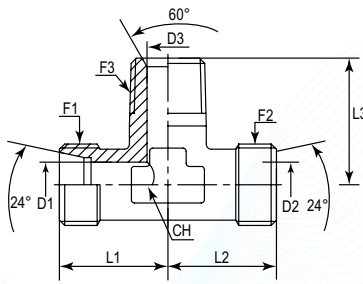

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	CH
#	METRIC	METRIC	BSPT	mm	mm	mm	mm	mm	mm	mm
DTTM-06L-01R	M12X1.5	M12X1.5	1/8"-27	4.00	4.00	4.50	19.00	19.00	20.00	12.00
DTTM-06L-02R	M12X1.5	M12X1.5	1/4"-19	4.00	4.00	6.00	21.00	21.00	36.00	12.00
DTTM-06S-02R	M14X1.5	M14X1.5	1/4"-19	4.00	4.00	6.00	23.00	23.00	26.00	12.00
DTTM-08L-02R	M14X1.5	M14X1.5	1/4"-19	6.00	6.00	6.00	21.00	21.00	26.00	12.00
DTTM-08L-03R	M14X1.5	M14X1.5	3/8"-19	6.00	6.00	9.00	24.00	24.00	28.00	17.00
DTTM-08S-02R	M16X1.5	M16X1.5	1/4"-19	5.00	5.00	6.00	24.00	24.00	27.00	14.00
DTTM-10L-02R	M16X1.5	M16X1.5	1/4"-19	8.00	8.00	6.00	22.00	22.00	27.00	14.00
DTTM-10L-03R	M16X1.5	M16X1.5	3/8"-19	8.00	8.00	9.00	24.00	24.00	28.00	17.00
DTTM-10L-04R	M16X1.5	M16X1.5	1/2"-14	8.00	8.00	12.00	24.00	24.00	34.00	19.00
DTTM-10S-03R	M18X1.5	M18X1.5	3/8"-19	7.00	7.00	9.00	25.00	25.00	28.00	17.00
DTTM-12L-03R	M18X1.5	M18X1.5	3/8"-19	10.00	10.00	9.00	24.00	24.00	28.00	17.00
DTTM-12L-04R	M18X1.5	M18X1.5	1/2"-14	10.00	10.00	12.00	24.00	24.00	32.00	22.00
DTTM-12S-03R	M20X1.5	M20X1.5	3/8"-19	8.00	8.00	9.00	29.00	29.00	29.00	17.00
DTTM-12S-04R	M20X1.5	M20X1.5	1/2"-14	8.00	8.00	12.00	29.00	29.00	32.00	19.00
DTTM-14S-03R	M22X1.5	M22X1.5	3/8"-19	10.00	10.00	9.00	30.00	30.00	30.00	19.00
DTTM-14S-04R	M22X1.5	M22X1.5	1/2"-14	10.00	10.00	12.00	30.00	30.00	34.00	19.00
DTTM-15L-03R	M22X1.5	M22X1.5	3/8"-19	12.00	12.00	9.00	28.00	28.00	30.00	19.00
DTTM-15L-04R	M22X1.5	M22X1.5	1/2"-14	12.00	12.00	12.00	28.00	28.00	34.00	19.00
DTTM-16S-03R	M24X1.5	M24X1.5	3/8"-19	12.00	12.00	9.00	33.00	33.00	37.00	24.00
DTTM-16S-04R	M24X1.5	M24X1.5	1/2"-14	12.00	12.00	12.00	33.00	33.00	36.00	24.00
DTTM-18L-04R	M26X1.5	M26X1.5	1/2"-14	15.00	15.00	12.00	31.00	31.00	36.00	24.00
DTTM-18L-06R	M26X1.5	M26X1.5	3/4"-14	15.00	15.00	16.70	34.00	34.00	42.00	27.00
DTTM-20S-04R	M30X2	M30X2	1/2"-14	16.00	16.00	12.00	37.00	37.00	41.00	27.00
DTTM-20S-06R	M30X2	M30X2	3/4"-14	16.00	16.00	16.70	37.00	37.00	42.00	27.00
DTTM-22L-06R	M30X2	M30X2	3/4"-14	19.00	19.00	16.70	35.00	35.00	42.00	27.00
DTTM-25S-06R	M36X2	M36X2	3/4"-14	20.00	20.00	16.70	42.00	42.00	45.00	36.00
DTTM-25S-08R	M36X2	M36X2	1"-11	20.00	20.00	22.20	42.00	42.00	48.00	36.00
DTTM-28L-08R	M36X2	M36X2	1"-11	24.00	24.00	22.20	38.00	38.00	48.00	36.00
DTTM-30S-08R	M42X2	M42X2	1"-11	25.00	25.00	22.20	49.00	49.00	55.00	41.00
DTTM-30S-10R	M42X2	M42X2	1-1/4"-11	25.00	25.00	28.60	49.00	49.00	55.00	41.00
DTTM-35L-10R	M45X2	M45X2	1-1/4"-11	30.00	30.00	28.60	45.00	45.00	55.00	41.00
DTTM-38S-12R	M52X2	M52X2	1-1/2"-11	32.00	32.00	33.30	57.00	57.00	61.00	50.00
DTTM-42L-12R	M52X2	M52X2	1-1/2"-11	36.00	36.00	33.30	51.00	51.00	61.00	50.00



Web: <https://www.dmejde.com>
E-mail: info@dmejde.com





Hydraulic Adaptors


JIS »



Certificate:

DAJSBM105JM


P658



Straight Connector JIS BSPP
Male 60° Cone

DAJSM152JM


P659



Straight Connector JIS Metric
Male 60° Cone

DAJSBM105M


P660



Straight Connector JIS BSPP Male 60°
- BSPP Male 60° Cone

DAJSBM107M


P661



Straight Connector JIS BSPP
Male 60° - BSPT Male 60°

DAJSM128M


P662



Straight Connector JIS Metric
Male 60° - NPTF Male 60°

DAJSM107M


P663



Straight Connector JIS Metric
Male 60° - BSPT Male 60°

DAJSBM1305


P664



Straight Connector JIS BSPP Male
60° Cone - SAE Male + O Ring

DAJSBM1000


P665



JIS Male Plug BSPP 60° Cone

DAJSM1000


P666



Plug JIS Male O Ring

DAJSM1251


P667



Straight Connector JIS Metric
Male 60° - JIC Swivel Female 74°

DAJSBM105F


P668



Straight Connector JIS BSPP
Male 60° Cone - BSPP Female

DAJSB31000


P669



JIS BSPP Female Cap Swivel 60° Cone

DAJS31000


P670



JIS Metric Female Cap Swivel
60° Cone

DAJSM407M


P671



45° Elbow JIS Metric Male 60° Cone -
BSPT Male 60°

DAJSM452Q


P672



45° Adjustable Elbow JIS Metric Male
60° - Metric Male + O Ring + Retaining
Ring

DAJSBM407M


P673



45° Elbow JIS BSPP Male 60° Cone -
BSPT Male 60°

DAJSBM907M


P674



90° Elbow JIS BSPP Male 60° -
BSPT Male 60° Cone

DAJSM907M


P675



90° Elbow JIS Metric Male 60°
Cone - BSPT Male 60°

DAJSBM906Q


P676



Adjustable 90° Elbow JIS BSPP Male 60° -
BSPP Male + O Ring + Retaining Ring

DAJSM906Q


P678



90° Elbow JIS Metric Male 60° Cone -
BSPP Male + O Ring + Retaining Ring

DAJSM952Q


P679



Adjustable 90° Elbow JIS Metric
Male 60° - Metric Male + O Ring
+ Retaining Ring

DAJSBM930S


P680



Adjustable 90° Elbow JIS BSPP
Male 60° - SAE Male + O Ring

DAJSM907I


P681



90° Elbow JIS Metric Male 60°
Cone - Metric Swivel Female 60°

DAJSBM904I


P682



90° Elbow JIS BSPP Male 60°
Cone - BSPP Swivel Female 60°

DAJSMT52JM


P683



Branch Tee Connector JIS Metric
Male 60° - JIS Metric Male 60°

DAJSMT07I


P684



Branch Tee JIS Metric Male 60°
Cone - Metric Swivel Female 60°

DAJSML07I


P685



Run Tee JIS Metric Male 60°
Cone - Metric Swivel Female 60°

DAJSBML04I

P686



Run Tees JIS BSPP Female 60° Cone -
BSPP Male 60°

DAJSBM105JM

Straight Connector JIS BSPP Male 60° Cone

D

Company

DME

A

Product Range

Adaptor

JSB

Thread Types

JIS BSPP

M

Connection Type

Male

1

Adaptor Structure

Straight

05J

Thread Types

JIS BSPP

M

Connection Type

Male



German Technology Equipment



New-Standard

DME&JDE Code: DAJSBM105JM


Product Type Hydraulic adaptor

Standard: JIS

Structure: Straight

Connection Type: Male x Male

Thread Types: JIS BSPP 60° Cone x JIS BSPP 60° Cone



Filter the F1 Thread through selecting the -XX options

PART NUMBER	F1/F2 (Thread)	C1/C2	D1/D2	L	S	Cross Number
#	BSPP	mm	mm	mm	mm	-
DAJSBM105JM-0404	1/4"-19	16.00	4.00	38.00	17.00	1S-04
DAJSBM105JM-0606	3/8"-19	18.00	8.50	42.00	19.00	1S-06
DAJSBM105JM-0808	1/2"-14	20.00	9.30	48.00	22.00	1S-08
DAJSBM105JM-1212	3/4"-14	22.00	16.70	54.00	30.00	1S-12
DAJSBM105JM-1616	1"-11	24.00	20.00	59.00	36.00	1S-16
DAJSBM105JM-2020	1-1/4"-11	27.00	28.00	67.00	46.00	1S-20
DAJSBM105JM-2424	1-1/2"-11	27.00	34.00	69.00	50.00	1S-24
DAJSBM105JM-3232	2"-11	30.00	46.00	77.00	65.00	1S-32

Certificate:



DAJSM152JM

Straight Connector JIS Metric Male 60° Cone

D

A

JS

M

1

52J

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIS Metric

Male

Straight

JIS Metric

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJSM152JM

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

JIS Metric 60° Cone × JIS Metric 60° Cone

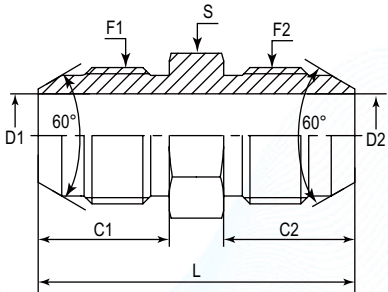

PART NUMBER	F1/F2 (Thread)	C1/C2	D1/D2	L	S	Cross Number
#	Metric	mm	mm	mm	mm	-
DAJSM152JM-1414	M14X1.5	17.00	5.00	40.00	17.00	1K-14
DAJSM152JM-1616	M16X1.5	18.00	7.00	42.00	17.00	1K-16
DAJSM152JM-1818	M18X1.5	18.00	8.50	42.00	19.00	1K-18
DAJSM152JM-2020	M20X1.5	20.00	10.00	48.00	22.00	1K-20
DAJSM152JM-2222	M22X1.5	20.00	12.00	48.00	24.00	1K-22
DAJSM152JM-2424	M24X1.5	21.50	15.00	53.00	27.00	1K-24
DAJSM152JM-3030	M30X1.5	26.00	18.50	63.00	32.00	1K-30
DAJSM152JM-3333	M33X1.5	30.00	20.00	71.00	36.00	1K-33



Certificate:



DAJSBM105M

Straight Connector JIS BSPP Male 60° - BSPP Male 60° Cone

D

A

JSB

M

1

05

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIS BSPP

Male

Straight

JIS BSPP

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJSBM105M

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

JIS BSPP 60° × BSPP 60° Cone

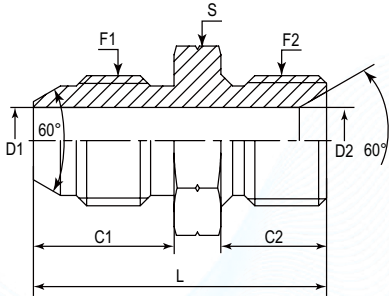

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DAJSBM105M-0404	1/4"-19	1/4"-19	16.00	12.00	4.00	4.00	34.00	19.00
DAJSBM105M-0406	1/4"-19	3/8"-19	16.00	13.50	4.00	8.50	34.00	19.00
DAJSBM105M-0604	3/8"-19	1/4"-19	18.00	12.00	8.50	4.00	36.00	19.00
DAJSBM105M-0606	3/8"-19	3/8"-19	18.00	13.50	8.50	8.50	37.50	22.00
DAJSBM105M-0608	1/2"-14	3/8"-19	18.00	16.00	11.00	8.50	44.00	27.00
DAJSBM105M-0806	3/8"-19	1/2"-14	20.00	13.50	8.50	11.00	41.50	22.00
DAJSBM105M-0808	1/2"-14	1/2"-14	20.00	16.00	11.00	11.00	46.00	27.00
DAJSBM105M-0812	3/4"-14	1/2"-14	20.00	18.50	16.70	11.00	49.50	32.00
DAJSBM105M-1206	3/8"-19	3/4"-14	22.00	13.50	8.50	16.70	45.50	30.00
DAJSBM105M-1208	1/2"-14	3/4"-14	22.00	16.00	11.00	20.00	48.00	30.00
DAJSBM105M-1212	3/4"-14	3/4"-14	22.00	18.50	16.70	16.70	51.50	32.00
DAJSBM105M-1216	1"-11	3/4"-14	22.00	20.50	20.00	16.70	55.50	41.00
DAJSBM105M-1608	1/2"-14	1"-11	24.00	16.00	11.00	20.00	51.00	36.00
DAJSBM105M-1612	3/4"-14	1"-11	24.00	18.50	16.70	20.00	53.50	36.00
DAJSBM105M-1616	1"-11	1"-11	24.00	20.50	20.00	20.00	57.50	41.00

Certificate:





DAJSBM107M

Straight Connector JIS BSPP Male 60° - BSPT Male 60°

D

A

JSB

M

1

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIS BSPP

Male

Straight

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJSBM107M

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

JIS BSPP 60° × BSPT 60°

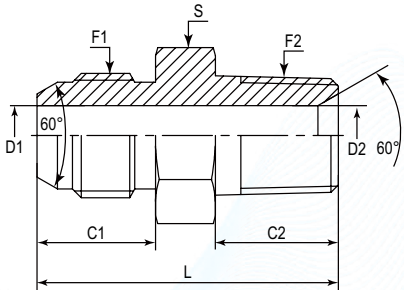

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	BSPT	mm	mm	mm	mm	mm	mm
DAJSBM107M-0404	1/4"-19	1/4"-19	16.00	14.50	4.50	6.00	38.00	17.00
DAJSBM107M-0606	3/8"-19	3/8"-19	18.00	15.00	8.50	8.50	39.00	19.00
DAJSBM107M-0808	1/2"-14	1/2"-14	20.00	19.00	9.30	12.00	47.00	22.00
DAJSBM107M-1212	3/4"-14	3/4"-14	22.00	20.00	16.00	16.00	52.00	30.00
DAJSBM107M-1616	1"-11	1"-11	24.00	25.50	20.00	22.20	62.50	41.00
DAJSBM107M-2020	1-1/4"-11	1-1/4"-11	27.00	25.00	28.00	28.00	65.00	46.00
DAJSBM107M-2424	1-1/2"-11	1-1/2"-11	27.00	25.00	33.30	33.30	67.00	50.00
DAJSBM107M-3232	2"-11	2"-11	30.00	30.00	46.00	46.00	77.00	65.00



Certificate:



DAJSM128M

Straight Connector JIS Metric Male 60° - NPTF Male 60°

D

A

JS

M

1

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIS Metric

Male

Straight

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJSM128M

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

JIS Metric 60° × NPTF 60°

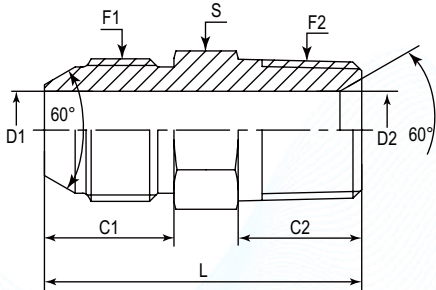

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Cross Number
#	Metric	NPTF	mm	mm	mm	mm	mm	mm	-
DAJSM128M-1404	M14X1.5	1/4"-18	17.00	14.22	5.00	7.14	38.00	17.00	1KN-1404
DAJSM128M-1406	M14X1.5	3/8"-18	17.00	14.22	5.00	10.31	39.00	19.00	1KN-1406
DAJSM128M-1606	M16X1.5	3/8"-18	18.00	14.22	7.00	10.31	40.00	19.00	1KN-1606
DAJSM128M-1608	M16X1.5	1/2"-14	18.00	19.05	7.00	13.49	45.50	22.00	1KN-1608
DAJSM128M-1806	M18X1.5	3/8"-18	18.00	14.22	8.50	10.31	40.00	19.00	1KN-1806
DAJSM128M-2006	M20X1.5	3/8"-18	20.00	14.22	10.00	10.00	44.00	22.00	1KN-2006
DAJSM128M-2008	M20X1.5	1/2"-14	20.00	19.05	10.00	13.49	47.50	22.00	1KN-2008
DAJSM128M-2208	M22X1.5	1/2"-14	20.00	19.05	12.00	12.00	47.50	24.00	1KN-2208
DAJSM128M-2408	M24X1.5	1/2"-14	21.50	19.05	13.49	13.49	50.50	27.00	1KN-2408
DAJSM128M-2412	M24X1.5	3/4"-14	21.50	19.05	15.00	18.26	51.00	30.00	1KN-2412
DAJSM128M-3012	M30X1.5	3/4"-14	26.00	19.05	18.26	18.26	56.00	32.00	1KN-3012
DAJSM128M-3316	M33X1.5	1"-11-1/2	30.00	23.88	20.00	23.88	66.50	36.00	1KN-3316



Certificate:



DAJSM107M

Straight Connector JIS Metric Male 60° - BSPT Male 60°

D

A

JS

M

1

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIS Metric

Male

Straight

BSPT

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJSM107M

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

JIS BSPP 60° × BSPT 60°

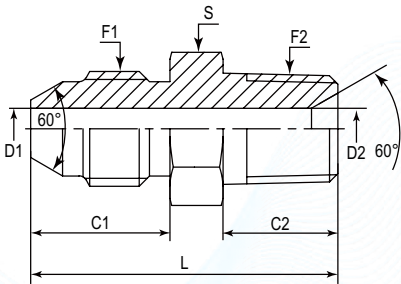

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S	Cross Number
#	Metric	BSPT	mm	mm	mm	mm	mm	mm	-
DAJSM107M-1204	M12X1.5	1/4"-19	16.00	14.00	4.50	6.00	36.50	17.00	1KT-1204SP
DAJSM107M-1402	M14X1.5	1/8"-28	17.00	10.00	4.50	4.50	33.00	17.00	1KT-1402SP
DAJSM107M-1404	M14X1.5	1/4"-19	17.00	14.00	5.00	5.00	37.50	17.00	1KT-1404SP
DAJSM107M-1406	M14X1.5	3/8"-19	17.00	15.00	5.00	9.00	37.50	17.00	1KT-1406SP
DAJSM107M-1604	M16X1.5	1/4"-19	18.00	14.00	6.00	6.00	38.00	17.00	1KT-1604SP
DAJSM107M-1606	M16X1.5	3/8"-19	18.00	15.00	7.00	7.00	39.00	19.00	1KT-1606SP
DAJSM107M-1806	M18X1.5	3/8"-19	18.00	15.00	8.50	9.00	39.00	19.00	1KT-1806SP
DAJSM107M-1808	M18X1.5	1/2"-14	18.00	19.00	8.50	12.00	45.50	22.00	1KT-1808SP
DAJSM107M-2006	M20X1.5	3/8"-19	20.00	15.00	10.00	9.00	43.00	24.00	1KT-2006SP
DAJSM107M-2208	M22X1.5	1/2"-14	20.00	19.00	12.00	12.00	48.00	24.00	1KT-2208SP
DAJSM107M-2408	M24X1.5	1/2"-14	21.50	19.00	15.00	12.00	50.50	27.00	1KT-2408SP
DAJSM107M-2412	M24X1.5	3/4"-14	21.50	20.00	15.00	16.70	51.50	30.00	1KT-2412SP
DAJSM107M-3012	M30X1.5	3/4"-14	26.00	20.00	18.50	16.70	57.00	32.00	1KT-3012SP
DAJSM107M-3316	M33X1.5	1"-11	30.00	24.00	20.00	22.20	65.00	36.00	1KT-3316SP

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

SGS

PC

DEKRA

DIN

SE

MA

CE

UK CA

DAJSBM1305

Straight Connector JIS BSPP Male 60° Cone - SAE Male + O Ring

D

A

JSB

M

1

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection & Sealing Method

DME

Adaptor

JIS BSPP

Male

Straight

SAE

Male + O Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJSBM1305

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

JIS BSPP 60° Cone × UNF

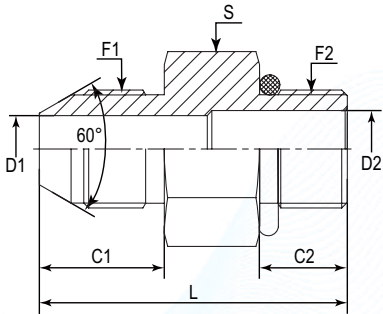

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	BSPP	UNF	mm	mm	mm	mm	mm	mm
DAJSBM1305-0404	1/4"-19	7/16"-20	16.00	9.10	4.00	4.00	31.00	14
DAJSBM1305-0406	1/4"-19	9/16"-18	16.00	9.90	4.00	7.54	32.00	17
DAJSBM1305-0604	3/8"-19	7/16"-20	18.00	9.10	8.50	4.37	33.00	17
DAJSBM1305-0606	3/8"-19	9/16"-18	18.00	9.90	8.50	7.54	34.00	17
DAJSBM1305-0806	1/2"-14	9/16"-18	20.00	11.10	9.30	7.54	38.00	22
DAJSBM1305-0808	1/2"-14	3/4"-16	20.00	11.10	9.30	9.30	39.00	22
DAJSBM1305-1210	3/4"-14	7/8"-14	22.00	1.70	16.00	12.29	44.50	30
DAJSBM1305-1212	3/4"-14	1-1/16"-12	22.00	15.10	15.47	15.47	48.00	32
DAJSBM1305-1612	1"-11	1-1/16"-12	24.00	15.10	20.00	15.47	50.00	36
DAJSBM1305-1616	1"-11	1-5/16"-12	24.00	15.10	20.00	21.44	50.00	38
DAJSBM1305-2016	1-1/4"-11	1-5/16"-12	7.00	15.10	28.00	21.44	55.00	46
DAJSBM1305-2020	1-1/4"-11	1-5/8"-12	27.00	15.10	27.38	27.38	57.00	50
DAJSBM1305-2420	1-1/2"-11	1-5/8"-12	27.00	15.10	34.00	27.38	57.00	50
DAJSBM1305-2424	1-1/2"-11	1-7/8"-12	27.00	15.10	33.32	33.32	57.00	55

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

SGS

PC

DEKRA

DIN

SE

MA

CE

UK CA

DAJSBM1000

JIS Male Plug BSPP 60° Cone

D

A

JSB

M

1

000

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Other Features

DME

Adaptor

JIS BSPP

Male

Straight

Nut/Plug

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJSBM1000

Product Type

Hydraulic adaptor

Adaptor Standard:

JIS

Adaptor Connection Type:


Male

Thread Types:

JIS BSPP 60° Cone

Other Features:

Nut/Plug



PART NUMBER	F (Thread)	C	D	L	S	Cross Number
#	BSPP	mm	mm	mm	mm	-
DAJSBM1000-0200	1/8"-28	12.00	3.20	18.00	14.00	4S-02
DAJSBM1000-0400	1/4"-19	16.00	4.00	24.00	17.00	4S-04
DAJSBM1000-0600	3/8"-19	18.00	8.50	24.00	19.00	4S-06
DAJSBM1000-0800	1/2"-14	20.00	9.30	28.00	22.00	4S-08
DAJSBM1000-1200	3/4"-14	22.00	16.70	32.00	30.00	4S-12
DAJSBM1000-1600	1"-11	24.00	20.00	35.00	36.00	4S-16
DAJSBM1000-2000	1-1/4"-11	27.00	28.00	40.00	46.00	4S-20
DAJSBM1000-2400	1-1/2"-11	27.00	34.00	42.00	50.00	4S-24
DAJSBM1000-3200	2"-11	30.00	46.00	47.00	65.00	4S-32



Certificate:



DAJSM1000

JIS Metric Male Plug 60° Cone

D

A

JS

M

1

000

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Other Features

DME

Adaptor

JIS Metric

Male

Straight

Nut/Plug

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJSM1000

Product Type

Hydraulic adaptor

Standard:

JIS

Connection Type:


Male

Thread Types:

JIS Metric 60° Cone

Other Features:

Nut/Plug



PART NUMBER	F (Thread)	C	D	L	S	Cross Number
#	Metric	mm	mm	mm	mm	-
DAJSM1000-1200	M12X1.5	17.00	3.00	22.00	14.00	4K-12
DAJSM1000-1400	M14X1.5	17.00	5.00	23.00	17.00	4K-14
DAJSM1000-1600	M16X1.5	18.00	7.00	24.00	17.00	4K-16
DAJSM1000-1800	M18X1.5	18.00	8.50	25.00	19.00	4K-18
DAJSM1000-2000	M20X1.5	20.00	10.00	28.00	22.00	4K-20
DAJSM1000-2200	M22X1.5	20.00	12.00	28.00	24.00	4K-22
DAJSM1000-2400	M24X1.5	21.50	15.00	31.50	27.00	4K-24
DAJSM1000-2600	M26X1.5	22.00	16.70	32.00	30.00	4K-26
DAJSM1000-3000	M30X1.5	26.00	18.50	37.00	32.00	4K-30
DAJSM1000-3300	M33X1.5	30.00	20.00	41.00	36.00	4K-33
DAJSM1000-4200	M42X1.5	27.00	28.00	41.00	46.00	4K-42



Certificate:



DAJSO1000

Plug JIS Male O Ring

D

A

JS

0

1

000

Company

Product Range

Thread Types

Sealing Method

Adaptor Structure

Other Features

DME

Adaptor

JIS Metric

O rings

Straight

Nut/Plug

German Technology Equipment

New-Standard

DME&JDE Code:

DAJSO1000

Product Type

Hydraulic adaptor

Standard:

JIS

Connection Type:

Male

Thread Types:


BSPP

Sealing Method:

O Rings

Other Features:

Nut/Plug



PART NUMBER	F (Thread)	C	L	S
#	BSPP	mm	mm	mm
DAJSO1000-0200	1/8"-28	7.60	13.50	14.00
DAJSO1000-0400	1/4"-19	11.20	15.00	17.00
DAJSO1000-0600	3/8"-19	12.00	22.00	24.00
DAJSO1000-1000	5/8"-14	14.50	23.00	32.00
DAJSO1000-1200	3/4"-14	14.50	27.00	36.00
DAJSO1000-1600	1"-11	18.60	30.00	46.00
DAJSO1000-2000	1-1/4"-11	18.60	32.00	50.00

DAJSM1251

Straight Connector JIS Metric Male 60° - JIC Swivel Female 74°

D

A

JS

M

1

251

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

JIS Metric

Male

Straight

JIC Swivel Female

German Technology Equipment

New-Standard

DME&JDE Code:

DAJSM1251

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


Straight

Connection Type:

Male × Swivel Female

Thread Types:

JIS Metric 60° × JIC UNF 74°

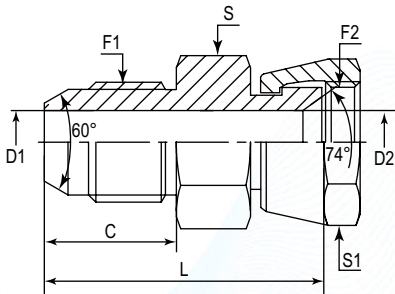

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	Metric	UNF	mm	mm	mm	mm	mm	mm
DAJSM1251-1404	M14X1.5	7/16"-20	17.00	4.37	4.37	32.50	17.00	14.27
DAJSM1251-1606	M16X1.5	9/16"-18	18.00	7.00	7.00	34.00	17.00	17.45
DAJSM1251-1806	M18X1.5	9/16"-18	18.00	7.54	7.54	37.00	19.00	17.45
DAJSM1251-2008	M20X1.5	3/4"-16	20.00	9.93	9.93	39.50	22.00	22.23
DAJSM1251-2208	M22X1.5	3/4"-16	20.00	12.00	9.93	39.50	24.00	22.23
DAJSM1251-2410	M24X1.5	7/8"-14	21.50	15.00	12.29	43.50	27.00	25.40
DAJSM1251-3010	M30X1.5	7/8"-14	26.00	18.50	12.29	49.00	32.00	25.40
DAJSM1251-3012	M30X1.5	1-1/16"-12	26.00	18.50	15.47	50.00	32.00	31.75
DAJSM1251-3312	M33X1.5	1-1/16"-12	30.00	20.00	15.47	54.00	36.00	31.75
DAJSM1251-3316	M33X1.5	1-5/16"-12	30.00	20.00	21.44	55.50	36.00	38.10



DAJSBM105F

Straight Connector JIS BSPP Male 60° Cone – BSPP Female

D

A

JSB

M

1

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIS BSPP

Male

Straight

JIS BSPP

Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJSBM105F

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


Straight

Connection Type:

Male × Female

Thread Types:

JIS BSPP 60° Cone × JIS BSPP



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	BSPP	BSPP	mm	mm	mm	mm
DAJSBM105F-0202	1/8"-28	1/8"-28	12.00	3.20	27.50	14
DAJSBM105F-0204	1/8"-28	1/4"-19	12.00	3.20	32.00	19
DAJSBM105F-0404	1/4"-19	1/4"-19	16.00	4.00	36.00	19
DAJSBM105F-0406	1/4"-19	3/8"-19	16.00	4.00	36.00	22
DAJSBM105F-0408	1/4"-19	1/2"-14	16.00	4.00	40.00	27
DAJSBM105F-0412	1/4"-19	3/4"-14	16.00	4.00	45.00	32
DAJSBM105F-0608	3/8"-19	1/2"-14	18.00	8.50	39.50	27
DAJSBM105F-0808	1/2"-14	1/2"-14	20.00	9.30	44.00	27
DAJSBM105F-0812	1/2"-14	3/4"-14	20.00	9.30	48.50	32
DAJSBM105F-0816	1/2"-14	1"-11	20.00	9.30	54.00	41
DAJSBM105F-1216	3/4"-14	1"-11	22.00	16.00	56.00	41

DAJSB31000

JIS BSPP Female Cap Swivel 60° Cone

D

A

JSB

3

1

000

Company

Product Range

Thread Types

Adaptor Structure

Adaptor Structure

Other Features

DME

Adaptor

JIS BSPP

Slip-on Female

Straight

Nut/Plug

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJSB31000

Product Type

Hydraulic adaptor

Standard:

JIS

Connection Type:


Slip-on Female

Thread Types:

JIS BSPP Cap Swivel 60° Cone

Other Features:

Nut/Plug



PART NUMBER	F (Thread)	D	L	S	S1	Cross Number
#	BSPP	mm	mm	mm	mm	-
DAJSB31000-0400	1/4"-19	4.00	14.50	17.00	19.00	9S-04
DAJSB31000-0600	3/8"-19	6.90	15.50	19.00	22.00	9S-06
DAJSB31000-0800	1/2"-14	9.50	19.00	22.00	27.00	9S-08
DAJSB31000-1000	5/8"-14	9.50	21.00	27.00	30.00	9S-10
DAJSB31000-1200	3/4"-14	15.00	23.50	32.00	32.00	9S-12
DAJSB31000-1600	1"-11	20.00	25.00	36.00	42.00	9S-16
DAJSB31000-2000	1-1/4"-11	26.00	30.00	50.00	50.00	9S-20

DAJS31000

JIS Metric Female Cap Swivel 60° Cone

D

A

JS

3

1

000

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Other Features

DME

Adaptor

JIS Metric

Male

Straight

Nut/Plug

German Technology Equipment

New-Standard

DME&JDE Code:

DAJS31000

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:

Straight

Connection Type:


Female

Thread Types:

JIS Metric Cap Swivel 60° Cone

Other Features:

Nut/Plug



PART NUMBER	F (Thread)	D	L	S	S1	Cross Number
#	Metric	mm	mm	mm	mm	-
DAJS31000-1400	M14X1.5	4.00	15.00	19.00	19.00	9K-14
DAJS31000-1600	M16X1.5	5.50	17.50	22.00	22.00	9K-16
DAJS31000-1800	M18X1.5	7.00	18.50	24.00	24.00	9K-18
DAJS31000-2000	M20X1.5	9.50	18.50	24.00	24.00	9K-20
DAJS31000-2200	M22X1.5	9.50	21.00	27.00	27.00	9K-22
DAJS31000-2400	M24X1.5	12.50	22.50	32.00	32.00	9K-24
DAJS31000-2600	M26X1.5	15.00	23.50	32.00	32.00	9K-26
DAJS31000-3000	M30X1.5	14.00	25.00	36.00	36.00	9K-30
DAJS31000-3300	M33X1.5	18.50	25.50	41.00	41.00	9K-33



Certificate:

DAJSM407M

45° Elbow JIS Metric Male 60° Cone - BSPT Male 60°

D

A

JS

M

4

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIS Metric

Male

45° Elbow

BSPT

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DAJSM407M

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


45° Elbow

Connection Type:

Male × Male

Thread Types:

JIS Metric 60° Cone × BSPT 60°

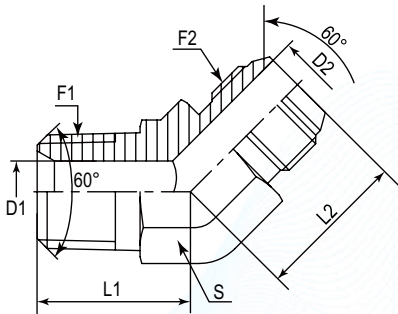

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	Cross Number
#	Metric	BSPT	mm	mm	mm	mm	mm	-
DAJSM407M-1404	M14X1.5	1/4"-19	5.00	6.00	25.00	21.00	14.00	1KT4-1404SP
DAJSM407M-1406	M14X1.5	3/8"-19	5.00	9.00	25.50	23.00	17.00	1KT4-1406SP
DAJSM407M-1606	M16X1.5	3/8"-19	7.00	9.00	26.00	23.00	17.00	1KT4-1606SP
DAJSM407M-1806	M18X1.5	3/8"-19	8.50	9.00	25.00	24.00	19.00	1KT4-1806SP
DAJSM407M-2006	M20X1.5	3/8"-19	10.00	9.00	30.00	24.00	19.00	1KT4-2006SP
DAJSM407M-2206	M22X1.5	3/8"-19	12.00	9.00	31.00	25.00	22.00	1KT4-2206SP
DAJSM407M-2208	M22X1.5	1/2"-14	12.00	12.00	31.00	30.00	22.00	1KT4-2208SP
DAJSM407M-2408	M24X1.5	1/2"-14	15.00	12.00	33.00	29.50	27.00	1KT4-2408SP
DAJSM407M-2412	M24X1.5	3/4"-14	15.00	16.70	33.00	30.50	27.00	1KT4-2412SP
DAJSM407M-3012	M30X1.5	3/4"-14	18.50	16.70	39.00	31.50	30.00	1KT4-3012SP
DAJSM407M-3316	M33X1.5	1"-11	20.00	22.20	37.50	38.00	33.00	1KT4-3316SP



Certificate:

DAJSM452Q

45° Adjustable Elbow JIS Metric Male 60° - Metric Male + O Ring + Retaining Ring

D

A

JS

M

4

52

0

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIS Metric

Male

45° Elbow

Metric

Male + O Ring + Retaining Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJSM452Q

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:

45° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

JIS Metric 60° Cone × Metric

Sealing Method:

O Ring + Retaining Ring

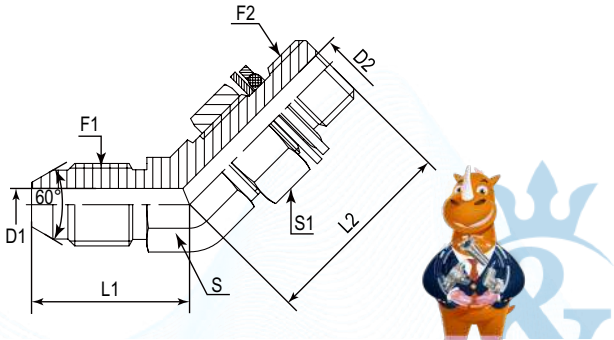

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DAJSM452Q-1412	M14X1.5	M12X1.5	6.00	6.00	27.00	35.00	17.00	17.00
DAJSM452Q-1816	M18X1.5	M16X1.5	8.50	7.00	30.80	36.50	19.00	22.00
DAJSM452Q-1820	M18X1.5	M20X1.5	8.50	12.00	33.00	43.00	22.00	27.00
DAJSM452Q-2220	M22X1.5	M20X1.5	12.00	12.00	35.50	43.00	22.00	27.00



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DAJSBM407M

45° Elbow JIS BSPP Male 60° Cone - BSPT Male 60°

D

A

JSB

M

4

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIS BSPP

Male

45° Elbow

BSPT

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJSBM407M

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


45° Elbow

Connection Type:

Male × Male

Thread Types:

JIS BSPP 60° Cone × BSPT 60°

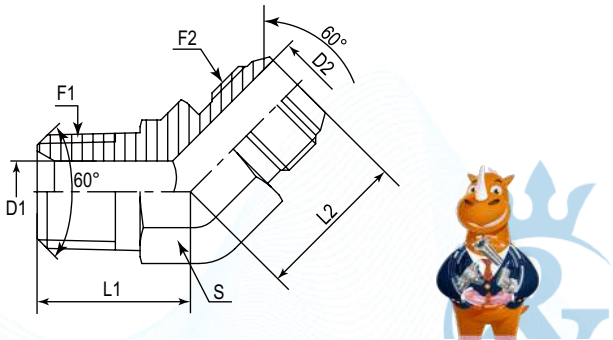

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S
#	BSPP	BSPT	mm	mm	mm	mm	mm
DAJSBM407M-0404	1/4"-19	1/4"-19	6.00	4.00	21.80	20.80	14.00
DAJSBM407M-0406	3/8"-19	1/4"-19	9.00	4.00	26.00	21.00	17.00
DAJSBM407M-0604	1/4"-19	3/8"-19	6.00	8.50	24.50	23.00	17.00
DAJSBM407M-0606	3/8"-19	3/8"-19	9.00	8.50	24.10	22.10	19.00
DAJSBM407M-0608	1/2"-14	3/8"-19	12.00	8.50	30.50	25.00	22.00
DAJSBM407M-0804	1/4"-19	1/2"-14	6.00	12.00	26.50	29.50	22.00
DAJSBM407M-0806	3/8"-19	1/2"-14	9.00	9.00	28.50	29.50	22.00
DAJSBM407M-0808	1/2"-14	1/2"-14	12.00	9.30	31.00	29.50	22.00
DAJSBM407M-0812	3/4"-14	1/2"-14	16.70	9.30	34.00	30.00	27.00
DAJSBM407M-1212	3/4"-14	3/4"-14	16.70	16.00	30.50	32.50	27.00
DAJSBM407M-1216	1"-11	3/4"-14	22.20	16.00	37.50	32.00	33.00
DAJSBM407M-1616	1"-11	1"-11	22.20	20.00	37.30	37.30	33.00
DAJSBM407M-2020	1-1/4"-11	1-1/4"-11	28.00	28.00	44.50	43.00	41.00
DAJSBM407M-2424	1-1/2"-11	1-1/2"-11	33.30	33.30	47.50	47.00	48.00
DAJSBM407M-3232	2"-11	2"-11	46.00	46.00	54.00	53.00	63.00

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA



DAJSBM907M

90° Elbow JIS BSPP Male 60° - BSPT Male 60° Cone

D

A

JSB

M

9

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIS BSPP

Male

90° Elbow

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJSBM907M

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


90° Elbow

Connection Type:

Male × Male

Thread Types:

JIS BSPP 60° × BSPT 60° Cone



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S
#	BSPP	BSPT	mm	mm	mm	mm	mm
DAJSBM907M-0204	1/4"-19	1/8"-28	4.5	4.5	26	22	14
DAJSBM907M-0404	1/4"-19	1/4"-19	4	6	27.5	26	14
DAJSBM907M-0406	3/8"-19	1/4"-19	8.5	6	31.5	26.5	17
DAJSBM907M-0604	1/4"-19	3/8"-19	4	8.5	30	28.5	17
DAJSBM907M-0606	3/8"-19	3/8"-19	8.5	9	31	31	19
DAJSBM907M-0608	1/2"-14	3/8"-19	9	9	38	32.5	22
DAJSBM907M-0806	3/8"-19	1/2"-14	8.5	12	36	36	22
DAJSBM907M-0808	1/2"-14	1/2"-14	9.3	12	38	36	22
DAJSBM907M-0812	3/4"-14	1/2"-14	16	16	43	39.5	27
DAJSBM907M-1208	1/2"-14	3/4"-14	9.3	16.7	41	43.5	27
DAJSBM907M-1212	3/4"-14	3/4"-14	16	16.7	40	41	27
DAJSBM907M-1612	3/4"-14	1"-11	16	22.2	47	50	33
DAJSBM907M-1616	1"-11	1"-11	20	22.2	48.5	50	33
DAJSBM907M-2020	1-1/4"-11	1-1/4"-11	28	28	57	56.5	41
DAJSBM907M-2424	1-1/2"-11	1-1/2"-11	33.3	33.3	61	62.5	48
DAJSBM907M-3232	2"-11	2"-11	46	46	73.2	74.2	63

DAJSM907M

90° Elbow JIS Metric Male 60° Cone - BSPT Male 60°

D

A

JS

M

9

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIS Metric

Male

90° Elbow

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJSM907M

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


90° Elbow

Connection Type:

Male × Male

Thread Types:

JIS Metric 60° Cone × BSPT 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	Cross Number
#	Metric	BSPT	mm	mm	mm	mm	mm	-
DAJSM907M-1402	M14X1.5	1/8"-28	5.00	4.50	28.50	22.00	14.00	1KT9-1402SP
DAJSM907M-1404	M14X1.5	1/4"-19	5.00	6.00	29.00	25.50	14.00	1KT9-1404SP
DAJSM907M-1406	M14X1.5	3/8"-19	5.00	9.00	30.00	31.00	19.00	1KT9-1406SP
DAJSM907M-1606	M16X1.5	3/8"-19	7.00	9.00	31.50	28.50	19.00	1KT9-1606SP
DAJSM907M-1806	M18X1.5	3/8"-19	8.50	9.00	33.80	29.50	19.00	1KT9-1806SP
DAJSM907M-2006	M20X1.5	3/8"-19	10.00	9.00	36.00	30.50	19.00	1KT9-2006SP
DAJSM907M-2206	M22X1.5	3/8"-19	12.00	9.00	38.00	32.50	22.00	1KT9-2206SP
DAJSM907M-2208	M22X1.5	1/2"-14	12.00	12.00	38.00	36.00	22.00	1KT9-2208SP
DAJSM907M-2408	M24X1.5	1/2"-14	15.00	12.00	43.00	40.50	27.00	1KT9-2408SP
DAJSM907M-2412	M24X1.5	3/4"-14	15.00	16.70	42.50	40.50	27.00	1KT9-2412SP
DAJSM907M-3012	M30X1.5	3/4"-14	18.50	16.70	48.00	45.30	30.00	1KT9-3012SP
DAJSM907M-3316	M33X1.5	1"-11	20.00	22.20	47.00	50.00	33.00	1KT9-3316SP



DAJSBM906Q

Adjustable 90° Elbow JIS BSPP Male 60° - BSPP Male + O Ring + Retaining Ring

D

A

JSB

M

9

06

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIS BSPP

Male

90° Elbow

BSPT

Male + O Ring + Retaining Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJSBM906Q

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:

90° Elbow

Connection Type:


Adjustable Male x Male

Thread Types:

JIS BSPP 60° x BSPP

Sealing Method:

O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	Cross Number
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm	-
DAJSBM906Q-0404	1/4"-19	1/4"-19	4.00	7.50	27.00	31.50	14.00	19.00	1SG9-0404
DAJSBM906Q-0606	3/8"-19	3/8"-19	8.50	9.90	31.00	36.50	19.00	22.00	1SG9-0606
DAJSBM906Q-0808	1/2"-14	1/2"-14	9.30	12.30	37.00	43.00	22.00	27.00	1SG9-0808
DAJSBM906Q-1212	3/4"-14	3/4"-14	16.00	15.50	43.00	49.30	27.00	32.00	1SG9-1212
DAJSBM906Q-1616	1"-11	1"-11	20.00	21.50	48.50	53.00	33.00	41.00	1SG9-1616
DAJSBM906Q-2020	1-1/4"-11	1-1/4"-11	28.00	27.50	52.00	58.00	41.00	50.00	1SG9-2020

DAJSM906Q

90° Elbow JIS Metric Male 60° Cone - BSPP Male + O Ring + Retaining Ring

D

A

JS

M

9

06

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection & Sealing Method

DME

Adaptor

JIS Metric

Male

90° Elbow

BSPP

Male + O Ring + Retaining Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJSM906Q

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:

90° Elbow

Connection Type:


Adjustable Male x Male

Thread Types:

JIS Metric 60° x BSPP

Sealing Method:

O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	METRIC	BSPP	mm	mm	mm	mm	mm	mm
DAJSM906Q-1404	M14X1.5	1/4"-19	7.00	7.50	30.60	31.50	19	19
DAJSM906Q-1406	M14X1.5	3/8"-19	7.00	9.90	30.60	36.50	19	22
DAJSM906Q-1606	M16X1.5	3/8"-19	7.00	9.90	30.80	36.50	19	22
DAJSM906Q-1806	M18X1.5	3/8"-19	8.50	9.90	31.00	36.50	19	22
DAJSM906Q-2006	M20X1.5	3/8"-19	10.00	9.90	35.50	38.00	22	22
DAJSM906Q-2208	M22X1.5	1/2"-14	12.00	12.30	35.50	44.00	22	27
DAJSM906Q-2408	M24X1.5	1/2"-14	15.00	12.30	42.00	43.00	27	27
DAJSM906Q-3012	M30X1.5	3/4"-14	18.50	15.50	46.00	49.00	33	36
DAJSM906Q-3316	M33X1.5	1"-11	20.00	21.50	46.50	52.00	33	41



DAJSM952Q

Adjustable 90° Elbow JIS Metric Male 60° - Metric Male + O Ring + Retaining Ring

D

A

JS

M

9

52

Q

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

JIS Metric

Male

90° Elbow

Metric

Male + O Ring + Retaining Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAJSM952Q

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

JIS Metric 60° × Metric

Sealing Method:

O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DAJSM952Q-1614	M16X1.5	M14X1.5	7.00	6.00	30.00	35.00	17.00	19.00
DAJSM952Q-1814	M18X1.5	M14X1.5	8.50	6.00	30.00	36.50	19.00	19.00
DAJSM952Q-1816	M18X1.5	M16X1.5	8.50	7.00	30.00	36.50	19.00	22.00
DAJSM952Q-2018	M20X1.5	M18X1.5	10.00	9.00	36.00	41.50	22.00	24.00
DAJSM952Q-2220	M22X1.5	M20X1.5	12.00	12.00	36.00	45.00	22.00	27.00



Certificate:

DAJSBM9305

Adjustable 90° Elbow JIS BSPP Male 60° - SAE Male + O Ring

D

A

JS

M

9

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection & Sealing Method

DME

Adaptor

JIS Metric

Male

90° Elbow

SAE UNF

Male + O Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DAJSBM9305

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:

90° Elbow

Connection Type:


Adjustable Male × Male

Thread Types:

BSPP × UNF

Sealing Method:

O Rings



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	BSPP	UNF	mm	mm	mm	mm	mm	mm
DAJSBM9305-0404	1/4"-19	7/16"-20	4.00	4.37	28.00	30.50	14	17
DAJSBM9305-0406	1/4"-19	9/16"-18	4.00	7.54	28.00	31.80	14	19
DAJSBM9305-0604	3/8"-19	7/16"-20	8.50	4.37	29.00	31.50	16	17
DAJSBM9305-0606	3/8"-19	9/16"-18	8.50	7.54	29.00	33.30	16	19
DAJSBM9305-0608	3/8"-19	3/4"-16	8.50	9.93	32.00	37.50	19	24
DAJSBM9305-0806	1/2"-14	9/16"-18	9.30	7.54	38.00	37.00	22	19
DAJSBM9305-0808	1/2"-14	3/4"-16	9.30	9.93	38.00	40.00	22	24
DAJSBM9305-1210	3/4"-14	7/8"-14	16.00	12.29	43.00	47.00	27	27
DAJSBM9305-1212	3/4"-14	1-1/16"-12	16.00	15.47	43.00	51.00	27	32
DAJSBM9305-1612	1"-11	1-1/16"-12	20.00	15.47	48.50	54.50	33	32
DAJSBM9305-1616	1"-11	1-5/16"-12	20.00	21.44	48.50	54.50	33	41
DAJSBM9305-2016	1-1/4"-11	1-5/16"-12	28.00	21.44	57.00	59.50	41	41
DAJSBM9305-2020	1-1/4"-11	1-5/8"-12	28.00	27.38	57.00	59.50	41	50
DAJSBM9305-2420	1-1/2"-11	1-5/8"-12	34.00	27.38	61.00	63.00	48	50
DAJSBM9305-2424	1-1/2"-11	1-7/8"-12	34.00	33.32	61.00	63.00	48	55

Certificate:




DAJSM9071

90° Elbow JIS Metric Male 60° Cone - Metric Swivel Female 60°

D	A	JS	M	9	071
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	JIS Metric	Male	90° Elbow	Metric Swivel Female



DME&JDE Code:	DAJSM9071
Product Type	Hydraulic adaptor
Standard:	JIS
Structure:	90° Elbow
Connection Type:	Male × Swivel Female
Thread Types:	JIS Metric 60° Cone × Metric 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1	Cross Number
#	Metric	Metric	mm	mm	mm	mm	mm	mm	-
DAJSM9071-1414	M14X1.5	M14X1.5	5.00	4.00	29.00	22.50	14.00	19.00	2K9-14
DAJSM9071-1616	M16X1.5	M16X1.5	7.00	7.00	31.50	24.50	16.00	22.00	2K9-16
DAJSM9071-1818	M18X1.5	M18X1.5	8.50	8.50	33.80	27.30	19.00	24.00	2K9-18
DAJSM9071-2222	M22X1.5	M22X1.5	12.00	12.00	38.00	29.50	22.00	27.00	2K9-22
DAJSM9071-2424	M24X1.5	M24X1.5	15.00	12.50	41.50	32.00	27.00	32.00	2K9-24
DAJSM9071-3030	M30X1.5	M30X1.5	18.50	14.00	48.00	38.00	30.00	36.00	2K9-30
DAJSM9071-3333	M33X1.5	M33X1.5	20.00	18.50	55.00	45.50	33.00	41.00	2K9-33


DAJSBM9041

90° Elbow JIS BSPP Male 60° Cone - BSPP Swivel Female 60°

D	A	JSB	M	9	041
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection Type
DME	Adaptor	JIS BSPP	Male	90° Elbow	BSPP Swivel Female



DME&JDE Code:	DAJSBM9041
Product Type	Hydraulic adaptor
Standard:	JIS
Structure:	90° Elbow
Connection Type:	Male × Swivel Female
Thread Types:	JIS BSPP 60° Cone × BSPP 60°



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	BSPP	BSPP	mm	mm	mm	mm	mm	mm
DAJSBM9041-0404	1/4"-19	1/4"-19	4.00	4.00	27.00	20.00	14	19
DAJSBM9041-0606	3/8"-19	3/8"-19	8.50	6.90	31.75	22.00	19	22
DAJSBM9041-0808	1/2"-14	1/2"-14	9.30	9.50	37.00	24.50	22	27
DAJSBM9041-1212	3/4"-14	3/4"-14	16.70	15.00	42.00	30.00	27	32
DAJSBM9041-1616	1"-11	1"-11	20.00	20.00	47.00	44.00	36	41
DAJSBM9041-2020	1-1/4"-11	1-1/4"-11	28.00	26.00	52.00	50.00	50	50
DAJSBM9041-2424	1-1/2"-11	1-1/2"-11	34.00	33.00	60.50	53.00	55	55
DAJSBM9041-3232	2"-11	2"-11	46.00	46.00	75.00	60.00	65	70

DAJSMT52JM

Branch Tee Connector JIS Metric Male 60° - JIS Metric Male 60°

D

Company

DME

A

Product Range

Adaptor

JS

Thread Types

JIS Metric

M

Connection Type

Male

T

Adaptor Structure

Branch Tee

52J

Thread Types

JIS Metric

M

Connection Type

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJSMT52JM

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


Branch Tee

Connection Type:

Male × Male × Male

Thread Types:

JIS Metric 60° × JIS Metric 60° × JIS Metric 60°

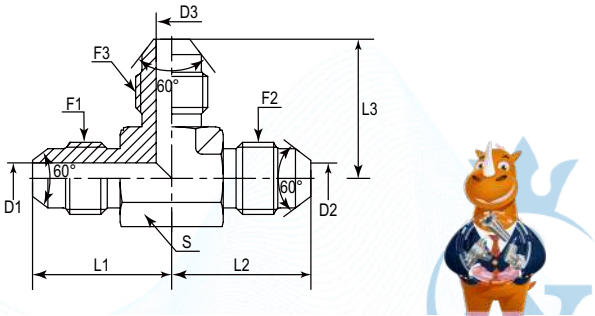

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S
#	METRIC	METRIC	METRIC	mm	mm	mm	mm	mm	mm	mm
DAJSMT52JM-141420	M14X1.5	M14X1.5	M20X1.5	5.00	5.00	10.0	34.00	34.00	37.00	22
DAJSMT52JM-181818	M18X1.5	M18X1.5	M18X1.5	8.50	8.50	8.50	30.80	30.80	30.80	19
DAJSMT52JM-222222	M22X1.5	M22X1.5	M22X1.5	12.00	12.00	12.0	35.50	35.50	35.50	22
DAJSMT52JM-242424	M24X1.5	M24X1.5	M24X1.5	15.00	15.0	15.0	39.50	39.50	39.50	27
DAJSMT52JM-303030	M30X1.5	M30X1.5	M30X1.5	18.00	18.0	18.0	46.00	46.00	46.00	33



Certificate:

DAJSMT071

Branch Tee JIS Metric Male 60° Cone - Metric Swivel Female 60°

D

Company

DME

A

Product Range

Adaptor

JS

Thread Types

JIS Metric

M

Connection Type

Male

T

Adaptor Structure

Branch Tee

071

Connection Type

Metric Swivel Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJSMT071

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


Branch Tee

Connection Type:

Male × Male × Swivel Female

Thread Types:

JIS Metric 60° Cone × JIS Metric 60° Cone × Metric 60°

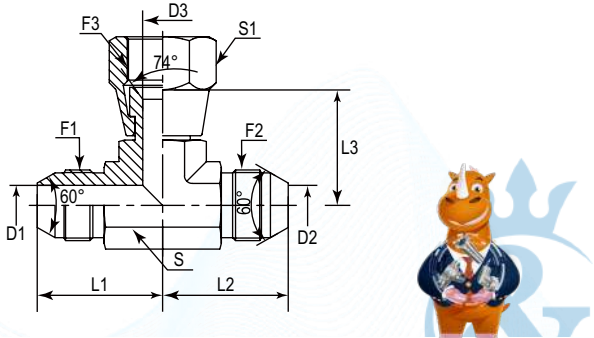

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	METRIC	METRIC	METRIC	mm	mm	mm	mm	mm	mm	mm	mm
DAJSMT071-1414	M14X1.5	M14X1.5	M14X1.5	6.00	6.00	4.00	27.00	27.00	19.50	17	19
DAJSMT071-1818	M18X1.5	M18X1.5	M18X1.5	8.50	8.50	8.50	30.80	30.80	24.30	19	24
DAJSMT071-2222	M22X1.5	M22X1.5	M22X1.5	12.00	12.00	9.50	35.50	35.50	27.00	22	27
DAJSMT071-2424	M24X1.5	M24X1.5	M24X1.5	15.00	15.00	12.50	39.50	39.50	29.50	27	32
DAJSMT071-3030	M30X1.5	M30X1.5	M30X1.5	18.00	18.00	18.00	46.00	46.00	35.60	33	36



Certificate:

DAJSML071

Run Tee JIS Metric Male 60° Cone - Metric Swivel Female 60°

D

A

JS

M

L

071

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

JIS Metric

Male

Run Tee

Metric Swivel Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJSML071

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


Run Tee

Connection Type:

Male × Swivel Female × Male

Thread Types:

JIS Metric 60° Cone × Metric 60° × JIS Metric 60° Cone

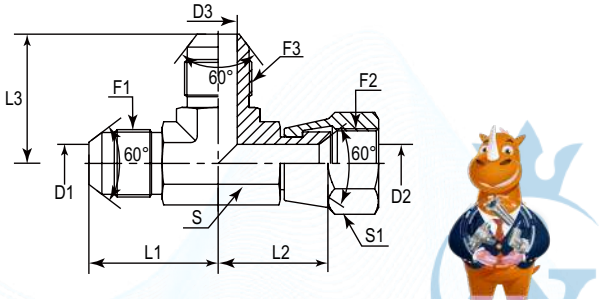

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	METRIC	METRIC	METRIC	mm	mm	mm	mm	mm	mm	mm	mm
DAJSML071-1414	M14X1.5	M14X1.5	M14X1.5	6.00	4.00	6.00	27.00	19.50	27.00	17	19
DAJSML071-1818	M18X1.5	M18X1.5	M18X1.5	8.50	8.50	8.50	30.80	24.30	30.80	19	24
DAJSML071-2222	M22X1.5	M22X1.5	M22X1.5	12.00	9.50	12.00	35.50	27.00	35.50	22	27
DAJSML071-2424	M24X1.5	M24X1.5	M24X1.5	15.00	12.50	15.00	39.50	29.50	39.50	27	32
DAJSML071-3030	M30X1.5	M30X1.5	M30X1.5	18.00	18.00	18.00	46.00	35.60	46.00	33	36

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA

DAJSBML041

Run Tees JIS BSPP Female 60° Cone - BSPP Male 60°

D

A

JSB

M

L

041

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

JIS BSPP

Male

Run Tee

BSPP Swivel Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJSBML041

Product Type

Hydraulic adaptor

Standard:

JIS

Structure:


Run Tee

Connection Type:

Female × Male × Female

Thread Types:

JIS BSPP 60° Cone × BSPP 60° × JIS BSPP 60° Cone

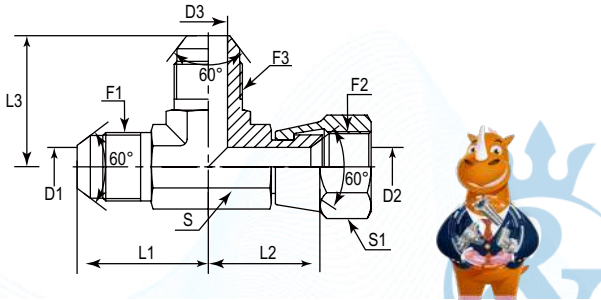

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	BSPP	BSPP	BSPP	mm	mm	mm	mm	mm	mm	mm	mm
DAJSBML041-0404	1/4"-19	1/4"-19	1/4"-19	5.00	4.00	5.00	26.90	20.50	26.90	14	19
DAJSBML041-0606	3/8"-19	3/8"-19	3/8"-19	7.00	7.00	7.00	31.50	24.50	31.50	19	22
DAJSBML041-0808	1/2"-14	1/2"-14	1/2"-14	11.00	10.00	11.00	38.00	26.50	38.00	22	27
DAJSBML041-1212	3/4"-14	3/4"-14	3/4"-14	16.00	15.00	16.00	42.20	30.20	42.20	27	32
DAJSBML041-1616	1"-11	1"-11	1"-11	22.20	22.20	22.20	47.00	44.00	47.00	33	41
DAJSBML041-2020	1-1/4"-11	1-1/4"-11	1-1/4"-11	28.60	26.00	28.60	52.30	50.00	52.30	41	50
DAJSBML041-2424	1-1/2"-11	1-1/2"-11	1-1/2"-11	33.30	33.30	33.30	60.50	53.30	60.50	48	55
DAJSBML041-3232	2"-11	2"-11	2"-11	46.00	46.00	46.00	75.00	60.00	75.00	65	70

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SE

MA






Hydraulic Adaptors

Metric »

DAMM152M


P691



Straight Connector Metric Male
60° Cone - Metric Male 60° Cone

DAMM1061


P692



Straight Connector Metric Male 60°
Cone - BSPP Male Gaptive Seal

DAMM128M


P693



Straight Connector Metric Male 60°
Cone - NPTF Male 60°

DAMM1021


P694



Straight Connector Metric Male 60°
Cone - Metric Female 60° Cone

DAMM1081


P695



Straight Connector Metric Male 60°
Cone - BSPP Female 60° Cone

DAMM1251


P696



Straight Connector Metric Male 60°
Cone - JIC Female 74° Cone

DAMM107M


P697



Straight Connector Metric Male 60° -
BSPT Male 60°

DAMM107M-LH


P698



Straight Connector Metric Male 60° -
BSPT Male 60° Large Hexagon

DAJMM152M


P699



Metric Male 74° Cone - Metric Male
Bonded Seal Type

DAJMM128M


P700



Metric Male 74° Cone -NPTF Male

DAMM1000


P701



Male Plug Metric Male 60°

DAMM152F


P702



Straight Connector Metric Male
60°Cone - Metric Fixed Female

DAMM128F


P703



Straight Connector Metric Male 60°
Cone - NPTF Fixed Female

DAMM105F


P705



Straight Connector Metric Male 60°
Cone - BSPP Fixed Female

DAMF1305


P706



Straight Connector Metric Female -
SAE Male O Ring

DAMF152F


P707



Straight Connector Metric Fixed
Female

DAMM952M


P708



90° Elbow Metric Male 60° Cone
- Metric Male 60° Cone

DAJCMM906Q


P709



90° Adjustable Elbow Metric Male 74°
Cone - BSPP Male + O Ring + Retaining
Ring

DAMMT52M


P710



Branch Tee Connector Metric 60° Male
- Metric 60° Male

DAJCMM152JCM


P711



Straight Connector Metric Male 74°
Cone

DAJCMM105M


P712



Straight Connector Metric Male 74°
Cone - BSPP Male 60°

DAJCMM152M


P713



Straight Connector Metric Male 74°
Cone - Metric Male 60° Cone

DAJCMM106Q


P714



Straight Connector Metric Male 74°
Cone - BSPP Male + O Ring

DAJCMM952Q


P715



90° Elbow Metric Male 74° Cone -
Metric Male + O Ring + Retaining Ring

DAJCMM107M


P716



Straight Connector Metric Male 74°
Cone - BSPT Male

DAJCMM128M


P717



Straight Connector Metric Male 74°
Cone - NPTF Male

DAJCMM130S


P718



Straight Connector Metric Male 74°
Cone - SAE Male O Ring

DAJCMM907M


P719



90° Elbow Metric Male 74° Cone -
BSPT Male

DAJCMM928M


P720



90° Elbow Metric Male 74° Cone -
NPTF Male

DAJCMM1000


P721



Metric Male 74° Cone Plug

DAJCMM31000


P722



Metric Female 74° Cone Plug

DAJCMM128F


P723



Straight Connector Metric Male 74°
Cone - NPTF Female

DAMM0152M0


P724



Straight Connector Metric Male
L + O Ring

DAJCMMT52JCM


P725



Branch Tee Metric Male 74° - Metric
Male 74°

DAJMML065

P726



Run Tee Connector Metric Male 84°
Cone - Adjustable BSPP Male O Ring


DAMM152M

Straight Connector Metric Male 60° Cone - Metric Male 60° Cone

D	A	M	M	1	52	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	Metric	Male	Straight	Metric	Male



DME&JDE Code:	DAMM152M
Product Type	Hydraulic adaptor
Standard:	Metric
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	Metric 60° Cone × Metric 60° Cone

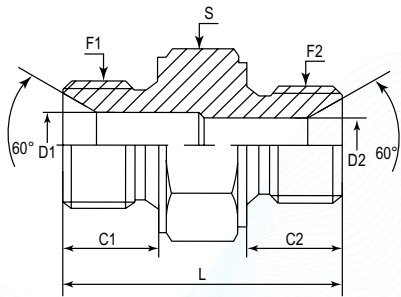

Filter the F1 Thread through selecting the -XX options								
PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DAMM152M-0808	M8X1	M8X1	8.00	8.00	3.00	3.00	24.00	14.00
DAMM152M-1008	M10X1	M8X1	8.00	8.00	3.00	3.00	25.00	14.00
DAMM152M-1010	M10X1	M10X1	8.00	8.00	3.50	3.50	25.00	14.00
DAMM152M-1210	M12X1.5	M10X1	10.00	8.00	4.00	4.00	27.00	17.00
DAMM152M-1212	M12X1.5	M12X1.5	10.00	10.00	5.00	5.00	29.00	17.00
DAMM152M-1412	M14X1.5	M12X1.5	12.00	10.00	5.00	5.00	33.00	19.00
DAMM152M-1414	M14X1.5	M14X1.5	11.00	11.00	6.00	6.00	34.00	19.00
DAMM152M-1612	M16X1.5	M12X1.5	12.00	10.00	8.00	5.00	34.00	22.00
DAMM152M-1614	M16X1.5	M14X1.5	12.00	12.00	6.00	6.00	35.00	22.00
DAMM152M-1616	M16X1.5	M16X1.5	12.00	12.00	8.00	8.00	36.00	22.00
DAMM152M-1812	M18X1.5	M12X1.5	12.00	10.00	10.00	5.00	34.00	24.00
DAMM152M-1816	M18X1.5	M16X1.5	12.00	12.00	8.00	8.00	36.00	24.00
DAMM152M-1818	M18X1.5	M18X1.5	12.00	12.00	10.00	10.00	36.00	24.00
DAMM152M-2018	M20X1.5	M18X1.5	14.00	12.00	10.00	10.00	38.00	27.00
DAMM152M-2020	M20X1.5	M20X1.5	14.00	14.00	12.00	12.00	41.00	27.00
DAMM152M-2216	M22X1.5	M16X1.5	14.00	12.00	14.10	8.00	39.50	27.00
DAMM152M-2218	M22X1.5	M18X1.5	14.00	12.00	14.10	10.00	39.50	27.00
DAMM152M-2222	M22X1.5	M22X1.5	14.00	14.00	14.10	14.10	41.50	27.00
DAMM152M-2420	M24X1.5	M20X1.5	14.00	14.00	15.00	12.00	43.00	30.00
DAMM152M-2422	M24X1.5	M22X1.5	14.00	14.00	14.10	14.10	43.00	30.00
DAMM152M-2424	M24X1.5	M24X1.5	14.00	14.00	15.00	15.00	43.00	30.00
DAMM152M-2618	M26X1.5	M18X1.5	16.00	12.00	15.00	10.00	43.00	32.00
DAMM152M-2622	M26X1.5	M22X1.5	16.00	14.00	14.10	14.10	45.00	32.00
DAMM152M-2626	M26X1.5	M26X1.5	16.00	16.00	15.00	15.00	47.00	32.00
DAMM152M-3030	M30X2	M30X2	18.00	18.00	19.50	19.50	49.00	36.00




DAMM1061

Straight Connector Metric Male 60° Cone - BSPP Male Gaptive Seal

D	A	M	M	1	061
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Connection & Sealing Method
DME	Adaptor	Metric	Male	Straight	BSPP Male with ED Ring



DME&JDE Code:	DAMM1061
Product Type	Hydraulic adaptor
Standard:	Metric
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	Metric 60° Cone × BSPP

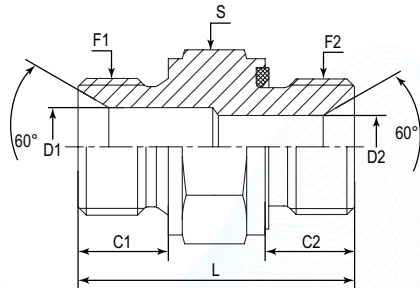

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	BSPP	mm	mm	mm	mm	mm	mm
DAMM1061-1204	M12X1.5	1/4"-19	10.00	12.00	4.00	6.00	32.00	19
DAMM1061-1404	M14X1.5	1/4"-19	11.00	12.00	6.00	6.00	33.00	19
DAMM1061-1406	M14X1.5	3/8"-19	12.00	12.00	6.00	7.90	35.00	22
DAMM1061-1604	M16X1.5	1/4"-19	11.00	12.00	8.00	6.00	34.50	22
DAMM1061-1606	M16X1.5	3/8"-19	12.00	12.00	8.00	7.90	35.50	22
DAMM1061-1608	M16X1.5	1/2"-14	12.00	12.00	8.00	12.00	35.50	24
DAMM1061-1806	M18X1.5	3/8"-19	14.00	12.00	10.00	7.90	39.50	27
DAMM1061-1808	M18X1.5	1/2"-14	12.00	14.00	10.00	12.00	40.00	27
DAMM1061-2008	M20X1.5	1/2"-14	12.00	14.00	12.00	12.00	40.00	27
DAMM1061-2206	M22X1.5	3/8"-19	14.00	14.00	14.10	7.90	42.00	27
DAMM1061-2208	M22X1.5	1/2"-14	14.00	14.00	14.10	12.00	42.00	27
DAMM1061-2212	M22X1.5	3/4"-14	16.00	14.00	14.10	16.70	45.00	32
DAMM1061-2412	M24X1.5	3/4"-14	14.00	16.00	15.00	16.70	45.00	32
DAMM1061-2608	M26X1.5	1/2"-14	14.00	16.00	15.00	12.00	45.00	32
DAMM1061-2612	M26X1.5	3/4"-14	16.00	16.00	15.00	16.70	47.00	32
DAMM1061-3012	M30X1.5	3/4"-14	18.00	16.00	19.00	16.70	49.00	36
DAMM1061-3016	M30X1.5	1"-11	18.00	18.00	19.00	22.20	53.00	41
DAMM1061-3316	M33X1.5	1"-11	19.00	18.00	21.50	22.20	54.00	41



DAMM128M

Straight Connector Metric Male 60° Cone - NPTF Male 60°

D

A

M

M

1

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric

Male

Straight

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAMM128M

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

Metric 60° Cone × NPTF 60°

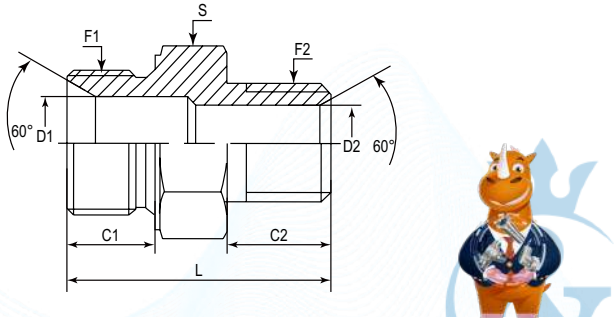

PART NUMBER	F1 (Thread)	F2 (Thread)	C	L	D1	D2	S	S1
#	Metric	NPTF	mm	mm	mm	mm	mm	mm
DAMM128M-0804	M8X1	1/4"-18	8.00	14.22	3.00	7.14	30.00	15.88
DAMM128M-1204	M12X1.5	1/4"-18	10.00	14.22	6.00	7.14	32.00	17.00
DAMM128M-1206	M12X1.5	3/8"-18	10.00	14.22	6.00	10.31	33.00	19.00
DAMM128M-1208	M12X1.5	1/2"-14	10.00	19.05	6.00	13.49	39.00	22.00
DAMM128M-1808	M18X1.5	1/2"-14	12.00	19.05	10.00	13.49	41.00	24.00

DAMM1021

Straight Connector Metric Male 60° Cone - Metric Female 60° Cone

D

A

M

M

1

021

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

Metric

Male

Straight

Metric Swivel
Female 60° Cone

 German Technology Equipment



New-Standard

DME&JDE Code:

DAMM1021

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Straight

Connection Type:

Male × Female

Thread Types:

Metric 60° Cone × Metric 60° Cone

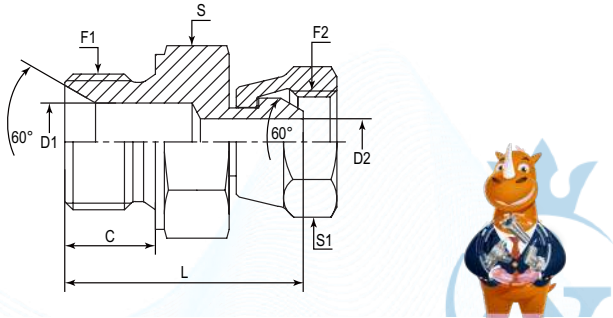

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	METRIC	METRIC	mm	mm	mm	mm	mm	mm
DAMM1021-1212	M12X1.5	M12X1.5	10.00	4.00	4.00	28.00	17	17
DAMM1021-1414	M14X1.5	M14X1.5	11.00	6.00	4.70	29.50	19	19
DAMM1021-1616	M16X1.5	M16X1.5	12.00	8.00	6.00	32.00	22	22
DAMM1021-1618	M16X1.5	M18X1.5	12.00	8.00	8.00	33.00	22	24
DAMM1021-1816	M18X1.5	M16X1.5	12.00	10.00	6.00	33.00	24	24
DAMM1021-1818	M18X1.5	M18X1.5	12.00	10.00	8.00	32.00	24	22
DAMM1021-1820	M18X1.5	M20X1.5	12.00	10.00	10.00	34.50	24	27
DAMM1021-1822	M18X1.5	M22X1.5	12.00	10.00	11.00	35.00	24	27
DAMM1021-2018	M20X1.5	M18X1.5	14.00	12.00	8.00	38.50	27	27
DAMM1021-2020	M20X1.5	M20X1.5	14.00	12.00	10.00	37.00	27	24
DAMM1021-2022	M20X1.5	M22X1.5	14.00	12.00	11.00	39.00	27	27
DAMM1021-2218	M22X1.5	M18X1.5	14.00	14.10	8.00	39.00	27	27
DAMM1021-2220	M22X1.5	M20X1.5	14.00	14.10	10.00	37.00	27	24
DAMM1021-2222	M22X1.5	M22X1.5	14.00	14.10	11.00	38.50	27	27
DAMM1021-2727	M27X2	M27X2	16.00	15.00	15.00	42.50	32	32
DAMM1021-3030	M30X2	M30X2	18.00	19.00	19.00	46.50	36	36



DAMM1081

Straight Connector Metric Male 60° Cone - BSPP Female 60° Cone

D

A

M

M

1

081

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

Metric

Male

Straight

BSPP Swivel Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAMM1081

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Straight

Connection Type:

Male × Female

Thread Types:

Metric 60° Cone × BSPP 60° Cone

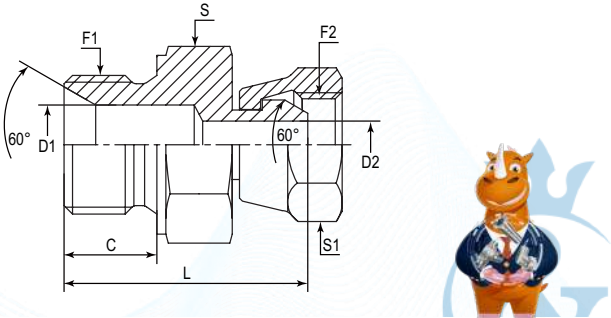

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	METRIC	BSPP	mm	mm	mm	mm	mm	mm
DAMM1081-1204	M12X1.5	1/4"-19	10.00	4.00	4.00	28.00	17	19
DAMM1081-1404	M14X1.5	1/4"-19	11.00	6.00	4.70	29.00	19	19
DAMM1081-1406	M14X1.5	3/8"-19	11.00	6.00	7.10	30.20	19	22
DAMM1081-1408	M14X1.5	1/2"-14	11.00	6.00	11.10	32.00	19	27
DAMM1081-1604	M16X1.5	1/4"-19	12.00	8.00	4.70	32.00	22	19
DAMM1081-1606	M16X1.5	3/8"-19	12.00	8.00	7.10	33.20	22	22
DAMM1081-1608	M16X1.5	1/2"-14	12.00	8.00	11.10	35.00	22	27
DAMM1081-1612	M16X1.5	3/4"-14	12.00	8.00	16.70	38.10	27	32
DAMM1081-1806	M18X1.5	3/8"-19	12.00	10.00	7.10	33.20	24	22
DAMM1081-1808	M18X1.5	1/2"-14	12.00	10.00	11.10	35.00	24	27
DAMM1081-2006	M20X1.5	3/8"-19	14.00	12.00	7.10	37.20	27	22
DAMM1081-2008	M20X1.5	1/2"-14	14.00	12.00	11.10	39.00	27	27
DAMM1081-2012	M20X1.5	3/4"-14	14.00	12.00	16.70	40.10	27	32
DAMM1081-2206	M22X1.5	3/8"-19	14.00	14.10	7.10	37.20	27	22
DAMM1081-2208	M22X1.5	1/2"-14	14.00	14.10	11.10	39.00	27	27
DAMM1081-2212	M22X1.5	3/4"-14	14.00	14.10	16.70	40.10	27	32
DAMM1081-2606	M26X1.5	3/8"-19	16.00	15.00	7.10	40.20	32	22
DAMM1081-2608	M26X1.5	1/2"-14	16.00	15.00	11.10	42.00	32	27
DAMM1081-2612	M26X1.5	3/4"-14	16.00	15.00	16.70	43.10	32	32
DAMM1081-3006	M30X2	3/8"-19	18.00	19.00	7.10	42.20	36	22
DAMM1081-3008	M30X2	1/2"-14	18.00	19.00	11.10	44.00	36	27

Certificate:



DAMM1251

Straight Connector Metric Male 60° Cone - JIC Female 74° Cone

D

A

M

M

1

251

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

DME

Adaptor

Metric

Male

Straight

JIC Swivel Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAMM1251

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Straight

Connection Type:

Male × Female

Thread Types:

Metric 60° Cone × UNF 74° Cone

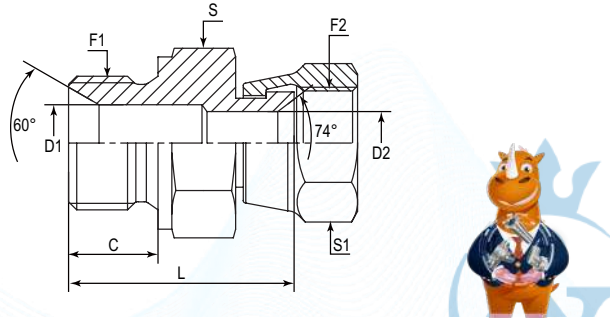

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D1	D2	L	S	S1
#	METRIC	UNF	mm	mm	mm	mm	mm	mm
DAMM1251-1004	M10X1	7/16"-20	8.00	4.00	4.37	22.00	14	17
DAMM1251-1205	M12X1.5	1/2"-20	10.00	4.00	5.94	24.50	17	17
DAMM1251-1406	M14X1.5	9/16"-18	11.00	6.00	7.54	25.50	19	19
DAMM1251-1608	M16X1.5	3/4"-16	12.00	8.00	9.93	30.50	22	24
DAMM1251-1808	M18X1.5	3/4"-16	12.00	10.00	9.93	30.50	24	24
DAMM1251-1810	M18X1.5	7/8"-14	12.00	10.00	12.29	31.00	24	27
DAMM1251-2210	M22X1.5	7/8"-14	14.00	14.10	12.29	35.00	27	27
DAMM1251-2712	M27X1.5	1-1/16"-12	16.00	15.00	15.47	39.50	32	32
DAMM1251-3016	M30X1.5	1-5/16"-12	18.00	21.50	21.44	41.50	36	41
DAMM1251-4520	M45X1.5	1-5/8"-12	20.00	30.00	27.38	49.00	55	50
DAMM1251-5224	M52X1.5	1-7/8"-12	20.00	38.00	33.32	49.50	60	55

Certificate:





DAMM107M

Straight Connector Metric Male 60° - BSPT Male 60°

D

A

M

M

1

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric

Male

Straight

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAMM107M

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

Metric 60° × BSPT 60°

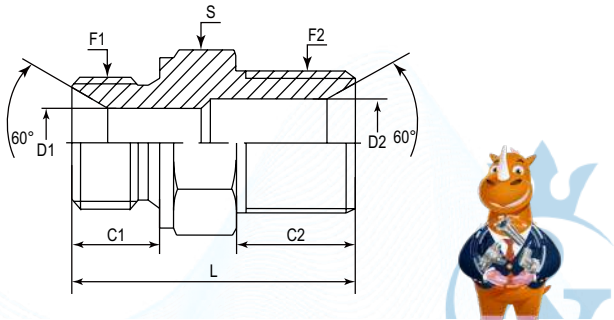

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	Metric	BSPT	mm	mm	mm	mm	mm	mm
DAMM107M-1002	M10X1	1/8"-28	8.00	10.00	4.00	4.00	26.00	14.00
DAMM107M-1404	M14X1.5	1/4"-19	10.00	14.00	6.00	6.00	31.00	14.00
DAMM107M-1604	M16X1.5	1/4"-19	11.00	14.00	7.00	7.00	32.00	17.00
DAMM107M-1804	M18X1.5	1/4"-19	11.00	14.00	10.00	7.00	33.00	19.00
DAMM107M-1806	M18X1.5	3/8"-19	11.00	15.00	10.00	10.00	34.00	19.00
DAMM107M-1808	M18X1.5	1/2"-14	12.00	19.00	10.00	13.00	41.50	24.00
DAMM107M-2204	M22X1.5	1/4"-19	14.00	14.00	14.10	7.00	36.00	24.00
DAMM107M-2206	M22X1.5	3/8"-19	14.00	15.00	14.10	10.00	41.00	27.00
DAMM107M-2208	M22X1.5	1/2"-14	18.00	19.00	14.10	13.00	41.00	24.00
DAMM107M-2608	M26X1.5	1/2"-14	16.00	19.00	15.00	13.00	40.00	27.00
DAMM107M-2612	M26X1.5	3/4"-14	12.00	20.00	15.00	15.00	41.00	27.00
DAMM107M-3012	M30X1.5	3/4"-14	14.00	20.00	18.00	18.00	43.00	32.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAMM107M-LH

Straight Connector Metric Male 60° - BSPT Male 60° Large Hexagon

D

A

M

M

1

07

M

H

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Nut Type

DME

Adaptor

Metric

Male

Straight

BSPT

Straight

Large Hexagon

 German Technology Equipment



New-Standard

DME&JDE Code:

DAMM107M-LH

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

Metric 60° × BSPT 60° + Large Hexagon

Other Features:

Hexagon

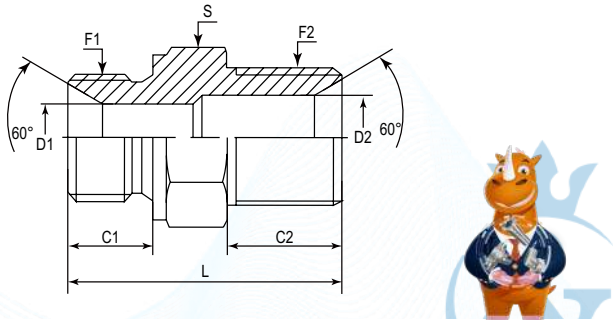

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	Metric	BSPT	mm	mm	mm	mm	mm	mm
DAMM107M-LH-1404	M14X1.5	1/4"-19	12.00	14.00	6.00	6.00	32.00	17.00
DAMM107M-LH-1606	M16X1.5	3/8"-19	12.00	15.00	8.00	8.00	37.00	22.00
DAMM107M-LH-2008	M20X1.5	1/2"-14	14.00	19.00	12.00	12.00	23.50	27.00
DAMM107M-LH-2208	M22X1.5	1/2"-14	14.00	19.00	14.10	13.00	45.00	27.00
DAMM107M-LH-2412	M24X1.5	3/4"-14	14.00	20.00	15.00	16.70	45.00	30.00
DAMM107M-LH-2616	M26X1.5	1"-11	16.00	24.00	15.00	22.20	50.00	32.00
DAMM107M-LH-3016	M30X2	1"-11	18.00	24.00	19.50	22.20	53.00	36.00
DAMM107M-LH-3316	M33X2	1"-11	18.00	24.00	21.50	21.50	54.00	41.00
DAMM107M-LH-3616	M36X2	1"-11	18.00	24.00	25.00	22.40	55.00	46.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAJMM152M

Metric Male 74° Cone - Metric Male Bonded Seal Type

D

A

JM

M

1

52

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric 74°

Male

Straight

Metric

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJMM152M

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

Metric 74° Cone × Metric Bonded Seal Type

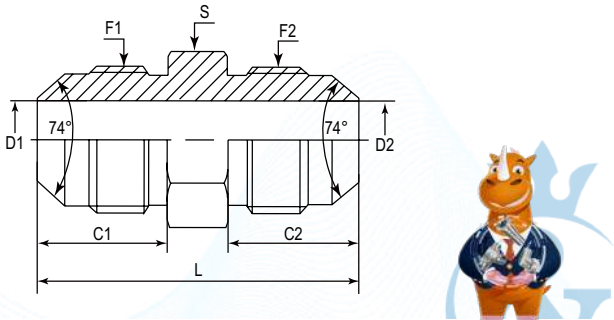

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	Metric	Metric	mm	mm	mm	mm	mm	mm
DAJMM152M-1414	M14X1.5	M14X1.5	17.00	17.00	5.00	5.00	40.00	17.00
DAJMM152M-1616	M16X1.5	M16X1.5	18.00	18.00	7.00	7.00	42.00	17.00
DAJMM152M-1818	M18X1.5	M18X1.5	18.00	18.00	8.50	8.50	42.00	19.00
DAJMM152M-2222	M22X1.5	M22X1.5	20.00	20.00	12.00	12.00	48.00	24.00

DAJMM128M

Metric Male 74° Cone -NPTF Male

D

A

JM

M

1

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric 74°

Male

Straight

NPTF

Male

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJMM128M

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

Metric 74° Cone × NPTF

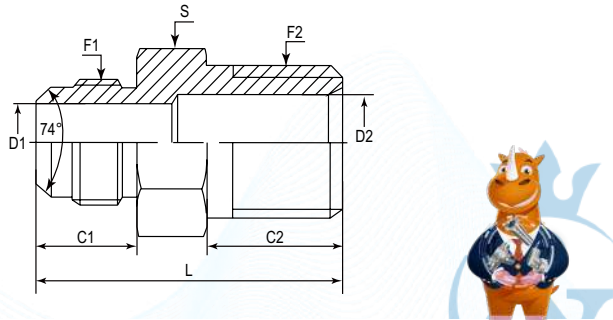

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	Metric	NPTF	mm	mm	mm	mm	mm	mm
DAJMM128M-1606	M16X1.5	3/8"-18	18.00	14.22	7.00	10.31	40.00	19.00
DAJMM128M-1806	M18X1.5	3/8"-18	18.00	14.22	8.50	10.31	40.00	19.00
DAJMM128M-2206	M22X1.5	3/8"-18	20.00	14.22	12.00	10.31	42.20	24.00
DAJMM128M-3012	M30X1.5	3/4"-14	26.00	19.05	18.50	18.26	56.00	32.00



DAMM1000

Male Plug Metric Male 60°

D

A

M

M

1

000

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Other Features

DME

Adaptor

Metric

Male

Straight

Nut/Plug

 German Technology Equipment



New-Standard

DME&JDE Code:

DAMM1000

Product Type

Hydraulic adaptor

Standard:

Metric

Connection Type:


Male × Male

Thread Types:

Metric 60°

Other Features:

Nut/Plug



PART NUMBER	F (Thread)	C	D	L	S
#	Metric	mm	mm	mm	mm
DAMM1000-0800	M8X1	8.00	2.00	14.00	13.00
DAMM1000-1000	M10X1	8.00	4.00	16.00	14.00
DAMM1000-1200	M12X1.5	10.00	4.00	18.00	17.00
DAMM1000-1400	M14X1.5	12.00	6.00	22.00	19.00
DAMM1000-1600	M16X1.5	12.00	8.00	22.00	22.00
DAMM1000-1800	M18X1.5	12.00	10.00	20.00	24.00
DAMM1000-2000	M20X1.5	14.00	12.00	24.00	27.00
DAMM1000-2200	M22X1.5	14.00	14.10	24.00	27.00
DAMM1000-2400	M24X1.5	14.00	15.00	25.00	30.00
DAMM1000-2600	M26X1.5	16.00	15.00	28.00	32.00
DAMM1000-3000	M30X2	18.00	19.00	30.00	36.00
DAMM1000-3600	M36X2	18.00	25.00	32.00	46.00
DAMM1000-4200	M42X2	20.00	28.60	34.00	50.00



Certificate:



DAMM152F

Straight Connector Metric Male 60°Cone - Metric Fixed Female

D

A

M

M

1

52

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric

Male

Straight

Metric

Fixed Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAMM152F

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

Metric 60° Cone × Metric



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	Metric	Metric	mm	mm	mm	mm
DAMM152F-0806	M8X1	M6X1	8.00	3.00	25.00	13.00
DAMM152F-1008	M10X1	M8X1	8.00	3.50	8.00	14.00
DAMM152F-1410	M14X1.5	M10X1	12.00	6.00	30.00	19.00
DAMM152F-1612	M16X1.5	M12X1.5	12.00	8.00	31.50	22.00
DAMM152F-1812	M18X1.5	M12X1.5	12.00	10.00	22.00	24.00
DAMM152F-1814	M18X1.5	M14X1.5	12.00	10.00	32.50	24.00
DAMM152F-1816	M18X1.5	M16X1.5	12.00	10.00	33.00	24.00
DAMM152F-1827	M18X1.5	M27X2	12.00	10.00	40.00	32.00
DAMM152F-2014	M20X1.5	M14X1.5	14.00	12.00	35.00	27.00
DAMM152F-2016	M20X1.5	M16X1.5	14.00	12.00	36.50	27.00
DAMM152F-2214	M22X1.5	M14X1.5	14.00	14.10	35.00	27.00
DAMM152F-2218	M22X1.5	M18X1.5	14.00	14.10	36.00	27.00
DAMM152F-2222	M22X1.5	M22X1.5	14.00	14.10	39.00	27.00
DAMM152F-2418	M24X1.5	M18X1.5	14.00	15.00	36.00	30.00
DAMM152F-2420	M24X1.5	M20X1.5	14.00	15.00	41.00	30.00
DAMM152F-2620	M26X1.5	M20X1.5	16.00	15.00	43.00	32.00
DAMM152F-2622	M26X1.5	M22X1.5	16.00	15.00	44.00	32.00
DAMM152F-2718	M27X2	M18X1.5	16.00	15.00	40.00	32.00
DAMM152F-3022	M30X2	M22X1.5	18.00	19.50	45.00	36.00
DAMM152F-3026	M30X2	M26X1.5	18.00	19.50	48.00	36.00
DAMM152F-3314	M33X2	M14X1.5	18.00	21.50	35.00	41.00
DAMM152F-3630	M36X2	M30X2	18.00	25.00	49.00	46.00
DAMM152F-4214	M42X2	M14X1.5	20.00	32.00	37.00	50.00
DAMM152F-4842	M48X2	M42X2	20.00	32.00	56.00	55.00

Certificate:





DAMM128F

Straight Connector Metric Male 60° Cone - NPTF Fixed Female

D

A

M

M

1

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type



Adaptor

Metric

Male

Straight

NPTF

Female


German Technology Equipment



New-Standard

DME&JDE Code:

DAMM128F

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

Metric 60° Cone × NPTF

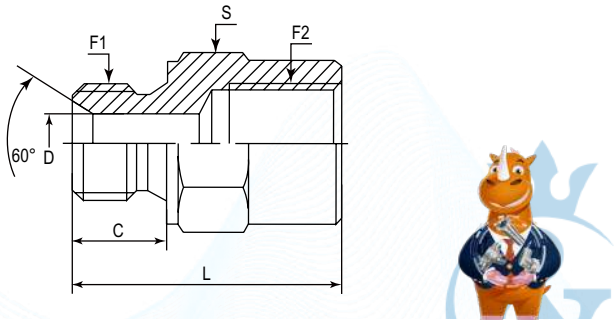

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	Metric	NPTF	mm	mm	mm	mm
DAMM128F-0402	M4X0.7	1/8"-27	8.00	1.00	26.50	14.00
DAMM128F-0602	M6X1	1/8"-27	8.00	2.00	26.50	14.00
DAMM128F-0802	M8X1	1/8"-27	8.50	3.00	26.50	14.00
DAMM128F-1002	M10X1	1/8"-27	8.00	4.00	22.00	15.88
DAMM128F-1004	M10X1	1/4"-18	8.00	4.00	28.00	19.00
DAMM128F-1008	M10X1	1/2"-14	8.00	4.00	37.00	28.58
DAMM128F-1202	M12X1.5	1/8"-27	10.00	4.00	25.50	17.00
DAMM128F-1204	M12X1.5	1/4"-18	10.00	4.00	30.00	19.00
DAMM128F-1206	M12X1.5	3/8"-18	10.00	6.00	33.00	22.00
DAMM128F-1404	M14X1.5	1/4"-18	12.00	6.00	32.00	19.00
DAMM128F-1406	M14X1.5	3/8"-18	12.00	6.00	35.00	22.00
DAMM128F-1602	M16X1.5	1/8"-27	12.00	8.00	26.50	22.00
DAMM128F-1604	M16X1.5	1/4"-18	12.00	8.00	34.50	22.00
DAMM128F-1606	M16X1.5	3/8"-18	12.00	8.00	31.00	22.00



Certificate:











DAMM128F-1608	M16X1.5	1/2"-14	12.00	8.00	37.00	28.58
DAMM128F-1804	M18X1.5	1/4"-18	12.00	10.00	35.00	24.00
DAMM128F-1806	M18X1.5	3/8"-18	12.00	10.00	32.00	24.00
DAMM128F-1808	M18X1.5	1/2"-14	12.00	10.00	37.00	28.58
DAMM128F-2004	M20X1.5	1/4"-18	14.00	12.00	35.00	26.97
DAMM128F-2006	M20X1.5	3/8"-18	14.00	12.00	34.00	26.97
DAMM128F-2008	M20X1.5	1/2"-14	14.00	12.00	39.00	28.58
DAMM128F-2204	M22X1.5	1/4"-18	14.00	14.10	36.00	26.97
DAMM128F-2206	M22X1.5	3/8"-18	14.00	14.10	36.00	26.97
DAMM128F-2208	M22X1.5	1/2"-14	14.00	14.10	39.00	28.58
DAMM128F-2212	M22X1.5	3/4"-14	14.00	14.10	42.50	34.93
DAMM128F-2408	M24X1.5	1/2"-14	14.00	15.00	39.00	30.00
DAMM128F-2412	M24X1.5	3/4"-14	14.00	15.00	39.00	34.93
DAMM128F-2604	M26X1.5	1/4"-18	16.00	15.00	38.00	32.00
DAMM128F-2608	M26X1.5	1/2"-14	16.00	15.00	41.00	32.00
DAMM128F-2612	M26X1.5	3/4"-14	16.00	15.00	41.60	34.93
DAMM128F-2712	M27X2	3/4"-14	16.00	15.00	41.60	34.93
DAMM128F-3008	M30X1.5	1/2"-14	18.00	21.50	46.00	36.00
DAMM128F-3012	M30X2	3/4"-14	18.00	21.50	48.50	36.00
DAMM128F-3316	M33X2	1"-11-1/2	16.00	23.00	47.00	41.28
DAMM128F-4024	M40X2	1-1/2"-11-1/2	20.00	26.60	58.50	60.00
DAMM128F-4216	M42X2	1"-11-1/2	20.00	28.60	51.00	50.00
DAMM128F-4220	M42X2	1-1/4"-11-1/2	20.00	28.60	57.50	50.80
DAMM128F-4224	M42X2	1-1/2"-11-1/2	20.00	28.60	59.00	60.00
DAMM128F-4824	M48X2	1-1/2"-11-1/2	20.00	32.00	58.50	60.00

Certificate:













DAMM105F

Straight Connector Metric Male 60° Cone - BSPP Fixed Female

D

A

M

M

1

05

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric

Male

Straight

BSPP

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAMM105F

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Straight

Connection Type:

Male × Fixed Female

Thread Types:

Metric 60° Cone × BSPP



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	Metric	BSPP	mm	mm	mm	mm
DAMM105F-1204	M12X1.5	1/4"-19	10.00	4.00	30.00	19.00
DAMM105F-1404	M14X1.5	1/4"-19	12.00	6.00	31.00	19.00
DAMM105F-1604	M16X1.5	1/4"-19	12.00	8.00	31.00	22.00
DAMM105F-1606	M16X1.5	3/8"-19	12.00	8.00	32.50	22.00
DAMM105F-1608	M16X1.5	1/2"-14	12.00	8.00	38.00	27.00
DAMM105F-1804	M18X1.5	1/4"-19	12.00	10.00	31.00	24.00
DAMM105F-1806	M18X1.5	3/8"-19	12.00	10.00	32.00	24.00
DAMM105F-1808	M18X1.5	1/2"-14	12.00	10.00	38.00	27.00
DAMM105F-2204	M22X1.5	1/4"-19	14.00	14.10	26.00	27.00
DAMM105F-2206	M22X1.5	3/8"-19	14.00	14.10	35.00	27.00
DAMM105F-2208	M22X1.5	1/2"-14	14.00	14.10	38.00	27.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAMF1305

Straight Connector Metric Female - SAE Male O Ring

D

A

M

F

1

30

5

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric

Female

Straight

SAE UNF

Male O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DAMF1305

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:

Straight

Connection Type:


Female × Male

Thread Types:

Metric × SAE UNF + O Ring

Sealing Method:

O Rings



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	Metric	UNF	mm	mm	mm	mm
DAMF1305-1206	M12X1.5	9/16"-18	12.00	7.49	30.00	17.00
DAMF1305-1404	M14X1.5	7/16"-20	9.10	4.40	33.00	22.23
DAMF1305-1405	M14X1.5	1/2"-20	9.14	5.94	31.50	20.64
DAMF1305-1806	M18X1.5	9/16"-18	9.93	7.54	36.83	25.40
DAMF1305-2208	M22X1.5	3/4"-16	11.13	9.93	38.10	28.58
DAMF1305-3312	M33X2	11/16"-12	15.09	15.47	46.00	41.28
DAMF1305-4820	M48X2	15/8"-12	15.09	27.38	47.75	57.15

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAMF152F

Straight Connector Metric Fixed Female

D

A

M

F

1

52

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric

Female

Straight

Metric

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DAMF152F

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Straight

Connection Type:

Fixed Female

Thread Types:

Metric x Metric



PART NUMBER	F1 (Thread)	F2 (Thread)	L	S
#	Metric	Metric	mm	mm
DAMF152F-0808	M8X1	M8X1	20.00	14.00
DAMF152F-1010	M10X1	M10X1	20.00	17.00
DAMF152F-1210	M12X1.5	M10X1	30.00	19.00
DAMF152F-1212	M12X1.5	M12X1.5	30.00	19.00
DAMF152F-1412	M14X1.5	M12X1.5	30.00	19.00
DAMF152F-1414	M14X1.5	M14X1.5	30.00	19.00
DAMF152F-1612	M16X1.5	M12X1.5	30.00	24.00
DAMF152F-1614	M16X1.5	M14X1.5	31.00	24.00
DAMF152F-1616	M16X1.5	M16X1.5	30.00	22.00
DAMF152F-1816	M18X1.5	M16X1.5	33.00	24.00
DAMF152F-1818	M18X1.5	M18X1.5	30.00	24.00
DAMF152F-2018	M20X1.5	M18X1.5	36.00	27.00
DAMF152F-2020	M20X1.5	M20X1.5	32.00	27.00
DAMF152F-2216	M22X1.5	M16X1.5	35.00	27.00
DAMF152F-2220	M22X1.5	M20X1.5	38.00	27.00
DAMF152F-2222	M22X1.5	M22X1.5	31.00	27.00
DAMF152F-2422	M24X1.5	M22X1.5	38.00	32.00
DAMF152F-2424	M24X1.5	M24X1.5	38.00	32.00
DAMF152F-2626	M26X1.5	M26X1.5	40.00	36.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAMM952M

90° Elbow Metric Male 60° Cone - Metric Male 60° Cone

D

A

M

M

9

52

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric

Male

90° Elbow

Metric

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAMM952M

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


90° Elbow

Connection Type:

Male x Male

Thread Types:

Metric 60° Cone x Metric 60° Cone



PART NUMBER	F1/F2 (Thread)	D1/D2	L1/L2	S
#	Metric	mm	mm	mm
DAMM952M-1212	M12X1.5	4.00	20.00	11.00
DAMM952M-1616	M16X1.5	8.00	29.00	19.00
DAMM952M-1818	M18X1.5	10.00	29.00	19.00
DAMM952M-2020	M20X1.5	12.00	34.00	22.00
DAMM952M-2222	M22X1.5	14.10	35.00	22.00
DAMM952M-2626	M26X1.5	15.00	42.00	27.00
DAMM952M-3030	M30X1.5	21.50	46.50	33.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:




DAJCMM906Q

90° Adjustable Elbow Metric Male 74° Cone - BSPP Male + O Ring + Retaining Ring

D	A	JSM	M	9	06	Q
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	JIC Metric	Male	90° Elbow	BSPP	Male + O Ring + Retaining Ring



DME&JDE Code:	DAJCMM906Q
Product Type	Hydraulic adaptor
Standard:	Metric
Structure:	90° Elbow
Connection Type:	Male × Male
Thread Types:	Metric 74° Cone × BSPP
Sealing Method:	O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	Metric	BSPP	mm	mm	mm	mm	mm	mm
DAJCMM906Q-1404	M14X1.5	1/4"-19	5.50	7.50	27.00	31.80	14.00	17.00
DAJCMM906Q-1406	M14X1.5	3/8"-19	5.00	9.90	30.00	36.50	19.00	22.00
DAJCMM906Q-1408	M14X1.5	1/2"-14	5.00	12.30	34.00	43.00	22.00	27.00
DAJCMM906Q-1606	M16X1.5	3/8"-19	7.00	9.90	31.50	36.50	19.00	22.00
DAJCMM906Q-1608	M16X1.5	1/2"-14	7.00	12.30	35.00	43.00	22.00	27.00
DAJCMM906Q-2208	M22X1.5	1/2"-14	12.00	12.30	38.00	43.00	22.00	27.00
DAJCMM906Q-2408	M24X1.5	1/2"-14	15.00	12.30	43.00	46.00	27.00	27.00
DAJCMM906Q-2412	M24X1.5	3/4"-14	15.00	15.50	43.00	49.00	27.00	36.00
DAJCMM906Q-3312	M33X1.5	3/4"-14	20.00	15.50	47.00	52.00	33.00	36.00
DAJCMM906Q-3316	M33X1.5	1"-11	20.00	21.50	47.00	52.00	33.00	36.00


DAMMT52M

Branch Tee Connector Metric 60° Male - Metric 60° Male

D	A	M	M	T	52	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	Metric	Male	Branch Tee	Metric	Male



DME&JDE Code:	DAMMT52M
Product Type	Hydraulic adaptor
Standard:	Metric
Structure:	Branch Tee
Connection Type:	Male × Male × Male
Thread Types:	Metric 60° × Metric 60° × Metric 60°

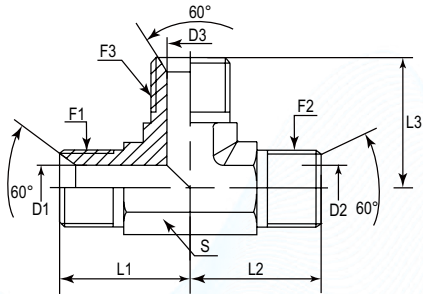

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S
#	METRIC	METRIC	METRIC	mm	mm	mm	mm	mm	mm	mm
DAMMT52M-161616	M16X1.5	M16X1.5	M16X1.5	8.00	8.00	8.00	29.00	29.00	29.00	19
DAMMT52M-181818	M18X1.5	M18X1.5	M18X1.5	10.00	10.00	10.00	29.00	29.00	29.00	19
DAMMT52M-202020	M20X1.5	M20X1.5	M20X1.5	12.00	12.00	12.00	34.00	34.00	34.00	22
DAMMT52M-222222	M22X1.5	M22X1.5	M22X1.5	14.10	14.10	14.10	35.00	35.00	35.00	22
DAMMT52M-262626	M26X1.5	M26X1.5	M26X1.5	15.00	15.00	15.00	42.00	42.00	42.00	27
DAMMT52M-303030	M30X1.5	M30X1.5	M30X1.5	21.50	21.50	21.50	46.50	46.50	46.50	33

DAJCMM152JCM

Straight Connector Metric Male 74° Cone

D

A

JSM

M

1

52

JCM

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Thread Types

DME

Adaptor

Metric 74° Cone

Male

Straight

Metric

Metric 74° Cone

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCMM152JCM

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

Metric 74° Cone × Metric 74° Cone

Sealing Method:

ED Rings

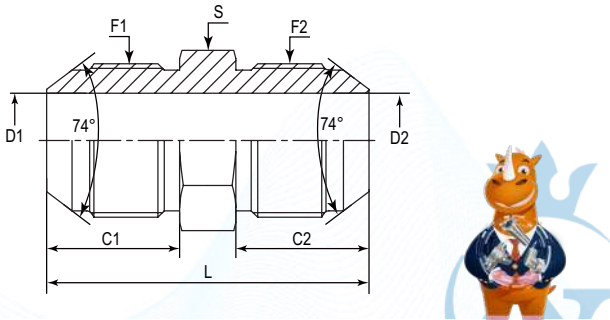

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	METRIC	mm	mm	mm	mm	mm	mm
DAJCMM152JCM-1010	M10X1	M10X1	12.00	12.00	3.20	3.20	30.00	12
DAJCMM152JCM-1212	M12X1.5	M12X1.5	15.70	15.70	5.00	5.00	37.50	14
DAJCMM152JCM-1414	M14X1.5	M14X1.5	17.00	17.00	5.00	5.00	40.00	17
DAJCMM152JCM-1616	M16X1.5	M16X1.5	18.00	18.00	7.00	7.00	42.00	17
DAJCMM152JCM-1818	M18X1.5	M18X1.5	18.00	18.00	8.50	8.50	42.00	19
DAJCMM152JCM-2222	M22X1.5	M22X1.5	19.50	19.50	12.00	12.00	47.00	24
DAJCMM152JCM-2424	M24X1.5	M24X1.5	20.00	20.00	15.00	15.00	50.00	27
DAJCMM152JCM-2727	M27X1.5	M27X1.5	20.00	20.00	16.70	16.70	50.00	30
DAJCMM152JCM-3030	M30X2	M30X2	23.00	23.00	18.50	18.50	57.00	32
DAJCMM152JCM-3333	M33X2	M33X2	26.00	26.00	20.00	20.00	63.00	36
DAJCMM152JCM-3636	M36X2	M36X2	26.00	26.00	26.00	26.00	63.00	38
DAJCMM152JCM-3939	M39X2	M39X2	26.00	26.00	27.00	27.00	65.00	41
DAJCMM152JCM-4242	M42X2	M42X2	28.50	28.50	28.00	28.00	70.00	46
DAJCMM152JCM-4545	M45X2	M45X2	28.50	28.50	33.00	33.00	70.00	46

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAJCMM105M

Straight Connector Metric Male 74° Cone – BSPP Male 60°

D

A

JCM

M

1

05

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric 74° Cone

Male

Straight

BSPP

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCMM105M

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Straight

Connection Type:

Male × Male

Thread Types:

Metric 74° Cone × BSPP 60° Cone

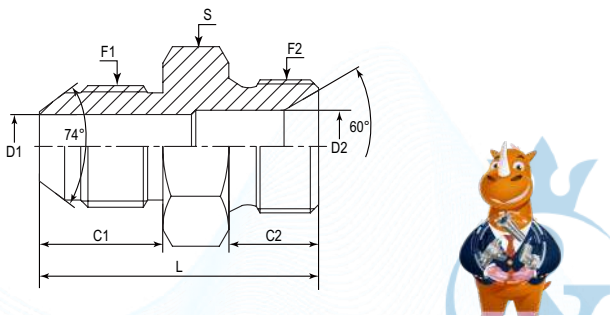

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	BSPP	mm	mm	mm	mm	mm	mm
DAJCMM105M-1202	M12X1.5	1/8"-28	15.70	10.00	5.00	3.50	32.00	14
DAJCMM105M-1404	M14X1.5	1/4"-19	17.00	12.00	5.00	4.70	35.00	19
DAJCMM105M-1606	M16X1.5	3/8"-19	18.00	13.50	7.00	7.90	39.50	22
DAJCMM105M-1806	M18X1.5	3/8"-19	18.00	13.50	8.50	7.90	39.50	22
DAJCMM105M-2208	M22X1.5	1/2"-14	19.50	16.00	12.00	11.10	45.50	27
DAJCMM105M-2410	M24X1.5	5/8"-14	20.00	17.50	15.00	14.00	47.50	30
DAJCMM105M-2712	M27X1.5	3/4"-14	20.00	18.50	16.70	16.70	49.50	32
DAJCMM105M-3012	M30X2	3/4"-14	23.00	18.50	18.50	16.70	52.50	32
DAJCMM105M-3316	M33X2	1"-11	26.00	20.50	20.00	22.20	59.50	41
DAJCMM105M-3916	M39X2	1"-11	26.00	20.50	27.00	22.20	59.50	41
DAJCMM105M-4520	M45X2	1-1/4"-11	28.50	20.50	33.00	28.60	64.00	50

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:




DAJCMM152M

Straight Connector Metric Male 74° Cone – Metric Male 60° Cone

D	A	JCM	M	1	52	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	Metric 74° Cone	Male	Straight	Metric	Male



DME&JDE Code:	DAJCMM152M
Product Type	Hydraulic adaptor
Standard:	Metric
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	Metric 74° Cone × Metric 60° Cone

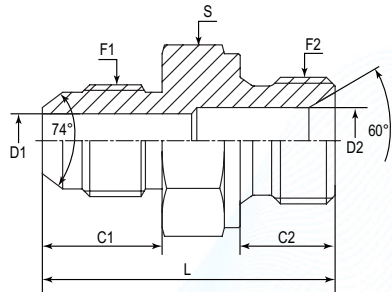

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	METRIC	mm	mm	mm	mm	mm	mm
DAJCMM152M-1210	M12X1.5	M10X1	15.70	8.00	5.00	4.00	34.50	17
DAJCMM152M-1212	M12X1.5	M12X1.5	15.70	10.00	5.00	4.00	35.00	17
DAJCMM152M-1412	M14X1.5	M12X1.5	17.00	10.00	5.00	4.00	37.00	22
DAJCMM152M-1414	M14X1.5	M14X1.5	17.00	12.00	5.00	6.00	38.00	19
DAJCMM152M-1612	M16X1.5	M12X1.5	18.00	10.00	7.00	4.00	38.00	22
DAJCMM152M-1616	M16X1.5	M16X1.5	18.00	12.00	7.00	8.00	40.00	22
DAJCMM152M-1816	M18X1.5	M16X1.5	18.00	12.00	8.50	8.00	40.00	22
DAJCMM152M-1818	M18X1.5	M18X1.5	18.00	12.00	8.50	10.00	40.00	24
DAJCMM152M-2216	M22X1.5	M16X1.5	19.50	12.00	12.00	8.00	41.50	22
DAJCMM152M-2218	M22X1.5	M18X1.5	19.50	12.00	12.00	10.00	41.50	24
DAJCMM152M-2222	M22X1.5	M22X1.5	19.50	14.00	12.00	14.10	43.00	27
DAJCMM152M-2422	M24X1.5	M22X1.5	20.00	14.00	15.00	14.10	43.50	27
DAJCMM152M-2424	M24X1.5	M24X1.5	20.00	14.00	15.00	15.50	45.00	30
DAJCMM152M-2727	M27X1.5	M27X1.5	20.00	16.00	16.70	15.00	47.00	32
DAJCMM152M-3030	M30X1.5	M30X1.5	23.00	18.00	18.50	21.50	53.00	36
DAJCMM152M-3333	M33X2	M33X2	26.00	19.00	20.00	22.20	57.00	41


DAJCMM106Q

Straight Connector Metric Male 74° Cone – BSPP Male + O Ring

D	A	JCM	M	1	06	0
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection & Sealing Method
DME	Adaptor	Metric 74° Cone	Male	Straight	BSPP	Male + Retaining Ring + O Ring



DME&JDE Code:	DAJCMM106Q
Product Type	Hydraulic adaptor
Standard:	Metric
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	Metric 74° Cone × BSPP
Sealing Method:	O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	BSPP	mm	mm	mm	mm	mm	mm
DAJCMM106Q-1404	M14X1.5	1/4"-19	17.00	11.00	5.00	7.50	36.00	19
DAJCMM106Q-1606	M16X1.5	3/8"-19	18.00	11.50	7.00	9.90	40.00	22
DAJCMM106Q-1806	M18X1.5	3/8"-19	18.00	11.50	8.50	9.90	40.00	22
DAJCMM106Q-1808	M18X1.5	1/2"-14	18.00	14.00	8.50	12.30	43.00	27
DAJCMM106Q-2208	M22X1.5	1/2"-14	19.50	14.00	12.00	12.30	44.50	27
DAJCMM106Q-2712	M27X1.5	3/4"-14	20.00	15.50	16.70	15.50	49.50	32
DAJCMM106Q-3012	M30X1.5	3/4"-14	23.00	15.50	18.50	15.50	52.50	32
DAJCMM106Q-3916	M39X2	1"-11	26.00	18.00	27.00	21.50	60.00	41
DAJCMM106Q-4520	M45X2	1-1/4"-11	28.50	20.00	33.00	27.50	66.50	50


DAJCMM952Q

90° Elbow Metric Male 74° Cone – Metric Male + O Ring + Retaining Ring

D	A	JCM	M	9	52	Q
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection & Sealing Method
DME	Adaptor	Metric 74° Cone	Male	90° Elbow	Metric	Male + O Ring + Retaining Ring



DME&JDE Code:	DAJCMM952Q
Product Type	Hydraulic adaptor
Standard:	Metric
Structure:	90° Elbow
Connection Type:	Male × Male
Thread Types:	Metric 74° Cone × Metric
Sealing Method:	O Ring + Retaining Ring



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S	S1
#	METRIC	METRIC	mm	mm	mm	mm	mm	mm
DAJCMM952Q-1412	M14X1.5	M12X1.5	5.00	6.00	30.20	32.00	14	17
DAJCMM952Q-1614	M16X1.5	M14X1.5	7.00	6.00	32.00	35.50	16	19
DAJCMM952Q-1816	M18X1.5	M16X1.5	8.50	7.00	34.00	36.00	19	22
DAJCMM952Q-2218	M22X1.5	M18X1.5	12.00	9.00	37.50	39.50	22	24
DAJCMM952Q-2722	M27X1.5	M22X1.5	16.70	12.00	41.50	43.50	27	27
DAJCMM952Q-3027	M30X1.5	M27X2	18.50	15.00	45.80	50.00	30	32
DAJCMM952Q-3327	M33X2	M27X2	20.00	15.00	49.50	52.00	33	32
DAJCMM952Q-3633	M36X2	M33X2	26.00	20.00	51.50	54.00	36	41
DAJCMM952Q-3933	M39X2	M33X2	27.00	20.00	55.50	57.20	41	41
DAJCMM952Q-4542	M45X2	M42X2	33.00	26.00	62.50	61.00	48	50


DAJCMM107M

Straight Connector Metric Male 74° Cone – BSPT Male

D	A	JCM	M	1	07	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	Metric 74° Cone	Male	Straight	BSPT	Male



DME&JDE Code:	DAJCMM107M
Product Type	Hydraulic adaptor
Standard:	Metric
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	Metric 74° Cone × BSPT 60° Cone

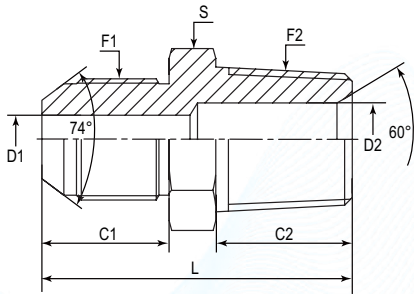

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	BSPP	mm	mm	mm	mm	mm	mm
DAJCMM107M-1002	M10X1	1/8"-28	12.00	10.00	3.20	3.50	28.00	12
DAJCMM107M-1404	M14X1.5	1/4"-19	17.00	14.50	5.00	6.00	37.50	17
DAJCMM107M-1406	M14X1.5	3/8"-19	17.00	15.00	5.00	9.00	38.00	17
DAJCMM107M-1604	M16X1.5	1/4"-19	18.00	14.50	7.00	6.00	38.50	17
DAJCMM107M-1606	M16X1.5	3/8"-19	18.00	15.00	7.00	9.00	39.00	17
DAJCMM107M-1804	M18X1.5	1/4"-19	18.00	14.50	8.50	6.00	38.50	19
DAJCMM107M-1806	M18X1.5	3/8"-19	18.00	15.00	8.50	9.00	39.00	19
DAJCMM107M-2208	M22X1.5	1/2"-14	19.50	20.00	12.00	12.00	47.50	24
DAJCMM107M-2708	M27X1.5	1/2"-14	20.00	20.00	16.70	12.00	50.00	30
DAJCMM107M-2712	M27X1.5	3/4"-14	20.00	20.00	16.70	16.70	50.00	30
DAJCMM107M-3012	M30X1.5	3/4"-14	23.00	20.00	18.50	16.70	54.00	32
DAJCMM107M-3312	M33X2	3/4"-14	26.00	20.00	20.00	16.70	57.00	36
DAJCMM107M-3616	M36X2	1"-11	26.00	25.50	26.00	22.20	61.50	38
DAJCMM107M-3916	M39X2	1"-11	26.00	25.50	27.00	22.20	64.50	41
DAJCMM107M-4520	M45X2	1-1/4"-11	28.50	25.50	33.00	28.60	68.00	46


DAJCMM128M

Straight Connector Metric Male 74° Cone – NPTF Male

D	A	JCM	M	1	28	M
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection Type
DME	Adaptor	Metric 74° Cone	Male	Straight	NPTF	Male



DME&JDE Code:	DAJCMM128M
Product Type	Hydraulic adaptor
Standard:	Metric
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	Metric 74° Cone × NPTF 60° Cone

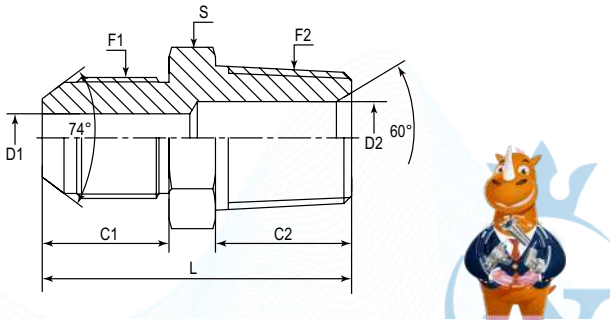

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	NPTF	mm	mm	mm	mm	mm	mm
DAJCMM128M-1202	M12X1.5	1/8"-27	15.70	10.50	5.00	4.78	32.00	14
DAJCMM128M-1204	M12X1.5	1/4"-18	15.70	15.00	5.00	7.14	36.50	14
DAJCMM128M-1402	M14X1.5	1/8"-27	17.00	10.50	5.00	4.78	33.00	17
DAJCMM128M-1404	M14X1.5	1/4"-18	17.00	15.00	5.00	7.14	38.00	17
DAJCMM128M-1604	M16X1.5	1/4"-18	18.00	15.00	7.00	7.14	39.00	17
DAJCMM128M-1606	M16X1.5	3/8"-18	18.00	16.00	7.00	10.31	40.00	19
DAJCMM128M-1804	M18X1.5	1/4"-18	18.00	15.00	8.50	7.14	39.00	19
DAJCMM128M-1806	M18X1.5	3/8"-18	18.00	16.00	8.50	10.31	40.00	19
DAJCMM128M-1808	M18X1.5	1/2"-14	18.00	19.50	8.50	13.49	45.50	22
DAJCMM128M-2206	M22X1.5	3/8"-18	19.50	16.00	12.00	10.31	43.50	24
DAJCMM128M-2208	M22X1.5	1/2"-14	19.50	19.50	12.00	13.49	47.00	24
DAJCMM128M-2706	M27X1.5	3/8"-18	20.00	16.50	16.70	10.31	46.00	30
DAJCMM128M-2708	M27X1.5	1/2"-14	20.00	19.50	16.70	13.49	49.50	30
DAJCMM128M-2712	M27X1.5	3/4"-14	20.00	19.50	16.70	18.26	49.50	30
DAJCMM128M-2716	M27X1.5	1"-11 1/2	20.00	25.50	16.70	23.83	56.50	36
DAJCMM128M-3012	M30X1.5	3/4"-14	23.00	19.50	18.50	18.26	53.50	32
DAJCMM128M-3312	M33X2	3/4"-14	26.00	19.50	20.00	18.26	56.50	36
DAJCMM128M-3616	M36X2	1"-11-1/2	26.00	25.50	26.00	23.83	63.00	41
DAJCMM128M-3916	M39X2	1"-11-1/2	26.00	25.50	27.00	23.83	64.50	41
DAJCMM128M-4516	M45X2	1"-11-1/2	28.50	25.50	33.00	23.83	67.00	46
DAJCMM128M-4520	M45X2	1-1/4"-11-1/2	28.50	26.50	33.00	31.75	68.00	46
DAJCMM128M-4524	M45X2	1-1/2"-11-1/2	28.50	27.50	33.00	38.10	71.00	50


DAJCMM1305

Straight Connector Metric Male 74° Cone – SAE Male O Ring

D	A	JCM	M	1	30	5
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Thread Types	Connection & Sealing Method
DME	Adaptor	Metric 74° Cone	Male	Straight	SAE	Male + O Ring



DME&JDE Code:	DAJCMM1305
Product Type	Hydraulic adaptor
Standard:	Metric
Structure:	Straight
Connection Type:	Male × Male
Thread Types:	Metric 74° Cone × SAE UNF
Sealing Method:	O Rings

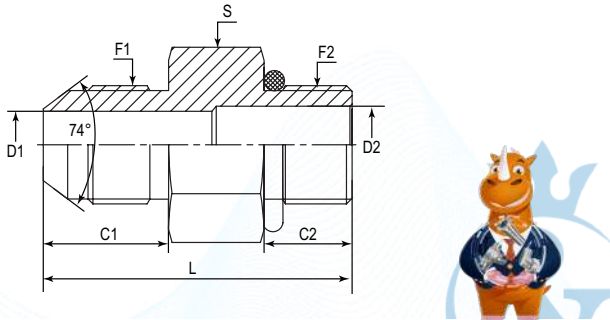

PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	UNF	mm	mm	mm	mm	mm	mm
DAJCMM1305-1606	M16X1.5	9/16"-18	18.00	9.90	7.00	7.54	35.00	17
DAJCMM1305-1808	M18X1.5	3/4"-18	18.00	11.10	8.50	9.93	37.00	22
DAJCMM1305-2210	M22X1.5	7/8"-14	19.50	12.70	16.70	12.29	42.00	27
DAJCMM1305-2712	M27X1.5	1-1/16"-12	20.00	15.10	18.50	15.47	46.00	32
DAJCMM1305-3012	M30X1.5	1-1/16"-12	23.00	15.10	18.50	15.47	49.00	32
DAJCMM1305-3316	M33X2	1-5/16"-12	26.00	15.10	20.00	21.44	54.00	38
DAJCMM1305-3916	M39X2	1-5/16"-12	26.00	15.10	27.00	21.44	58.00	41
DAJCMM1305-4220	M42X2	1- 5/8"-12	28.50	15.10	28.00	27.38	58.00	50

DAJCMM907M

90° Elbow Metric Male 74° Cone - BSPT Male

D

A

JCM

M

9

07

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric 74° Cone

Male

90° Elbow

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCMM907M

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


90° Elbow

Connection Type:

Male × Male

Thread Types:

Metric 74° Cone × BSPT 60° Cone



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S
#	METRIC	BSPT	mm	mm	mm	mm	mm
DAJCMM907M-1404	M14X1.5	1/4"-19	5.00	6.00	30.20	25.50	14
DAJCMM907M-1604	M16X1.5	1/4"-19	7.00	6.00	32.00	26.50	16
DAJCMM907M-1806	M18X1.5	3/8"-19	8.50	9.00	34.00	29.00	19
DAJCMM907M-1808	M18X1.5	1/2"-14	8.50	12.00	36.00	36.00	22
DAJCMM907M-2208	M22X1.5	1/2"-14	12.00	12.00	37.50	36.00	22
DAJCMM907M-2708	M27X1.5	1/2"-14	16.70	12.00	41.50	39.50	27
DAJCMM907M-2712	M27X1.5	3/4"-14	16.70	16.70	41.50	44.00	27
DAJCMM907M-3012	M30X1.5	3/4"-14	18.50	16.70	45.80	45.50	30
DAJCMM907M-3312	M33X2	3/4"-14	20.00	16.70	49.50	47.50	33
DAJCMM907M-3616	M36X2	1"-11	26.00	22.20	51.50	52.00	36
DAJCMM907M-3916	M39X2	1"-11	27.00	22.20	55.50	55.50	41
DAJCMM907M-4520	M45X2	1 1/4"-11	33.00	28.60	62.50	61.00	48

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAJCMM928M

90° Elbow Metric Male 74° Cone - NPTF Male

D

A

JCM

M

9

28

M

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric 74° Cone

Male

90° Elbow

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCMM928M

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


90° Elbow

Connection Type:

Male × Male

Thread Types:

Metric 74° Cone × NPTF 60° Cone



PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	L1	L2	S
#	METRIC	NPTF	mm	mm	mm	mm	mm
DAJCMM928M-1202	M12X1.5	1/8"-27	5.00	4.78	25.50	21.00	14
DAJCMM928M-1204	M12X1.5	1/4"-18	5.00	7.14	28.00	25.50	14
DAJCMM928M-1402	M14X1.5	1/8"-27	5.00	4.78	30.20	23.50	17
DAJCMM928M-1404	M14X1.5	1/4"-18	5.00	7.14	30.20	25.50	17
DAJCMM928M-1604	M16X1.5	1/4"-18	7.00	7.14	32.00	26.50	19
DAJCMM928M-1606	M16X1.5	3/8"-18	7.00	10.31	32.00	30.00	19
DAJCMM928M-1608	M16X1.5	1/2"-14	7.00	13.49	36.00	36.70	19
DAJCMM928M-1804	M18X1.5	1/4"-18	8.50	7.14	34.00	28.70	22
DAJCMM928M-1806	M18X1.5	3/8"-18	8.50	10.31	34.00	31.00	22
DAJCMM928M-2206	M22X1.5	3/8"-18	12.00	10.31	37.50	32.50	27
DAJCMM928M-2208	M22X1.5	1/2"-14	12.00	13.49	37.50	36.70	27
DAJCMM928M-2708	M27X1.5	1/2"-14	16.70	13.49	41.50	40.00	32
DAJCMM928M-2712	M27X1.5	3/4"-14	16.70	18.26	41.50	44.00	32
DAJCMM928M-2716	M27X1.5	1"-11-1/2	16.70	23.83	45.00	49.00	32
DAJCMM928M-3012	M30X1.5	3/4"-14	18.50	18.26	45.80	45.00	36
DAJCMM928M-3616	M36X2	1"-11-1/2	26.00	23.83	51.50	51.50	41
DAJCMM928M-3916	M39X2	1"-11-1/2	27.00	23.83	55.50	54.50	46
DAJCMM928M-4220	M45X2	1-1/4"-11-1/2	28.00	31.75	57.00	54.50	50
DAJCMM928M-4516	M45X2	1"-11-1/2	33.00	23.83	62.50	58.50	55
DAJCMM928M-4520	M45X2	1-1/4"-11-1/2	33.00	31.75	62.50	58.50	55
DAJCMM928M-4524	M45X2	1-1/2"-11-1/2	33.00	38.10	62.50	63.00	55

Certificate:



Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



DAJCMM1000

Metric Male 74° Cone Plug

D

A

JCM

M

1

000

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Other Features

DME

Adaptor

Metric 74°Cone

Male

Straight

Nut/Plug

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCMM1000

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:

Straight

Connection Type:


Male

Thread Types:

Metric

Other Features:

Nut/Plug



PART NUMBER	F1 (Thread)	C	D	L	S
#	METRIC	mm	mm	mm	mm
DAJCMM1000-1000	M10X1	12.00	3.20	18.00	12
DAJCMM1000-1200	M12X1.5	15.70	5.00	21.50	14
DAJCMM1000-1400	M14X1.5	17.00	5.00	23.00	17
DAJCMM1000-1600	M16X1.5	18.00	7.00	24.00	17
DAJCMM1000-1800	M18X1.5	18.00	8.50	24.00	19
DAJCMM1000-2200	M22X1.5	19.50	12.00	27.50	24
DAJCMM1000-2400	M24X1.5	20.00	15.00	30.00	27
DAJCMM1000-2700	M27X1.5	20.00	16.70	30.00	30
DAJCMM1000-3000	M30X1.5	23.00	18.50	34.00	32
DAJCMM1000-3300	M33X2	26.00	20.00	37.00	36
DAJCMM1000-3600	M36X2	26.00	26.00	38.00	38
DAJCMM1000-3900	M39X2	26.00	27.00	39.00	41
DAJCMM1000-4200	M42X2	28.50	28.00	41.50	46
DAJCMM1000-4500	M45X2	28.50	33.00	41.50	46

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAJCMM31000

Metric Female 74° Cone Plug

D

A

JCM

M

3

1

000

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Structure

Other Features

DME

Adaptor

Metric 74°Cone

Male

Slip-on Female

Straight

Nut/Plug

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCMM31000

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:

Straight

Connection Type:


Female

Thread Types:

Metric

Other Features:

Nut/Plug



PART NUMBER	F1 (Thread)	D	L	S
#	METRIC	mm	mm	mm
DAJCMM31000-1400	M14X1.5	4.00	11.00	19
DAJCMM31000-1600	M16X1.5	5.50	12.00	22
DAJCMM31000-1800	M18X1.5	7.00	13.00	24
DAJCMM31000-2200	M22X1.5	9.50	14.00	27
DAJCMM31000-2700	M27X1.5	15.00	17.00	32
DAJCMM31000-3000	M30X1.5	14.00	17.00	36
DAJCMM31000-3600	M36X2	25.00	20.00	41
DAJCMM31000-3900	M39X2	27.00	21.00	46
DAJCMM31000-4500	M45X2	33.00	23.00	50
DAJCMM31000-5200	M52X2	38.00	27.00	60
DAJCMM31000-6000	M60X2	54.60	30.00	70

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAJCMM128F

Straight Connector Metric Male 74° Cone – NPTF Female

D

A

JSM

M

1

28

F

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric 74° Cone

Male

Straight

NPTF

Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJCMM128F

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Straight

Connection Type:

Male × Female

Thread Types:

Metric 74° Cone × NPTF



PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	L	S
#	METRIC	NPTF	mm	mm	mm	mm
DAJCMM128F-1202	M12X1.5	1/8"-27	15.70	5.00	31.90	14
DAJCMM128F-1404	M14X1.5	1/4"-18	17.00	5.00	38.30	19
DAJCMM128F-1606	M16X1.5	3/8"-18	18.00	7.00	41.00	22
DAJCMM128F-1806	M18X1.5	3/8"-18	18.00	8.50	40.90	22
DAJCMM128F-2208	M22X1.5	1/2"-14	19.50	12.00	48.40	30
DAJCMM128F-2712	M27X1.5	3/4"-14	20.00	16.70	50.40	36
DAJCMM128F-3616	M36X2	1"-11-1/2	25.00	26.00	61.60	41
DAJCMM128F-4220	M42X2	1-1/4"-11-1/2	28.50	28.00	67.40	50



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DAMMO152MO

Straight Connector Metric Male L + O Ring

D

A

M

M

O

1

52

M

O

Company

Product Range

Connection Type

Connection Type

seal Type

Adaptor Structure

Connection & Sealing Method

Connection Type

seal Type

DME

Adaptor

Male

Male

O Ring

Straight

Male + O Ring

Male

O Ring

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAMMO152MO

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:

Straight

Connection Type:


Male × Male

Thread Types:

Metric × Metric

Sealing Method:

O Rings



PART NUMBER	F1 (Thread)	F2 (Thread)	C1	C2	D1	D2	L	S
#	METRIC	METRIC	mm	mm	mm	mm	mm	mm
DAMMO152MO-1010	M10X1	M10X1	8.50	8.50	3.20	3.20	28.00	14
DAMMO152MO-1212	M12X1.5	M12X1.5	11.00	11.00	5.00	5.00	33.00	17
DAMMO152MO-1414	M14X1.5	M14X1.5	11.00	11.00	5.00	5.00	33.00	19
DAMMO152MO-1616	M16X1.5	M16X1.5	11.50	11.50	7.00	7.00	34.00	22
DAMMO152MO-1818	M18X1.5	M18X1.5	12.50	12.50	8.50	8.50	36.00	24
DAMMO152MO-2222	M22X1.5	M22X1.5	13.00	13.00	12.00	12.00	39.00	27
DAMMO152MO-2727	M27X2	M27X2	16.00	16.00	16.70	16.70	45.00	32
DAMMO152MO-3333	M33X2	M33X2	16.00	16.00	20.00	20.00	48.00	41
DAMMO152MO-4242	M42X2	M42X2	16.00	16.00	28.00	28.00	50.00	50
DAMMO152MO-4848	M48X2	M48X2	17.50	17.50	32.00	32.00	53.00	55

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA



DAJCMMT52JCM

Branch Tee Metric Male 74° – Metric Male 74°

D

A

JCM

M

T

52

JCM

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Thread Types

DME

Adaptor

Metric 74°Cone

Male

Branch Tee

Metric

Metric 74°Cone

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCMMT52JCM

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:


Branch Tee

Connection Type:

Male × Male × Male

Thread Types:

Metric 74° Cone × Metric 74° Cone × Metric 74° Cone

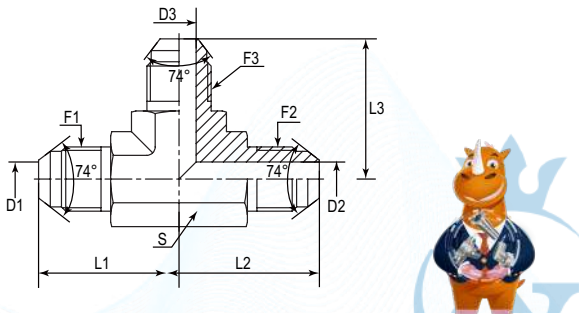

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S
#	METRIC	METRIC	METRIC	mm	mm	mm	mm	mm	mm	mm
DAJCMMT52JCM-1414	M14X1.5	M14X1.5	M14X1.5	5.00	5.00	5.00	27.00	27.00	27.00	14
DAJCMMT52JCM-1616	M16X1.5	M16X1.5	M16X1.5	7.00	7.00	7.00	29.50	29.50	29.50	16
DAJCMMT52JCM-1818	M18X1.5	M18X1.5	M18X1.5	8.50	8.50	8.50	34.00	34.00	34.00	19
DAJCMMT52JCM-2222	M22X1.5	M22X1.5	M22X1.5	12.00	12.00	12.00	37.50	37.50	37.50	22
DAJCMMT52JCM-2727	M27X1.5	M27X1.5	M27X1.5	16.70	16.70	16.70	41.50	41.50	41.50	27
DAJCMMT52JCM-3030	M30X1.5	M27X1.5	M27X1.5	18.50	18.50	18.50	42.80	42.80	42.80	30
DAJCMMT52JCM-3333	M33X2	M33X2	M33X2	20.00	20.00	20.00	49.50	49.50	49.50	33



Certificate:



DAJMML065

Run Tee Connector Metric Male 84° Cone - Adjustable BSPP Male O Ring

D

A

M

M

L

06

5

Company

Product Range

Connection Type

Connection Type

Adaptor Structure

Thread Types

Connection Type

DME

Adaptor

Metric 84°

Male

Run Tee

BSPP

Male O Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJMML065

Product Type

Hydraulic adaptor

Standard:

Metric

Structure:

Run Tee

Connection Type:


Male × Adjustable Male

Thread Types:

UNF 74° Cone × BSPP + O Ring × Metric 84° Cone

Sealing Method:

O Rings

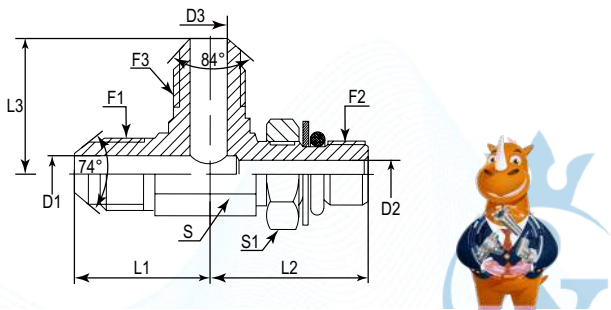

PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	D1	D2	D3	L1	L2	L3	S	S1
#	UNF	BSPP	METRIC	mm	mm	mm	mm	mm	mm	mm	mm
DAJMML065-0604	7/16"-20	1/4"-19	M14X1.5	4.37	7.50	7.54	28.50	31.50	28.50	14.00	19.00



Certificate:






Hydraulic Adaptors

Test Point »

TP-DAJCM1251-BPF


P729



Test Point JIC Male - JIC Swivel
Female with BSP Gage Port

TP-DAOF51241-BPF


P730



Test Point ORFS Male - ORFS Swivel
Female with BSP Gage Port

TP-DAJSM1071-BPF


P731



Test Point Metric Male - Metric
Swivel Female with BSP Gage Port
BSP

TP-DANPM1091-BPF


P732



Test Point NPTF Male - NPSM
Swivel Female with BSP Gage Port

TP-DAJCM1251-NPF


P733



Test Point JIC Male - JIC Swivel
Female with NPTF Gage Port

TP-DAJCM1251-UNF


P734



Test Point JIC Male 74° - JIC Swivel
Female 74° with JIC Gage Port

TP-DAOF51241-NPF


P735



Test Point ORFS Male - ORFS Swivel
Female with NPTF Gage Port

TP-DAOF51241-UNF


P736



Test Point ORFS Male - ORFS Swivel
Female with JIC Gage Port

TP-DABPM1081-BPF


P737



Test Point BSP Male - BSP Swivel
Female with BSP Gage Port BSP

TP-DAJCM1305-NPF

P738



Test Point JIC Male - JIC Male + O
Ring with NPTF Gage Port

TP-DAJCM1251-BPF

Test Point JIC Male - JIC Swivel Female with BSP Gage Port

TP

D

A

JC

M

1

251

BPF

Test Point

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Accessory

DME

Adaptor

JIC

Male

Straight

JIC Swivel Female

BSP Female Gage Port

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

TP-DAJCM1251-BPF

Product Type

Hydraulic adaptor

Standard:

Test Point Adaptor

Structure:


Straight

Connection Type:

Male × Swivel Female × Female

Thread Types:

JIC UNF × JIC UNF × BSPP Gage Port

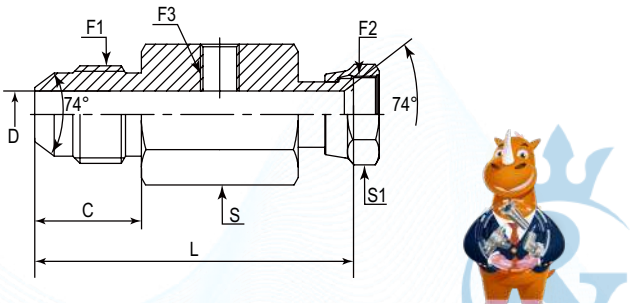

Filter the F1 Thread through selecting the -XX options								
PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	C	D	L	S	S1
#	UNF	UNF	BSPP	mm	mm	mm	mm	mm
TP-DAJCM1251-BPF-040402	7/16"-20	7/16"-20	1/8"-28	13.97	4.37	42.00	1"	9/16"
TP-DAJCM1251-BPF-050502	1/2"-20	1/2"-20	1/8"-28	13.97	5.94	42.90	1"	5/8"
TP-DAJCM1251-BPF-060602	9/16"-18	9/16"-18	1/8"-28	14.12	7.54	44.00	1"	11/16"
TP-DAJCM1251-BPF-080802	3/4"-16	3/4"-16	1/8"-28	16.69	9.93	48.00	1"	7/8"
TP-DAJCM1251-BPF-101002	7/8"-14	7/8"-14	1/8"-28	19.25	12.29	51.50	1"	1"
TP-DAJCM1251-BPF-121202	1-1/16"-12	1-1/16"-12	1/8"-28	21.95	15.47	55.00	1-1/8"	1-1/4"
TP-DAJCM1251-BPF-141402	1-3/16"-12	1-3/16"-12	1/8"-28	23.00	18.00	56.60	1-1/4"	1-3/8"
TP-DAJCM1251-BPF-161602	1-5/16"-12	1-5/16"-12	1/8"-28	23.14	21.44	57.50	1-3/8"	1-1/2"
TP-DAJCM1251-BPF-202002	1-5/8"-12	1-5/8"-12	1/8"-28	24.33	27.38	60.00	1-11/16"	2"

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

TP-DAOF51241-BPF

Test Point ORFS Male - ORFS Swivel Female with BSP Gage Port

TP

D

A

OF

5

1

241

BPF

Test Point

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Accessory

DME

Adaptor

ORFS

Male

Straight

ORFS Swivel Female

BSP Female Gage Port

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

TP-DAOF51241-BPF

Product Type

Hydraulic adaptor

Standard:

Test Point Adaptor

Structure:


Straight

Connection Type:

Male × Swivel Female × Female

Thread Types:

UNF × UNF × BSPP Gage Port

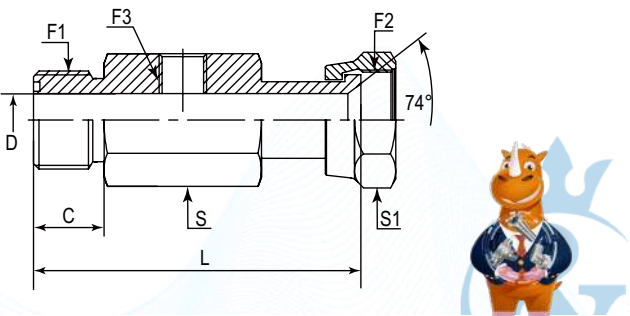

Filter the F1 Thread through selecting the -XX options								
PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	C	D	L	S	S1
#	UNF	UNF	BSPP	mm	mm	mm	mm	mm
TP-DAOF51241-BPF-040402	9/16"-18	9/16"-18	1/8"-28	9.80	4.19	46.50	1"	11/16"
TP-DAOF51241-BPF-060602	11/16"-16	11/16"-16	1/8"-28	11.20	6.71	50.00	1"	13/16"
TP-DAOF51241-BPF-080802	13/16"-16	13/16"-16	1/8"-28	12.80	9.09	54.50	1"	15/16"
TP-DAOF51241-BPF-101002	1"-14	1"-14	1/8"-28	15.49	11.51	60.50	1-1/16"	1-1/8"
TP-DAOF51241-BPF-121202	1-3/16"-12	1-3/16"-12	1/8"-28	17.02	13.89	65.50	1-1/4"	1-3/8"
TP-DAOF51241-BPF-161602	1-7/16"-12	1-7/16"-12	1/8"-28	17.50	19.89	70.00	1-1/2"	1-5/8"
TP-DAOF51241-BPF-202002	1-11/16"-12	1-11/16"-12	1/8"-28	17.50	26.00	70.00	1-7/8"	1-7/8"

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA



TP-DAJSM1071-BPF

Test Point Metric Male - Metric Swivel Female with BSP Gage Port BSP

TP

Test Point

D

Company
DME

A

Product Range
Adaptor

JS

Thread Types
JIS Metric

M

Connection Type
Male

1

Adaptor Structure
Straight

071

Connection Type
Metric Swivel Female

BPF

Accessory
BSP Female Gage Port

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code: TP-DAJSM1071-BPF


Product Type: Hydraulic adaptor

Standard: Test Point

Structure: Straight

Connection Type: Male × Swivel Female × Female

Thread Types: Metric × Metric × BSPP Gage Port

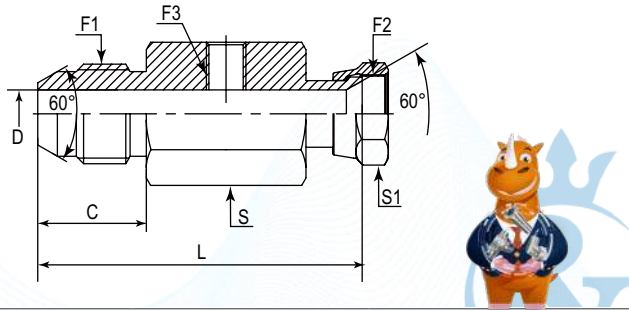

Filter the F1 Thread through selecting the -XX options								
PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	C	D	L	S	S1
#	Metric	Metric	BSPP	mm	mm	mm	mm	mm
TP-DAJSM1071-BPF-141402	M14X1.5	M14X1.5	1/8"-28	17.00	4.00	46.50	25.40	19.00
TP-DAJSM1071-BPF-181802	M18X1.5	M18X1.5	1/8"-28	18.00	7.00	49.50	25.40	24.00
TP-DAJSM1071-BPF-222202	M22X1.5	M22X1.5	1/8"-28	20.00	9.50	51.50	25.40	27.00
TP-DAJSM1071-BPF-242402	M24X1.5	M24X1.5	1/8"-28	21.50	12.50	53.50	27.00	32.00
TP-DAJSM1071-BPF-262602	M26X1.5	M26X1.5	1/8"-28	22.00	13.00	54.50	30.00	32.00
TP-DAJSM1071-BPF-303002	M30X1.5	M30X1.5	1/8"-28	26.00	14.00	59.50	33.00	36.00

Certificate:

TP-DANPM1091-BPF

Test Point NPTF Male - NPSM Swivel Female with BSP Gage Port

TP

Test Point

D

Company
DME

A

Product Range
Adaptor

NP

Thread Types
NPTF

M

Connection Type
Male

1

Adaptor Structure
Straight

091

Connection Type
NPSM Swivel Female

BPF

Accessory
BSP Female Gage Port

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code: TP-DANPM1091-BPF


Product Type: Hydraulic adaptor

Standard: Test Point Adaptor

Structure: Straight

Connection Type: Male × Swivel Female × Female

Thread Types: NPTF × NPSM × BSP Gage Port

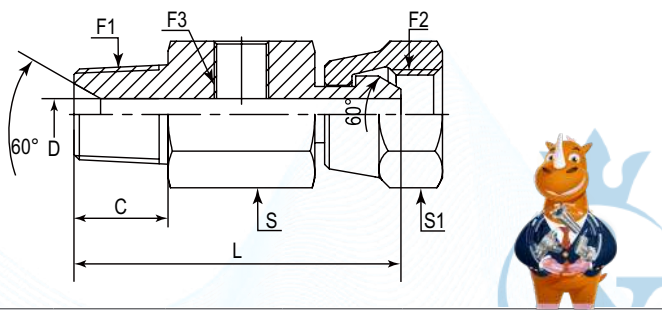

Filter the F1 Thread through selecting the -XX options								
PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	C	D	L	S	S1
#	NPTF	NPSM	BSPP	mm	mm	mm	mm	mm
TP-DANPM1091-BPF-060602	3/8"-18	3/8"-18	1/8"-28	14.22	8.13	44.63	25.40	22.23

Certificate:



TP-DAJCM1251-NPF

Test Point JIC Male - JIC Swivel Female with NPTF Gage Port

TP

D

A

JC

M

1

251

NPF

Test Point

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Accessory

DME

Adaptor

JIC UNF

Male

Straight

JIC Swivel Female

NPTF Female Gage Port

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

TP-DAJCM1251-NPF

Product Type

Hydraulic adaptor

Standard:

Test Point Adaptor

Structure:


Straight

Connection Type:

Male × Swivel Female × Female

Thread Types:

JIC × JIC × NPTF Gage Port

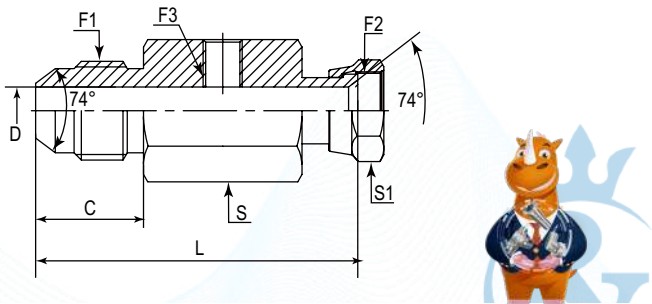

Filter the F1 Thread through selecting the -XX options								
PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	C	D	L	S	S1
#	UNF	UNF	NPTF	mm	mm	mm	mm	mm
TP-DAJCM1251-NPF-040404	7/16"-20	7/16"-20	1/4"-18	13.97	4.37	50.00	19.05	14.27
TP-DAJCM1251-NPF-060604	9/16"-18	9/16"-18	1/4"-18	14.12	7.54	64.50	22.20	17.45
TP-DAJCM1251-NPF-080804	3/4"-16	3/4"-16	1/4"-18	16.69	9.93	64.50	22.22	22.23
TP-DAJCM1251-NPF-101004	7/8"-14	7/8"-14	1/4"-18	19.25	12.29	65.25	22.20	25.40
TP-DAJCM1251-NPF-121204	1-1/16"-12	1-1/16"-12	1/4"-18	21.95	15.47	72.40	26.97	31.75
TP-DAJCM1251-NPF-161604	1-5/16"-12	1-5/16"-12	1/4"-18	25.93	21.44	81.71	33.30	38.10
TP-DAJCM1251-NPF-202004	1-5/8"-12	1-5/8"-12	1/4"-18	24.33	27.38	65.08	42.86	50.80
TP-DAJCM1251-NPF-242404	1-7/8"-12	1-7/8"-12	1/4"-18	27.51	33.32	70.00	47.62	57.15

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

TP-DAJCM1251-UNF

Test Point JIC Male 74°- JIC Swivel Female 74° with JIC Gage Port

TP

D

A

JC

M

1

251

UNF

Test Point

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Accessory

DME

Adaptor

JIC UNF

Male

Straight

JIC Swivel Female

UNF Gage Port

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

TP-DAJCM1251-UNF

Product Type

Hydraulic adaptor

Standard:

Test Point Adaptor

Structure:


Straight

Connection Type:

Male × Swivel Female × Female

Thread Types:

UNF × UNF × UNF Gage Port

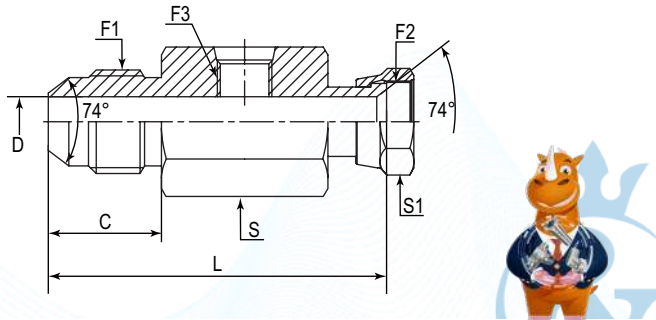

Filter the F1 Thread through selecting the -XX options									
PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	C1	C2	D	L	S	S1
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm
TP-DAJCM1251-UNF-040404	7/16"-20	7/16"-20	7/16"-20	13.97	8.03	4.37	42.00	25.40	14.27
TP-DAJCM1251-UNF-060604	9/16"-18	9/16"-18	7/16"-20	14.12	9.91	7.54	44.03	25.40	17.45
TP-DAJCM1251-UNF-080804	3/4"-16	3/4"-16	7/16"-20	16.69	11.20	9.93	47.90	25.40	22.23
TP-DAJCM1251-UNF-101004	7/8"-14	7/8"-14	7/16"-20	19.25	11.96	12.29	51.21	25.40	25.40
TP-DAJCM1251-UNF-121204	1-1/16"-12	1-1/16"-12	7/16"-20	21.95	12.85	15.47	54.80	28.58	31.75
TP-DAJCM1251-UNF-161604	1-5/16"-12	1-5/16"-12	7/16"-20	23.14	14.37	21.44	57.50	34.93	38.10
TP-DAJCM1251-UNF-202004	1-5/8"-12	1-5/8"-12	7/16"-20	24.33	15.75	27.38	60.08	42.86	50.80

Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

TP-DAOF51241-NPF

Test Point ORFS Male - ORFS Swivel Female with NPTF Gage Port

TP

D

A

OF

5

1

241

NPF

Test Point

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Accessory

DME

Adaptor

ORFS

Male

Straight

ORFS Swivel Female

NPTF Female Gage Port

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

TP-DAOF51241-NPF

Product Type

Hydraulic adaptor

Standard:

Test Point Adaptor

Structure:


Straight

Connection Type:

Male × Swivel Female × Female

Thread Types:

UNF × UNF × NPTF Gage Port

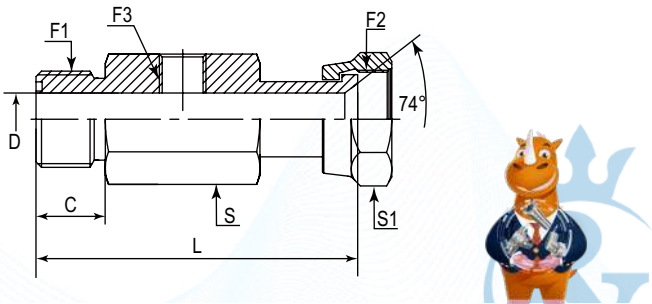

Filter the F1 Thread through selecting the -XX options								
PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	C	D	L	S	S1
#	UNF	UNF	NPTF	mm	mm	mm	mm	mm
TP-DAOF51241-NPF-040404	9/16"-18	9/16"-18	1/4"-18	9.80	4.19	51.30	25.40	17.46
TP-DAOF51241-NPF-060604	11/16"-16	11/16"-16	1/4"-18	11.20	6.71	54.90	25.40	20.62
TP-DAOF51241-NPF-080804	13/16"-16	13/16"-16	1/4"-18	12.80	9.09	59.52	25.40	23.81
TP-DAOF51241-NPF-101004	1"-14	1"-14	1/4"-18	15.49	11.51	65.40	27.00	28.58
TP-DAOF51241-NPF-121204	1-3/16"-12	1-3/16"-12	1/4"-18	17.02	13.89	70.50	32.00	34.92
TP-DAOF51241-NPF-161604	1-7/16"-12	1-7/16"-12	1/4"-18	17.50	19.89	73.00	41.27	41.28

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

TP-DAOF51241-UNF

Test Point ORFS Male - ORFS Swivel Female with JIC Gage Port

TP

D

A

OF

5

1

241

UNF

Test Point

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Accessory

DME

Adaptor

ORFS

Male

Straight

ORFS Swivel Female

UNF Female Gage Port

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

TP-DAOF51241-UNF

Product Type

Hydraulic adaptor

Standard:

Test Point Adaptor

Structure:


Straight

Connection Type:

Male × Swivel Female × Female

Thread Types:

UNF × UNF × UNF Gage Port

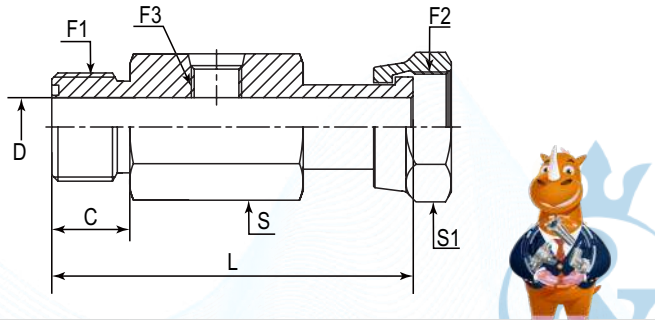

Filter the F1 Thread through selecting the -XX options									
PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	C1	C2	D	L	S	S1
#	UNF	UNF	UNF	mm	mm	mm	mm	mm	mm
TP-DAOF51241-UNF-040404	9/16"-18	9/16"-18	7/16"-20	9.80	16.51	4.19	51.30	25.40	17.46
TP-DAOF51241-UNF-060604	11/16"-16	11/16"-16	7/16"-20	11.20	18.67	6.71	54.90	25.40	20.62
TP-DAOF51241-UNF-080804	13/16"-16	13/16"-16	7/16"-20	12.80	21.72	9.09	59.52	25.40	23.81
TP-DAOF51241-UNF-080806	13/16"-16	13/16"-16	9/16"-18	12.80	21.72	9.09	59.50	25.40	23.81
TP-DAOF51241-UNF-101004	1"-14	1"-14	7/16"-20	15.49	24.89	11.51	65.40	27	28.58
TP-DAOF51241-UNF-121204	1-3/16"-12	1-3/16"-12	7/16"-20	17.02	28.45	13.89	70.50	32	34.92
TP-DAOF51241-UNF-161604	1-7/16"-12	1-7/16"-12	7/16"-20	17.50	30.48	19.89	73.00	41.27	41.28
TP-DAOF51241-UNF-242404	2"-12	2"-12	7/16"-20	17.50	30.48	32.00	76.00	53.98	57.15

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

TP-DABPM1081-BPF

Test Point BSP Male - BSP Swivel Female with BSP Gage Port BSP

TP

D

A

BP

M

1

081

BPF

Test Point

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Connection Type

Accessory

Adaptor

BSP

Male

Straight

BSP Swivel Female

BSP Female Gage Port

German Technology Equipment

New-Standard

DME&JDE Code:

TP-DABPM1081-BPF

Product Type

Hydraulic adaptor

Standard:

Test Point

Structure:


Straight

Connection Type:

Male × Swivel Female × Female

Thread Types:

BSP × BSP × BSP Gage Port

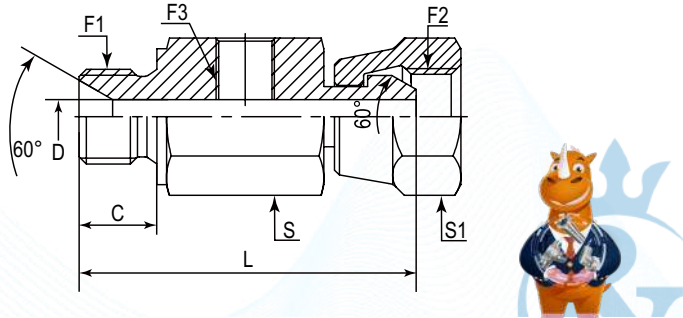

Filter the F1 Thread through selecting the -XX options								
PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	C	D	L	S	S1
#	BSP	BSP	BSP	mm	mm	mm	mm	mm
TP-DABPM1081-BPF-080802	1/2"-14	1/2"-14	1/8"-28	14.00	11.10	50.00	27.00	27.00
TP-DABPM1081-BPF-121202	3/4"-14	3/4"-14	1/8"-28	16.00	16.70	54.50	32.00	32.00
TP-DABPM1081-BPF-121204	3/4"-14	3/4"-14	1/4"-19	16.00	16.70	54.50	32.00	32.00
TP-DABPM1081-BPF-161602	1"-11	1"-11	1/8"-28	19.00	22.20	59.50	41.00	41.00
TP-DABPM1081-BPF-161604	1"-11	1"-11	1/4"-19	19.00	22.20	59.50	41.00	41.00

TP-DAJCM1305-NPF

Test Point JIC Male - JIC Male + O Ring with NPTF Gage Port

TP

D

A

JC

M

1

30

5

NPF

Test Point

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Thread Types

Connection Type

Accessory

Adaptor

JIC

Male

Straight

JIC

Male + O Ring

NPTF Female Gage Port

German Technology Equipment

New-Standard

DME&JDE Code:

TP-DAJCM1305-NPF

Product Type

Hydraulic adaptor

Standard:

Test Point Adaptor

Structure:

Straight

Connection Type:


Male × Male × Female

Thread Types:

UNF × UNF + O Ring × NPTF Gage Port

Sealing Method:

O Rings

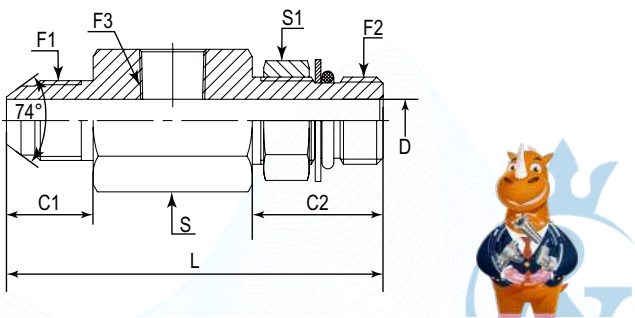

Filter the F1 Thread through selecting the -XX options									
PART NUMBER	F1 (Thread)	F2 (Thread)	F3 (Thread)	C1	C2	D	L	S	S1
#	UNF	UNF	NPTF	mm	mm	mm	mm	mm	mm
TP-DAJCM1305-NPF-080804	3/4"-16	3/4"-16	1/4"-18	18.69	24.22	9.93	79.40	22.22	22.22
TP-DAJCM1305-NPF-121204	1-1/16"-12	1-1/16"-12	1/4"-18	24.74	32.17	15.47	91.90	26.97	31.75



Captive Flange



Split Flange



Straight



45° Elbow



90° Elbow

Hydraulic Flange & Adaptor

Hydraulic flange & adaptors are used in the most demanding applications, including high pressure, shock and vibration, especially in larger sizes. It can save labor times and costs as well as reduce tool limitation during installation, which makes installation efficient, easy can flexible.

DME&JDE supplies full ranges of hydraulic flanges and adaptors for your fluid power transmission. Just select the perfect one for your line or you can contact our specialist for further production recommendation and solution design.

CODE SYSTEM

e.g. DAJCM4364-B

D

A

JC

M

4

3

6

4

B

Brand

Product Range

JIC

Male

45° Elbow

Flange

SAE Code 62

Split Flange Head

Swept



Product Range

Thread Types

Connection type

Adaptor Structure

Adaptor Type

Flange Series


Flange Type

Elbow Type

Code	Description	Code	Description	Code	Description	Code	Description	Code	Description	Code	Description	Code	Description	Code	Description																							
A	Adaptor	BP	BSPP	M	Male	1	Straight	3	Flange	3	SAE Code 61	C	Captive Flange	B	Swept Elbow																							
		BT	BSPT									B	Blind Flange																									
		JC	JIC			4	45° Elbow			6	SAE Code 62		4	Split Flange Head																								
		UN	SAE										6	SAE Code 62																								
		NP	NPTF			9	90° Elbow																															
FL	Flange	NPS	NPSM	F	Female																																	
		OF5	ORFS																																			
		JSB	JIS BSPP																																			
		JSM	JIS Metric																																			
		M	Metric																																			
		JCM	74° Cone Metric																																			

DFLC3


P746

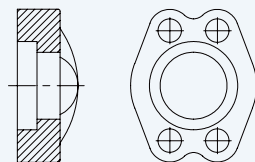

Captive Flange SAE Code 61

DFLC6


P747

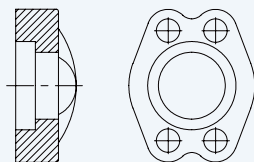

Captive Flange SAE Code 62

DFL3


P748

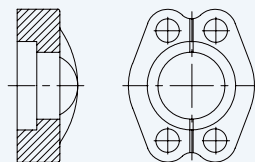

Split Flange SAE Code 61

DFL6


P749

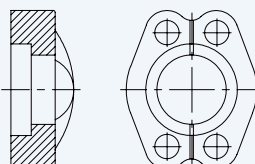

Split Flange SAE Code 62

DFL3BP


P750

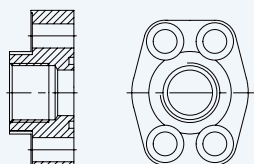

4 Bolt Thread Flange, BSPP Female Code 61

DFL6BP


P751

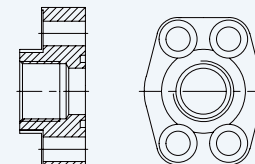

4 Bolt Thread Flange, BSPP Female Code 62

DFLB3


P752

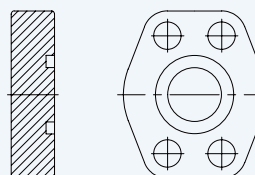

Blind Flanges Zero Pressure SAE Code 61

DFLB6


P753

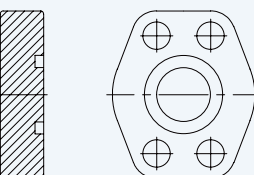

Blind Flanges Zero Pressure SAE Code 62

DFLBP3


P754

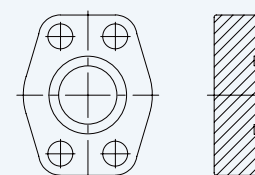

Blind Flanges Low Pressure SAE Code 61

DFLBP6


P755

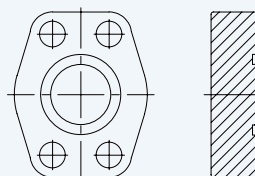

Blind Flanges Low Pressure SAE Code 62

DAJCM1334


P756

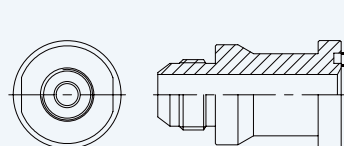

Straight JIC Male 74° - Flange SAE Code 61

DAJCM1364


P757

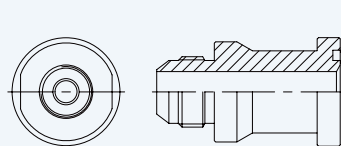

Straight Connector JIC Male -
Flange SAE Code 62

DAUNM1334


P758



Straight Connector SAE Male + O Ring
- Flange SAE Code 61

DAUNM1364


P759



Straight Connector SAE Male + O Ring
- Flange SAE Code 62

DAOF51334


P760



Straight Connector ORFS Male
- Flange SAE Code 61

DAOF51364


P761



Straight Connector ORFS Male
- Flange SAE Code 62

DABPM1334


P762



Straight Connector BSPP Male 60°
- Flange SAE Code 61

DABPM1364

P763



Straight Connector BSPP Male 60°
- Flange SAE Code 62

DFLOP3

P764



SAE Flange Plug with O Ring Code 61

DFLOP6


P765



SAE Flange Plug with O Ring Code 62

DAJCM4334


P767



45° Forged Elbows JIC Male 74°
- Flange SAE Code 61

DAJCM4334-B


P768



45° Swept Elbows JIC Male 74°
- Flange SAE Code 61

DAJCM4364


P769



45° Forged Elbow JIC Male 74°
- Flange SAE Code 62

DAJCM4364-B


P770

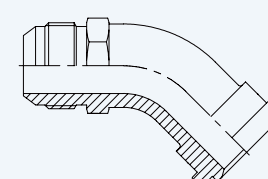

45° Swept Elbow JIC Male 74°
- Flange SAE Code 62

DAOF54334


P771



45° Forged Elbows ORFS Male
- Flange SAE Code 61

DAOF54364


P772



45° Forged Elbows ORFS Male
- Flange SAE Code 62

DAJCM9334


P773



90° Forged Elbow JIC Male 74°
- Flange SAE Code 61

DAJCM9364


P774



90° Forged Elbow JIC Male 74°
- Flange SAE Code 62

DAJCM9334-B


P775



90° Swept Elbows JIC Male 74°
- Flange SAE Code 61

DAJCM9364-B


P776



90° Swept Elbows JIC Male 74°
- Flange SAE Code 62

DAOF59334


P777



90° Forged Elbow ORFS Male
- Flange SAE Code 61

DAOF59364


P778



90° Forged Elbow ORFS Male
- Flange SAE Code 62

DABPM9334


P779



90° Forged Elbow ORFS Male
- Flange SAE Code 62

DABPM9364

P780



90° Forged Elbows BSPP Male 60°
- Flange SAE Code 62

DFLC3

Captive Flange SAE Code 61

D

FL

C

3

Company

Product Range

Flange Type

Flange Series

DME

Flange

Captive

SAE Code 61

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DFLC3

Product Type:


Flange

Flange Type:

Captive flange

Connection Type:

Flange Code 61

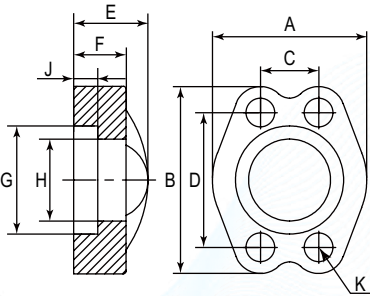

PART NUMBER	Flange Size	A	B	C	D	E	F	G	H	J	K
#		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
DFLC3-08	0.5	46	53.8	17.48	38.1	19.1	12.7	30.96	24.3	6.22	8.7
DFLC3-12	0.75	52.3	65	22.23	47.63	22.4	14.2	39.89	32.1	6.22	10.3
DFLC3-16	1	58.7	69.9	26.19	52.37	23.9	15.7	45.24	38.5	7.49	10.3
DFLC3-20	1.25	73.2	79.2	30.18	58.72	22.4	14.2	51.59	43.7	7.49	11.9
DFLC3-24	1.5	82.6	93.7	35.71	69.85	25.4	15.7	61.11	50.8	7.49	13.5
DFLC3-32	2	96.8	101.6	42.88	77.77	26.2	15.7	72.24	62.7	9.02	13.5
DFLC3-40	2.5	108.7	114.3	50.8	88.9	38.1	19.1	84.94	74.9	9.02	13.5
DFLC3-48	3	131.1	134.9	61.93	106.38	41.1	22.4	102.39	90.9	9.02	16.7
DFLC3-56	3.5	139.7	152.4	69.85	120.65	28.4	22.4	115.09	102.4	10.72	16.7
DFLC3-64	4	152.4	162.1	77.77	130.18	35.1	25.4	127.79	115.1	10.72	16.7

DFLC6

Captive Flange SAE Code 62

D

Company

DME

FL

Product Range

Flange

C

Flange Type

Captive

6

Flange Series

SAE Code 62

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DFLC6

Product Type:


Flange

Flange Type:

Captive flange

Connection Type:

Flange Code 62

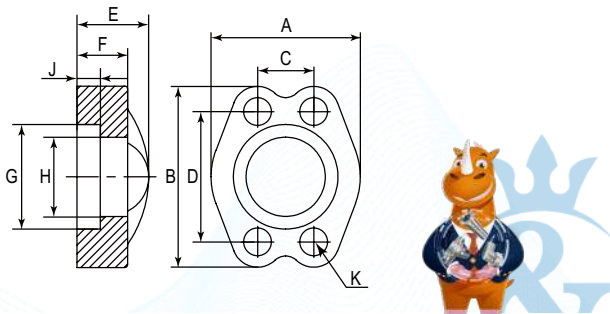

PART NUMBER	Flange Size	A	B	C	D	E	F	G	H	J	K
#		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
DFLC6-08	0.5	47.2	56.4	18.24	40.49	22.4	15.7	32.54	24.6	7.24	8.7
DFLC6-12	0.75	60.5	71.4	23.83	50.8	28.4	19.1	42.06	32.5	8.26	10.3
DFLC6-16	1	69.9	81	27.79	57.15	33.3	23.9	48.41	38.9	9.02	11.9
DFLC6-20	1.25	77.7	95.3	31.75	66.68	38.1	26.9	54.76	44.5	9.78	13.5
DFLC6-24	1.5	95.3	112.8	36.53	79.38	42.9	30.2	64.29	51.6	12.07	16.7
DFLC6-32	2	114.3	133.4	44.45	96.82	52.3	36.6	80.16	67.6	12.07	19.8

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DFL3

Split Flange SAE Code 61

D

Company

DME

FL

Product Range

Flange

3

Flange Series

SAE Code 61

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DFL3

Product Type:


Flange

Flange Type:

Split flange

Connection Type:

Flange Code 61

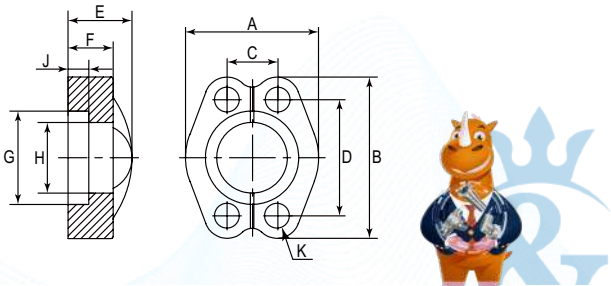

PART NUMBER	Flange Size	A	B	C	D	E	F	G	H	J	K
#		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
DFL3-08	0.5	45.97	5385.00	17.48	38.10	19.05	12.70	30.96	24.26	6.22	9.00
DFL3-12	0.75	52.32	65.02	22.25	47.63	22.35	14.22	38.89	32.13	6.22	11.00
DFL3-16	1	58.67	69.85	26.16	52.30	23.88	15.75	45.24	38.48	7.49	11.00
DFL3-20	1.25	73.15	79.25	30.18	58.72	22.35	14.22	51.59	43.69	7.49	12.00
DFL3-24	1.5	82.55	93.73	35.71	69.85	25.40	15.75	61.11	50.80	7.49	13.50
DFL3-32	2	96.77	101.60	42.88	77.77	26.16	15.75	72.24	62.74	9.02	13.50
DFL3-40	2.5	108.71	114.30	50.80	88.90	38.10	19.05	84.94	74.93	9.02	13.50
DFL3-48	3	131.06	134.87	61.93	106.38	42.40	22.35	102.39	90.93	9.02	17.50

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DFL6

Split Flange SAE Code 62

D

Company

DME

FL

Product Range

Flange

6

Flange Series


SAE Code 62

German Technology Equipment

SHIELD FLEX

New-Standard

- DME&JDE Code: DFL6
- Product Type: Flange
- Flange Type: Split flange
- Connection Type: Flange Code 62

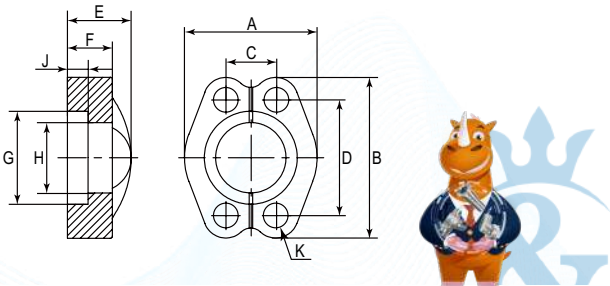

PART NUMBER	Flange Size	A	B	C	D	E	F	G	H	J	K
#		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
DFL6-08	0.5	47.19	56.39	18.24	40.49	22.35	15.75	32.54	24.64	7.24	9.00
DFL6-12	0.75	59.89	71.37	23.83	50.8	28.45	19.05	42.06	32.51	8.26	11.00
DFL6-16	1	69.44	81.03	27.79	57.15	33.27	23.88	48.41	38.86	9.02	13.00
DFL6-20	1.25	76.96	95.25	31.75	66.68	38.1	26.92	54.76	44.45	9.78	15.00
DFL6-24	1.5	94.95	112.78	36.53	79.38	42.93	30.23	64.29	51.56	12.07	17.00
DFL6-32	2	113.54	133.35	44.45	96.82	52.32	36.58	80.16	67.56	12.07	21.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DFL3BP

4 Bolt Thread Flange, BSPP Female Code 61

D

Company

DME

FL

Product Range

Flange

3

Flange Series

SAE Code 61

BP

Thread types


BSPP

German Technology Equipment

SHIELD FLEX

New-Standard

- DME&JDE Code: DFL3BP
- Product Type: Flange
- Flange Type: 4 bolt thread captive flange
- Connection Type: Flange Code 61
- Thread Types: BSPP female

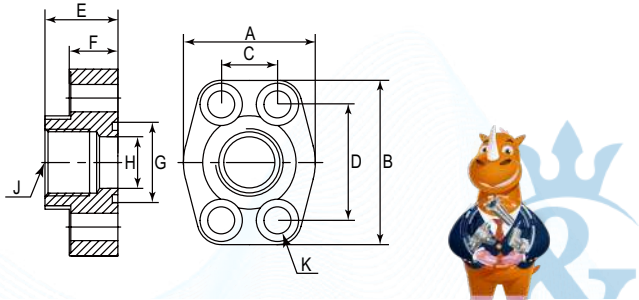

PART NUMBER	A	B	C	D	E	F	G	H	J (Thread)
#	BSP	Inch	mm	mm	mm	mm	mm	mm	BSPP
DFL3BP-08	46	54.1	17.48	38.1	36.1	16	25.4	12.7	1/2"-14
DFL3BP-12	51.6	65	22.23	47.63	36	18	31.75	19.1	3/4"-14
DFL3BP-16	57.9	70	26.19	52.37	38	18	39.62	25.45	1"-11
DFL3BP-20	72.3	79	30.18	58.72	41	21	44.45	31.8	1-1/4"-11
DFL3BP-24	81.8	93.5	35.71	69.85	45	25	53.72	38.15	1-1/2"-11
DFL3BP-32	95.3	101.6	42.88	77.77	45	25	63.25	50.85	2"-11

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DFL6BP

4 Bolt Thread Flange, BSPP Female Code 62

D

Company

DME

FL

Product Range

Flange

6

Flange Series

SAE Code 62

BP

Thread types

BSPP

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DFL6BP

Product Type:

Flange

Flange Type:


4 bolt thread captive flange

Connection Type:

Female Code 62

Thread Types:

BSPP female

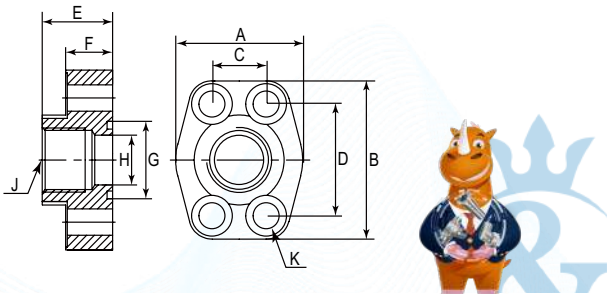

PART NUMBER	A	B	C	D	E	F	G	H	J (Thread)
#	BSP	Inch	mm	mm	mm	mm	mm	mm	BSPP
DFL6BP-08	46	56.1	18.24	40.49	36.1	16	25.4	12.75	1/2"-14
DFL6BP-12	60	71	23.8	50.8	35	21	31.75	19.1	3/4"-14
DFL6BP-16	70	81	27.76	57.15	42	25	39.62	25.45	1"-11
DFL6BP-20	78	95	31.75	66.68	45	27	44.45	31.8	1-1/4"-11
DFL6BP-24	95	112.5	36.5	79.38	50	30	53.72	38.1	1-1/2"-11
DFL6BP-32	114	132.5	44.45	96.82	65	37	63.25	50.85	2"-11



Certificate:

DFLB3

Blind Flanges Zero Pressure SAE Code 61

D

Company

DME

FL

Product Range

Flange

B

Flange Series

Blind

3

Flange Series

SAE Code 61

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DFLB3

Product Type:


Flange

Flange Type:

Blind flange

Connection Type:

Flange Code 61

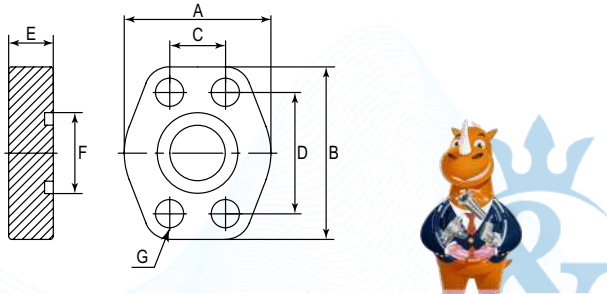

PART NUMBER	A	B	C	D	E	F	G	Cross Number
#	mm	mm	mm	mm	mm	mm	mm	
DFLB3-08	46	54.1	17.48	38.1	14	25.4	9	AX3-08
DFLB3-12	52.32	65.02	22.23	47.63	14	31.75	11	AX3-12
DFLB3-16	58.67	69.85	26.19	52.4	16	39.62	11	AX3-16
DFLB3-20	73.15	79.25	30.18	58.76	14	44.45	12	AX3-20
DFLB3-24	82.55	93.73	35.71	69.85	16	53.72	13.49	AX3-24
DFLB3-32	96.77	101.6	42.88	77.8	16	63.25	13.49	AX3-32
DFLB3-40	108.71	114.3	50.8	88.9	19	76.07	13.49	AX3-40
DFLB3-48	131.06	134.87	61.93	106.38	22	91.82	17.5	AX3-48



Certificate:

DFLB6

Blind Flanges Zero Pressure SAE Code 62

D

Company

DME

FL

Product Range

Flange

B

Flange Type

Blind

6

Flange Series

SAE Code 62

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DFLB6

Product Type:


Flange

Flange Type:

Blind flange

Connection Type:

Flange Code 62



PART NUMBER	A	B	C	D	E	F	G	Cross Number
#	mm	mm	mm	mm	mm	mm	mm	
DFLB6-08	49.3	56.5	18.2	40.5	14	25.5	9	AX6-08
DFLB6-12	63.5	71.37	23.8	50.8	19	31.75	11	AX6-12
DFLB6-16	69.85	81.03	27.76	57.15	24	39.62	13	AX6-16
DFLB6-20	77.72	95.25	31.75	66.68	27	44.45	15	AX6-20
DFLB6-24	95.25	112.78	36.5	79.38	30	53.72	17	AX6-24
DFLB6-32	114.3	133.35	44.45	96.82	37	63.25	21	AX6-32

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DFLBP3

Blind Flanges Low Pressure SAE Code 61

D

Company

DME

FL

Product Range

Flange

B

Flange Type

Blind

P

Flange Pressure Type

Low Pressure

3

Flange Series

SAE Code 61

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DFLBP3

Product Type:


Flange

Flange Type:

Blind flange

Connection Type:

Flange Code 61



PART NUMBER	A	B	C	D	E	F	G
#	mm	mm	mm	mm	mm	mm	mm
DFLBP3-08	46	54.1	17.48	38.1	14	25.4	19.05
DFLBP3-12	52.4	65.1	22.23	47.63	11	31.75	19.05
DFLBP3-16	58.75	69.85	26.19	52.4	11	39.62	22.35
DFLBP3-20	73.03	79.38	30.18	58.76	12	44.45	23.88
DFLBP3-24	82.55	93.68	35.71	69.85	13.5	53.72	30.23
DFLBP3-32	96.85	101.6	42.88	77.8	13.5	63.25	36.58

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DFLBP6

Blind Flanges Low Pressure SAE Code 62

D

Company

DME

FL

Product Range

Flange

B

Flange Type

Blind

P

Flange Pressure Type

Low Pressure

6

Flange Series

SAE Code 62

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DFLBP6

Product Type:


Flange

Flange Type:

Blind flange

Connection Type:

Flange Code 62



PART NUMBER	A	B	C	D	E	F	G
#	mm	mm	mm	mm	mm	mm	mm
DFLBP6-08	49.3	56.5	18.2	40.5	14	25.5	31.75
DFLBP6-12	63.5	74.93	23.8	50.8	11	31.75	31.75
DFLBP6-16	69.85	81.03	27.76	57.15	13	39.62	38.1
DFLBP6-20	77.72	95.25	31.75	66.68	15	44.45	39.75
DFLBP6-24	95.25	112.78	36.5	79.38	17	53.72	46.1
DFLBP6-32	114.3	133.35	44.45	96.82	21	63.25	46.1



DAJCM1334

Straight JIC Male 74° – Flange SAE Code 61

D

Company

DME

A

Product Range

Adaptor

JC

Flange Types

JIC

M

Connection Type

Male

1

Adaptor Structure

Straight

3

Adaptor Type

Flange

3

Flange Series

SAE Code 61

4

Flange Head Type

Slip Flange Head

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJCM1334

Product Type:

Hydraulic adaptor, Flange

Standard:

JIC

Structure:


Straight

Connection Types:

Male × Flange SAE Code 61

Thread Types:

JIC 74° Cone × SAE Code 61 Flange

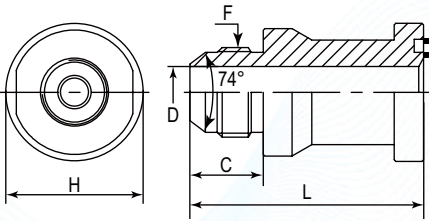

PART NUMBER	F (Thread)	C	D	L	S
#	UNF	mm	mm	mm	mm
DAJCM1334-0808	3/4"-16	16.69	10	66.04	28.5
DAJCM1334-0812	3/4"-16	16.69	10	69.85	34.85
DAJCM1334-1212	1-1/16"-12	21.95	15.52	69.85	34.85
DAJCM1334-1216	1-1/16"-12	21.95	15.52	71.12	41.2
DAJCM1334-1220	1-1/16"-12	21.95	15.52	69.93	44.37
DAJCM1334-1224	1-1/16"-12	21.95	15.52	83.34	53.9
DAJCM1334-1616	1-5/16"-12	23.14	21.44	71.12	41.2
DAJCM1334-1620	1-5/16"-12	23.14	21.44	71.12	44.37
DAJCM1334-1624	1-5/16"-12	23.14	21.44	84.53	53.9
DAJCM1334-1632	1-5/16"-12	23.14	21.44	90.25	66.6
DAJCM1334-2020	1-5/8"-12	24.3	27.38	71.1	44.37
DAJCM1334-2032	1-5/8"-12	24.33	27.38	91.44	66.6
DAJCM1334-2420	1-7/8"-12	27.51	33.48	86.36	47.55
DAJCM1334-2424	1-7/8"-12	27.51	33.48	88.9	53.9
DAJCM1334-2432	1-7/8"-12	27.51	33.48	94.62	66.6
DAJCM1334-3224	2-1/2"-12	33.86	38.1	106.68	66.6
DAJCM1334-3232	2-1/2"-12	33.86	45.24	100.97	66.6



DAJCM1364

Straight Connector JIC Male – Flange SAE Code 62

D

A

JC

M

1

3

6

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

JIC

Male

Straight

Flange

SAE Code 62

Slip Flange Head

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJCM1364

Product Type:

Hydraulic adaptor, Flange

Standard:

JIC

Structure:


Straight

Connection Types:

Male × Flange SAE Code 62

Thread Types:

UNF 74° Cone × SAE Code 62 Flange

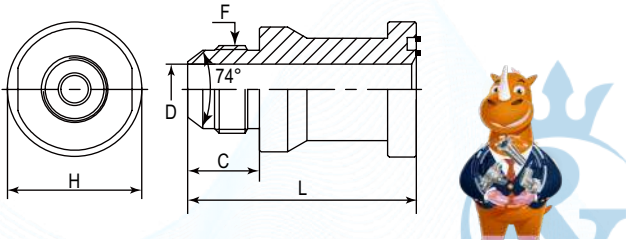

PART NUMBER	F (Thread)	C	D	L	S
#	UNF	mm	mm	mm	mm
DAJCM1364-0808	3/4"-16	16.69	10.82	66.19	28.5
DAJCM1364-0812	3/4"-16	16.69	10.82	56.64	34.85
DAJCM1364-1212	1-1/16"-12	21.95	15.52	69.85	34.85
DAJCM1364-1216	1-1/16"-12	21.95	15.52	71.12	41.2
DAJCM1364-1612	1-5/16"-12	23.1	15.52	69.9	34.85
DAJCM1364-1616	1-5/16"-12	23.1	21.44	71.1	41.2
DAJCM1364-1620	1-5/16"-12	23.14	21.44	77.47	44.37
DAJCM1364-1624	1-5/16"-12	23.14	21.44	87.71	53.9
DAJCM1364-2016	1-5/8"-12	24.33	27.38	71.12	41.2
DAJCM1364-2020	1-5/8"-12	24.3	27.38	77.5	44.37
DAJCM1364-2024	1-5/8"-12	24.33	27.38	88.9	53.9
DAJCM1364-2420	1-7/8"-12	27.5	27.38	83.8	47.55
DAJCM1364-2424	1-7/8"-12	27.51	33.48	88.9	53.9
DAJCM1364-2432	1-7/8"-12	27.51	33.48	100.97	66.6
DAJCM1364-3224	2-1/2"-12	33.86	38.1	125.48	66.6
DAJCM1364-3232	2-1/2"-12	33.86	45.24	107.32	66.6

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DAUNM1334

Straight Connector SAE Male + O Ring – Flange SAE Code 61

D

A

UN

M

1

3

3

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

SAE

Male

Straight

Flange

SAE Code 61

Slip Flange Head

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAUNM1334

Product Type:

Hydraulic adaptor, Flange

Standard:

Straight

Connection Types:


Male × Flange SAE Code 61

Thread Types:

UNF + O Ring × SAE Code 61 Flange

Sealing Method:

Oring

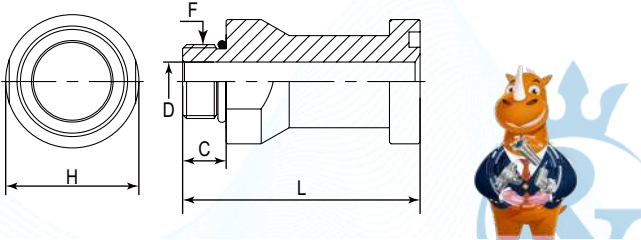

PART NUMBER	F (Thread)	C	D	L	H
#	UNF	mm	mm	mm	mm
DAUNM1334-0808	3/4"-16	14	10.72	63.2	28.5
DAUNM1334-1212	1-1/16"-12	18.49	16.66	66.4	34.85
DAUNM1334-1616	1-5/16"-12	18.49	22.23	66.4	41.2
DAUNM1334-2020	1-5/8"-12	18.49	27.76	79.6	47.55
DAUNM1334-2424	1-7/8"-12	18.49	34.14	79.86	53.9
DAUNM1334-3232	2-1/2"-12	18.49	46.05	92.3	69.77

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DAUNM1364

Straight Connector SAE Male + O Ring – Flange SAE Code 62

D

A

UN

M

1

3

6

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

SAE

Male

Straight

Flange

SAE Code 62

Slip Flange Head

 German Technology Equipment



New-Standard

DME&JDE Code:

DAUNM1364

Product Type:

Hydraulic adaptor, Flange

Standard:

SAE

Structure


Straight

Connection Types:

Male × Flange SAE Code 62

Thread Types:

UNF + O Ring × SAE Code 62 Flange

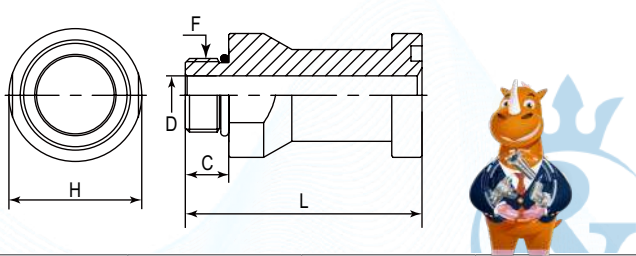

PART NUMBER	F (Thread)	C	D	L	H
#	UNF	mm	mm	mm	mm
DAUNM1364-0808	3/4"-16	14	9.93	63.5	28.5
DAUNM1364-1212	1-1/16"-12	18.49	15.47	66.55	34.85
DAUNM1364-1612	1-5/16"-12	18.49	15.52	66.6	34.85
DAUNM1364-1616	1-5/16"-12	18.49	21.44	66.6	41.2
DAUNM1364-2020	1-5/8"-12	18.49	27.38	76.2	47.55
DAUNM1364-2424	1-7/8"-12	18.49	33.32	81.03	53.9
DAUNM1364-3232	2-1/2"-12	18.49	45.24	95.25	69.77

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAOF51334

Straight Connector ORFS Male – Flange SAE Code 61

D

A

OF

5

1

3

3

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

ORFS

Male

Straight

Flange

SAE Code 61

Slip Flange Head

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF51334

Product Type:

Hydraulic adaptor, Flange

Standard:

ORFS

Structure:


Straight

Connection Types:

Male × Flange SAE Code 61

Thread Types:

UNF × SAE Code 61 Flange

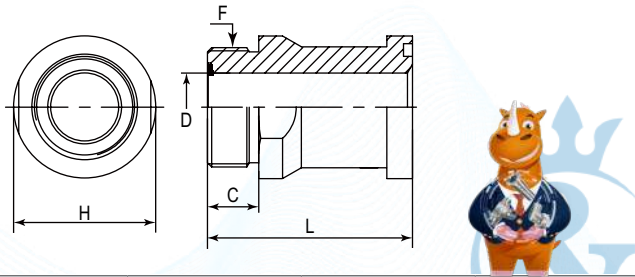

PART NUMBER	F (Thread)	C	D	L	H
#	UNF	mm	mm	mm	mm
DAOF51334-0808	13/16"-16	13	9.5	62.35	28.5
DAOF51334-1212	1-3/16"-12	16.99	15.49	69.85	34.85
DAOF51334-1216	1-3/16"-12	16.99	15.49	71.12	41.2
DAOF51334-1612	1-7/16"-12	17.5	15.49	69.85	41.2
DAOF51334-1616	1-7/16"-12	17.5	20.6	71.1	41.2
DAOF51334-1620	1-7/16"-12	17.5	20.5	71.1	44.37
DAOF51334-2020	1-11/16"-12	17.5	26	64.3	44.37
DAOF51334-2024	1-11/16"-12	17.5	26	88.9	53.9
DAOF51334-2424	2"-12	17.5	32	88.9	53.9
DAOF51334-2432	2"-12	17.5	32	84.61	66.6
DAOF51334-3232	1-1/2"-12	22.25	45	89.36	66.6

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAOF51364

Straight Connector ORFS Male – Flange SAE Code 62

D

A

OF

5

1

3

6

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

ORFS

Male

Straight

Flange

SAE Code 62

Slip Flange Head

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAOF51364

Product Type:

Hydraulic adaptor, Flange

Standard:

ORFS

Structure


Straight

Connection Types:

Male × Flange SAE Code 62

Thread Types:

ORFS UNF × SAE Code 62 Flange

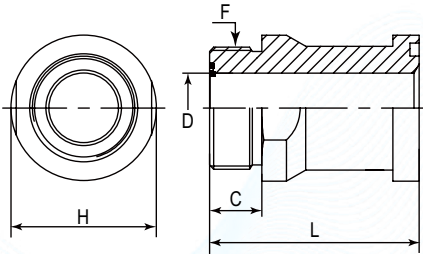

PART NUMBER	F (Thread)	C	D	L	H
#	UNF	mm	mm	mm	mm
DAOF51364-0808	13/16"-16	13	9.5	62.5	28.5
DAOF51364-1212	1-3/16"-12	17.02	15.47	69.9	34.85
DAOF51364-1216	1-3/16"-12	16.99	15.49	71.12	41.2
DAOF51364-1612	1-7/16"-12	17.5	15.47	69.85	41.2
DAOF51364-1616	1-7/16"-12	17.5	20.6	72.6	41.2
DAOF51364-1620	1-7/16"-12	17.5	20.6	77.5	44.37
DAOF51364-2020	1-11/16"-12	17.5	26	77.5	44.37
DAOF51364-2424	2"-12	17.5	32	88.9	53.9
DAOF51364-3232	2-1/2"-12	22.25	45	89.36	66.6



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DABPM1334

Straight Connector BSPP Male 60° – Flange SAE Code 61

D

A

BP

M

1

3

3

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

BSPP

Male

Straight

Flange

SAE Code 61

Slip Flange Head

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DABPM1334

Product Type:

Hydraulic adaptor, Flange

Standard:

BSPP

Structure:


Straight

Connection Types:

Male × Flange SAE Code 61

Thread Types:

BSPP 60° Cone × SAE Code 61 Flange

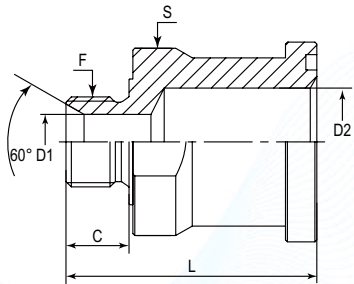

PART NUMBER	F (Thread)	C	D1	D2	L	S
#	BSPP	mm	mm	mm	mm	mm
DABPM1334-0808	1/2"-14	14	10	10	64.35	29
DABPM1334-1212	3/4"-14	16	16.7	16.7	64.9	32
DABPM1334-1220	3/4"-14	16	16.7	27.38	53.8	50
DABPM1334-1616	1"-11	19	22.2	22.2	68	41
DABPM1334-2020	1-1/4"-11	20	28.6	28.6	67.8	50
DABPM1334-2424	1-1/2"-11	22	33.3	33.3	84.4	55
DABPM1334-3232	2"-11	25	46	46	92.1	67
DABPM1334-3240	2"-11	25	46	46	95	70



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DABPM1364

Straight Connector BSPP Male 60° – Flange SAE Code 62

D

A

BP

M

1

3

6

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

BSPP

Male

Straight

Flange

SAE Code 62

Slip Flange Head

 German Technology Equipment



New-Standard

DME&JDE Code:

DABPM1364

Product Type:

Hydraulic adaptor, Flange

Standard:

BSPP

Structure


Straight

Connection Types:

Male × Flange SAE Code 62

Thread Types:

BSPP 60° Cone × SAE Code 62 Flange



PART NUMBER	F (Thread)	C	D1	D2	L	S
#	BSPP	mm	mm	mm	mm	mm
DABPM1364-0808	1/2"-14	14	10	10	64.35	28.5
DABPM1364-1212	3/4"-14	16	16.7	16.7	63.9	34.85
DABPM1364-1220	3/4"-14	16	16.7	27.38	70.2	44.37
DABPM1364-1616	1"-11	19	22.2	22.2	68	41.2
DABPM1364-2020	1-1/4"-11	20	28.6	28.6	74.2	50
DABPM1364-2424	1-1/2"-11	22	33.3	33.3	86.6	55
DABPM1364-3232	2"-11	25	46	46	99.5	67
DABPM1364-3240	2"-11	25	46	46	95	70

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DFLOP3

SAE Flange Plug with O Ring Code 61

D

FL

OP

3

Company

Product Range

Flange Type

Flange Series

DME

Flange

Plug with O Ring

Code 61

 German Technology Equipment



New-Standard

DME&JDE Code:

DFLOP3

Product Type:


Flange

Flange Type:

Plug with O Ring flange

Connection Type:

Flange Code 61



PART NUMBER	A	B	C	D	L
#	mm	mm	mm	mm	mm
DFLOP3-08	30.2	25.4	24	6.8	16
DFLOP3-12	38.1	31.75	31.75	6.73	14.22
DFLOP3-16	44.45	39.62	37.97	8	14.22
DFLOP3-20	50.8	44.45	43.05	8	14.22
DFLOP3-24	60.33	53.72	50.17	8	15.75
DFLOP3-32	71.42	63.25	62.2	9.53	15.75
DFLOP3-40	84.1	75.3	74	9.6	40

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DFLOP6

SAE Flange Plug with O Ring Code 62

D

FL

OP

6

Company

Product Range

Flange Type

Flange Series

DME

Flange

Plug with O Ring

Code 62

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DFLOP6

Product Type:


Flange

Flange Type:

Plug with O Ring flange

Connection Type:

Flange Code 61



PART NUMBER	A	B	C	D	L
#	mm	mm	mm	mm	mm
DFLOP6-08	31.8	25.4	24	7.8	18
DFLOP6-12	41.28	31.75	31.75	8.76	17.53
DFLOP6-16	47.63	39.62	38.1	9.53	20.57
DFLOP6-20	53.98	44.45	43.6	10.29	25.4
DFLOP6-24	63.5	53.72	50.55	12.57	30.23
DFLOP6-32	79.38	63.25	66.42	12.57	38.1



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DAJCM4334

45° Forged Elbows JIC Male 74° – Flange SAE Code 61

D

A

JC

M

4

3

3

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

JIC

Male

45° Elbow

Flange

SAE Code 61

Slip Flange Head

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DAJCM4334

Product Type:

Hydraulic adaptor, Flange

Standard:

JIC

Structure:


45° Forged Elbow

Connection Types:

Male × Flange SAE Code 61

Thread Types:

JIC 74° Cone × SAE Code 61 Flange



PART NUMBER	F (Thread)	C	D1	D2	L1	L2	S
#	UNF	mm	mm	mm	mm	mm	mm
DAJCM4334-1212	1-1/16"-12	29.50	33.48	33.48	45.00	60.50	47.63
DAJCM4334-1216	1-1/16"-12	24.33	15.52	21.44	37.30	47.00	33.30
DAJCM4334-1616	1-5/16"-12	24.33	21.44	21.44	37.30	47.00	33.30
DAJCM4334-1624	1-5/16"-12	24.33	21.44	33.48	41.50	60.50	47.63
DAJCM4334-2020	1-5/8"-12	25.00	27.38	27.38	40.38	51.82	41.28
DAJCM4334-2424	1-7/8"-12	29.50	33.48	33.48	45.00	60.50	47.63
DAJCM4334-3232	2-1/2"-12	35.00	45.24	45.24	56.39	76.20	63.50



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DEKRA

DIN

SAE

MA

DAJCM4334-B

45° Swept Elbows JIC Male 74° – Flange SAE Code 61

D

A

JC

M

4

3

3

4

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

Elbow Type

DME

Adaptor

JIC

Male

45° Elbow

Flange

SAE Code 61

Slip Flange Head

Swept

German Technology Equipment

New-Standard

DME&JDE Code:

DAJCM4334-B

Product Type:

Hydraulic adaptor, Flange

Standard:

JIC

Structure


45° Swept Elbows

Connection Types:

Male × Flange SAE Code 61

Thread Types:

JIC 74° Cone × SAE Code 61 Flange

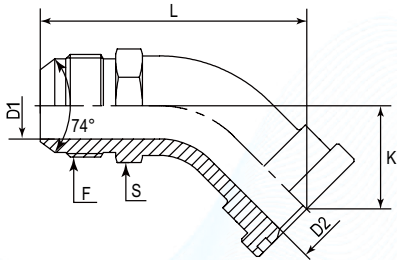

PART NUMBER	F (Thread)	D1	D2	L	K	S
#	UNF	mm	mm	mm	mm	mm
DAJCM4334-0808B	3/4"-16	9.3	9.3	78	25	22.23
DAJCM4334-1212B	1-1/16"-12	15.52	15.52	80	26	28.58
DAJCM4334-1216B	1-1/16"-12	15.52	15.52	109	31.5	28.58
DAJCM4334-1612B	1-5/16"-12	15.52	15.52	112	31.5	34.93
DAJCM4334-1616B	1-5/16"-12	21	21	114.5	33.5	34.93
DAJCM4334-1620B	1-5/16"-12	21	21	123.2	35.4	34.93
DAJCM4334-2016B	1-5/8"-12	21	21	98	31	42.86
DAJCM4334-2024B	1-5/8"-12	27.38	27.38	108	37	42.86
DAJCM4334-3224B	2-1/2"-12	33.48	33.48	158	55	70
DAJCM4334-3232B	2-1/2"-12	45.24	45.24	158	56	70



DAJCM4364

45° Forged Elbow JIC Male 74° – Flange SAE Code 62

D

A

JC

M

4

3

6

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

JIC

Male

45° Elbow

Flange

SAE Code 62

Slip Flange Head

German Technology Equipment

New-Standard

DME&JDE Code:

DAJCM4364

Product Type:

Hydraulic adaptor, Flange

Standard:

JIC

Structure


45° Forged Elbow

Connection Types:

Male × Flange SAE Code 62

Thread Types:

JIC 74° Cone × SAE Code 62 Flange



PART NUMBER	F (Thread)	C	D1	D2	L1	L2	S
#	UNF	mm	mm	mm	mm	mm	mm
DAJCM4364-1212	1-1/16"-12	24.5	15.52	15.52	32.5	40.5	27
DAJCM4364-1616	1-5/16"-12	23.14	21.44	21.44	38	47	33.3
DAJCM4364-2020	1-5/8"-12	25	27.38	27.38	40.4	51.8	41.28
DAJCM4364-2424	1-7/8"-12	29.5	33.48	33.48	45	60.5	47.63
DAJCM4364-3232	2-1/2"-12	35	45.24	45.24	56.39	76.5	63.5



DAJCM4364-B

45° Swept Elbow JIC Male 74° – Flange SAE Code 62

D

A

JC

M

4

3

6

4

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

Elbow Type

DME

Adaptor

JIC

Male

45° Elbow

Flange

SAE Code 62

Slip Flange Head

Swept

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM4364-B

Product Type:

Hydraulic adaptor, Flange

Standard:

JIC

Structure


45° Swept Elbow

Connection Types:

Male × Flange SAE Code 62

Thread Types:

JIC 74° Cone × SAE Code 62 Flange

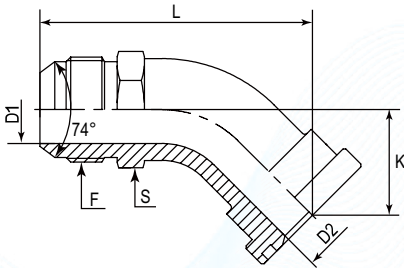

PART NUMBER	F (Thread)	D1	D2	L	K	S
#	UNF	mm	mm	mm	mm	mm
DAJCM4364-1212B	1-1/16"-12	15.5	15.5	85	29	28.58
DAJCM4364-1220B	1-1/16"-12	15.47	15.47	95	42	28.57
DAJCM4364-1616B	1-5/16"-12	20	20	105	42	34.93
DAJCM4364-1620B	1-5/16"-12	21	21	118.6	44	34.93
DAJCM4364-1624B	1-5/16"-12	21.44	21.44	105	41	34.93
DAJCM4364-2016B	1-5/8"-12	20	20	122	42	42.86
DAJCM4364-2020B	1-5/8"-12	26	26	126	44	42.86
DAJCM4364-2024B	1-5/8"-12	27.38	27.38	118	46	42.86
DAJCM4364-2420B	1-7/8"-12	26	26	125	36	50.8

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAOF54334

45° Forged Elbows ORFS Male – Flange SAE Code 61

D

A

OF

5

4

3

3

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

ORFS

Male

45° Elbow

Flange

SAE Code 61

Slip Flange Head

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF54334

Product Type:

Hydraulic adaptor, Flange

Standard:

ORFS

Structure:


45° Elbow

Connection Types:

Male × Flange SAE Code 61

Thread Types:

ORFS UNF × SAE Code 61 Flange



PART NUMBER	F1 (Thread)	C	D1	D2	L1	L2	S
#	UNF	mm	mm	mm	mm	mm	mm
DAOF54334-1212	1-3/16"-12	17.02	15.5	15.5	32.51	40.13	30.18
DAOF54334-1616	1-7/16"-12	17.5	20.6	20.6	38	47	33.3
DAOF54334-2020	1-11/16"-12	17.5	26	26	40	52	41.27
DAOF54334-2424	2"-12	17.5	32	32	45.2	60.5	47.63
DAOF54334-3232	2-1/2"-12	22.25	45	45	46	76.5	63.5

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DAOF54364

45° Forged Elbows ORFS Male – Flange SAE Code 62

D

A

OF

5

4

3

6

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

ORFS

Male

45° Elbow

Flange

SAE Code 62

Slip Flange Head

 German Technology Equipment



New-Standard

DME&JDE Code:

DAOF54364

Product Type:

Hydraulic adaptor, Flange

Standard:

ORFS

Structure


45° Swept Elbows

Connection Types:

Male × Flange SAE Code 62

Thread Types:

ORFS UNF × SAE Code 62 Flange



PART NUMBER	F1 (Thread)	C	D1	D2	L1	L2	S
#	UNF	mm	mm	mm	mm	mm	mm
DAOF54364-1212	1-3/16"-12	17.02	15.5	15.5	32.51	40.13	30.18
DAOF54364-1616	1-7/16"-12	17.5	20.6	20.6	37.3	47	33.35
DAOF54364-2020	1-11/16"-12	17.5	26	26	40	52	41.27
DAOF54364-2424	2"-12	29.5	32	32	45.2	60.5	47.63
DAOF54364-3232	2-1/2"-12	22.25	45	45	46	76.5	63.5



DAJCM9334

90° Forged Elbow JIC Male 74° – Flange SAE Code 61

D

A

JC

M

9

3

3

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

JIC

Male

90° Elbow

Flange

SAE Code 61

Slip Flange Head

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM9334

Product Type:

Hydraulic adaptor, Flange

Standard:

JIC

Structure:


90° Forged Elbow

Connection Types:

Male × Flange SAE Code 61

Thread Types:

JIC 74° Cone × SAE Code 61 Flange



PART NUMBER	F (Thread)	C	D1	D2	L1	L2	S
#	UNF	mm	mm	mm	mm	mm	mm
DAJCM9334-0808	3/4"-16	16.7	10	10	37.08	54.1	22.23
DAJCM9334-0812	3/4"-16	24.5	10.01	15.52	42.16	54.1	27
DAJCM9334-1212	1-1/16"-12	24.5	15.52	15.52	42.16	54.1	26.97
DAJCM9334-1216	1-1/16"-12	24.5	15.52	21.44	46	60.2	33.33
DAJCM9334-1220	1-1/16"-12	24.5	15.52	27.38	50.04	66.55	41.28
DAJCM9334-1224	1-1/16"-12	29.5	15.52	33.48	59.2	80	47.63
DAJCM9334-1612	1-5/16"-12	24.5	15.52	15.52	42.2	54.1	27
DAJCM9334-1616	1-5/16"-12	24.33	21.44	21.44	45.97	60.2	33.33
DAJCM9334-1620	1-5/16"-12	24.33	21.44	27.38	52.32	66.55	41.27
DAJCM9334-1624	1-5/16"-12	25	21.44	33.48	59.18	80.01	47.63
DAJCM9334-2016	1-5/8"-12	24.33	21.44	21.44	45.97	60.2	33.35
DAJCM9334-2020	1-5/8"-12	25	27.38	27.38	52.32	66.55	41.28
DAJCM9334-2024	1-5/8"-12	29.5	27.38	33.48	59.2	80	47.6
DAJCM9334-2420	1-7/8"-12	27.5	27.38	27.38	52.3	66.6	41.27
DAJCM9334-2424	1-7/8"-12	29.5	33.48	33.48	59.18	80	47.63
DAJCM9334-2432	1-7/8"-12	35	33.48	45.24	77.7	107.95	63.5
DAJCM9334-3224	2-1/2"-12	33.9	33.48	33.48	65.5	80	47.6
DAJCM9334-3232	2-1/2"-12	35	45.24	45.24	77.72	107.95	63.5
DAJCM9334-3240	2-1/2"-12	33.86	45.24	45.24	77.72	107.95	63.5



DAJCM9364

90° Forged Elbow JIC Male 74° – Flange SAE Code 62

D

A

JC

M

9

3

6

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

JIC

Male

90° Elbow

Flange

SAE Code 62

Slip Flange Head

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM9364

Product Type:

Hydraulic adaptor, Flange

Standard:

JIC

Structure


90° Forged Elbow

Connection Types:

Male × Flange SAE Code 62

Thread Types:

JIC 74° Cone × SAE Code 62 Flange



PART NUMBER	F (Thread)	C	D1	D2	L1	L2	S
#	UNF	mm	mm	mm	mm	mm	mm
DAJCM9364-0808	3/4"-16	16.7	10	10	37.1	54.1	22.23
DAJCM9364-0812	3/4"-16	24.5	10	15.52	42.16	54.1	26.97
DAJCM9364-1212	1-1/16"-12	24.5	15.52	15.52	42.16	54.1	27
DAJCM9364-1216	1-1/16"-12	24.4	15.52	21.44	45.97	60.2	33.35
DAJCM9364-1612	1-5/16"-12	24.5	15.52	15.52	42.16	54.1	27
DAJCM9364-1616	1-5/16"-12	23.14	21.44	21.44	45.97	60.2	33.33
DAJCM9364-1620	1-5/16"-12	23.14	21.44	21.44	52.3	70.1	41.27
DAJCM9364-1624	1-5/16"-12	25	21.44	33.48	54.7	80	47.6
DAJCM9364-2016	1-5/8"-12	24.33	21.44	21.44	45.97	60.2	41.27
DAJCM9364-2020	1-5/8"-12	25	27.38	27.38	52.32	70.1	41.28
DAJCM9364-2024	1-5/8"-12	29.5	27.38	33.48	59.2	80	47.6
DAJCM9364-2420	1-7/8"-12	27.51	33	27.38	55.5	70.1	47.6
DAJCM9364-2424	1-7/8"-12	29.5	33.48	33.48	59.18	80.01	47.63
DAJCM9364-2432	1-7/8"-12	35	33.48	45.24	77.7	107.95	63.5
DAJCM9364-3224	2-1/2"-12	35	45.24	33.48	77.72	107.95	63.5
DAJCM9364-3232	2-1/2"-12	35	45.24	45.24	77.7	107.95	63.5



DAJCM9334-B

90° Swept Elbows JIC Male 74° – Flange SAE Code 61

D

A

JC

M

9

3

3

4

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

Elbow Type

DME

Adaptor

JIC

Male

90° Elbow

Flange

SAE Code 61

Slip Flange Head

Swept Head

 German Technology Equipment



New-Standard

DME&JDE Code:

DAJCM9334-B

Product Type:

Hydraulic adaptor, Flange

Standard:

JIC

Structure:


90° Swept Elbows

Connection Types:

Male × Flange SAE Code 61

Thread Types:

JIC 74° Cone × SAE Code 61 Flange



PART NUMBER	F (Thread)	C	D1	D2	L1	L2	S
#	UNF	mm	mm	mm	mm	mm	mm
DAJCM9334-0808B	3/4"-16	16.69	9.3	9.3	60	46	22.23
DAJCM9334-0812B	3/4"-16	16.69	9.3	9.3	60	47	22.23
DAJCM9334-1212B	1-1/16"-12	21.95	15.52	15.52	70	53.8	28.57
DAJCM9334-1216B	1-1/16"-12	21.95	15	15	88	64	28.57
DAJCM9334-1220B	1-1/16"-12	21.95	15	15	90.1	70	28.57
DAJCM9334-1612B	1-5/16"-12	23.14	15.52	15.52	75	53.8	34.93
DAJCM9334-1616B	1-5/16"-12	23.14	21	21	86.1	60	34.93
DAJCM9334-1620B	1-5/16"-12	23.14	20	20	88	67	34.93
DAJCM9334-1624B	1-5/16"-12	23.14	21.44	21.44	88	82.5	34.93
DAJCM9334-2016B	1-5/8"-12	24.33	21.33	21.33	90	66	42.86
DAJCM9334-2020B	1-5/8"-12	24.33	27.38	27.38	98	76	42.93
DAJCM9334-2024B	1-5/8"-12	24.33	27.38	27.38	102	102.11	42.86
DAJCM9334-2424B	1-7/8"-12	27.51	33.32	33.32	116.08	102.11	50.8
DAJCM9334-3232B	2-1/2"-12	35	45.24	45.24	147	123	70



DAJCM9364-B

90° Swept Elbows JIC Male 74° – Flange SAE Code 62

D

A

JC

M

9

3

6

4

B

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

Elbow Type

DME

Adaptor

JIC

Male

90° Elbow

Flange

SAE Code 62

Slip Flange Head

Swept

German Technology Equipment

New-Standard

DME&JDE Code:

DAJCM9364-B

Product Type:

Hydraulic adaptor, Flange

Standard:

JIC

Structure


90° Swept Elbows

Connection Types:

Male × Flange SAE Code 62

Thread Types:

JIC 74° Cone × SAE Code 62 Flange



PART NUMBER	F (Thread)	C	D1	D2	L1	L2	S
#	UNF	mm	mm	mm	mm	mm	mm
DAJCM9364-0808B	3/4"-16	16.69	9.3	9.3	60	46	22.23
DAJCM9364-1212B	1-1/16"-12	21.95	15.5	15.5	71.88	57.91	28.58
DAJCM9364-1216B	1-1/16"-12	21.95	15	15	89.1	72.9	28.58
DAJCM9364-1612B	1-5/16"-12	23.14	15.5	15.5	74.42	57.91	34.93
DAJCM9364-1616B	1-5/16"-12	23.14	20	20	86.11	72.9	34.93
DAJCM9364-1620B	1-5/16"-12	23.14	20	20	88	78	34.93
DAJCM9364-1624B	1-5/16"-12	23.14	21.44	21.44	88	83	34.93
DAJCM9364-2016B	1-5/8"-12	24.33	20	20	89.92	72.9	42.86
DAJCM9364-2020B	1-5/8"-12	24.33	26	26	101.09	87.88	42.86
DAJCM9364-2024B	1-5/8"-12	24.33	26	26	110	96	42.86
DAJCM9364-2420B	1-7/8"-12	27.51	26	26	109.98	87.88	50.8
DAJCM9364-2424B	1-7/8"-12	27.51	33.48	33.48	116.08	102.11	50.8
DAJCM9364-2432B	1-7/8"-12	27.51	33.48	33.48	137.5	123	50.8

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DAOF59334

90° Forged Elbow ORFS Male – Flange SAE Code 61

D

A

OF

5

9

3

3

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

ORFS

Male

90° Elbow

Flange

SAE Code 61

Slip Flange Head

German Technology Equipment

New-Standard

DME&JDE Code:

DAOF59334

Product Type:

Hydraulic adaptor, Flange

Standard:

ORFS

Structure:


90° Forged Elbow

Connection Types:

Male × Flange SAE Code 61

Thread Types:

ORFS UNF × SAE Code 61 Flange



PART NUMBER	F (Thread)	C	D1	D2	L1	L2	S
#	UNF	mm	mm	mm	mm	mm	Inch
DAOF59334-1212	1-3/16"-12	17.02	15.52	15.52	42.16	54.1	1-3/16"
DAOF59334-1216	1-3/16"-12	24	15.5	20.6	46	60.2	1-5/16"
DAOF59334-1612	1-7/16"-12	25.2	20.6	15.52	46	54.5	1-7/16"
DAOF59334-1616	1-7/16"-12	25.2	20.6	20.6	46	60.2	1-7/16"
DAOF59334-1620	1-7/16"-12	25.2	20.6	20.6	52.3	66.55	1-5/8"
DAOF59334-2016	1-11/16"-12	25	21.44	21.44	52.3	65	1-5/8"
DAOF59334-2020	1-11/16"-12	25	26	26	52.32	66.55	1-5/8"
DAOF59334-2024	1-11/16"-12	25	26	26	59.2	80	1-7/8"
DAOF59334-2420	2"-12	29.5	27.38	27.38	59.18	72.5	1-7/8"
DAOF59334-2424	2"-12	29.5	32	33.48	59.18	80.01	1-7/8"

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:


DAOF59364

90° Forged Elbow ORFS Male – Flange SAE Code 62

D	A	OF	5	9	3	6	4
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Adaptor Type	Flange Series	Flange Head Type
DME	Adaptor	ORFS	Male	90° Elbow	Flange	SAE Code 62	Slip Flange Head



DME&JDE Code:	DAOF59364
Product Type:	Hydraulic adaptor, Flange
Standard:	ORFS
Structure	90° Forged Elbow
Connection Types:	Male × Flange SAE Code 62
Thread Types:	ORFS UNF × SAE Code 62 Flange



PART NUMBER	F (Thread)	C	D1	D2	L1	L2	S
#	UNF	mm	mm	mm	mm	mm	Inch
DAOF59364-1212	1-3/16"-12	17.02	15.47	15.47	42.2	54.1	1-3/16"
DAOF59364-1216	1-3/16"-12	24	15.47	21.44	46	60.2	1-5/16"
DAOF59364-1612	1-7/16"-12	25.2	20.6	15.52	46	59.5	1-5/16"
DAOF59364-1616	1-7/16"-12	25.5	20.6	20.6	46	60.2	1-5/16"
DAOF59364-1620	1-7/16"-12	25.2	20.6	27.38	53.33	70.1	1-5/8"
DAOF59364-2016	1-11/16"-12	24.33	26	21.44	45.97	60.2	1-5/8"
DAOF59364-2020	1-11/16"-12	25	26	26	52.32	70.1	1-5/8"
DAOF59364-2024	1-11/16"-12	25	26	33.48	59.2	80	1-7/8"
DAOF59364-2424	2"-12	29.5	32	32	59.18	80.01	1-7/8"


DABPM9334

90° Forged Elbow ORFS Male – Flange SAE Code 62

D	A	BP	M	9	3	3	4
Company	Product Range	Thread Types	Connection Type	Adaptor Structure	Adaptor Type	Flange Series	Flange Head Type
DME	Adaptor	BSPP	Male	90° Elbow	Flange	SAE Code 61	Slip Flange Head



DME&JDE Code:	DABPM9334
Product Type:	Hydraulic adaptor, Flange
Standard:	BSPP
Structure:	90° Forged Elbow
Connection Types:	Male × Flange SAE Code 61
Thread Types:	BSPP 60° Cone × SAE Code 61 Flange



PART NUMBER	F (Thread)	D1	D2	L1	L2	S
#	BSPP	mm	mm	mm	mm	mm
DABPM9334-0808	1/2"-14	11.1	10	37.2	54.1	22.23
DABPM9334-0812	1/2"-14	11.1	15.52	42.1	54.1	27
DABPM9334-1212	3/4"-14	16.7	15.52	42.1	54.1	27
DABPM9334-1216	3/4"-14	16.7	21.44	46	60.2	33.35
DABPM9334-1612	1"-11	22.2	15.52	46	59	33.35
DABPM9334-1616	1"-11	22.2	21.44	46	60.2	33.35
DABPM9334-1620	1"-11	22.2	27.38	52.3	66.55	41.28
DABPM9334-2020	1-1/4"-11	27.38	27.38	52.3	66.55	41.28
DABPM9334-2424	1-1/2"-11	33.3	33.3	60.5	80	47.6

DABPM9364

90° Forged Elbows BSPP Male 60° – Flange SAE Code 62

D

A

BP

M

9

3

6

4

Company

Product Range

Thread Types

Connection Type

Adaptor Structure

Adaptor Type

Flange Series

Flange Head Type

DME

Adaptor

BSPP

Male

90° Elbow

Flange

SAE Code 62

Slip Flange Head

 German Technology Equipment



New-Standard

- DME&JDE Code:

DABPM9364
- Product Type:


Hydraulic adaptor, Flange
- Standard:

BSPP
- Structure

90° Forged Elbow
- Connection Types:

Male × Flange SAE Code 62
- Thread Types:

BSPP 60° Cone × SAE Code 62 Flange



PART NUMBER	F (Thread)	D1	D2	L1	L2	S
#	BSPP	mm	mm	mm	mm	mm
DABPM9364-0808	1/2"-14	11.1	10	37.1	54.1	22.23
DABPM9364-0812	1/2"-14	11.1	15.52	42.1	54.1	27
DABPM9364-1212	3/4"-14	16.7	15.52	42.1	54.1	27
DABPM9364-1216	3/4"-14	16.7	21.44	46	60.2	33.35
DABPM9364-1612	1"-11	22.2	15.52	46	60	33.3
DABPM9364-1616	1"-11	22.2	21.44	46	60.2	33.35
DABPM9364-1620	1"-11	22.2	27.38	52.3	70.1	41.28
DABPM9364-2020	1-1/4"-11	27.38	27.38	52.3	70.1	41.28
DABPM9364-2424	1-1/2"-11	33.3	33.3	60.5	80.01	47.6


Web: <https://www.dmejde.com>
E-mail: info@dmejde.com




Certificate:



Hydraulic
Flange & Adaptor

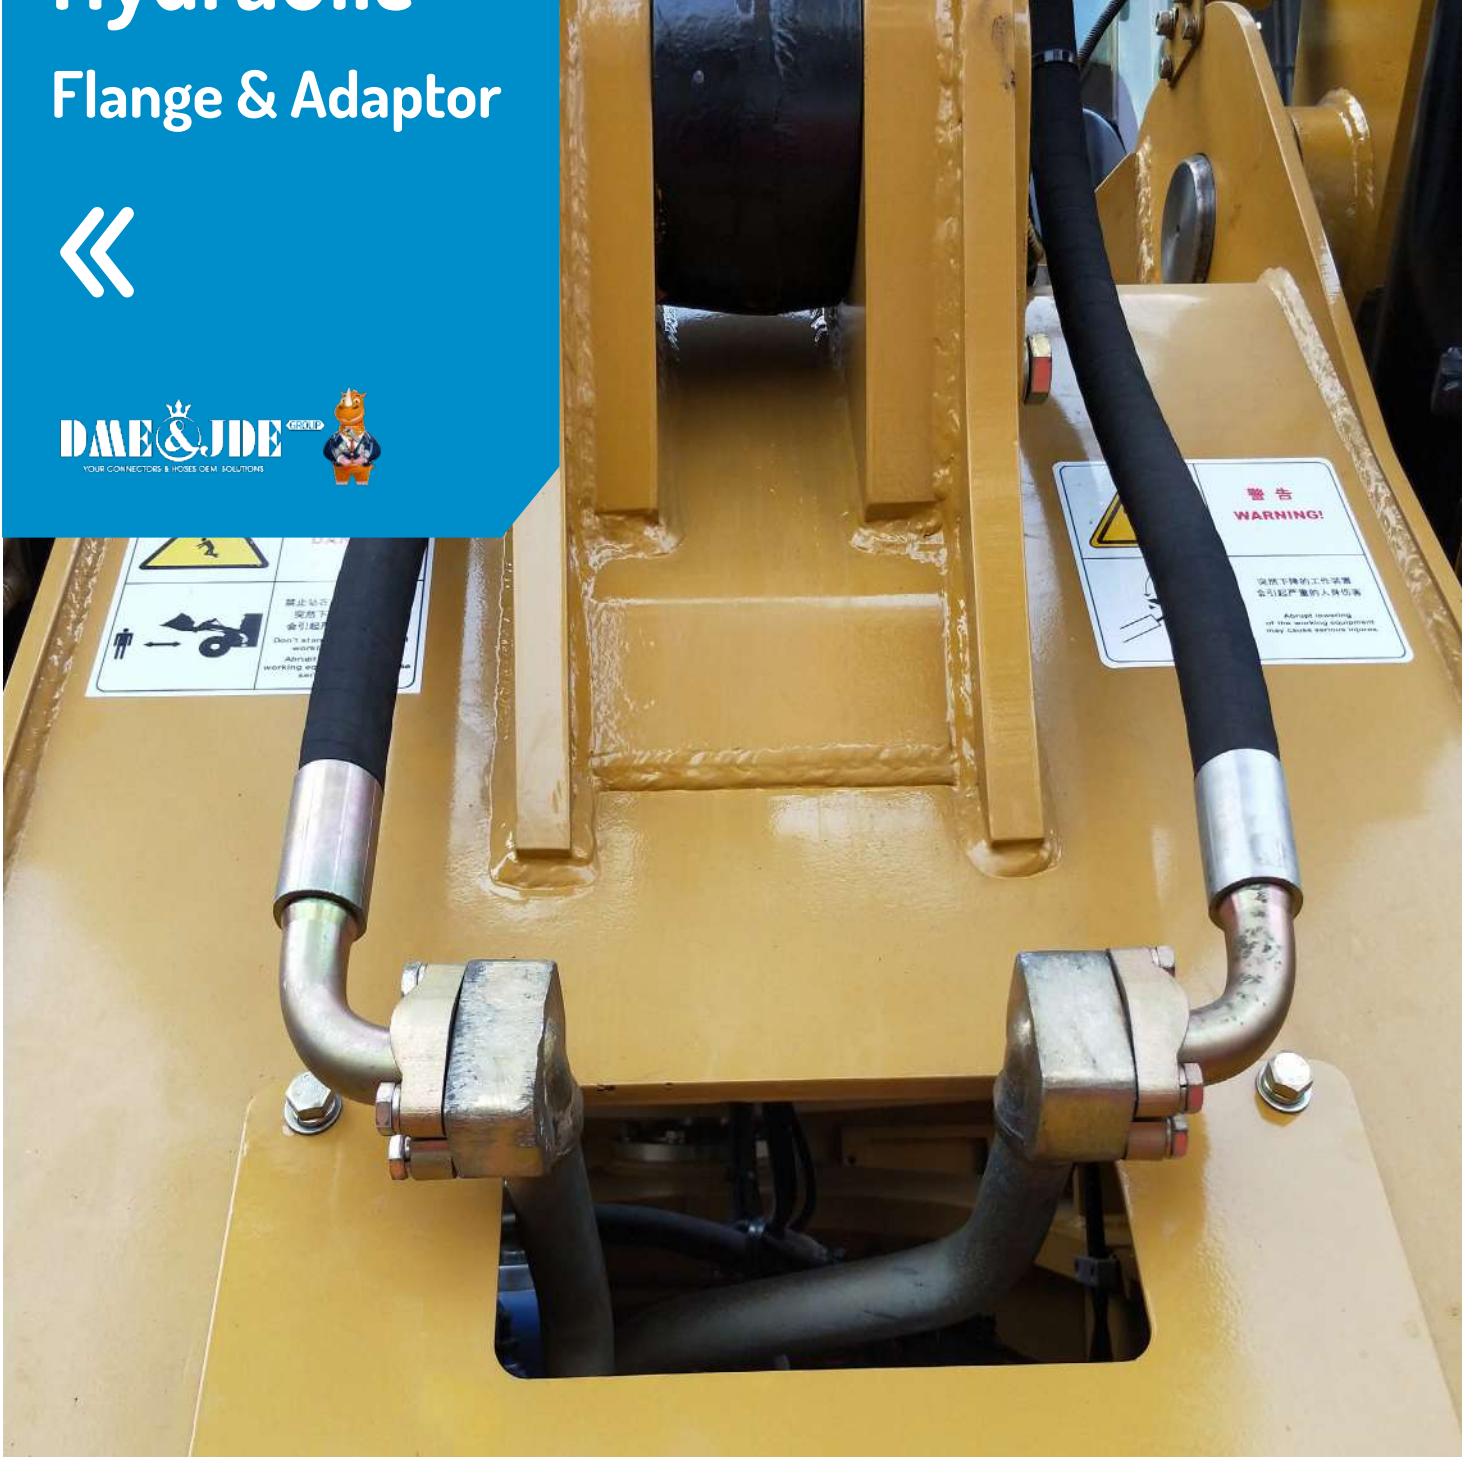

CODE SYSTEM (e.g. DP9MFS)

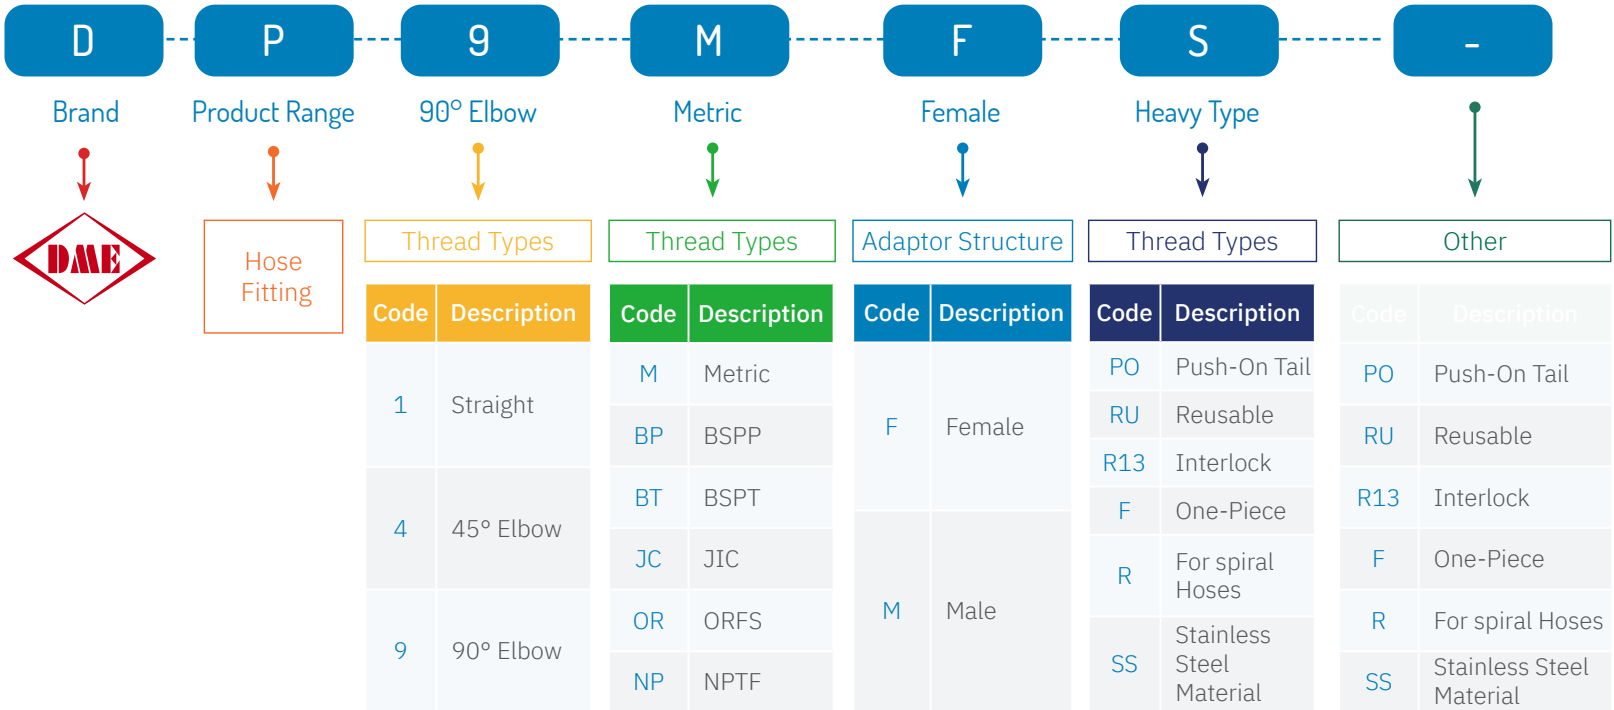

Hose Fitting

Hose fitting is a connecting part that connects flexible hoses to equipment ports. It supplies reliable connection and sealing for fluid power transmission.


DME&JDE Hose Fitting are with different fitting sizes and configurations for your fluid transmission line. No matter what your application, what pressure and what types of hoses, we can satisfy your requirements and enhance equipment performance. You can get not only the satisfied fittings, but also technical know-how and widest support system.






Hose Fitting Ferrule »

DPF1T
P785




No-Skive Ferrule for SAE100 R1AT
or EN853 1SN/EN857 1SC

DPF2T
P786




No-Skive Ferrule for SAE100 R1AT/
R2AT or EN853 1SN/2SN

DPF4T
P787




Skive Ferrule For SAE100 R9 R12
4SP 4SH Hose

DPF4T-NK
P788



No-Skive Ferrule For SAE100 R9 R12
4SP 4SH Hose

DPF5T
P789




No-Skive Ferrule For SAE100 R5 Hose

DPFR7
P790



No Skive Ferrule for SAE 100 R7
Hose

DPFR13
P791




Double Skive Ferrule for Heavy
Duty Spiral Hose SAE R13/R15

DPF01SN
P792




Ferrule For SAE100 R1AT/EN 853
1SN Hose

DPF04H
P793




Ferrule For 4SP, 4SH/12-16,
R12/06-16 Hose

DPFTF0
P794



Ferrule for Teflon Hose

DPF02SN
P795



Ferrule For SAE100 R2AT/EN 853
2SN Hose

DPF1T

No-Skive Ferrule for SAE100 R1AT or EN853 1SN/EN857 1SC

D

Company

DME

P

Product Range

Hose Fitting

F

Hose Fitting Type

Ferrule

1T

Available Hose Type

SAE100 R1AT or EN853 1SN/EN857 1SC

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DPF1T

Product Type:


Hose Fitting

Hose Fitting Type:

Ferrule

Available Hose Type:

SAE100 R1AT or EN853 1SN/EN857 1SC



PART NUMBER	Ø	D	L
#	Inch	mm	mm
DPF1T-03	3/16"	17.50	24.50
DPF1T-04	1/4"	21.00	30.00
DPF1T-05	5/16"	21.50	30.00
DPF1T-06	3/8"	24.30	32.00
DPF1T-08	1/2"	28.00	34.00
DPF1T-10	5/8"	31.30	37.00
DPF1T-12	3/4"	35.50	42.00
DPF1T-16	1"	43.50	51.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAkkS

PC

DEKRA

DIN

SE

MA

CE

UK CA

DPF2T

No-Skive Ferrule for SAE100 R1AT/R2AT or EN853 1SN/2SN

D

Company

DME

P

Product Range

Hose Fitting

F

Hose Fitting Type

Ferrule

2T

Available Hose Type

SAE100 R1AT/R2AT or EN853 1SN/2SN

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DPF2T

Product Type:


Hose Fitting

Hose Fitting Type:

Ferrule

Available Hose Type:

SAE100 R1AT/R2AT or EN853 1SN/2SN

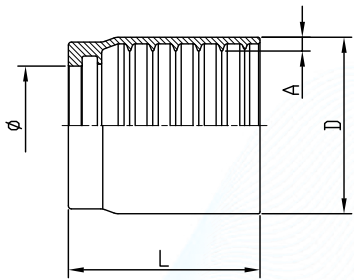

PART NUMBER	Ø	A	D	L
#	Inch	mm	mm	mm
DPF2T-03	3/16"	3.35	21	23
DPF2T-04	1/4"	3.55	23	30.5
DPF2T-05	5/16"	3.35	24	30
DPF2T-06	3/8"	3.20	26	32
DPF2T-08	1/2"	3.00	29	34
DPF2T-10	5/8"	3.35	33	37
DPF2T-12	3/4"	3.25	37	42
DPF2T-16	1"	4.05	47	51
DPF2T-20	1-1/4"	4.60	59	59
DPF2T-24	1-1/2"	5.50	67	67
DPF2T-32	2"	5.75	80	72

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAkkS

PC

DEKRA

DIN

SE

MA

CE

UK CA

DPF4T

Skive Ferule For SAE100 R9 R12 4SP 4SH Hose

D

P

F

4T

Company

Hose Fitting

Hose Fitting Type

Available Hose Type

DME

Hose Fitting

Ferrule

SAE100 R9 R12 4SP 4SH

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DPF4T

Product Type


Hose Fitting

Hose Fitting Type:

Ferrule

Available Hose Type:

SAE100 R9 R12 4SP 4SH

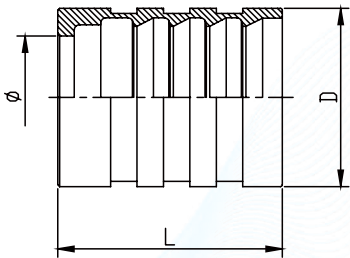

PART NUMBER	Ø	D	L
#	Inch	mm	mm
DPF4T-06	3/8"	25.50	33.50
DPF4T-08	1/2"	30.00	37.00
DPF4T-10	5/8"	34.00	40.00
DPF4T-12	3/4"	37.4	40.00
DPF4T-16	1"	46.00	60.00
DPF4T-20	1-1/4"	56.00	66.00
DPF4T-24	1-1/2"	65.00	76.50
DPF4T-32	2"	80.00	80.00



DPF4T-NK

No-Skive Ferule For SAE100 R9 R12 4SP 4SH Hose

D

P

F

4T

NK

Company

Hose Fitting

Hose Fitting Type

Available Hose Type

Ferrule Type

DME

Hose Fitting

Ferrule

SAE100 R9 R12 4SP 4SH

No-Skive

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DPF4T-NK

Product Type


Hose Fitting

Hose Fitting Type:

Ferrule

Available Hose Type:

SAE100 R9 R12 4SP 4SH

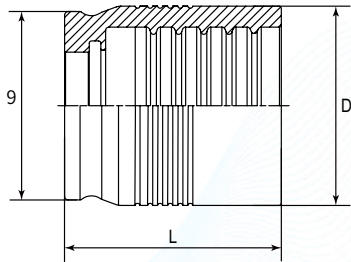

PART NUMBER	Ø	D	L
#	Inch	mm	mm
DPF4T-NK-06	3/8"	30.00	31.00
DPF4T-NK-08	1/2"	34.80	34.00
DPF4T-NK-10	5/8"	40.00	37.00
DPF4T-NK-12	3/4"	44.50	42.00
DPF4T-NK-16	1"	50.80	56.00



DPF5T

No-Skive Ferule For SAE100 R5 Hose

D

P

F

5T

Company

Hose Fitting

Hose Fitting Type

Available Hose Type

DME

Hose Fitting

Ferrule

SAE100 R5

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DPF5T

Product Type


Hose Fitting

Hose Fitting Type:

Ferrule

Available Hose Type:

SAE100 R5



PART NUMBER	Ø	D	L
#	Inch	mm	mm
DPF5T-03	3/16"	18.70	27.00
DPF5T-04	1/4"	19.50	30.00
DPF5T-05	5/16"	21.60	32.00
DPF5T-06	3/8"	25.00	32.00
DPF5T-08	1/2"	28.50	34.00
DPF5T-10	5/8"	33.00	37.00



DPFR7

No Skive Ferrule for SAE 100 R7 Hose

D

P

F

R7

Company

Hose Fitting

Hose Fitting Type

Available Hose Type

DME

Hose Fitting

Ferrule

SAE 100 R7

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DPFR7

Product Type


Hose Fitting

Hose Fitting Type:

Ferrule

Available Hose Type:

SAE 100 R7



PART NUMBER	Ø	D	L
#	Inch	mm	mm
DPFR7-03	3/16"	14.20	27.00
DPFR7-04	1/4"	17.00	29.00
DPFR7-05	5/16"	18.80	31.00
DPFR7-06	3/8"	21.00	31.00
DPFR7-08	1/2"	25.50	34.00
DPFR7-10	5/8"	31.50	36.00
DPFR7-12	3/4"	33.00	43.00



DPFR13

Double Skive Ferrule for Heavy Duty Spiral Hose SAE R13/R15

D

P

F

R13

Company

Product Range

Hose Fitting Type

Available Hose Type

DME

Hose Fitting

Ferrule

SAE R13/R15

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DPFR13

Product Type


Hose Fitting

Hose Fitting Type:

Ferrule

Available Hose Type:

SAE R13/R15



PART NUMBER	Ø	D	L
#	Inch	mm	mm
DPFR13-10	5/8"	36.00	43.50
DPFR13-12	3/4"	40.00	53.00
DPFR13-16	1"	49.00	66.00
DPFR13-20	1-1/4"	60.00	88.50
DPFR13-24	1-1/2"	69.30	102.00
DPFR13-32	2"	86.50	108.00



DPF01SN

Ferrule For SAE100 R1AT/EN 853 1SN Hose

D

P

F

01SN

Company

Product Range

Hose Fitting Type

Available Hose Type

DME

Hose Fitting

Ferrule

SAE100 R1AT/EN 853 1SN

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DPF01SN

Product Type


Hose Fitting

Hose Fitting Type:

Ferrule

Available Hose Type:

SAE100 R1AT/EN 853 1SN



PART NUMBER	Ø	D	L
#	Inch	mm	mm
DPF01SN-03	3/16"	17.50	24.50
DPF01SN-04	1/4"	19.80	30.00
DPF01SN-05	5/16"	20.80	31.00
DPF01SN-06	3/8"	23.30	32.00
DPF01SN-08	1/2"	27.00	34.00
DPF01SN-10	5/8"	30.00	37.00
DPF01SN-12	3/4"	34.00	43.00
DPF01SN-16	1"	42.60	50.00
DPF01SN-20	1-1/4"	52.00	59.00
DPF01SN-24	1-1/2"	58.00	74.00
DPF01SN-32	2"	72.00	78.00



DPF04H

Ferrule For 4SP, 4SH/12-16, R12/06-16 Hose

D

P

F

04H

Company

Product Range

Hose Fitting Type

Available Hose Type

DME

Hose Fitting

Ferrule

4SP、4SH/12-16、
R12/06-16

 German Technology Equipment



New-Standard

DME&JDE Code:

DPF04H

Product Type


Hose Fitting

Hose Fitting Type:

Ferrule

Available Hose Type:

4SP、4SH/12-16、R12/06-16

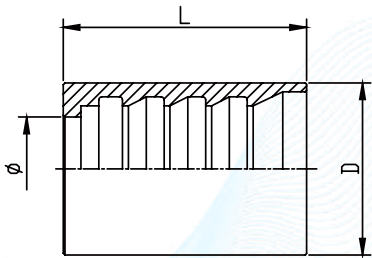

PART NUMBER	Ø	D	L
#	Inch	mm	mm
DPF04H-04	1/4"	6.00	37.50
DPF04H-06	3/8"	10.00	39.00
DPF04H-08	1/2"	12.00	41.00
DPF04H-10	5/8"	16.00	43.00
DPF04H-12	3/4"	20.00	51.00
DPF04H-16	1"	25.00	61.50
DPF04H-20	1-1/4"	32.00	67.50
DPF04H-24	1-1/2"	40.00	75.00
DPF04H-32	2"	50.00	79.00

DPFTFO

Ferrule for Teflon Hose

D

P

F

TF0

Company

Product Range

Hose Fitting Type

Available Hose Type

DME

Hose Fitting

Ferrule

Teflon

 German Technology Equipment



New-Standard

DME&JDE Code:

DPFTFO

Product Type


Hose Fitting

Hose Fitting Type:

Ferrule

Available Hose Type:

Teflon

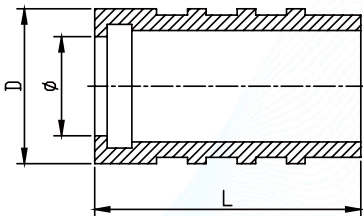

PART NUMBER	Ø	D	L
#	Inch	mm	mm
DPFTFO-04	1/4"	16.00	31.00
DPFTFO-05	5/16"	17.00	30.00
DPFTFO-06	3/8"	22.00	32.00
DPFTFO-08	1/2"	25.00	33.00
DPFTFO-10	5/8"	29.00	37.00
DPFTFO-12	3/4"	34.00	42.00
DPFTFO-16	1"	40.00	50.00

DPF02SN

Ferrule For SAE100 R2AT/EN 853 2SN Hose

D

P

F

02SN

Company

Product Range

Fitting Type

Available Hose Type

DME

Hose Fitting Type

Ferrule

SAE100 R2AT/EN 853 2SN

German Technology Equipment

New-Standard

DME&JDE Code:

DPF02SN

Product Type


Hose Fitting

Hose Fitting Type:

Ferrule

Available Hose Type:

SAE100 R2AT/EN 853 2SN



PART NUMBER	Ø	D	L
#	Inch	mm	mm
DPF02SN-04	1/4"	6.00	30.00
DPF02SN-05	5/16"	8.00	31.00
DPF02SN-06	3/8"	10.00	32.00
DPF02SN-08	1/2"	12.00	34.00
DPF02SN-10	5/8"	16.00	37.00
DPF02SN-12	3/4"	20.00	43.00
DPF02SN-16	1"	25.00	50.00
DPF02SN-20	1-1/4"	32.00	59.00
DPF02SN-24	1-1/2"	40.00	74.00
DPF02SN-32	2"	50.00	78.00

Certificate:



Hose Fitting

Ferrule



DME&JDE GROUP

YOUR CONNECTORS & HOSES OEM SOLUTIONS





Hose Fitting

Insert Hose Fitting »




DP1BPM P801 Straight Connector BSPP Male 60° Cone Seat Or Bonded Seal – Braided Hose And Spiral Hose	DP1JCM P802 Straight Connector JIC Male 74° Cone – Braided Hose And Spiral Hose	DP1MML P803 Straight Connector Metric Male 24° Cone Light Type – Braided Hose And Spiral Hose	DP1MMS P804 Straight Connector Metric Male 24° Cone Heavy Type – Braided Hose And Spiral Hose
DP1ORM P805 Straight Connector ORFS Male – Braided Hose And Spiral Hose	DP1NPM P806 Straight Connector NPTF Male – Braided Hose And Spiral Hose	DP1ORF P807 Straight Connector ORFS Female – Braided Hose And Spiral Hose	DP1MFF P808 Straight Connector Metric Female – Braided Hose And Spiral Hose
DP1MFS P809 Straight Connector Metric Female 24° Cone Heavy Type – Braided Hose And Spiral Hose	DP1MFL P810 Straight Connector Metric Female 24° Cone Light Type – Braided Hose And Spiral Hose	DP1KSF P811 Straight Connector JIS Metric Female 60° Cone – Braided Hose And Spiral Hose	DP1BPF P812 Straight Connector BSPP Swivel Female 60° Cone – Braided Hose And Spiral Hose
DP1JCF P813 Straight Connector JIC Swivel Female 74° Cone – Braided Hose And Spiral Hose	DP1TYF P814 Straight Connector JIS BSPP Swivel Female 60° Cone – Braided Hose And Spiral Hose	DP1NPS P815 Straight Connector NPSM Swivel Female 60° Cone – Braided Hose And Spiral Hose	DP1FL P816 Straight Connector SAE Flange Code 61 – Braided Hose And Spiral Hose



DP1FS


P817



Straight Connector SAE Flange Code 62 – Braided Hose And Spiral Hose

DP1MP


P818



Straight Connector Metric Standard Pipe DIN Type

DP4MP


P819



45° Elbow Metric Standard Pipe DIN Type – Braided Hose And Spiral Hose

DP9MP


P820



Straight Connector Metric Male 24° Cone Heavy Type – Braided Hose And Spiral Hose

DP1WF


P821



Straight Connector Metric Female – Braided Hose And Spiral Hose

DPSTS

P822



Socket Weld – Braided Hose And Spiral Hose

DDC


P823



Pushlock Hose Joiner

BJBMP


P824



Banjo Bolt Metric Male

BJBM


P825



Banjo Bolt Metric Male

BJBBP


P826



Banjo Bolt BSPP Male

BJM


P827



Banjo Metric

BJBP


P828



Banjo BSPP

DP4MFL


P829



45° Elbow Metric Female 24° Cone Light Type – Braided Hose And Spiral Hose

DP4MFS


P830



45° Elbow Metric Female 24° Cone Heavy Type – Braided Hose And Spiral Hose

DP4KSF


P831



45° Elbow Metric Female 60° Cone – Braided Hose And Spiral Hose

DP4ORF


P832



45° Elbow ORFS Female – Braided Hose And Spiral Hose

DP4BPF


P833



45° Elbow BSPP Swivel Female 60° Cone – Braided Hose And Spiral Hose

DP4JCF


P834



45° Elbow JIC Swivel Female 74° Cone – Braided Hose And Spiral Hose

DP4TYF


P835



45° Elbow JIS BSPP Swivel Female 60° Cone – Braided Hose And Spiral Hose

DP4FL


P836



45° Elbow SAE Flange Code 61 – Braided Hose And Spiral Hose

DP4FS


P837



45° Elbow SAE Flange Code 62 – Braided Hose And Spiral Hose

DP9MFL


P838



90° Elbow Metric Female 24° Cone Light Type – Braided Hose And Spiral Hose

DP9MFS


P839



90° Elbow Metric Female 24° Cone Heavy Type – Braided Hose And Spiral Hose

DP9KSF


P840



90° Elbow JIS Metric Female 60° Cone – Braided Hose And Spiral Hose

DP9ORF


P841



90° Elbow ORFS Female – Braided Hose And Spiral Hose

DP9JCF


P842



90° Elbow JIC Swivel Female 74° Cone – Braided Hose And Spiral Hose

DP9BPF


P843



90° Elbow BSPP Swivel Female 60° Cone – Braided Hose And Spiral Hose

DP9TYF


P844



90° Elbow JIS BSPP Swivel Female 60° Cone – Braided Hose And Spiral Hose

DP9FL


P845



90° Elbow SAE Flange Code 61 – Braided Hose And Spiral Hose

DP9FS

P846



90° Elbow SAE Flange Code 62 – Braided Hose And Spiral Hose

DP1BPM

Straight Connector BSPP Male 60° Cone Seat Or Bonded Seal – Braided Hose And Spiral Hose

D

P

1

BP

M

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

Straight

BSPP

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1BPM

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


BSPP 60° Cone Seat Or Bonded Seal

Structure:

Straight

Connection Type:

Male

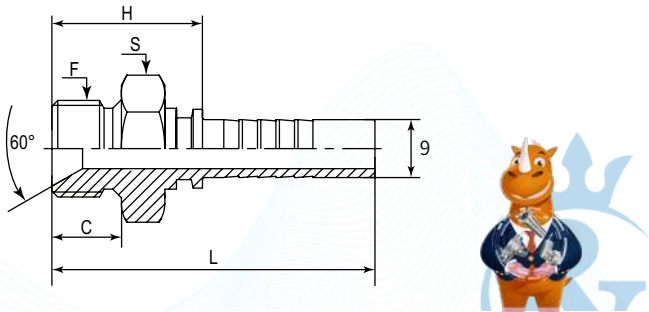

PART NUMBER	F (Thread)	Ø	H	C	L	S
#	BSPP	Inch	mm	mm	mm	mm
DP1BPM-0204	1/8"-28	1/4"	20.50	10.00	49.00	14
DP1BPM-0404	1/4"-19	1/4"	26.00	10.00	50.00	19
DP1BPM-0406	1/4"-19	3/8"	26.00	10.00	52.30	19
DP1BPM-0604	3/8"-19	1/4"	28.50	12.00	53.50	22
DP1BPM-0606	3/8"-19	3/8"	28.50	12.00	55.80	22
DP1BPM-0608	3/8"-19	1/2"	29.00	12.00	57.80	22
DP1BPM-0806	1/2"-14	3/8"	32.00	14.00	58.30	27
DP1BPM-0808	1/2"-14	1/2"	33.00	14.00	60.30	27
DP1BPM-1208	3/4"-14	1/2"	38.00	16.00	64.30	32
DP1BPM-1210	3/4"-14	5/8"	38.00	16.00	67.30	32
DP1BPM-1212	3/4"-14	3/4"	39.00	16.00	77.30	32
DP1BPM-1612	1"-11	3/4"	42.00	18.00	77.30	41
DP1BPM-1616	1"-11	1"	43.50	18.00	86.00	41
DP1BPM-2016	1-1/4"-11	1"	46.50	20.50	94.50	50
DP1BPM-2020	1-1/4"-11	1-1/4"	47.00	20.50	102.50	50
DP1BPM-2420	1-1/2"-11	1-1/4"	50.00	22.00	111.00	55
DP1BPM-2424	1-1/2"-11	1-1/2"	51.00	22.00	115.00	55
DP1BPM-3232	2"-11	2"	53.50	24.00	124.00	70

Certificate:



DP1JCM

Straight Connector JIC Male 74° Cone – Braided Hose And Spiral Hose

D

P

1

JC

M

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

Straight

JIC

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1JCM

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


JIC 74° Cone

Structure:

Straight

Connection Type:

Male

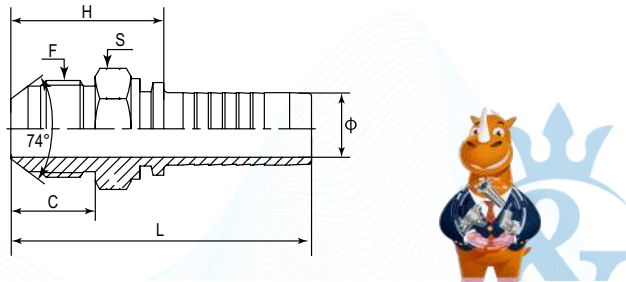

PART NUMBER	F (Thread)	Ø	C	H	L	S
#	UNF	Inch	mm	mm	mm	mm
DP1JCM-0404	7/16"-20	1/4"	14.00	26.20	54.00	12
DP1JCM-0504	1/2"-20	1/4"	14.00	26.20	54.00	14
DP1JCM-0604	9/16"-18	1/4"	14.10	26.20	54.00	17
DP1JCM-0606	9/16"-18	3/8"	14.10	27.20	57.00	17
DP1JCM-0806	3/4"-16	3/8"	16.70	31.00	60.80	22
DP1JCM-0808	3/4"-16	1/2"	16.70	31.70	63.00	22
DP1JCM-1008	7/8"-14	1/2"	19.30	34.70	66.00	24
DP1JCM-1010	7/8"-14	5/8"	19.30	35.20	69.00	24
DP1JCM-1012	7/8"-14	3/4"	19.30	37.60	77.20	27
DP1JCM-1208	1-1/16"-12	1/2"	21.90	39.00	70.30	27
DP1JCM-1210	1-1/16"-12	5/8"	21.90	39.50	73.30	27
DP1JCM-1212	1-1/16"-12	3/4"	21.90	40.40	80.00	27
DP1JCM-1216	1-1/16"-12	1"	21.90	41.60	89.10	32
DP1JCM-1612	1-5/16"-12	3/4"	23.10	42.20	81.80	36
DP1JCM-1616	1-5/16"-12	1"	23.10	43.00	90.50	36
DP1JCM-2016	1-5/8"-12	1"	24.30	47.30	94.50	46
DP1JCM-2020	1-5/8"-12	1-1/4"	24.30	48.50	102.50	46
DP1JCM-2420	1-7/8"-12	1-1/4"	27.50	67.50	121.50	50
DP1JCM-2424	1-7/8"-12	1-1/2"	27.50	53.50	121.50	50
DP1JCM-3232	2-1/2"-12	2"	33.90	72.00	144.00	65

Certificate:



DP1MML

Straight Connector Metric Male 24° Cone Light Type – Braided Hose And Spiral Hose

D

P

1

M

M

L

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Pressure Grade

DME

Hose Fitting

Straight

Metric

Male

Light Type

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1MML

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


Metric 24°Cone Light Type

Structure:

Straight

Connection Type:

Male

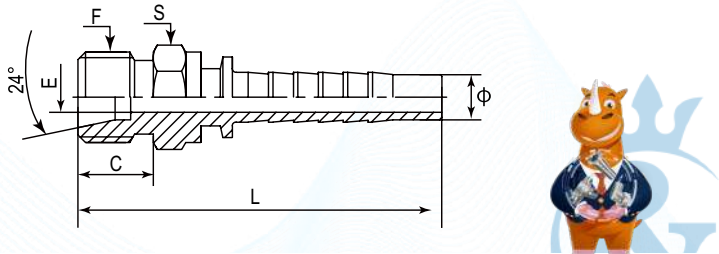

PART NUMBER	F (Thread)	Cone 24°	Ø	C	E	L	S
#	Metric	-	Inch	mm	mm	mm	mm
DP1MML-1204	M12X1.5	06L	1/4"	10.00	6.00	48.30	14
DP1MML-1404	M14X1.5	08L	1/4"	10.00	8.00	48.00	14
DP1MML-1604	M16X1.5	10L	1/4"	11.00	10.00	51.00	17
DP1MML-1606	M16X1.5	10L	3/8"	11.00	10.00	53.30	17
DP1MML-1806	M18X1.5	12L	3/8"	11.00	12.00	53.30	19
DP1MML-2206	M22X1.5	15L	3/8"	12.00	15.00	57.00	24
DP1MML-2208	M22X1.5	15L	1/2"	12.00	15.00	56.00	24
DP1MML-2610	M26X1.5	18L	5/8"	13.00	18.00	60.30	27
DP1MML-2612	M26X1.5	18L	3/4"	12.00	18.00	70.00	27
DP1MML-3012	M30X2	22L	3/4"	14.00	22.00	69.30	32
DP1MML-3612	M36X2	28L	3/4"	14.00	28.00	85.00	36
DP1MML-3616	M36X2	28L	1"	14.00	28.00	88.00	36
DP1MML-4520	M45X2	35L	1-1/4"	19.00	35.00	97.00	46
DP1MML-5220	M52X2	42L	1-1/4"	16.00	42.00	107.00	55
DP1MML-5224	M52X2	42L	1-1/2"	16.00	42.00	113.00	55

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP1MMS

Straight Connector Metric Male 24° Cone Heavy Type – Braided Hose And Spiral Hose

D

P

1

M

M

S

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Pressure Grade

DME

Hose Fitting

Straight

Metric

Male

Heavy Type

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1MMS

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


Metric 24° Cone Heavy Type

Structure:

Straight

Connection Type:

Male

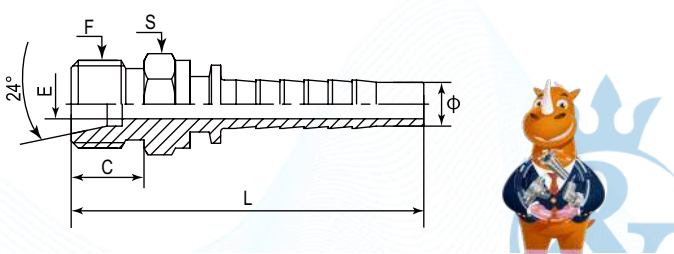

PART NUMBER	F (Thread)	Cone 24°	Ø	C	E	L	S
#	Metric	-	Inch	mm	mm	mm	mm
DP1MMS-1404	M14X1.5	06S	1/4"	12.00	6.00	51.50	14
DP1MMS-1604	M16X1.5	08S	1/4"	12.00	8.00	53.50	17
DP1MMS-1804	M18X1.5	10S	1/4"	12.00	10.00	54.00	19
DP1MMS-2006	M20X1.5	12S	3/8"	12.00	12.00	58.30	22
DP1MMS-2208	M22X1.5	14S	1/2"	14.00	14.00	60.30	24
DP1MMS-2408	M24X1.5	16S	1/2"	14.00	16.00	63.30	27
DP1MMS-3010	M30X2	20S	5/8"	16.00	20.00	69.30	32
DP1MMS-3012	M30X2	20S	3/4"	16.00	20.00	77.30	32
DP1MMS-3612	M36X2	25S	3/4"	18.00	25.00	79.30	41
DP1MMS-3616	M36X2	25S	1"	18.00	25.00	92.00	36
DP1MMS-4216	M42X2	30S	1"	20.00	30.00	96.00	46
DP1MMS-4220	M42X2	30S	1-1/4"	20.00	30.00	103.00	46
DP1MMS-5220	M52X2	38S	1-1/4"	22.00	38.00	107.00	55
DP1MMS-5224	M52X2	38S	1-1/2"	22.00	38.00	117.00	55

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP1ORM

Straight Connector ORFS Male – Braided Hose And Spiral Hose

D

P

1

OR

M

Company

Hose Fitting

Fitting Structure

Standard

Connection Type

DME

Hose Fitting

Straight

ORFS

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DP1ORM

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


UNF

Structure:

Straight

Connection Type:

Male

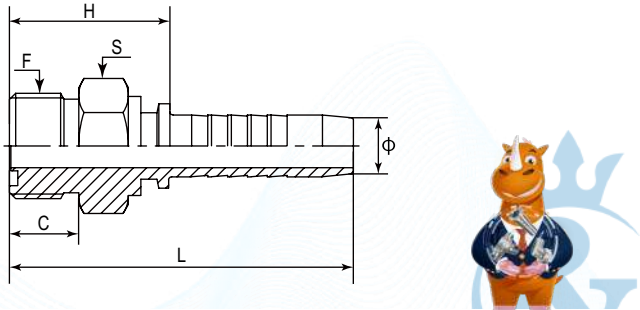

PART NUMBER	F (Thread)	Ø	H	C	L	S
#	UNF	Inch	mm	mm	mm	mm
DP1ORM-0404	9/16"-18	1/4"	23.50	9.80	50.70	17
DP1ORM-0604	11/16"-16	1/4"	26.00	11.20	53.20	19
DP1ORM-0606	11/16"-16	3/8"	26.00	11.20	55.50	19
DP1ORM-0806	13/16"-16	3/8"	28.00	12.80	58.50	22
DP1ORM-0808	13/16"-16	1/2"	29.00	12.80	60.30	22
DP1ORM-1008	1"-14	1/2"	33.50	15.49	65.20	27
DP1ORM-1010	1"-14	5/8"	33.50	15.49	68.20	27
DP1ORM-1208	1-3/16"-12	1/2"	35.00	17.02	66.70	32
DP1ORM-1210	1-3/16"-12	5/8"	35.00	17.02	69.70	32
DP1ORM-1212	1-3/16"-12	3/4"	36.00	17.02	75.70	32
DP1ORM-1612	1-7/16"-12	3/4"	36.50	17.50	76.20	41
DP1ORM-1616	1-7/16"-12	1"	38.00	17.50	84.90	41
DP1ORM-2020	1-11/16"-12	1-1/4"	40.00	17.50	101.00	46
DP1ORM-2424	2"-12	1-1/2"	43.00	17.50	113.50	55



Certificate:

DP1NPM

Straight Connector NPTF Male – Braided Hose And Spiral Hose

D

P

1

NP

M

Company

Hose Fitting

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

Straight

NPTF

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DP1NPM

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


NPTF

Structure:

Straight

Connection Type:

Male

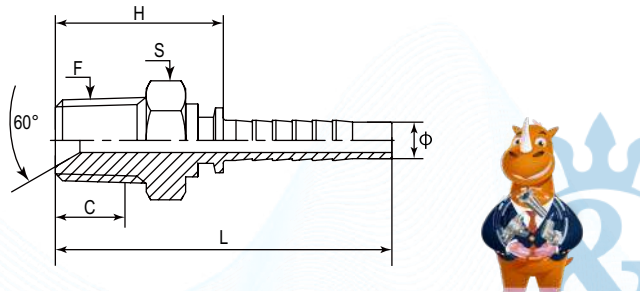

PART NUMBER	F (Thread)	Ø	H	C	L	S
#	NPTF	Inch	mm	mm	mm	mm
DP1NPM-0204	1/8"-27	1/4"	22.20	10.50	50.00	12
DP1NPM-0404	1/4"-18	1/4"	27.70	15.00	55.50	17
DP1NPM-0406	1/4"-18	3/8"	27.20	15.00	57.00	17
DP1NPM-0604	3/8"-18	1/4"	29.20	16.00	57.00	19
DP1NPM-0606	3/8"-18	3/8"	29.50	16.00	59.20	19
DP1NPM-0608	3/8"-18	1/2"	30.70	16.00	62.00	19
DP1NPM-0804	1/2"-14	1/4"	33.90	19.50	61.70	22
DP1NPM-0806	1/2"-14	3/8"	34.20	19.50	64.00	22
DP1NPM-0808	1/2"-14	1/2"	34.70	19.50	66.00	22
DP1NPM-0810	1/2"-14	5/8"	37.00	19.50	70.80	24
DP1NPM-0812	1/2"-14	3/4"	38.40	19.50	78.00	27
DP1NPM-1208	3/4"-14	1/2"	37.80	19.50	69.10	27
DP1NPM-1210	3/4"-14	5/8"	38.00	19.50	71.80	27
DP1NPM-1212	3/4"-14	3/4"	38.40	19.50	78.00	27
DP1NPM-1612	1"-11-1/2	3/4"	44.40	25.50	84.00	36
DP1NPM-1616	1"-11-1/2	1"	44.50	25.50	92.00	36
DP1NPM-2016	1-1/4"-11-1/2	1"	47.50	26.50	95.00	46
DP1NPM-2020	1-1/4"-11-1/2	1-1/4"	49.00	26.50	103.00	46
DP1NPM-2424	1-1/2"-11-1/2	1-1/2"	51.00	27.50	119.00	50
DP1NPM-3232	2"-11-1/2	2"	55.00	27.50	127.00	65



Certificate:

DP1ORF

Straight Connector ORFS Female – Braided Hose And Spiral Hose

D

P

1

OR

F

Company

Hose Fitting

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

Straight

ORFS

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1ORF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


UNF

Structure:

Straight

Connection Type:

Female

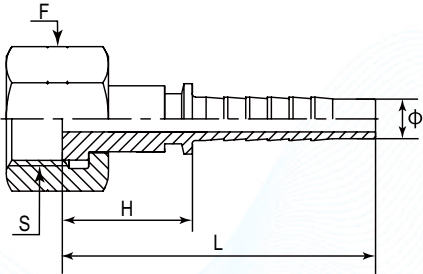

PART NUMBER	F (Thread)	Ø	H	L	S
#	UNF	Inch	mm	mm	mm
DP1ORF-0404	9/16"-18	1/4"	21.00	49.50	19
DP1ORF-0604	11/16"-16	1/4"	23.00	51.50	22
DP1ORF-0606	11/16"-16	3/8"	23.00	53.50	22
DP1ORF-0806	13/16"-16	3/8"	26.00	56.50	27
DP1ORF-0808	13/16"-16	1/2"	26.50	59.50	27
DP1ORF-1008	1"-14	1/2"	30.00	63.00	30
DP1ORF-1010	1"-14	5/8"	30.00	66.00	30
DP1ORF-1210	1-3/16"-12	5/8"	33.00	69.00	36
DP1ORF-1212	1-3/16"-12	3/4"	33.50	74.50	36
DP1ORF-1616	1-7/16"-12	1"	35.50	90.50	41
DP1ORF-2020	1-11/16"-12	1-1/4"	36.00	97.00	50
DP1ORF-2424	2"-12	1-1/2"	36.50	107.00	60



Certificate:



DP1MFF

Straight Connector Metric Female - Braided Hose And Spiral Hose

D

P

1

M

F

F

Company

Hose Fitting

Fitting Structure

Thread Types

Connection Type

Sealing Method

DME

Hose Fitting

Straight

Metric

Female

O-Ring

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1MFF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:

UNF

Structure:


Straight

Connection Type:

Female

Sealing Method:

O rings

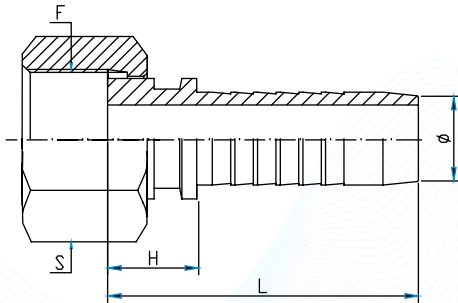

PART NUMBER	F (Thread)	Ø	H	L	S
#	Metric	mm	mm	mm	mm
DP1MFF-1404	M14×1.5	1/4"	15.5	44.0	19
DP1MFF-1604	M16×1.5	1/4"	15.0	43.5	19
DP1MFF-1804	M18×1.5	1/4"	16.0	44.5	22
DP1MFF-2006	M20×1.5	3/8"	17.0	47.0	27
DP1MFF-2208	M22×1.5	1/2"	17.5	48.8	27
DP1MFF-2408	M24×1.5	1/2"	17.5	48.8	30
DP1MFF-3010	M30×2	5/8"	19.2	58.8	36
DP1MFF-3012	M30×2	3/4"	19.2	58.8	36
DP1MFF-3612	M36×2	3/4"	20.7	60.3	46
DP1MFF-3616	M36×2	1"	20.7	69.0	46
DP1MFF-4216	M42×2	1"	26.0	73.2	50
DP1MFF-4220	M42×2	1-1/4"	26.0	80.0	50
DP1MFF-5220	M52×2	1-1/4"	26.0	80.0	60
DP1MFF-5224	M52×2	1-1/2"	26.0	94.0	60



Certificate:



DP1MFS

Straight Connector Metric Female 24° Cone Heavy Type – Braided Hose And Spiral Hose

D

P

1

M

F

S

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Pressure Grade

DME

Hose Fitting

Straight

Metric

Female

Heavy Type

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1MFS

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


Metric 24° Cone Heavy Type

Structure:

Straight

Connection Type:

Female

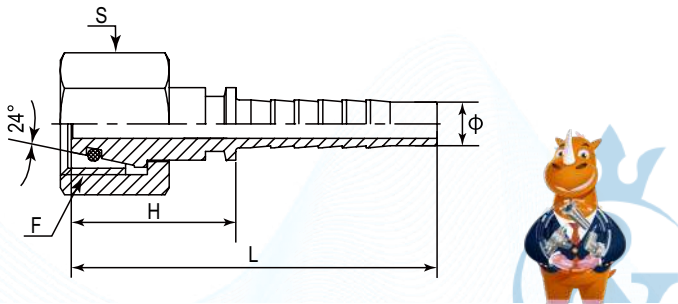

PART NUMBER	F (Thread)	Cone 24°	Ø	H	L	S
#	Metric	-	mm	mm	mm	mm
DP1MFS-1404	M14X1.5	06S	1/4"	22.70	50.50	17
DP1MFS-1604	M16X1.5	08S	1/4"	24.20	52.00	19
DP1MFS-1804	M18X1.5	10S	1/4"	24.70	52.50	22
DP1MFS-2006	M20X1.5	12S	3/8"	25.50	55.30	24
DP1MFS-2208	M22X1.5	14S	1/2"	27.00	58.30	27
DP1MFS-2408	M24X1.5	16S	1/2"	27.00	58.30	30
DP1MFS-3010	M30X2	20S	5/8"	33.50	67.30	36
DP1MFS-3012	M30X2	20S	3/4"	33.70	73.30	36
DP1MFS-3612	M36X2	25S	3/4"	30.70	70.30	46
DP1MFS-3616	M36X2	25S	1"	32.50	79.00	46
DP1MFS-4216	M42X2	30S	1"	35.50	82.00	50
DP1MFS-4220	M42X2	38S	1-1/4"	35.50	90.00	50
DP1MFS-5220	M52X2	38S	1-1/4"	35.00	89.00	60
DP1MFS-5224	M52X2	38S	1-1/2"	48.00	118.00	60

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP1MFL

Straight Connector Metric Female 24° Cone Light Type – Braided Hose And Spiral Hose

D

P

1

M

F

L

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Pressure Grade

DME

Hose Fitting

Straight

Metric

Female

Light Type

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1MFL

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


Metric 24° Cone Light Type

Structure:

Straight

Connection Type:

Female

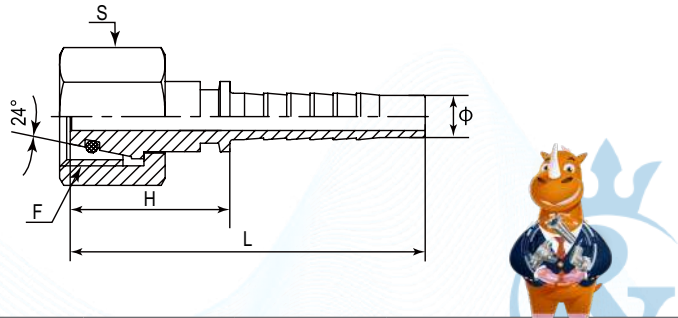

PART NUMBER	F (Thread)	Cone 24°	Ø	H	L	S
#	Metric	-	mm	mm	mm	mm
DP1MFL-1204	M12X1.5	06L	1/4"	22.70	49.50	14
DP1MFL-1404	M14X1.5	08L	1/4"	22.70	50.50	17
DP1MFL-1406	M14X1.5	10L	3/8"	23.00	52.80	17
DP1MFL-1604	M16X1.5	10L	1/4"	21.70	49.50	19
DP1MFL-1606	M16X1.5	10L	3/8"	24.80	54.60	19
DP1MFL-1806	M18X1.5	12L	3/8"	25.50	55.30	22
DP1MFL-2206	M22X1.5	15L	3/8"	25.50	55.30	27
DP1MFL-2208	M22X1.5	15L	1/2"	26.00	57.30	27
DP1MFL-2210	M22X1.5	18L	5/8"	25.00	58.80	27
DP1MFL-2610	M26X1.5	18L	5/8"	31.50	65.30	32
DP1MFL-2612	M26X1.5	18L	3/4"	28.00	68.00	32
DP1MFL-3012	M30X2	22L	3/4"	32.20	71.80	36
DP1MFL-3612	M36X2	28L	3/4"	34.70	74.30	41
DP1MFL-3616	M36X2	28L	1"	34.80	82.00	41
DP1MFL-4520	M45X2	35L	1-1/4"	35.00	89.00	55
DP1MFL-5220	M52X2	42L	1-1/4"	39.00	100.00	60
DP1MFL-5224	M52X2	42L	1-1/2"	38.00	106.00	60

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP1KSF

Straight Connector JIS Metric Female60° Cone – Braided Hose And Spiral Hose

D

P

1

KS

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

Straight

JIS Metric

Female

German Technology Equipment

New-Standard

DME&JDE Code:

DP1KSF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


JIS Metric 60° Cone

Structure:

Straight

Connection Type:

Female

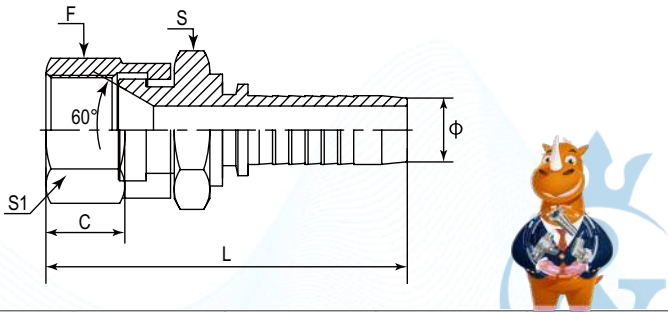

PART NUMBER	F (Thread)	Ø	C	L	S	S1
#	Metric	Inch	mm	mm	mm	mm
DP1KSF-1204	M12X1.5	1/4"	9.00	48.50	17.00	17
DP1KSF-1404	M14X1.5	1/4"	10.50	51.50	19.00	19
DP1KSF-1406	M14X1.5	3/8"	10.50	51.00	19.00	19
DP1KSF-1604	M16X1.5	1/4"	10.00	52.50	17.00	22
DP1KSF-1605	M16X1.5	5/16"	10.00	54.00	17.00	22
DP1KSF-1606	M16X1.5	3/8"	10.00	54.00	17.00	22
DP1KSF-1806	M18X1.5	3/8"	11.50	54.00	24.00	24
DP1KSF-1808	M18X1.5	1/2"	11.50	57.50	24.00	24
DP1KSF-2008	M20X1.5	1/2"	12.00	61.50	27.00	24
DP1KSF-2208	M22X1.5	1/2"	14.00	58.50	27.00	27
DP1KSF-2408	M24X1.5	1/2"	15.00	60.50	30.00	30
DP1KSF-2410	M24X1.5	5/8"	15.00	64.00	30.00	30
DP1KSF-3012	M30X1.5	3/4"	18.30	69.50	36.00	36
DP1KSF-3312	M33X1.5	3/4"	21.30	72.00	41.00	41
DP1KSF-3316	M33X1.5	1"	21.30	87.00	41.00	41
DP1KSF-3620	M36X1.5	1-1/4"	20.00	96.50	46.00	46
DP1KSF-4224	M42X1.5	1-1/2"	18.80	107.00	55.00	55

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DP1BPF

Straight Connector BSPP Swivel Female 60° Cone – Braided Hose And Spiral Hose

D

P

1

BP

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

Straight

BSPP

Swivel Female

German Technology Equipment

New-Standard

DME&JDE Code:

DP1BPF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


BSPP 60° Cone

Structure:

Straight

Connection Type:

Swivel Female

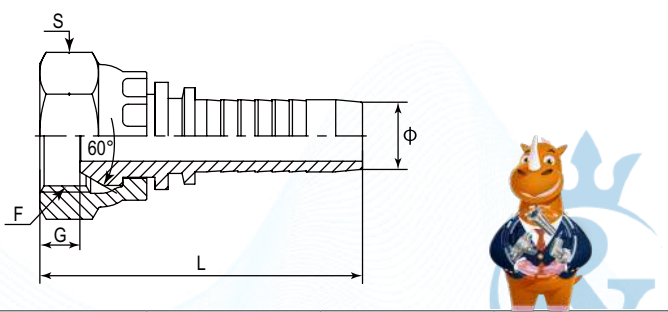

PART NUMBER	F (Thread)	Ø	G	L	S
#	BSPP	mm	mm	mm	mm
DP1BPF-0204	G 1/8"	1/4"	4.3	46.5	14
DP1BPF-0404	G 1/4"	1/4"	5.2	47.2	19
DP1BPF-0604	G 3/8"	1/4"	5.2	49.2	22
DP1BPF-0606	G 3/8"	3/8"	6	50.2	22
DP1BPF-0806	G 1/2"	3/8"	6.5	53.2	27
DP1BPF-0808	G 1/2"	1/2"	6.5	55.7	27
DP1BPF-1008	G 5/8"	1/2"	9.7	57.2	30
DP1BPF-1010	G 5/8"	5/8"	9.7	58.7	30
DP1BPF-1212	G 3/4"	3/4"	8.7	67.6	32
DP1BPF-1616	G 1"	1"	10.5	84.8	41
DP1BPF-2020	G 1-1/4"	1-1/4"	10.1	93.9	50
DP1BPF-2424	G 1-1/2"	1-1/2"	12.5	106.5	55
DP1BPF-3232	G 2"	2"	16.1	113	70

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DP1JCF

Straight Connector JIC Swivel Female 74° Cone – Braided Hose And Spiral Hose

D

P

1

JC

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

Straight

JIC

Swivel Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DP1JCF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


JIC 74° Cone

Structure:

Straight

Connection Type:

Swivel Female

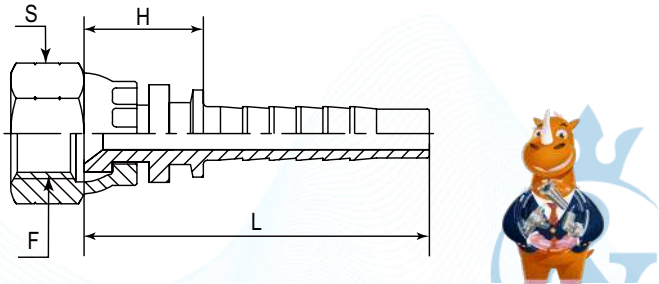

PART NUMBER	F (Thread)	Ø	H	L	S
#	UNF	mm	mm	mm	mm
DP1JCF-0404	7/16"-20	1/4"	15.20	43.00	17
DP1JCF-0504	1/2"-20	1/4"	15.20	43.00	17
DP1JCF-0505	1/2"-20	5/16"	15.50	45.20	17
DP1JCF-0604	9/16"-18	1/4"	14.70	42.50	19
DP1JCF-0606	9/16"-18	1/4"	15.70	45.50	19
DP1JCF-0806	3/4"-16	3/8"	17.70	47.50	24
DP1JCF-0808	3/4"-16	1/2"	18.20	49.50	24
DP1JCF-1008	7/8"-14	1/2"	19.20	50.50	27
DP1JCF-1010	7/8"-14	5/8"	19.70	53.50	27
DP1JCF-1012	7/8"-14	3/4"	20.70	60.30	27
DP1JCF-1208	1-1/16"-12	1/2"	20.50	51.80	32
DP1JCF-1210	1-1/16"-12	5/8"	21.20	55.00	32
DP1JCF-1212	1-1/16"-12	3/4"	21.40	61.00	32
DP1JCF-1216	1-1/16"-12	1"	22.20	69.70	32
DP1JCF-1612	1-5/16"-12	3/4"	21.70	61.30	41
DP1JCF-1616	1-5/16"-12	1"	22.50	70.00	41
DP1JCF-2016	1-5/8"-12	1"	24.50	72.00	50
DP1JCF-2020	1-5/8"-12	1-1/4"	26.00	80.00	50
DP1JCF-2420	1-7/8"-12	1-1/4"	26.50	80.50	55
DP1JCF-2424	1-7/8"-12	1-1/2"	26.50	94.50	55
DP1JCF-3232	2-1/2"-12	2"	27.00	99.00	70

Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

SGS

PC

DEKRA

DIN

SAE

MA

CE

UK CA

DP1TYF

Straight Connector JIS BSPP Swivel Female 60° Cone – Braided Hose And Spiral Hose

D

P

1

TY

M

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

Straight

JIS BSPP

Swivel Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DP1TYF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


JIC BSPP 60° Cone

Structure:

Straight

Connection Type:

Swivel Female

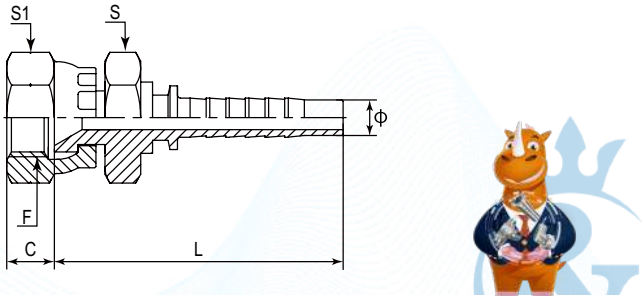

PART NUMBER	F (Thread)	Ø	C	L	S	S1
#	BSPP	Inch	mm	mm	mm	mm
DP1TYF-0404	1/4"-19	1/4"	8.00	48.50	19.00	19
DP1TYF-0604	3/8"-19	1/4"	9.00	51.50	22.00	22
DP1TYF-0606	3/8"-19	3/8"	9.00	53.00	22.00	22
DP1TYF-0806	1/2"-14	3/8"	12.00	58.00	27.00	27
DP1TYF-0808	1/2"-14	1/2"	12.00	57.80	27.00	27
DP1TYF-1010	5/8"-14	1/2"	11.50	66.50	30.00	30
DP1TYF-1210	3/4"-14	5/8"	13.50	66.50	32.00	32
DP1TYF-1212	3/4"-14	3/4"	13.50	71.00	32.00	32
DP1TYF-1616	1"-11	1"	16.00	80.50	41.00	41
DP1TYF-2020	1-1/4"-11	1-1/4"	18.50	104.00	50.00	50
DP1TYF-2424	1-1/2"-11	1-1/2"	19.00	115.00	55.00	55
DP1TYF-3232	2"-11	2"	23.00	122.50	70.00	70

Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

SGS

PC

DEKRA

DIN

SAE

MA

CE

UK CA

DP1NPS

Straight Connector NPSM Swivel Female 60°Cone – Braided Hose And Spiral Hose

D

P

1

NPS

Company

Product Range

Fitting Structure

Thread Types

DME

Hose Fitting

Straight

NPSM

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DP1NPS

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


NPTF 60° Cone

Structure:

Straight

Connection Type:

Swivel Female

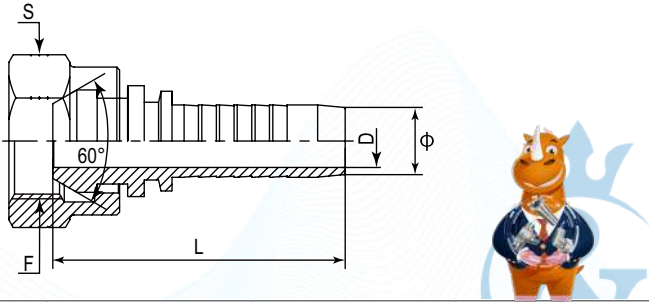

PART NUMBER	F (Thread)	Ø	L	S
#	NPSM	Inch	mm	mm
DP1NPS-0404	1/4"-18	1/4"	45.50	19
DP1NPS-0606	3/8"-18	3/8"	49.70	22
DP1NPS-0806	1/2"-14	3/8"	53.20	27
DP1NPS-0808	1/2"-14	1/2"	55.70	27
DP1NPS-1212	3/4"-14	3/4"	67.60	32
DP1NPS-1616	1"-11-1/2	1"	84.80	41
DP1NPS-2020	1-1/4"-11-1/2	1-1/4"	93.90	50
DP1NPS-2424	1-1/2"-11-1/2	1-1/2"	106.50	55
DP1NPS-3232	2"-11-1/2	2"	113.00	70

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

CE

UK CA

DP1FL

Straight Connector SAE Flange Code 61 – Braided Hose And Spiral Hose

D

P

1

FL

Company

Product Range

Fitting Structure

Connection Type

DME

Hose Fitting

Straight

SAE Flange Code 61

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DP1FL

Product Type:

Hose Fitting

Hose Fitting Type:


Insert

Structure:

Straight

Connection Type:

Flange Code 61

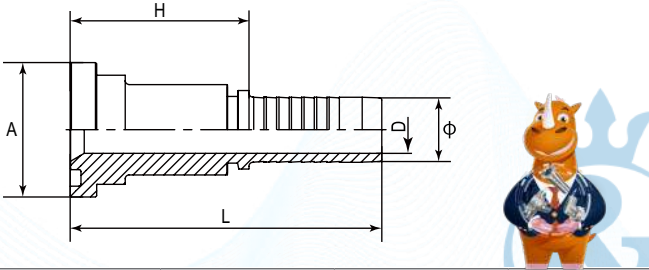

PART NUMBER	Flange	Ø	H	L	A
#	-	Inch	mm	mm	mm
DP1FL-0808	8	1/2"	48.50	81.50	30.20
DP1FL-0810	8	5/8"	46.50	82.50	30.20
DP1FL-1212	12	3/4"	53.50	94.50	38.00
DP1FL-1612	16	3/4"	59.50	100.50	44.50
DP1FL-1616	16	1"	60.50	115.50	44.50
DP1FL-2016	20	1"	65.00	120.00	50.80
DP1FL-2020	20	1-1/4"	65.50	126.50	50.80
DP1FL-2420	24	1-1/4"	70.00	130.00	60.40
DP1FL-2424	24	1-1/2"	70.50	141.00	60.40
DP1FL-3232	32	2"	77.00	153.00	71.40

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

CE

UK CA

DP1FS

Straight Connector SAE Flange Code 62 – Braided Hose And Spiral Hose

D

P

1

FS

Company

Product Range

Fitting Structure

Connection Type

DME

Hose Fitting

Straight

SAE Flange Code 62

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1FS

Product Type:

Hose Fitting

Hose Fitting Type:


Insert

Structure:

Straight

Connection Type:

Flange Code 62

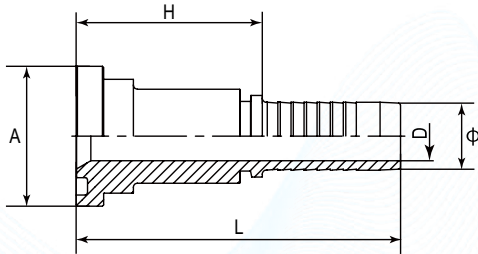

PART NUMBER	Flange	Ø	H	L	A	D
#	-	Inch	mm	mm	mm	mm
DP1FS-0808	8	1/2"	49.50	82.50	31.80	9.00
DP1FS-0810	8	5/8"	53.00	89.00	31.80	9.00
DP1FS-1212	12	3/4"	60.00	89.80	41.20	15.00
DP1FS-1612	16	3/4"	62.50	103.50	47.80	9.60
DP1FS-1616	16	1"	66.50	104.00	47.80	20.00
DP1FS-2016	20	1"	70.50	120.00	53.90	26.00
DP1FS-2020	20	1-1/4"	71.00	132.00	53.90	10.40
DP1FS-2420	24	1-1/4"	80.50	141.50	63.50	12.70
DP1FS-2424	24	1-1/2"	81.00	151.50	63.50	12.70
DP1FS-3232	32	2"	100.00	176.00	79.40	12.70



DP1MP

Straight Connector Metric Standard Pipe DIN Type

D

P

1

M

P

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

Straight

Metric

Standard Pipe

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1MP

Product Type:

Hose Fitting

Hose Fitting Type:


Insert

Thread Type:

Metric

Structure:

Straight

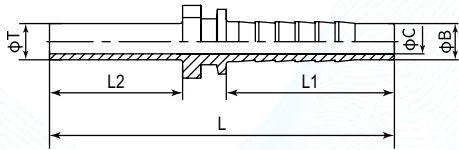

PART NUMBER	T (Pipe Dia.)	B (Hose Bore)	L	L1	L2	C
#	mm	mm	mm	mm	mm	mm
DP1MP-0603	6L	3/16"	52	24	24	3
DP1MP-0604	6L	1/4"	57	28	25	3
DP1MP-0803	8L	3/16"	52	24	24	3
DP1MP-0804	8L	1/4"	58.5	28	25	4
DP1MP-0805	8L	5/16"	60.7	28	27	4.9
DP1MP-0806	8L	3/8"	60.8	29.5	26.5	6.9
DP1MP-1005	10L	5/16"	63.2	28	27	4.9
DP1MP-1006	10L	3/8"	63.3	29.5	26.5	6.9
DP1MP-1004	10S	1/4"	61	28	28	4
DP1MP-1206	12L	3/8"	62.8	29.5	26.5	6.9
DP1MP-1208	12L	1/2"	64.8	29.5	28	9.5
DP1MP-1204	12S	1/4"	59	28	26.5	4
DP1MP-1205	12S	5/16"	62.7	28	26	4.9
DP1MP-1406	14S	3/8"	67.5	29.5	33	7
DP1MP-1408	14S	1/2"	66.8	29.5	33	9.3
DP1MP-1506	15L	3/8"	64.8	29.5	27.5	6.9
DP1MP-1508	15L	1/2"	65	29.5	30	9.5
DP1MP-1608	16S	1/2"	68	29.5	35	9.3
DP1MP-1808	18L	1/2"	65	29.5	30.5	9.5
DP1MP-1810	18L	5/8"	68	34	30	13
DP1MP-1812	18L	3/4"	76	39	30	15
DP1MP-2008	20S	1/2"	74.5	29.5	39.5	9.5
DP1MP-2010	20S	5/8"	86.3	34	37.7	13
DP1MP-2012	20S	3/4"	92.1	39	40	15
DP1MP-2210	22L	5/8"	72.8	34	33	12
DP1MP-2212	22L	3/4"	83	39	37	15
DP1MP-2512	25S	3/4"	95.3	39	44.3	15
DP1MP-2516	25S	1"	93	47	39	19
DP1MP-2816	28L	1"	93	47	39	19
DP1MP-3016	30S	1"	95	47	41	19
DP1MP-3520	35L	1-1/4"	110	54.5	47	26
DP1MP-3820	38S	1-1/4"	110	54.5	47	26
DP1MP-4224	42L	1-1/2"	112.5	58	46	32



DP4MP

45° Elbow Metric Standard Pipe DIN Type – Braided Hose And Spiral Hose

D

P

4

M

P

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

45° Elbow

Metric

Standard Pipe

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DP4MP

Product Type:


Hose Fitting

Hose Fitting Type:

Insert

Structure:

45° Elbow

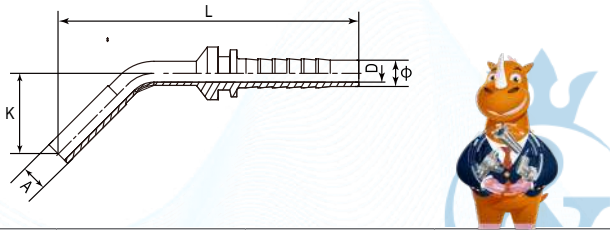

PART NUMBER	A	Ø	D	L	K
#	mm	Inch	mm	mm	mm
DP4MP-0603	6	3/16"	2.50	58.00	14.00
DP4MP-0604	6	1/4"	4.00	75.50	26.50
DP4MP-0804	8	1/4"	4.00	78.00	28.00
DP4MP-1004	10	1/4"	4.00	82.50	29.50
DP4MP-1005	10	5/16"	4.90	80.70	17.00
DP4MP-1006	10	3/8"	6.90	82.80	27.14
DP4MP-1205	12	5/16"	4.90	83.00	18.00
DP4MP-1206	12	3/8"	6.90	81.80	17.00
DP4MP-1406	14	3/8"	6.90	84.00	18.00
DP4MP-1408	14	1/2"	9.30	100.70	33.70
DP4MP-1508	15	1/2"	9.30	99.30	31.50
DP4MP-1608	22	1/2"	15.00	120.10	30.00
DP4MP-1810	18	5/8"	13.00	102.80	24.00
DP4MP-2010	20	5/8"	13.00	106.00	25.00
DP4MP-2012	20	3/4"	15.00	123.60	28.00
DP4MP-2212	22	3/4"	15.00	125.00	29.00
DP4MP-2512	25	3/4"	15.00	127.00	30.00
DP4MP-2816	28	1"	20.00	151.50	33.00
DP4MP-3016	30	1"	20.00	155.00	35.00
DP4MP-3520	35	1-1/4"	26.00	174.00	52.00
DP4MP-3820	38	1-1/4"	26.00	176.00	54.00



Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

SGS

PC

DEKRA

DIN

SAE

MA

CE

UK CA

DP9MP

90° Elbow Metric Standard Pipe DIN Type – Braided Hose And Spiral Hose

D

P

9

M

P

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

90° Elbow

Metric

Standard Pipe

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DP9MP

Product Type:

Hose Fitting

Hose Fitting Type:


Insert

Structure:

90° Elbow

Thread Types:

Metric

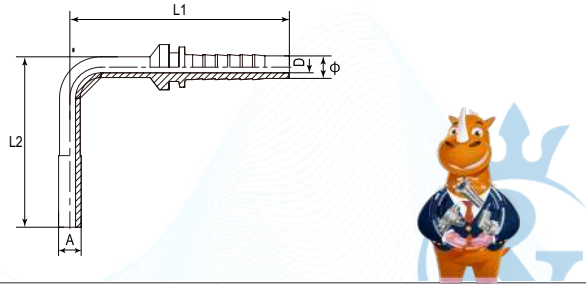

PART NUMBER	A	Ø	D	L1	L2
#	mm	Inch	mm	mm	mm
DP9MP-0603	6	3/16"	3.00	49.00	32.00
DP9MP-0604	6	1/4"	4.00	52.00	32.00
DP9MP-0803	8	3/16"	3.00	54.00	34.00
DP9MP-0804	8	1/4"	4.00	57.00	34.00
DP9MP-0805	8	5/16"	4.90	54.70	34.00
DP9MP-1004	10	1/4"	4.00	60.00	40.00
DP9MP-1005	10	5/16"	4.90	56.70	40.00
DP9MP-1006	10	3/8"	6.90	56.80	40.00
DP9MP-1204	12	1/4"	4.00	62.00	44.00
DP9MP-1205	12	5/16"	4.90	63.20	44.00
DP9MP-1206	12	3/8"	6.90	65.00	45.00
DP9MP-1406	14	3/8"	6.90	68.30	46.00
DP9MP-1408	14	1/2"	9.30	74.80	46.00
DP9MP-1506	15	3/8"	6.90	70.00	46.00
DP9MP-1508	15	1/2"	6.90	72.00	46.00
DP9MP-1608	16	1/2"	9.30	75.00	46.00
DP9MP-1808	18	1/2"	9.30	76.00	48.00
DP9MP-1810	18	5/8"	13.00	78.00	50.00
DP9MP-2010	20	5/8"	13.00	82.00	55.00
DP9MP-2012	20	3/4"	15.00	89.00	70.00
DP9MP-2210	22	5/8"	13.00	92.00	70.00
DP9MP-2212	22	3/4"	15.00	95.60	70.00
DP9MP-2512	25	3/4"	15.00	102.00	75.00
DP9MP-2816	28	1"	20.00	120.70	83.50
DP9MP-3016	30	1"	22.00	125.00	85.00
DP9MP-3520	35	1-1/4"	24.00	130.00	88.00
DP9MP-3820	38	1-1/4"	28.00	140.00	90.00

Certificate:

ISO 9001

ISO 14001

ISO 45001

MSHA

DAKKS

SGS

PC

DEKRA

DIN

SAE

MA

CE

UK CA



DP1WF

Straight Connector Metric Female – Braided Hose And Spiral Hose

D

P

1

W

F

Company

Product Range

Fitting Structure

Medium

Connection Type

DME

Hose Fitting

Straight

Water

Female

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DP1WF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Structure:


Straight

Thread Types:

Metric

Connection Type:

Female

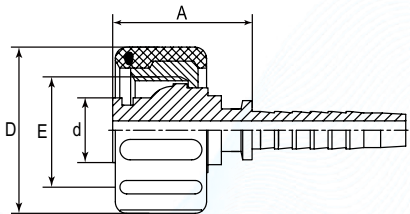

PART NUMBER	E (Thread)	A	d	D
#	METRIC	mm	mm	mm
DP1WF-2204	M22X1.5	32.70	14.00	34.50
DP1WF-2205	M22X1.5	32.70	14.00	34.50
DP1WF-2206	M22X1.5	32.70	14.00	34.50



DPSTS

Socket Weld – Braided Hose And Spiral Hose

D

P

S

S

TS

Company

Product Range

Fitting Structure

Fitting Structure

Connection Type

DME

Hose Fitting

Socket

Socket

Weld Tube

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:


DPSTS

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

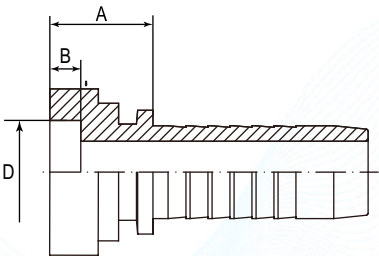

PART NUMBER	D	Ø	A	B
#	mm	Inch	mm	mm
DPSTS-0806	8	3/8"	14.5	5
DPSTS-0906	9	3/8"	14.5	5
DPSTS-1006	10	3/8"	14.5	5
DPSTS-1008	10	1/2"	12.5	5
DPSTS-1308	13	1/2"	15	5
DPSTS-1510	15	3/8"	15.5	5
DPSTS-1612	16	3/4"	14	5
DPSTS-2012	20	3/4"	16.5	5
DPSTS-2216	22	1"	18	5



DDC

Pushlock Hose Joiner

D

DC

Company

Connection Type

DME

Push lock

 German Technology Equipment



New-Standard

- DME&JDE Code:


DDC
- Product Type:

Hose Fitting
- Hose Fitting Type:

Insert
- Structure:

Straight
- Connection Type:

Push lock

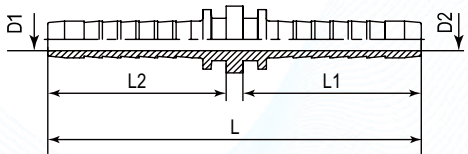

PART NUMBER	D1	D2	L1	L2	L
#	mm	mm	mm	mm	mm
DDC-04	4.00	4.00	32.00	32.00	67.00
DDC-05	4.90	4.90	34.20	34.20	71.40
DDC-06	6.90	6.90	34.30	34.30	71.60
DDC-08	9.30	9.30	36.30	36.30	75.60
DDC-10	13.00	13.00	39.30	39.30	82.60
DDC-12	15.00	15.00	45.30	45.30	94.60
DDC-16	20.00	20.00	54.00	54.00	112.00
DDC-20	26.00	26.00	62.00	62.00	132.00
DDC-24	32.00	32.00	76.00	76.00	160.00
DDC-32	44.20	44.20	80.00	80.00	170.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



BJBMP

Banjo Bolt Metric Male

BJB

MP

Other Features

Connection Type

Banjo Bolt

Metric Male

 German Technology Equipment



New-Standard

- DME&JDE Code:

BJBMP
- Product Type:


Hose Fitting
- Hose Fitting Type:

Insert
- Thread Type:

Metric
- Connection Type:

Male
- Other Features:

Banjo



PART NUMBER	F (Thread)	C	L	S
#	Metric	mm	mm	mm
BJBMP-08	M8X1	4	23	12
BJBMP-12	M12X1.5	6	30	17
BJBMP-16	M16X1.5	9	45	22
BJBMP-18	M18X1.5	11	40	24
BJBMP-20	M20X1.5	11	48	27
BJBMP-22	M22X1.5	16	48.5	27
BJBMP-26	M26X1.5	18	55	32
BJBMP-30	M30X1.5	24	58	36
BJBMP-30	M30X1.5	24	58	36

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



BJBM

Banjo Bolt Metric Male

- BJB

Other Features

Banjo Bolt
- M

Connection Type

Metric Male

 German Technology Equipment



New-Standard

- DME&JDE Code:

BJBM
- Product Type:


Hose Fitting
- Hose Fitting Type:

Insert
- Thread Type:

Metric
- Connection Type:

Male
- Other Features:

Banjo



PART NUMBER	F (Thread)	C	L	S
#	Metric	mm	mm	mm
BJBM-08	8X1	4	23	12
BJBM-10	10X1	4	25	17
BJBM-12	12X1.5	6	31	17
BJBM-14	14X1.5	8	35	19
BJBM-16	16X1.5	9	41	22
BJBM-18	18X1.5	10	44	24
BJBM-22	22X1.5	12.5	51.5	27
BJBM-26	26X1.5	16	55	32
BJBM-30	30X2	19	57	36

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



BJBBP

Banjo Bolt BSPP Male

- BJB

Other Features

Banjo Bolt
- BP

Connection Type

BSPP Male

 German Technology Equipment



New-Standard

- DME&JDE Code:

BJBBP
- Product Type:


Hose Fitting
- Hose Fitting Type:

Insert
- Thread Type:

BSPP
- Connection Type:

Male
- Other Features:

Banjo



PART NUMBER	F (Thread)	C	L	S
#	BSPP	mm	mm	mm
BJBBP-02	1/8"	5	30	17
BJBBP-04	1/4"	6	33	19
BJBBP-06	3/8"	9	39	22
BJBBP-08	1/2"	11	52	27
BJBBP-10	5/8"	13	55	30
BJBBP-12	3/4"	15	59	32
BJBBP-16	1"	17.5	71	41

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



BJM

Banjo Metric

BJ

Other Features

Banjo

M

Connection Type

Metric

 German Technology Equipment



New-Standard

DME&JDE Code:

BJM

Product Type:


Hose Fitting

Hose Fitting Type:

Insert

Thread Type:

Metric

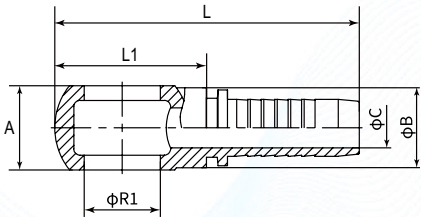

PART NUMBER	R1 (Thread)	B	L	L1	A	C
#	METRIC	mm	mm	mm	mm	mm
BJM-1003	10X1.5	3/16"	44.5	19	10	3
BJM-1004	10X1.5	1/4"	51.87	18.87	10.2	4
BJM-1204	12X1.5	1/4"	65.9	34	14	4
BJM-1205	12X1.5	5/16"	58.5	25.5	12.2	5.5
BJM-1206	12X1.5	3/8"	55	24.5	12	7
BJM-1404	14X1.5	1/4"	60.5	34	14	4
BJM-1405	14X1.5	5/16"	61	30.4	14	5.5
BJM-1406	14X1.5	3/8"	62.8	38	14	7
BJM-1604	16X1.5	1/4"	62.5	30	16	4
BJM-1605	16X1.5	5/16"	67	34	17	5.5
BJM-1606	16X1.5	3/8"	72.5	38	17	7
BJM-1804	18X1.5	1/4"	68	35.5	20	4
BJM-1805	18X1.5	5/16"	68	35.5	20	5.5
BJM-1806	16X1.5	3/8"	70.3	37.5	20	7
BJM-1808	18X1.5	1/2"	80.5	45.5	22	9.5
BJM-2206	22X1.5	3/8"	77.6	58.1	25	7
BJM-2208	22X1.5	1/2"	80.5	45.5	23.5	9.5
BJM-2210	22X1.5	5/8"	83.5	41.5	25	12
BJM-2612	26X1.5	3/4"	91.5	45.5	22	15
BJM-3012	30X1.5	3/4"	116	71	30	15
BJM-3016	30X1.5	1"	111	57	36	21
BJM-3020	30X1.5	1-1/4"	122	57	36	27

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



BJBP

Banjo BSPP

BJ

Other Features

Banjo

BP

Connection Type

BSPP

 German Technology Equipment



New-Standard

DME&JDE Code:

BJBP

Product Type:


Hose Fitting

Hose Fitting Type:

Insert

Thread Type:

BSPP

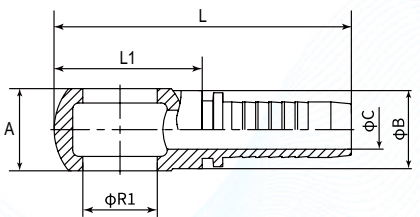

PART NUMBER	R1 (Thread)	B	L	L1	A	C
#	BSPP	mm	mm	mm	mm	mm
BJBP-0204	1/8"	1/4"	58.5	26	16	4
BJBP-0404	1/4"	1/4"	65.9	34	14	4
BJBP-0406	1/4"	3/8"	61.5	27	15	7
BJBP-0604	3/8"	1/4"	64.5	32	15	7
BJBP-0605	3/8"	5/16"	67	34	17	5.5
BJBP-0606	3/8"	3/8"	72.5	38	17	7
BJBP-0806	1/2"	3/8"	80	45.5	23.5	7
BJBP-0808	1/2"	1/2"	80.5	45.5	23.5	9.5
BJBP-1212	3/4"	3/4"	99.8	53.8	29	15
BJBP-1616	1"	1"	126.5	72.5	38	19

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP4MFL

45° Elbow Metric Female 24° Cone Light Type – Braided Hose And Spiral Hose

D

Company

DME

P

Product Range

Hose Fitting

4

Fitting Structure

45° Elbow

M

Thread Types

Metric

F

Connection Type

Female

L

Pressure Grade

Light Type

German Technology Equipment

New-Standard

DME&JDE Code:

DP4MFL

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


Metric 24° Cone Light Type

Structure:

45° Elbow

Connection Type:

Female

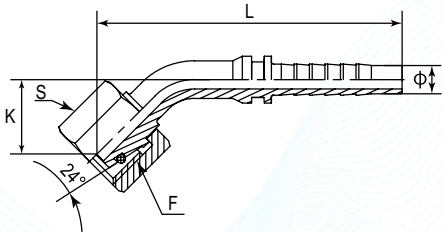

PART NUMBER	F (Thread)	Cone 24°	Ø	K	L	S
#	Metric	-	mm	mm	mm	mm
DP4MFL-1204	M12X1.5	06L	1/4"	20.00	70.80	14
DP4MFL-1404	M14X1.5	08L	1/4"	16.00	69.00	17
DP4MFL-1604	M16X1.5	10L	1/4"	17.00	65.80	19
DP4MFL-1606	M16X1.5	10L	3/8"	17.00	75.80	19
DP4MFL-1806	M18X1.5	12L	3/8"	23.00	74.80	22
DP4MFL-2206	M22X1.5	15L	3/8"	17.00	77.80	27
DP4MFL-2208	M22X1.5	15L	1/2"	25.80	83.30	27
DP4MFL-2610	M26X1.5	18L	5/8"	30.00	95.80	32
DP4MFL-2612	M26X1.5	22L	3/4"	30.00	107.60	32
DP4MFL-3012	M30X2	22L	3/4"	30.00	107.60	36
DP4MFL-3612	M36X2	22L	3/4"	38.00	107.60	46
DP4MFL-3616	M36X2	28L	1"	38.00	128.50	46
DP4MFL-4520	M45X2	35L	1-1/4"	45.00	147.00	55
DP4MFL-5220	M52X2	35L	1-1/4"	51.00	147.00	60
DP4MFL-5224	M52X2	42L	1-1/2"	51.00	164.00	60

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DP4MFS

45° Elbow Metric Female 24° Cone Heavy Type – Braided Hose And Spiral Hose

D

Company

DME

P

Product Range

Hose Fitting

4

Fitting Structure

45° Elbow

M

Thread Types

Metric

F

Connection Type

Female

S

Pressure Grade

Heavy Type

German Technology Equipment

New-Standard

DME&JDE Code:

DP4MFS

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


Metric 24° Cone Heavy Type

Structure:

45° Elbow

Connection Type:

Female

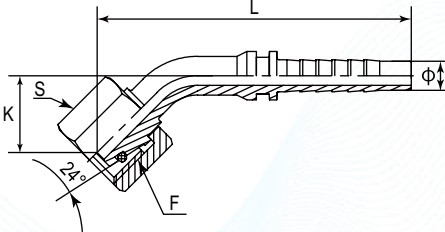

PART NUMBER	F (Thread)	Cone 24°	Ø	K	L	S
#	Metric	-	mm	mm	mm	mm
DP4MFS-1404	M14X1.5	06S	1/4"	16.00	65.80	17
DP4MFS-1604	M16X1.5	08S	1/4"	17.00	65.80	19
DP4MFS-1804	M18X1.5	10S	1/4"	20.60	70.80	22
DP4MFS-2006	M20X1.5	12S	3/8"	25.00	78.80	24
DP4MFS-2208	M22X1.5	14S	1/2"	24.00	97.00	27
DP4MFS-2408	M24X1.5	16S	1/2"	25.50	93.30	30
DP4MFS-3010	M30X2	20S	5/8"	24.00	101.80	36
DP4MFS-3012	M30X2	20S	3/4"	31.00	122.60	36
DP4MFS-3612	M36X2	25S	3/4"	36.00	131.00	46
DP4MFS-3616	M36X2	25S	1"	33.00	126.50	46
DP4MFS-4216	M42X2	30S	1"	41.00	136.50	50
DP4MFS-4220	M42X2	30S	1-1/4"	53.00	199.00	50
DP4MFS-5220	M52X2	38S	1-1/4"	54.00	200.00	60
DP4MFS-5224	M52X2	38S	1-1/2"	57.00	232.00	60

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DP4KSF

45°Elbow Metric Female 60°Cone – Braided Hose And Spiral Hose

D

P

4

KS

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

45° Elbow

JIS Metric

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DP4KSF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


JIS Metric 60° Cone

Structure:

45° Elbow

Connection Type:

Female

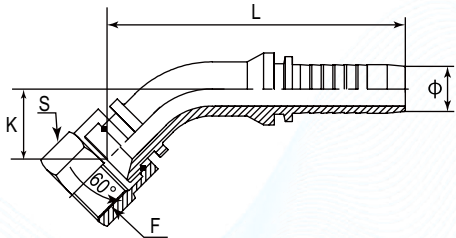

PART NUMBER	F (Thread)	Ø	L	K	S
#	Metric	Inch	mm	mm	mm
DP4KSF-1204	M12X1.5	1/4"	67.00	17.00	17
DP4KSF-1404	M14X1.5	1/4"	71.90	21.30	19
DP4KSF-1604	M16X1.5	1/4"	75.00	22.00	22
DP4KSF-1605	M16X1.5	5/16"	77.60	24.30	22
DP4KSF-1606	M16X1.5	3/8"	78.00	24.50	24
DP4KSF-1806	M18X1.5	3/8"	79.20	24.90	24
DP4KSF-1808	M18X1.5	1/2"	84.00	25.50	27
DP4KSF-2008	M20X1.5	1/2"	90.00	26.50	27
DP4KSF-2208	M22X1.5	1/2"	95.10	27.20	27
DP4KSF-2408	M24X1.5	1/2"	105.00	28.50	27
DP4KSF-2410	M24X1.5	5/8"	110.70	29.90	32
DP4KSF-3012	M30X1.5	3/4"	119.00	33.50	36
DP4KSF-3312	M33X1.5	3/4"	135.00	34.00	36
DP4KSF-3316	M33X1.5	1"	144.90	35.70	41
DP4KSF-3620	M36X1.5	1-1/4"	165.10	41.90	46
DP4KSF-4224	M42X1.5	1-1/2"	190.70	49.00	55

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP4ORF

45° Elbow ORFS Female – Braided Hose And Spiral Hose

D

P

4

OR

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

45° Elbow

ORFS

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DP4ORF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


UNF

Structure:

45° Elbow

Connection Type:

Female

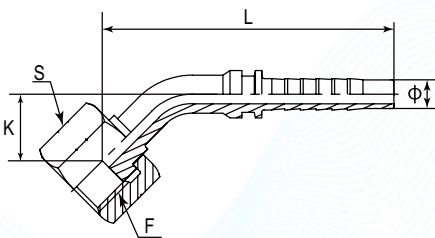

PART NUMBER	F (Thread)	Ø	L	K	S
#	UNF	Inch	mm	mm	mm
DP4ORF-0404	9/16"-18	1/4"	64.00	14.00	19
DP4ORF-0604	11/16"-16	1/4"	65.50	15.00	22
DP4ORF-0606	11/16"-16	3/8"	79.00	17.00	22
DP4ORF-0806	13/16"-16	3/8"	81.50	18.00	27
DP4ORF-0808	13/16"-16	1/2"	91.00	23.00	27
DP4ORF-1008	1"-14	1/2"	93.00	23.00	30
DP4ORF-1010	1"-14	5/8"	109.50	26.00	30
DP4ORF-1210	1-3/16"-12	5/8"	11.50	27.00	36
DP4ORF-1212	1-3/16"-12	3/4"	123.50	27.00	36
DP4ORF-1616	1-7/16"-12	1"	157.50	30.00	41
DP4ORF-2020	1-11/16"-12	1-1/4"	187.50	44.00	50
DP4ORF-2424	2"-12	1-1/2"	219.50	36.50	60

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP4BPF

45° Elbow BSPP Swivel Female 60°Cone – Braided Hose And Spiral Hose

D

P

4

BP

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

45° Elbow

BSPP

Swivel Female

German Technology Equipment

New-Standard

DME&JDE Code:

DP4BPF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


BSPP 60° Cone

Structure:

45° Elbow

Connection Type:

Swivel Female

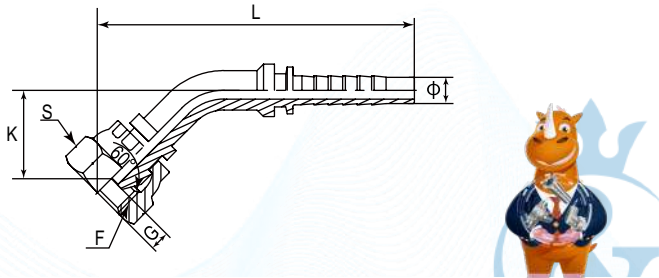

PART NUMBER	F (Thread)	Ø	G	K	L	S
#	BSPP	mm	mm	mm	mm	mm
DP4BPF-0204	G 1/8"	1/4"	4.30	15.00	66.50	14
DP4BPF-0404	G 1/4"	1/4"	5.20	15.00	68.50	19
DP4BPF-0604	G 3/8"	1/4"	5.20	18.00	71.00	22
DP4BPF-0606	G 3/8"	3/8"	6.00	19.00	84.00	22
DP4BPF-0806	G 1/2"	3/8"	6.50	21.00	87.00	27
DP4BPF-0808	G 1/2"	1/2"	6.50	24.00	97.00	27
DP4BPF-1008	G 5/8"	1/2"	9.70	25.50	98.00	30
DP4BPF-1010	G 5/8"	5/8"	9.70	23.00	114.50	30
DP4BPF-1212	G 3/4"	3/4"	8.70	30.00	129.50	32
DP4BPF-1616	G 1"	1"	10.50	35.00	165.00	41
DP4BPF-2020	G 1-1/4"	1-1/4"	10.10	52.00	199.00	50
DP4BPF-2424	G 1-1/2"	1-1/2"	12.50	47.00	233.00	55
DP4BPF-3232	G 2"	2"	16.10	66.50	282.00	70

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DP4JCF

45° Elbow JIC Swivel Female 74° Cone – Braided Hose And Spiral Hose

D

P

4

JC

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

45° Elbow

JIC

Swivel Female

German Technology Equipment

New-Standard

DME&JDE Code:

DP4JCF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


JIC 74° Cone

Structure:

45° Elbow

Connection Type:

Swivel Female

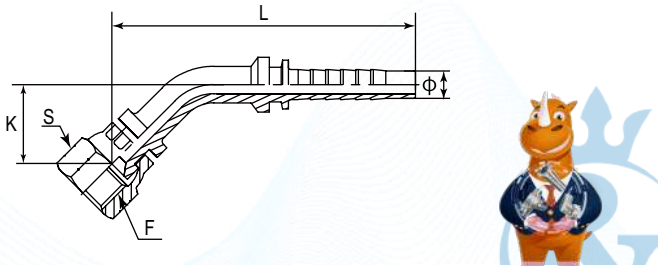

PART NUMBER	F (Thread)	Ø	L	K	S
#	UNF	mm	mm	mm	mm
DP4JCF-0404	7/16"-20	1/4"	65.80	14.00	17
DP4JCF-0504	1/2"-20	1/4"	67.80	14.00	17
DP4JCF-0604	9/16"-18	1/4"	66.20	17.40	19
DP4JCF-0606	9/16"-18	3/8"	80.80	17.00	19
DP4JCF-0806	3/4"-16	3/8"	81.80	17.00	24
DP4JCF-0808	3/4"-16	1/2"	96.30	22.00	24
DP4JCF-1008	7/8"-14	1/2"	95.30	23.00	27
DP4JCF-1010	7/8"-14	5/8"	101.80	24.00	27
DP4JCF-1012	7/8"-14	3/4"	123.60	24.00	32
DP4JCF-1210	1-1/16"-12	5/8"	103.80	25.00	32
DP4JCF-1212	1-1/16"-12	3/4"	123.60	28.00	32
DP4JCF-1216	1-1/16"-12	1"	151.50	28.00	32
DP4JCF-1612	1-5/16"-12	3/4"	127.60	30.00	41
DP4JCF-1616	1-5/16"-12	1"	151.50	33.00	41
DP4JCF-2016	1-5/8"-12	1"	151.50	33.00	50
DP4JCF-2020	1-5/8"-12	1-1/4"	174.00	52.00	50
DP4JCF-2420	1-7/8"-12	1-1/4"	174.00	42.00	55
DP4JCF-2424	1-7/8"-12	1-1/2"	184.00	42.00	55
DP4JCF-3232	2-1/2"-12	2"	242.00	68.00	75

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DP4TYF

45° Elbow JIS BSPP Swivel Female 60° Cone – Braided Hose And Spiral Hose

D

P

4

TY

F

Company

Hose Fitting

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

45° Elbow

JIS BSPP

Swivel Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DP4TYF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


JIS BSPP 60° Cone

Structure:

45° Elbow

Connection Type:

Swivel Female

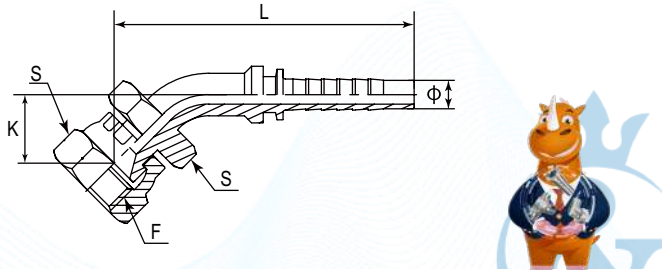

PART NUMBER	F (Thread)	Ø	L	K	S	S1
#	BSPP	Inch	mm	mm	mm	mm
DP4TYF-0404	1/4"-19	1/4"	71.90	21.30	19	19
DP4TYF-0606	3/8"-19	3/8"	78.90	24.60	22	22
DP4TYF-0808	1/2"-14	1/2"	96.50	27.50	27	27
DP4TYF-1212	3/4"-14	3/4"	122.30	33.90	32	32
DP4TYF-1616	1"-11	1"	142.30	36.10	41	41
DP4TYF-2020	1-1/4"-11	1-1/4"	165.40	43.70	50	50
DP4TYF-2424	1-1/2"-11	1-1/2"	192.50	50.80	55	55
DP4TYF-3232	2"-11	2"	216.60	57.60	70	70



DP4FL

45° Elbow SAE Flange Code 61 – Braided Hose And Spiral Hose

D

P

4

FL

Company

Hose Fitting

Fitting Structure

Connection Type

DME

Hose Fitting

45° Elbow

SAE Flange Code 61

 German Technology Equipment



New-Standard

DME&JDE Code:

DP4FL

Product Type:

Hose Fitting

Hose Fitting Type:


Insert

Structure:

45° Elbow

Connection Type:

Flange Code 61

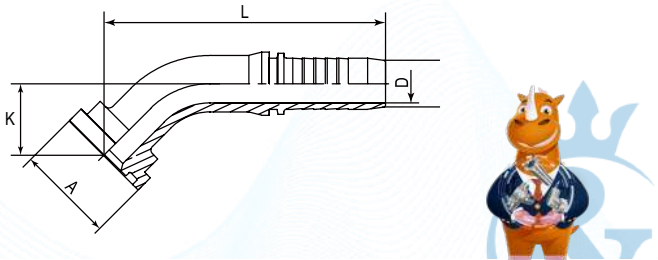

PART NUMBER	Flange	Ø	L	K	A	D
#	-	Inch	mm	mm	mm	mm
DP4FL-0808	8	1/2"	95.00	19.00	30.20	9.50
DP4FL-0810	8	5/8"	102.00	23.00	30.20	12.00
DP4FL-1212	12	3/4"	127.00	26.00	38.00	14.00
DP4FL-1612	16	3/4"	132.00	28.00	44.50	14.00
DP4FL-1616	16	1"	162.00	32.00	44.50	19.70
DP4FL-2016	20	1"	163.00	36.00	50.80	19.70
DP4FL-2020	20	1-1/4"	197.00	38.00	50.80	25.50
DP4FL-2420	24	1-1/4"	197.00	41.00	60.40	25.50
DP4FL-2424	24	1-1/2"	232.00	44.00	60.40	30.00
DP4FL-3232	32	2"	286.00	56.00	71.40	43.50



DP4FS

45° Elbow SAE Flange Code 62 – Braided Hose And Spiral Hose

D

P

4

FS

Company

Product Range

Fitting Structure

Connection Type

DME

Hose Fitting

45° Elbow

SAE Flange Code 62

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DP4FS

Product Type:

Hose Fitting

Hose Fitting Type:


Insert

Structure:

45° Elbow

Connection Type:

Flange Code 62

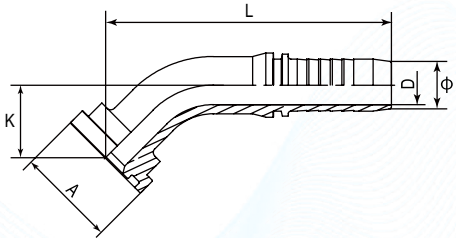

PART NUMBER	Flange	Ø	L	K	A	D
#	-	Inch	mm	mm	mm	mm
DP4FS-0808	8	1/2"	95.00	19.00	31.80	9.50
DP4FS-0810	8	5/8"	102.00	23.00	31.80	12.00
DP4FS-1212	12	3/4"	127.00	26.00	41.20	14.00
DP4FS-1612	16	3/4"	132.00	28.00	47.80	14.00
DP4FS-1616	16	1"	162.00	32.00	47.80	19.70
DP4FS-2016	20	1"	163.00	36.00	53.90	19.70
DP4FS-2020	20	1-1/4"	163.00	36.00	53.90	19.70
DP4FS-2420	24	1-1/4"	197.00	41.00	63.50	25.50
DP4FS-2424	24	1-1/2"	232.00	44.00	63.50	30.00
DP4FS-3232	32	2"	286.00	56.00	79.40	43.50

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

PC

DEKRA

DIN

SAE

MA

CE

UK CA

DP9MFL

90° Elbow Metric Female 24° Cone Light Type – Braided Hose And Spiral Hose

D

P

9

M

F

L

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Pressure Type

DME

Hose Fitting

90° Elbow

Metric

Female

Light Type

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DP9MFL

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


Metric 24° Cone Light Type

Structure:

90° Elbow

Connection Type:

Female

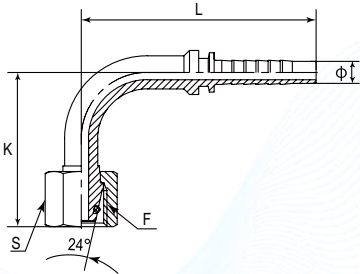

PART NUMBER	SFKL	Cone 24°	Ø	K	L	S
#	Metric	-	mm	mm	mm	mm
DP9MFL-1204	M12X1.5	06L	1/4"	30.30	58.40	14
DP9MFL-1404	M14X1.5	08L	1/4"	28.00	52.00	17
DP9MFL-1604	M16X1.5	10L	1/4"	30.00	52.00	19
DP9MFL-1606	M16X1.5	10L	3/8"	37.50	62.80	19
DP9MFL-1806	M18X1.5	12L	3/8"	37.00	66.80	22
DP9MFL-2206	M22X1.5	15L	3/8"	39.00	61.80	27
DP9MFL-2208	M22X1.5	15L	1/2"	41.00	71.30	27
DP9MFL-2610	M26X1.5	18L	5/8"	52.00	79.80	32
DP9MFL-2612	M26X1.5	18L	3/4"	58.00	97.00	32
DP9MFL-3012	M30X2	22L	3/4"	65.00	99.00	36
DP9MFL-3612	M36X2	28L	3/4"	68.00	100.00	41
DP9MFL-3616	M36X2	28L	1"	68.00	113.50	41
DP9MFL-4520	M45X2	35L	1-1/4"	85.00	135.00	50
DP9MFL-5220	M52X2	42L	1-1/4"	89.00	153.00	60
DP9MFL-5224	M52X2	42L	1-1/2"	99.00	180.00	60

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

PC

DEKRA

DIN

SAE

MA

CE

UK CA

DP9MFS

90° Elbow Metric Female 24° Cone Heavy Type – Braided Hose And Spiral Hose

D

P

9

M

F

S

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Pressure Grade

DME

Hose Fitting

90° Elbow

Metric

Female

Heavy Type

 German Technology Equipment



New-Standard

DME&JDE Code:

DP9MFS

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


Metric 24° Cone Heavy Type

Structure:

90° Elbow

Connection Type:

Female

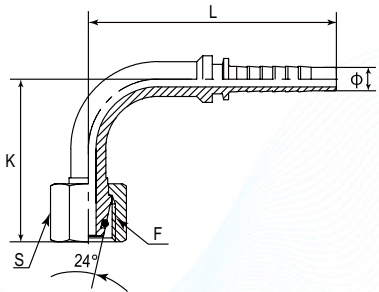

PART NUMBER	F (Thread)	Cone 24°	Ø	K	L	S
#	Metric		mm	mm	mm	mm
DP9MFS-1404	M14X1.5	06S	1/4"	30.00	58.80	17
DP9MFS-1604	M16X1.5	08S	1/4"	28.00	53.80	19
DP9MFS-1804	M18X1.5	10S	1/4"	38.00	58.80	22
DP9MFS-2006	M20X1.5	12S	3/8"	37.50	63.80	24
DP9MFS-2208	M22X1.5	14S	1/2"	50.00	71.30	27
DP9MFS-2408	M24X1.5	16S	1/2"	45.30	73.30	30
DP9MFS-2410	M24X1.5	16S	1/2"	56.30	89.80	30
DP9MFS-3010	M30X2	20S	5/8"	56.00	89.80	36
DP9MFS-3012	M30X2	20S	3/4"	59.00	99.00	36
DP9MFS-3612	M36X2	25S	3/4"	59.00	99.00	46
DP9MFS-3616	M36X2	25S	1"	68.00	108.50	46
DP9MFS-4216	M42X2	30S	1"	68.00	108.50	50
DP9MFS-4220	M42X2	30S	1-1/4"	86.00	153.00	50
DP9MFS-5220	M52X2	38S	1-1/4"	83.00	137.00	60
DP9MFS-5224	M52X2	38S	1-1/2"	96.00	180.00	60

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP9KSF

90° Elbow JIS Metric Female 60° Cone – Braided Hose And Spiral Hose

D

P

9

KS

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

90° Elbow

JIC Metric

Female

 German Technology Equipment



New-Standard

DME&JDE Code:

DP9KSF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


JIS Metric 60° Cone

Structure:

90° Elbow

Connection Type:

Female

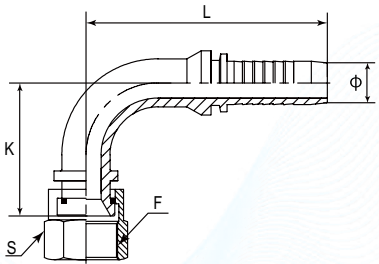

PART NUMBER	F (Thread)	Ø	L	K	S
#	Metric	Inch	mm	mm	mm
DP9KSF-1204	M12X1.5	1/4"	57.80	29.00	17
DP9KSF-1404	M14X1.5	1/4"	58.50	40.00	19
DP9KSF-1406	M14X1.5	3/8"	65.30	43.30	19
DP9KSF-1604	M16X1.5	1/4"	52.80	30.00	22
DP9KSF-1605	M16X1.5	5/16"	63.00	44.00	22
DP9KSF-1806	M18X1.5	3/8"	65.30	46.30	24
DP9KSF-1808	M18X1.5	1/2"	65.30	35.30	24
DP9KSF-2008	M20X1.5	1/2"	70.30	41.50	24
DP9KSF-2208	M22X1.5	1/2"	74.00	52.50	27
DP9KSF-2408	M24X1.5	1/2"	92.00	52.50	30
DP9KSF-2410	M24X1.5	5/8"	92.00	59.00	30
DP9KSF-3012	M30X1.5	3/4"	106.50	71.50	36
DP9KSF-3312	M33X1.5	3/4"	106.50	76.00	41
DP9KSF-3316	M33X1.5	1"	131.70	76.00	41
DP9KSF-3620	M36X1.5	1-1/4"	154.00	89.00	46
DP9KSF-4224	M42X1.5	1-1/2"	180.40	108.00	55

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP90RF

90° Elbow ORFS Female – Braided Hose And Spiral Hose

D

P

9

OR

F

Company

Hose Fitting

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

90° Elbow

ORFS

Female

German Technology Equipment

New-Standard

DME&JDE Code:

DP90RF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


UNF

Structure:

90° Elbow

Connection Type:

Female

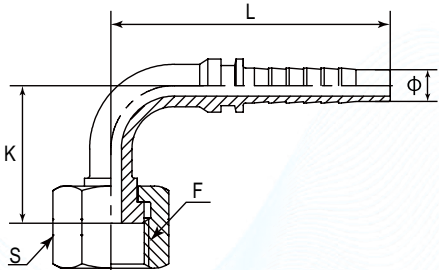

PART NUMBER	F (Thread)	Ø	L	K	S
#	UNF	Inch	mm	mm	mm
DP90RF-0404	9/16"-18	1/4"	52.00	26.00	19
DP90RF-0604	11/16"-16	1/4"	52.00	23.00	22
DP90RF-0606	11/16"-16	3/8"	64.00	32.00	22
DP90RF-0806	13/16"-16	3/8"	64.00	32.00	27
DP90RF-0808	13/16"-16	1/2"	74.00	40.00	27
DP90RF-1008	1"-14	1/2"	74.00	40.00	30
DP90RF-1010	1"-14	5/8"	85.00	45.00	30
DP90RF-1210	1-3/16"-12	5/8"	85.00	49.00	36
DP90RF-1212	1-3/16"-12	3/4"	99.00	51.00	36
DP90RF-1616	1-7/16"-12	1"	129.00	62.00	41
DP90RF-2020	1-11/16"-12	1-1/4"	153.00	73.00	50
DP90RF-2424	2"-12	1-1/2"	179.00	84.00	60

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DP9JCF

90° Elbow JIC Swivel Female 74° Cone – Braided Hose And Spiral Hose

D

P

9

JC

F

Company

Hose Fitting

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

90° Elbow

JIC

Swivel Female

German Technology Equipment

New-Standard

DME&JDE Code:

DP9JCF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


JIC 74° Cone

Structure:

90° Elbow

Connection Type:

Swivel Female

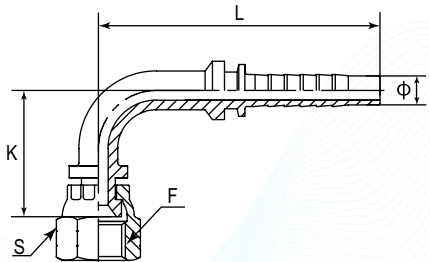

PART NUMBER	F (Thread)	Ø	L	K	S
#	UNF	mm	mm	mm	mm
DP9JCF-0404	7/16"-20	1/4"	57.80	29.00	17
DP9JCF-0504	1/2"-20	1/4"	52.80	26.00	17
DP9JCF-0604	9/16"-18	1/4"	52.80	27.00	19
DP9JCF-0606	9/16"-18	3/8"	62.80	35.50	19
DP9JCF-0806	3/4"-16	3/8"	66.30	38.50	24
DP9JCF-0808	3/4"-16	1/2"	70.30	41.50	24
DP9JCF-1008	7/8"-14	1/2"	75.30	46.50	27
DP9JCF-1010	7/8"-14	5/8"	79.30	46.00	27
DP9JCF-1012	7/8"-14	3/4"	95.60	54.00	27
DP9JCF-1208	1-1/16"-12	1/2"	71.30	45.00	32
DP9JCF-1210	1-1/16"-12	5/8"	78.80	49.00	32
DP9JCF-1212	1-1/16"-12	3/4"	95.60	54.00	32
DP9JCF-1216	1-1/16"-12	1"	120.00	70.50	32
DP9JCF-1612	1-5/16"-12	3/4"	102.30	62.00	41
DP9JCF-1616	1-5/16"-12	1"	120.00	71.00	41
DP9JCF-2016	1-5/8"-12	1"	120.00	71.00	50
DP9JCF-2020	1-5/8"-12	1-1/4"	146.00	84.50	50
DP9JCF-2420	1-7/8"-12	1-1/4"	146.00	84.50	55
DP9JCF-2424	1-7/8"-12	1-1/2"	167.00	101.00	55
DP9JCF-3232	2-1/2"-12	2"	205.00	124.00	75

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DP9BPF

90° Elbow BSPP Swivel Female 60° Cone – Braided Hose And Spiral Hose

D

P

9

BP

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

90° Elbow

BSPP

Swivel Female

German Technology Equipment

New-Standard

DME&JDE Code:

DP9BPF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


BSPP 60° Cone

Structure:

90° Elbow

Connection Type:

Swivel Female

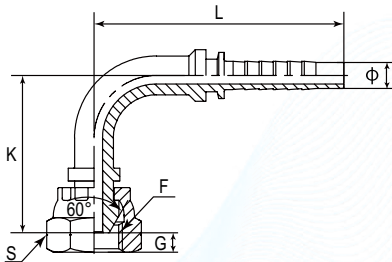

PART NUMBER	F (Thread)	Ø	G	K	L	S
#	BSPP	mm	mm	mm	mm	mm
DP9BPF-0204	G 1/8"	1/4"	4.30	26.00	52.00	14
DP9BPF-0404	G 1/4"	1/4"	5.20	29.00	52.00	19
DP9BPF-0604	G 3/8"	1/4"	5.20	31.00	52.00	22
DP9BPF-0606	G 3/8"	3/8"	6.00	38.00	64.00	22
DP9BPF-0806	G 1/2"	3/8"	6.50	40.50	64.00	27
DP9BPF-0808	G 1/2"	1/2"	6.50	45.00	74.00	27
DP9BPF-1008	G 5/8"	1/2"	9.70	45.00	74.00	30
DP9BPF-1010	G 5/8"	5/8"	9.70	45.00	85.00	30
DP9BPF-1212	G 3/4"	3/4"	8.70	57.00	99.00	32
DP9BPF-1616	G 1"	1"	10.50	72.50	129.00	41
DP9BPF-2020	G 1-1/4"	1-1/4"	10.10	87.50	153.00	50
DP9BPF-2424	G 1-1/2"	1-1/2"	12.50	100.00	179.00	55
DP9BPF-3232	G 2"	2"	16.10	130.00	218.00	70



Certificate:

DP9TYF

90° Elbow JIS BSPP Swivel Female 60° Cone – Braided Hose And Spiral Hose

D

P

9

TY

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

DME

Hose Fitting

90° Elbow

JIC BSPP

Swivel Female

German Technology Equipment

New-Standard

DME&JDE Code:

DP9TYF

Product Type:

Hose Fitting

Hose Fitting Type:

Insert

Thread Type:


JIS BSPP 60° Cone

Structure:

90° Elbow

Connection Type:

Swivel Female

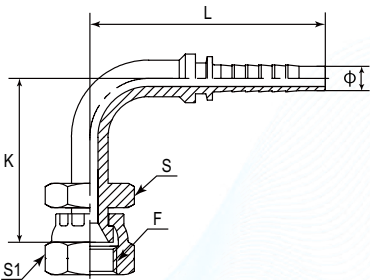

PART NUMBER	F (Thread)	Ø	L	K	S	S1
#	UNF	mm	mm	mm	mm	mm
DP9TYF-0404	1/4"-19	1/4"	58.50	38.00	19.00	19
DP9TYF-0606	3/8"-19	3/8"	65.60	38.00	22.00	22
DP9TYF-0808	1/2"-14	1/2"	74.00	45.00	27.00	27
DP9TYF-1010	5/8"-14	1/2"	92.50	61.00	30.00	30
DP9TYF-1212	3/4"-14	3/4"	106.50	69.00	32.00	32
DP9TYF-1616	1"-11	1"	131.70	76.50	41.00	41
DP9TYF-2020	1-1/4"-11	1-1/4"	152.50	92.50	50.00	50
DP9TYF-2424	1-1/2"-11	1-1/2"	180.40	110.50	55.00	55
DP9TYF-3232	2"-11	2"	207.80	133.80	70.00	70



Certificate:

DP9FL

90° Elbow SAE Flange Code 61 – Braided Hose And Spiral Hose

D

P

9

FL

Company

Product Range

Fitting Structure

Connection Type

DME

Hose Fitting

90° Elbow

SAE Flange Code 61

 German Technology Equipment



New-Standard

DME&JDE Code:

DP9FL

Product Type:

Hose Fitting

Hose Fitting Type:


Insert

Structure:

90° Elbow

Connection Type:

Flange Code 61

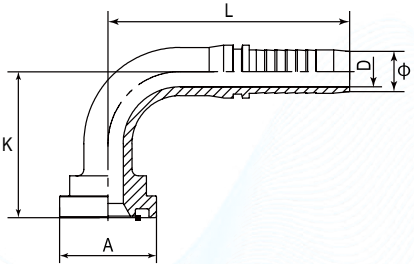

PART NUMBER	Flange	Ø	L	K	A
#	-	Inch	mm	mm	mm
DP9FL-0808	8	1/2"	74.00	40.00	30.20
DP9FL-0810	8	5/8"	85.00	53.00	30.20
DP9FL-1212	12	3/4"	99.00	58.00	38.00
DP9FL-1612	16	3/4"	99.00	62.00	44.50
DP9FL-1616	16	1"	129.00	70.00	44.50
DP9FL-2016	20	1"	129.00	75.00	50.80
DP9FL-2020	20	1-1/4"	153.00	90.00	50.80
DP9FL-2420	24	1-1/4"	153.00	95.00	60.40
DP9FL-2424	24	1-1/2"	179.00	104.00	60.40
DP9FL-3224	32	1-1/2"	179.00	115.00	71.40
DP9FL-3232	32	2"	218.00	138.00	71.40

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP9FS

90° Elbow SAE Flange Code 62 – Braided Hose And Spiral Hose

D

P

9

FS

Company

Product Range

Fitting Structure

Connection Type

DME

Hose Fitting

90° Elbow

SAE Flange Code 62

 German Technology Equipment



New-Standard

DME&JDE Code:

DP9FS

Product Type:

Hose Fitting

Hose Fitting Type:


Insert

Structure:

90° Elbow

Connection Type:

Flange Code 62

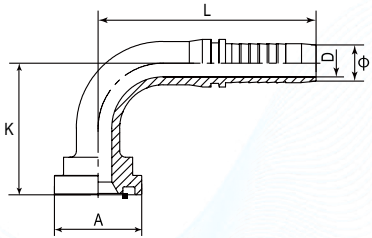

PART NUMBER	Flange	Ø	L	K	A
#	-	Inch	mm	mm	mm
DP9FS-0808	8	1/2"	74.00	40.00	31.80
DP9FS-0810	8	5/8"	85.00	53.00	31.80
DP9FS-1212	12	3/4"	99.00	58.00	41.20
DP9FS-1612	16	3/4"	99.00	62.00	47.80
DP9FS-1616	16	1"	129.00	70.00	47.80
DP9FS-2016	20	1"	129.00	75.00	53.90
DP9FS-2020	20	1 1/4"	153.00	90.00	53.90
DP9FS-2420	24	1 1/4"	153.00	95.00	63.50
DP9FS-2424	24	1 1/2"	179.00	104.00	63.50
DP9FS-3232	32	2"	218.00	138.00	79.40

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:






Hose Fitting

Interlock »



DP1BPM-R13


P850



Straight Connector BSPP Male 60° Cone - Interlock

DP1NPM-R13


P851



Straight Connector NPTF Male 60° - Interlock

DP1BPF-R13


P852



Straight Connector BSPP Female 60° Cone - Interlock

DP1ORF-R13


P853



Straight Connector ORFS Female - Interlock

DP1MFS-R13


P854



Straight Connector Metric Female 24° Cone + O Ring Heavy Type - Interlock

DP1JCF-R13


P855



Straight Connector JIC Female 74° Cone - Interlock

DP1FL-R13


P856



Straight Connector SAE Flange 3000 PSI - Interlock

DP1FS-R13


P857



Straight Connector SAE Flange 6000 PSI - Interlock

DP1FSCAT-R13


P858



Straight Connector SAE Flange 9000 PSI - Interlock

DP4BPF-R13


P859



45° Elbow BSPP Female 60° Cone

DP4MFS-R13


P860



45° Elbow Metric Female 24° Cone + O Ring Heavy Type - Interlock

DP4ORF-R13


P861



45° Elbow ORFS Female - Interlock

DP4FL-R13


P862



45° Elbow SAE Flange 3000 PSI - Interlock

DP4FS-R13


P863



45° Elbow SAE Flange 6000 PSI - Interlock

DP4FSCAT-R13


P864



45° Elbow SAE Flange 9000 PSI - Interlock

DP9BPF-R13


P865



90° Elbow BSPP Female 60° Cone - Interlock

DP9JCF-R13


P866



90° Elbow JIC Female 74° Cone – Interlock

DP9MFS-R13


P867



90° Elbow Metric Female 24° Cone + O Ring Heavy Type – Interlock

DP90RF-R13


P868



90° Elbow ORFS Female – Interlock

DP9FL-R13


P869



90° Elbow SAE Flange 3000 PSI – Interlock

DP9FS-R13


P870



90° Elbow SAE Flange 6000 PSI – Interlock

DP9FSCAT-R13

P871



90° Elbow SAE Flange 9000 PSI – Interlock

DP1BPM-R13

Straight Connector BSPP Male 60° Cone – Interlock


D	P	I	BP	M	R13
Company	Product Range	Fitting Structure	Thread Types	Connection Type	Hose Fitting
DME	Hose Fitting	Straight	BSPP	Male	Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:	DP1BPM-R13
Product Type:	Hose Fitting
Hose Fitting Type:	Interlock
Thread Type:	BSPP 60° Cone
Structure:	Straight
Connection Type:	Male

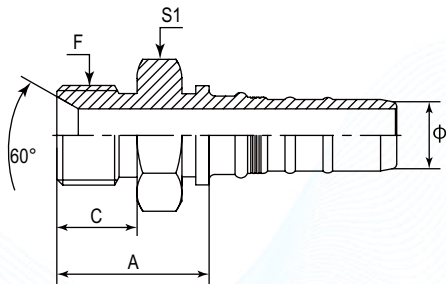

PART NUMBER	F (Thread)	Ø	A	C	S1
#	BSPP	Inch	mm	mm	mm
DP1BPM-R13-1212	3/4"-14	20.00	37.50	18.50	30
DP1BPM-R13-1616	1"-11	25.00	41.00	20.50	36
DP1BPM-R13-2020	1-1/4"-11	32.00	45.30	20.50	46
DP1BPM-R13-2424	1-1/2"-11	40.00	49.70	23.00	50
DP1BPM-R13-3232	2"-11	50.00	52.00	25.50	60

Certificate:



DP1NPM-R13

Straight Connector NPTF Male 60° – Interlock

D

P

1

NP

M

R13

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting

DME

Hose Fitting

Straight

NPTF

Male

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1NPM-R13

Product Type:

Hose Fitting

Hose Fitting Type:

Interlock

Thread Type:


NPTF 60°

Structure:

Straight

Connection Type:

Male

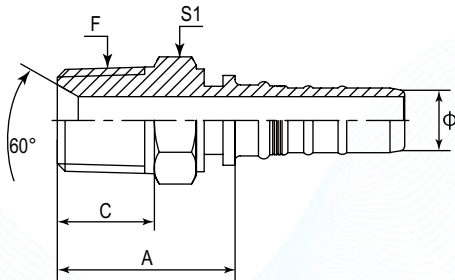

PART NUMBER	F (Thread)	Ø	A	C	S1
#	NPTF	Inch	mm	mm	mm
DP1NPM-R13-1212	3/4"-14	20.00	37.50	19.50	30
DP1NPM-R13-1616	1"-11-1/2	25.00	45.90	25.50	38
DP1NPM-R13-2020	1-1/4"-11-1/2	32.00	51.30	26.50	46
DP1NPM-R13-2424	1-1/2"-11-1/2	40.00	54.20	27.50	50
DP1NPM-R13-3232	2"-11-1/2	50.00	56.50	27.50	65

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP1BPF-R13

Straight Connector BSPP Female 60° Cone – Interlock

D

P

1

BP

F

R13

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting

DME

Hose Fitting

Straight

BSPP

Female

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1BPF-R13

Product Type:

Hose Fitting

Hose Fitting Type:

Interlock

Thread Type:


BSPP 60° Cone

Structure:

Straight

Connection Type:

Female

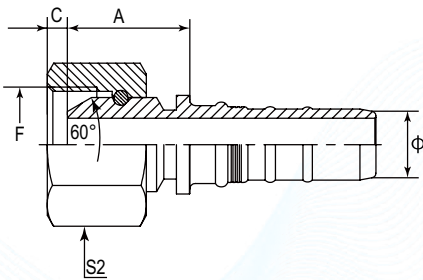

PART NUMBER	F (Thread)	Ø	A	C	S2
#	BSPP	Inch	mm	mm	mm
DP1BPF-R13-1212	3/4"-14	20.00	27.50	8.70	32
DP1BPF-R13-1616	1"-11	25.00	32.40	10.50	41
DP1BPF-R13-2020	1-1/4"-11	32.00	35.80	10.10	50
DP1BPF-R13-2424	1-1/2"-11	40.00	36.70	12.50	55
DP1BPF-R13-3232	2"-11	50.00	36.50	16.00	70

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP1ORF-R13

Straight Connector ORFS Female – Interlock

D

P

1

OR

F

R13

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting

DME

Hose Fitting

Straight

ORFS UNF

Female

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1ORF-R13

Product Type:

Hose Fitting

Hose Fitting Type:

Interlock

Thread Type:


UNF

Structure:

Straight

Connection Type:

Female

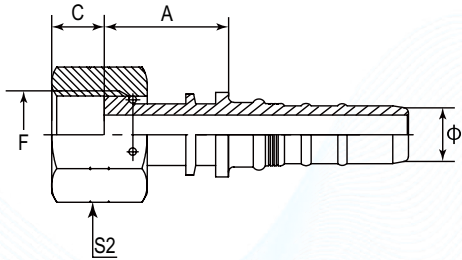

PART NUMBER	F (Thread)	Ø	A	C	S2
#	UNF	Inch	mm	mm	mm
DP1ORF-R13-1212	1-3/16"-12	20.00	41.00	15.00	36
DP1ORF-R13-1616	1-7/16"-12	25.00	44.40	15.00	41
DP1ORF-R13-2020	1-11/16"-12	32.00	47.80	15.00	50
DP1ORF-R13-2424	2"-12	40.00	48.20	15.00	60



DP1MFS-R13

Straight Connector Metric Female 24° Cone + O Ring Heavy Type – Interlock

D

P

1

M

F

R13

S

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting

Pressure Grade

DME

Hose Fitting

Straight

Metric

Female + O Ring

Interlock

Heavy Type

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1MFS-R13

Product Type:

Hose Fitting

Hose Fitting Type:

Interlock

Thread Type:

Metric 24° Cone + O Ring Heavy Type

Structure:


Straight

Connection Type:

Female

Sealing Method:

O Rings

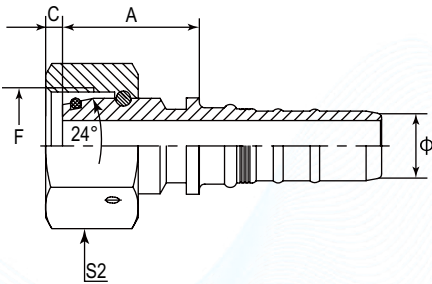

PART NUMBER	F (Thread)	Ø	A	C	S2
#	Metric	Inch	mm	mm	mm
DP1MFS-R13-3012	M30X2	20.00	30.00	2.50	36
DP1MFS-R13-3612	M36X2	20.00	38.50	3.50	46
DP1MFS-R13-3616	M36X2	25.00	31.90	3.20	46
DP1MFS-R13-4212	M42X2	20.00	42.00	3.90	50
DP1MFS-R13-4216	M42X2	25.00	33.40	3.90	50
DP1MFS-R13-4220	M42X2	32.00	38.80	3.90	50
DP1MFS-R13-5220	M52X2	32.00	45.30	4.50	60
DP1MFS-R13-5224	M52X2	40.00	38.20	4.50	60



DP1JCF-R13

Straight Connector JIC Female 74° Cone – Interlock

D

P

1

JC

F

R13

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting

DME

Hose Fitting

Straight

JIC UNF

Female + O Ring

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1JCF-R13

Product Type:

Hose Fitting

Hose Fitting Type:

Interlock

Thread Type:


JIC UNF 74° Cone

Structure:

Straight

Connection Type:

Female

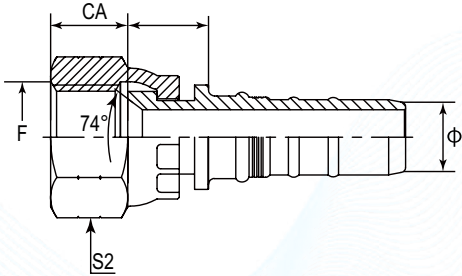

PART NUMBER	F (Thread)	Ø	A	C	S2
#	UNF	Inch	mm	mm	mm
DP1JCF-R13-1212	1-1/16"-12	20.00	26.50	15.00	32
DP1JCF-R13-1616	1-5/16"-12	25.00	29.40	16.00	41
DP1JCF-R13-2020	1-5/8"-12	32.00	32.30	16.10	50
DP1JCF-R13-2424	1-7/8"-12	40.00	35.20	20.00	60
DP1JCF-R13-3232	2-1/2"-12	50.00	34.50	23.50	75

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP1FL-R13

Straight Connector SAE Flange 3000 PSI – Interlock

D

P

1

FL

R13

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting

DME

Hose Fitting

Straight

SAE Flange 3000 PSI

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1FL-R13

Product Type:

Hose Fitting

Hose Fitting Type:


Interlock

Fitting Structure:

Straight

Connection Type:

Flange 3000 PSI

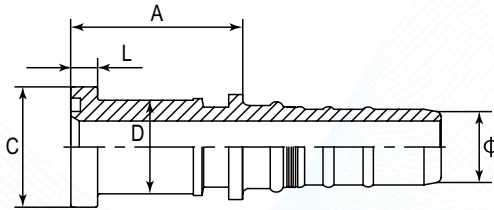

PART NUMBER	Flange Size	Ø	A	C	D	L
#	-	Inch	mm	mm	mm	mm
DP1FL-R13-1212	3/4"	20.00	50.00	38.10	31.70	7.00
DP1FL-R13-1612	1"	20.00	54.00	44.40	38.00	8.20
DP1FL-R13-1616	1"	25.00	54.40	44.40	38.00	8.20
DP1FL-R13-2016	1-1/4"	25.00	59.40	50.80	43.20	8.20
DP1FL-R13-2020	1-1/4"	32.00	65.80	50.80	43.20	8.20
DP1FL-R13-2420	1-1/2"	32.00	71.80	60.30	50.30	8.20
DP1FL-R13-2424	1-1/2"	40.00	72.20	60.30	50.30	8.20
DP1FL-R13-3224	2"	40.00	74.20	71.40	62.20	9.80
DP1FL-R13-3232	2"	50.00	78.50	71.40	62.20	9.80

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP1FS-R13

Straight Connector SAE Flange 6000 PSI – Interlock

D

P

1

FS

R13

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting

DME

Hose Fitting

Straight

SAE Flange 6000 PSI

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1FS-R13

Product Type:

Hose Fitting

Hose Fitting Type:


Interlock

Structure:

Straight

Connection Type:

Flange 6000 PSI

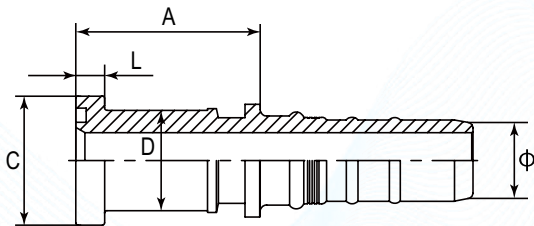

PART NUMBER	Flange Size	Ø	A	C	D	L
#	-	Inch	mm	mm	mm	mm
DP1FS-R13-1212	3/4"	20.00	53.00	41.30	32.00	8.76
DP1FS-R13-1612	1"	20.00	58.00	47.60	38.00	9.53
DP1FS-R13-1616	1"	25.00	59.40	47.60	38.00	9.53
DP1FS-R13-2016	1-1/4"	25.00	67.40	54.00	44.00	10.29
DP1FS-R13-2020	1-1/4"	32.00	69.80	54.00	44.00	10.29
DP1FS-R13-2024	1-1/4"	40.00	74.70	54.00	44.00	10.29
DP1FS-R13-2420	1-1/2"	32.00	78.80	63.50	51.00	12.57
DP1FS-R13-2424	1-1/2"	40.00	78.70	63.50	51.00	12.57
DP1FS-R13-3224	2"	40.00	91.20	79.40	67.00	12.57
DP1FS-R13-3232	2"	50.00	91.00	79.40	67.00	12.57

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP1FSCAT-R13

Straight Connector SAE Flange 9000 PSI – Interlock

D

P

1

FSCAT

R13

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting

DME

Hose Fitting

Straight

SAE Flange 9000 PSI

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1FSCAT-R13

Product Type:

Hose Fitting

Hose Fitting Type:


Interlock

Structure:

Straight

Connection Type:

Flange 9000 PSI

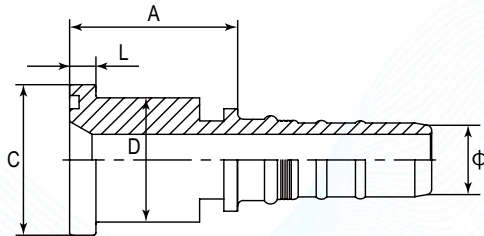

PART NUMBER	Flange Size	Ø	A	C	D	L
#	-	Inch	mm	mm	mm	mm
DP1FSCAT-R13-1212	3/4"	20.00	58.50	41.30	32.00	14.30
DP1FSCAT-R13-1612	1"	20.00	63.00	47.60	38.00	14.30
DP1FSCAT-R13-1616	1"	25.00	64.40	47.60	38.00	14.30
DP1FSCAT-R13-2016	1-1/4"	25.00	66.80	54.00	43.00	14.30
DP1FSCAT-R13-2020	1-1/4"	32.00	73.80	54.00	43.00	14.30
DP1FSCAT-R13-2420	1-1/2"	32.00	80.60	63.50	51.00	14.30
DP1FSCAT-R13-2424	1-1/2"	40.00	80.70	63.50	51.00	14.30

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP4BPF-R13

45° Elbow BSPP Female 60° Cone

D

P

4

BP

F

R13

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting

DME

Hose Fitting

45° Elbow

BSPP

Female

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP4BPF-R13

Product Type:

Hose Fitting

Fitting Type:

Interlock

Thread Type:


BSPP 60°Cone

Structure:

45° Elbow

Connection Type:

Female

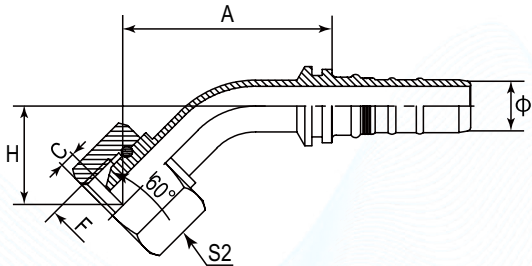

PART NUMBER	F (Female)	Ø	A	C	H	S2
#	BSPP	Inch	mm	mm	mm	mm
DP4BPF-R13-1212	3/4"-14	20.00	88.30	8.70	32.50	32.00
DP4BPF-R13-1616	1"-11	25.00	99.30	10.50	32.90	41.00
DP4BPF-R13-2020	1-1/4"-11	32.00	112.90	10.10	37.90	50.00
DP4BPF-R13-2424	1-1/2"-11	40.00	131.00	12.50	45.50	55.00
DP4BPF-R13-3232	2"-11	50.00	154.70	16.00	52.70	70.00

DP4MFS-R13

45° Elbow Metric Female 24° Cone + O Ring Heavy Type – Interlock

D

P

4

M

FS

R13

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting

DME

Hose Fitting

45° Elbow

Metric

Female + O Ring Heavy Type

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP4MFS-R13

Product Type:

Hose Fitting

Hose Fitting Type:

Interlock

Thread Type:

Metric 24° Cone + O Ring Heavy Type

Structure:


45° Elbow

Connection Type:

Female

Sealing Method:

O Rings

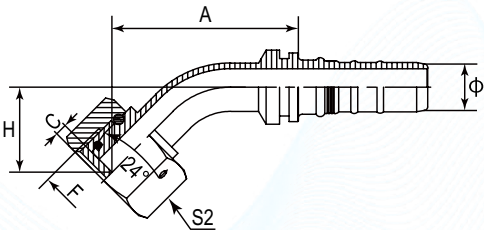

PART NUMBER	F (Thread)	Ø	A	C	H	S2
#	Metric	Inch	mm	mm	mm	mm
DP4MFS-R13-3612	M36X2	20.00	89.40	3.50	33.00	46.00
DP4MFS-R13-4216	M42X2	25.00	102.30	3.90	35.90	50.00
DP4MFS-R13-5220	M52X2	32.00	114.50	4.50	39.40	60.00



DP4ORF-R13

45° Elbow ORFS Female – Interlock

D

P

4

OR

F

R13

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting

DME

Hose Fitting

45° Elbow

ORFS UNF

Female

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP4ORF-R13

Product Type:

Hose Fitting

Hose Fitting Type:

Interlock

Thread Type:


UNF

Structure:

45° Elbow

Connection Type:

Female

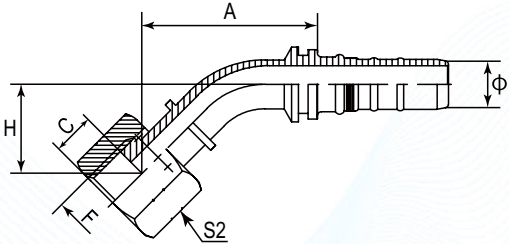

PART NUMBER	F (Thread)	Ø	A	C	H	S2
#	UNF	Inch	mm	mm	mm	mm
DP4ORF-R13-1212	1-3/16"-12	20.00	97.70	15.00	42.00	36
DP4ORF-R13-1616	1-7/16"-12	25.00	111.00	15.00	44.60	41
DP4ORF-R13-2020	1-11/16"-12	32.00	124.00	15.00	49.00	50
DP4ORF-R13-2424	2"-12	40.00	138.20	15.00	53.60	60

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP4FL-R13

45° Elbow SAE Flange 3000 PSI – Interlock

D

P

4

FL

R13

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting

DME

Hose Fitting

45° Elbow

SAE Flange 3000 PSI

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP4FL-R13

Product Type:

Hose Fitting

Hose Fitting Type:


Interlock

Structure:

45° Elbow

Connection Type:

Flange 3000 PSI

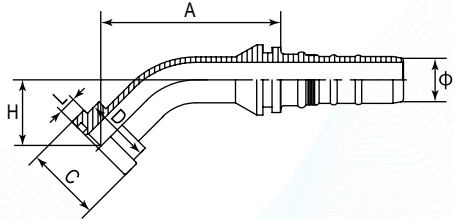

PART NUMBER	Flange Size	Ø	A	C	D	H	L
#	-	Inch	mm	mm	mm	mm	mm
DP4FL-R13-1212	3/4"	20.00	85.80	38.10	31.70	28.90	7.00
DP4FL-R13-1612	1"	20.00	85.80	44.40	38.00	28.90	8.00
DP4FL-R13-1616	1"	25.00	96.10	44.40	38.00	29.70	8.00
DP4FL-R13-2016	1-1/4"	25.00	96.10	50.80	43.00	29.70	8.00
DP4FL-R13-2020	1-1/4"	32.00	108.80	50.80	43.00	33.80	8.00
DP4FL-R13-2420	1-1/2"	32.00	110.20	60.30	50.00	35.20	8.00
DP4FL-R13-2424	1-1/2"	40.00	123.70	60.30	50.00	39.10	8.00
DP4FL-R13-3224	2"	40.00	123.70	71.40	62.00	39.10	9.53
DP4FL-R13-3232	2"	50.00	148.30	71.40	62.00	46.30	9.53

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP4FS-R13

45° Elbow SAE Flange 6000 PSI – Interlock

D

P

4

FS

R13

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting

DME

Hose Fitting

45° Elbow

SAE Flange 6000 PSI

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP4FS-R13

Product Type:

Hose Fitting

Hose Fitting Type:


Interlock

Structure:

45° Elbow

Connection Type:

Flange 6000 PSI

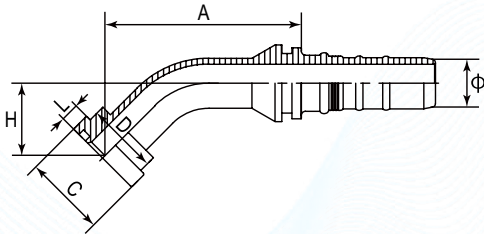

PART NUMBER	Flange Size	Ø	A	C	D	H	L
#	-	Inch	mm	mm	mm	mm	mm
DP4FS-R13-1212	3/4"	20.00	88.70	41.30	32.00	31.80	8.76
DP4FS-R13-1612	1"	20.00	90.80	47.60	38.00	33.20	9.53
DP4FS-R13-1616	1"	25.00	101.10	47.60	38.00	34.70	9.53
DP4FS-R13-2016	1-1/4"	25.00	103.90	54.00	44.00	37.50	10.29
DP4FS-R13-2020	1-1/4"	32.00	116.60	54.00	44.00	41.50	10.29
DP4FS-R13-2420	1-1/2"	32.00	120.10	63.50	51.00	45.10	12.57
DP4FS-R13-2424	1-1/2"	40.00	134.60	63.50	51.00	49.00	12.57
DP4FS-R13-3224	2"	40.00	140.20	79.40	67.00	54.70	12.57
DP4FS-R13-3232	2"	50.00	163.30	79.40	67.00	61.90	12.57

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP4FSCAT-R13

45° Elbow SAE Flange 9000 PSI – Interlock

D

P

4

FSCAT

R13

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting

DME

Hose Fitting

45° Elbow

SAE Flange 9000 PSI

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP4FSCAT-R13

Product Type:

Hose Fitting

Hose Fitting Type:


Interlock

Structure:

45° Elbow

Connection Type:

Flange 9000 PSI

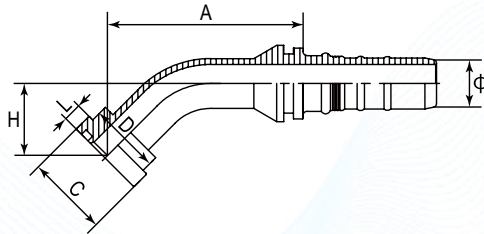

PART NUMBER	Flange Size	Ø	A	C	D	H	L
#	-	Inch	mm	mm	mm	mm	mm
DP4FSCAT-R13-1212	3/4"	20.00	92.60	41.30	32.00	35.60	14.30
DP4FSCAT-R13-1612	1"	20.00	93.70	47.60	38.00	36.70	14.30
DP4FSCAT-R13-1616	1"	25.00	103.90	47.60	38.00	37.50	14.30
DP4FSCAT-R13-2016	1-1/4"	25.00	104.60	54.00	43.00	38.20	14.30
DP4FSCAT-R13-2020	1-1/4"	32.00	117.30	54.00	43.00	42.30	14.30
DP4FSCAT-R13-2420	1-1/2"	32.00	118.00	63.50	51.00	43.00	14.30
DP4FSCAT-R13-2424	1-1/2"	40.00	132.50	63.50	51.00	46.90	14.30

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP9BPF-R13

90° Elbow BSPP Female 60° Cone – Interlock

D

P

9

BP

F

R13

Company

Hose Fitting

Fitting Structure

Thread Types

Connection Type

Hose Fitting

DME

Hose Fitting

90° Elbow

BSPP

Female

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP9BPF-R13

Product Type:

Hose Fitting

Hose Fitting Type:

Interlock

Thread Type:


BSPP 60° Cone

Structure:

90° Elbow

Connection Type:

Female

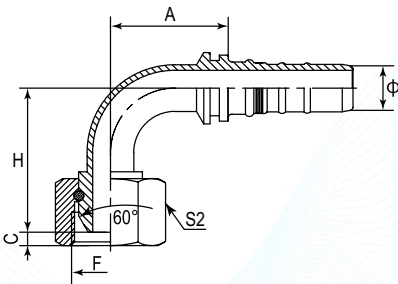

PART NUMBER	F (Thread)	Ø	A	C	H	S2
#	BSPP	Inch	mm	mm	mm	mm
DP9BPF-R13-1212	3/4"-14	20.00	73.80	8.70	67.10	32
DP9BPF-R13-1616	1"-11	25.00	91.90	10.50	72.00	41
DP9BPF-R13-2020	1-1/4"-11	32.00	105.80	10.10	88.30	50
DP9BPF-R13-2424	1-1/2"-11	40.00	124.20	12.50	103.00	55
DP9BPF-R13-3232	2"-11	50.00	148.80	16.00	123.30	70

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP9JCF-R13

90° Elbow JIC Female 74° Cone – Interlock

D

P

9

JC

F

R13

Company

Hose Fitting

Fitting Structure

Thread Types

Connection Type

Hose Fitting

DME

Hose Fitting

90° Elbow

JIC UNF

Female

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP9JCF-R13

Product Type:

Hose Fitting

Hose Fitting Type:

Interlock

Thread Type:


JIC UNF74° Cone

Structure:

90° Elbow

Connection Type:

Female

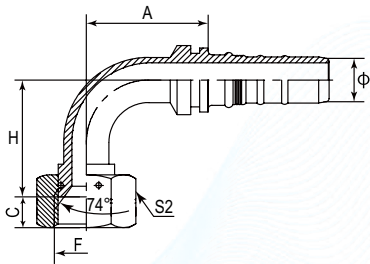

PART NUMBER	F (Thread)	Ø	A	C	H	S2
#	UNF	Inch	mm	mm	mm	mm
DP9JCF-R13-1212	1-3/16"-12	20.00	73.80	15.00	64.50	32
DP9JCF-R13-1616	1-5/16"-12	25.00	88.90	16.00	72.50	41
DP9JCF-R13-2020	1-5/8"-12	32.00	105.80	16.10	81.50	50
DP9JCF-R13-2424	1-7/8"-12	40.00	124.20	20.00	101.00	55
DP9JCF-R13-3232	2-1/2"-12	50.00	150.30	23.50	121.30	75

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP9MFS-R13

90° Elbow Metric Female 24° Cone + O Ring Heavy Type – Interlock

D

P

9

M

FS

R13

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting

DME

Hose Fitting

90° Elbow

Metric

Female + O Ring Heavy Type

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP9MFS-R13

Product Type:

Hose Fitting

Hose Fitting Type:

Interlock

Thread Type:

Metric 24° Cone + O Ring Heavy Type

Structure:


90° Elbow

Connection Type:

Female

Sealing Method:

O Rings

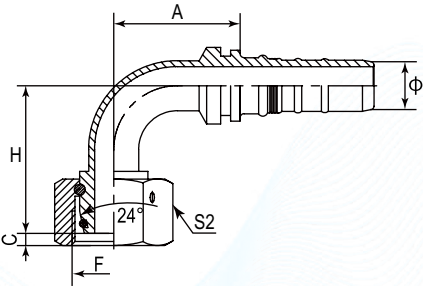

PART NUMBER	F (Thread)	Ø	A	C	H	S2
#	Metric	Inch	mm	mm	mm	mm
DP9MFS-R13-3612	M36X2	20.00	74.50	3.50	67.80	46
DP9MFS-R13-3616	M36X2	25.00	88.90	3.20	79.50	46
DP9MFS-R13-4216	M42X2	25.00	88.90	3.90	80.50	50
DP9MFS-R13-4220	M42X2	32.00	105.80	3.90	91.50	50
DP9MFS-R13-5220	M52X2	32.00	105.80	4.50	86.50	60
DP9MFS-R13-5224	M52X2	40.00	124.20	4.50	104.50	60



Certificate:



DP90RF-R13

90° Elbow ORFS Female – Interlock

D

P

9

OR

F

R13

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting

DME

Hose Fitting

90° Elbow

ORFS UNF

Female

Interlock

 German Technology Equipment



New-Standard

DME&JDE Code:

DP90RF-R13

Product Type:

Hose Fitting

Hose Fitting Type:

Interlock

Thread Type:


UNF

Structure:

90° Elbow

Connection Type:

Female



PART NUMBER	F (Thread)	Ø	A	C	H	S2
#	UNF	Inch	mm	mm	mm	mm
DP90RF-R13-1212	1-3/16"-12	20.00	73.80	15.00	80.50	36
DP90RF-R13-1616	1-7/16"-12	25.00	88.90	15.00	88.50	41
DP90RF-R13-2020	1-11/16"-12	32.00	105.80	15.00	100.00	50
DP90RF-R13-2424	2"-12	40.00	123.20	15.00	114.50	60



Certificate:



DP9FL-R13

90° Elbow SAE Flange 3000 PSI – Interlock

D

P

9

FL

R13

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting

Hose Fitting

90° Elbow

SAE Flange 3000 PSI

Interlock

German Technology Equipment

New-Standard

DME&JDE Code:

DP9FL-R13

Product Type:

Hose Fitting

Hose Fitting Type:


Interlock

Structure:

90° Elbow

Connection Type:

Flange 3000 PSI

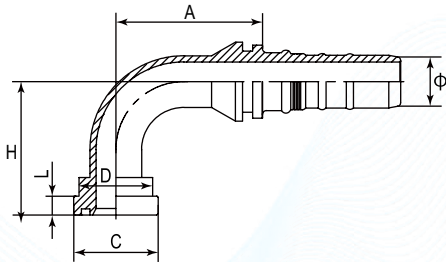

PART NUMBER	Flange Size	Ø	A	C	D	H	L
#	-	Inch	mm	mm	mm	mm	mm
DP9FL-R13-1212	3/4"	20.00	75.00	38.10	31.70	62.00	7.00
DP9FL-R13-1612	1"	20.00	75.00	44.40	38.00	62.00	8.00
DP9FL-R13-1616	1"	25.00	88.90	44.40	38.00	67.50	8.00
DP9FL-R13-2016	1-1/4"	25.00	88.90	50.80	43.00	67.50	8.00
DP9FL-R13-2020	1-1/4"	32.00	105.80	50.80	43.00	78.50	8.00
DP9FL-R13-2420	1-1/2"	32.00	105.80	60.30	50.00	80.50	8.00
DP9FL-R13-2424	1-1/2"	40.00	123.20	60.30	50.00	94.00	8.00
DP9FL-R13-3224	2"	40.00	123.20	71.40	62.00	94.00	9.53
DP9FL-R13-3232	2"	50.00	150.30	71.40	62.00	114.30	9.53

DP9FS-R13

90° Elbow SAE Flange 6000 PSI – Interlock

D

P

9

FS

R13

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting

Hose Fitting

90° Elbow

SAE Flange 6000 PSI

Interlock

German Technology Equipment

New-Standard

DME&JDE Code:

DP9FS-R13

Product Type:

Hose Fitting

Hose Fitting Type:


Interlock

Structure:

90° Elbow

Connection Type:

Flange 6000 PSI

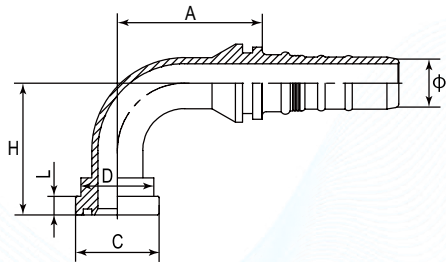

PART NUMBER	Flange Size	Ø	A	C	D	H	L
#	-	Inch	mm	mm	mm	mm	mm
DP9FS-R13-1212	3/4"	20.00	75.00	41.30	32.00	66.00	8.76
DP9FS-R13-1612	1"	20.00	75.00	47.60	38.00	68.00	9.53
DP9FS-R13-1616	1"	25.00	88.90	47.60	38.00	73.50	9.53
DP9FS-R13-2016	1-1/4"	25.00	88.90	54.00	44.00	78.50	10.29
DP9FS-R13-2020	1-1/4"	32.00	105.80	54.00	44.00	86.50	10.29
DP9FS-R13-2420	1-1/2"	32.00	105.80	63.50	51.00	89.50	12.57
DP9FS-R13-2424	1-1/2"	40.00	124.20	63.50	51.00	103.00	12.57
DP9FS-R13-3224	2"	40.00	124.20	79.40	67.00	103.00	12.57
DP9FS-R13-3232	2"	50.00	150.30	79.40	67.00	123.30	12.57



DP9FSCAT-R13

90° Elbow SAE Flange 9000 PSI – Interlock

D

P

9

FSCAT

R13

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting

Hose Fitting

90° Elbow

SAE Flange 9000 PSI

Interlock

German Technology Equipment

New-Standard

DME&JDE Code:

DP9FSCAT-R13

Product Type:

Hose Fitting

Hose Fitting Type:


Interlock

Structure:

90° Elbow

Connection Type:

Flange 9000 PSI

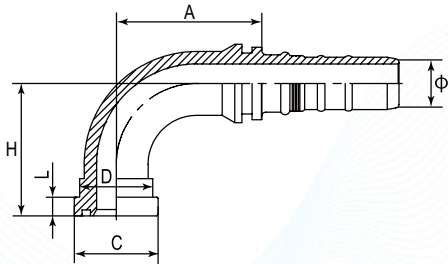

PART NUMBER	Flange Size	Ø	A	C	D	H	L
#	-	Inch	mm	mm	mm	mm	mm
DP9FSCAT-R13-1212	3/4"	20.00	75.00	41.30	32.00	71.50	14.30
DP9FSCAT-R13-1612	1"	20.00	75.00	47.60	38.00	73.00	14.30
DP9FSCAT-R13-1616	1"	25.00	88.90	47.60	38.00	78.50	14.30
DP9FSCAT-R13-2016	1-1/4"	25.00	88.90	54.00	43.00	79.50	14.30
DP9FSCAT-R13-2020	1-1/4"	32.00	105.80	54.00	43.00	90.50	14.30
DP9FSCAT-R13-2420	1-1/2"	32.00	105.80	63.50	51.00	91.50	14.30
DP9FSCAT-R13-2424	1-1/2"	40.00	124.20	63.50	51.00	105.00	14.30

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

Hose Fitting


Interlock





DP1NPM-P0


P875



Straight NPTF Male 60° - Push On Tail

DP1JCM-P0


P876



Straight JIC Male 74° Cone - Push On Tail

DP1BTM-P0


P877



Straight BSPT Male 60° Cone - Push On Tail

DP1BPF-P0


P878



Straight BSPP Swivel Female 60° - Push On Tail

DP1JCF-P0


P879



Straight JIC Swivel Female 74° - Push On Tail

DP9JCF-P0


P880



90° Elbow JIC Swivel Female 74° Cone - Push On Tail

DP9BPF-P0

P881



90° Elbow BSPP Swivel Female 60° - Push On Tail

DDC-P0

P882



Push On Hose Joiner

Hose Fitting

Push-on »

DP1NPM-PO

Straight NPTF Male 60° – Push On Tail

D

P

I

NP

M

PO

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

NPTF

Male

Push On Tail

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1NPM-PO

Product Type:

Hose Fitting

Hose Fitting Type:

Push-On

Thread Type:


NPTF 60° Cone

Structure:

Straight

Connection Type:

Male

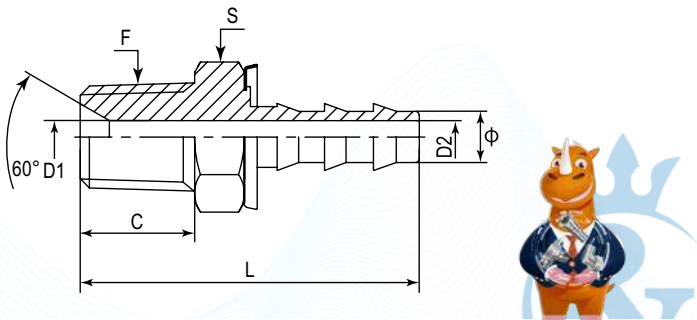

PART NUMBER	F (Thread)	Ø	C	D1	D2	L	S
#	NPTF	Inch	mm	mm	mm	mm	mm
DP1NPM-0204PO	1/8"-27	6.70	10.50	4.30	4.30	38.40	12.00
DP1NPM-0404PO	1/4"-18	6.70	15.00	4.30	4.30	44.40	17.00
DP1NPM-0606PO	3/8"-18	9.90	16.00	7.50	7.50	51.90	19.00
DP1NPM-0608PO	3/8"-18	13.20	16.00	9.90	9.90	53.60	19.00
DP1NPM-0806PO	1/2"-14	9.90	19.50	7.50	7.50	55.90	22.00
DP1NPM-0808PO	1/2"-14	13.20	19.50	9.90	9.90	57.60	22.00
DP1NPM-1210PO	3/4"-14	16.25	19.50	15.00	12.40	71.30	27.00
DP1NPM-1212PO	3/4"-14	19.50	19.50	15.40	15.40	71.70	27.00
DP1NPM-1616PO	1"-11-1/2	25.60	25.50	20.80	20.80	87.30	36.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP1JCM-PO

Straight JIC Male 74° Cone – Push On Tail

D

P

I

JC

M

PO

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

JIC UNF

Male

Push On Tail

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1JCM-PO

Product Type:

Hose Fitting

Hose Fitting Type:

Push-On

Fitting Thread Type:


JIC UNF 74° Cone

Structure:

Straight

Connection Type:

Male

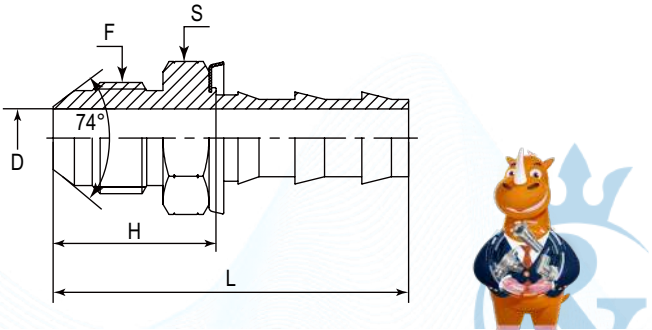

PART NUMBER	F (Thread)	Ø	D	H	L	S
#	UNF	Inch	mm	mm	mm	mm
DP1JCM-0404PO	7/16"-20	6.70	4.30	22.00	40.00	12.00
DP1JCM-0604PO	9/16"-18	6.70	4.30	22.00	40.00	17.00
DP1JCM-0606PO	9/16"-18	9.90	7.50	22.00	40.00	17.00
DP1JCM-0806PO	3/4"-16	9.90	7.50	27.20	48.40	22.00
DP1JCM-0808PO	3/4"-16	13.20	9.90	27.20	52.70	22.00
DP1JCM-1010PO	7/8"-14	16.25	12.20	30.00	69.00	24.00
DP1JCM-1012PO	7/8"-14	19.50	15.50	29.40	68.00	24.00
DP1JCM-1208PO	1-1/16"-12	13.20	9.90	34.50	60.00	30.00
DP1JCM-1210PO	1-1/16"-12	16.25	12.20	34.00	73.00	30.00
DP1JCM-1212PO	1-1/16"-12	19.50	15.50	33.40	72.00	30.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP1BTM-PO

Straight BSPT Male 60° Cone – Push On Tail

D

P

I

BT

M

PO

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

BSPT

Male

Push On Tail

German Technology Equipment

New-Standard

DME&JDE Code:

DP1BTM-PO

Product Type:

Hose Fitting

Hose Fitting Type:

Push-On

Thread Type:


BSPT 60° Cone

Structure:

Straight

Connection Type:

Male

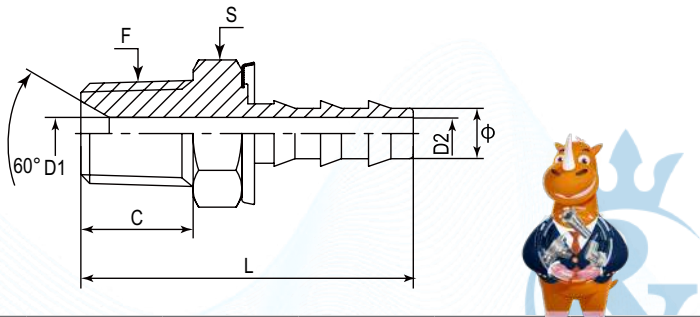

PART NUMBER	F (Thread)	Ø	C	D1	D2	L	S
#	BSPT	Inch	mm	mm	mm	mm	mm
DP1BTM-0204PO	1/8"-28	6.70	10.50	4.30	4.30	38.40	12.00
DP1BTM-0404PO	1/4"-19	6.70	15.00	4.30	4.30	44.40	17.00
DP1BTM-0606PO	3/8"-19	9.90	16.00	7.50	7.50	51.90	19.00
DP1BTM-0608PO	3/8"-19	13.20	16.00	9.90	9.90	53.60	19.00
DP1BTM-0806PO	1/2"-14	9.90	19.50	7.50	7.50	55.90	22.00
DP1BTM-0808PO	1/2"-14	13.20	19.50	9.90	9.90	57.60	22.00
DP1BTM-1210PO	3/4"-14	16.25	19.50	15.00	12.40	71.30	27.00
DP1BTM-1212PO	3/4"-14	19.50	19.50	15.40	15.40	71.70	27.00
DP1BTM-1616PO	1"-11	25.60	25.50	20.80	20.80	87.30	36.00

Certificate:

DP1BPF-PO

Straight BSPP Swivel Female 60° – Push On Tail

D

P

I

BP

F

PO

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

BSPP

Swivel Female

Push On Tail

German Technology Equipment

New-Standard

DME&JDE Code:

DP1BPF-PO

Product Type:

Hose Fitting

Hose Fitting Type:

Push-On

Thread Type:


BSPP 60°

Structure:

Straight

Connection Type:

Swivel Female

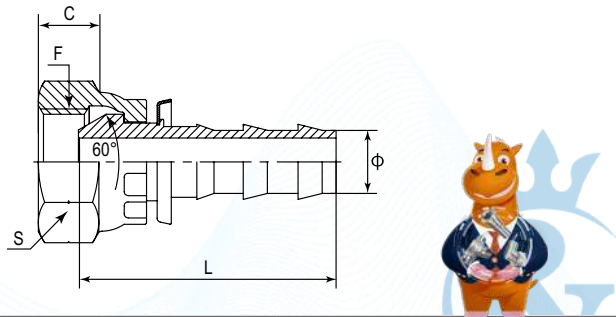

PART NUMBER	F (Thread)	Ø	C	L	S
#	BSPP	Inch	mm	mm	mm
DP1BPF-0404PO	1/4"-19	6.70	8.50	33.90	19.00
DP1BPF-0406PO	1/4"-19	9.90	8.50	39.20	19.00
DP1BPF-0606PO	3/8"-19	9.90	9.00	40.70	22.00
DP1BPF-0608PO	3/8"-19	13.20	9.00	43.40	22.00
DP1BPF-0806PO	1/2"-14	9.90	11.00	41.70	27.00
DP1BPF-0808PO	1/2"-14	13.20	11.00	44.40	27.00
DP1BPF-0810PO	1/2"-14	16.25	11.00	54.80	27.00
DP1BPF-1010PO	5/8"-14	16.25	13.50	55.30	30.00
DP1BPF-1212PO	3/4"-14	19.50	14.50	56.00	32.00
DP1BPF-1616PO	1"-11	25.60	15.50	69.80	41.00

Certificate:

DP1JCF-PO

Straight JIC Swivel Female 74° – Push On Tail

D

P

1

JC

F

PO

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

JIC UNF

Swivel Female

Push On Tail

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1JCF-PO

Product Type:

Hose Fitting

Hose Fitting Type:

Push-On

Thread Type:


JIC UNF 74°

Structure:

Straight

Connection Type:

Swivel Female

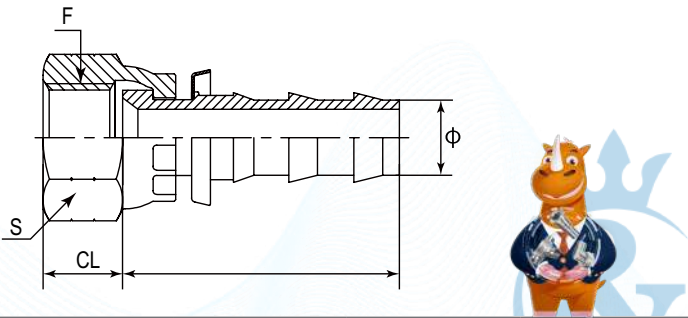

PART NUMBER	F (Thread)	Ø	C	L	S
#	UNF	mm	mm	mm	mm
DP1JCF-0404PO	7/16"-20	6.70	8.50	30.40	17.00
DP1JCF-0606PO	9/16"-18	9.90	9.50	36.70	19.00
DP1JCF-0806PO	3/4"-16	9.90	11.50	39.20	24.00
DP1JCF-0808PO	3/4"-16	13.20	11.50	41.40	24.00
DP1JCF-1008PO	7/8"-14	13.20	13.00	41.90	27.00
DP1JCF-1010PO	7/8"-14	16.25	13.00	52.30	27.00
DP1JCF-1212PO	1-1/16"-12	19.50	14.50	53.00	32.00
DP1JCF-1616PO	1-5/16"-12	25.60	15.50	64.80	41.00



Certificate:



DP9JCF-PO

90° Elbow JIC Swivel Female 74° Cone – Push On Tail

D

P

9

JC

F

PO

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

90° Elbow

JIC UNF

Swivel Female

Push On Tail

 German Technology Equipment



New-Standard

DME&JDE Code:

DP9JCF-PO

Product Type:

Hose Fitting

Hose Fitting Type:

Push-On

Thread Type:


JIC UNF 74° Cone

Structure:

90° Elbow

Connection Type:

Swivel Female

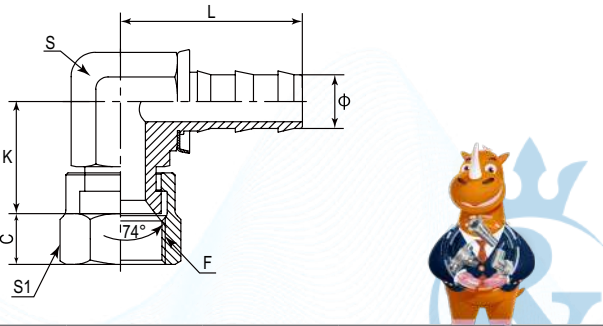

PART NUMBER	F (Thread)	Ø	C	K	L	S	S1
#	UNF	Inch	mm	mm	mm	mm	mm
DP9JCF-0404PO	7/16"-20	6.70	9.00	18.00	32.10	11.00	17.00
DP9JCF-0504PO	1/2"-20	6.70	8.38	17.50	34.60	14.00	15.88
DP9JCF-0606PO	9/16"-18	9.90	10.50	22.22	40.00	14.27	19.00
DP9JCF-0808PO	3/4"-16	13.20	10.50	24.33	44.70	19.05	24.00
DP9JCF-1008PO	7/8"-14	13.20	12.50	27.50	46.20	22.00	27.00
DP9JCF-1010PO	7/8"-14	16.25	12.50	27.50	56.60	22.00	27.00
DP9JCF-1212PO	1-1/16"-12	19.50	16.00	30.00	59.50	27.00	32.00



Certificate:



DP9BPF-PO

90° Elbow BSPP Swivel Female 60° – Push On Tail

D

P

9

BP

F

PO

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

90° Elbow

BSPP

Swivel Female

Push On Tail

German Technology Equipment

New-Standard

DME&JDE Code:

DP9BPF-PO

Product Type:

Hose Fitting

Hose Fitting Type:

Push-On

Thread Type:


BSPP 60°

Structure:

90° Elbow

Connection Type:

Swivel Female

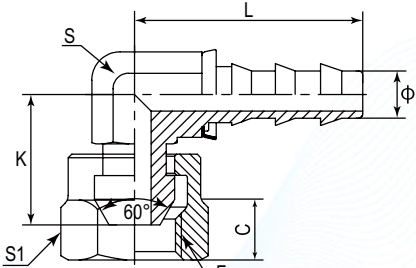

PART NUMBER	F (Thread)	Ø	C	K	L	S	S1
#	BSPP	Inch	mm	mm	mm	mm	mm
DP9BPF-0404PO	1/4"-19	6.70	8.50	18.50	32.40	11.00	19.00
DP9BPF-0606PO	3/8"-19	9.90	9.00	28.20	38.50	19.00	22.00
DP9BPF-0808PO	1/2"-14	13.20	11.00	26.50	44.70	19.00	27.00
DP9BPF-1212PO	3/4"-14	19.50	14.50	37.90	59.50	27.00	32.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:

DDC-PO

Push On Hose Joiner

D

DC

PO

Company

Product Range

Hose Fitting Type

DME

Hose Fitting

Push On Tail

German Technology Equipment

New-Standard

DME&JDE Code:


DDC-PO

Product Type:

Hose Fitting

Hose Fitting Type:

Push-On

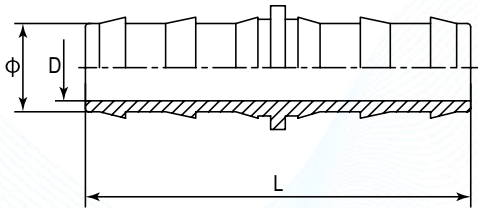

PART NUMBER	Ø	D	L
#	Inch	mm	mm
DDC-04PO	6.70	4.30	43.30
DDC-06PO	9.90	7.50	53.70
DDC-08PO	13.20	9.90	57.60
DDC-10PO	16.25	12.40	80.20
DDC-12PO	19.50	15.40	79.00

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:




Hose Fitting

Reusable »



DPF1T-RU


P885



Ferrule, Reusable 1 Wide

DPF2T-RU


P886



Ferrule, Reusable 2 Wide

DP1JCM-RU


P887



Straight Connector JIC Male 60°
- Reusable Tail for R1/R2/R5

DP1NPM-RU


P888



Straight Connector NPTF Male
60° - Reusable Tail for R1/R2/R5

DP1JCF-RU


P889



Straight Connector JIC Swivel Female
- Reusable Tail for R1/R2/R5

DP1BPF-RU


P890



Straight Connector BSPP Swivel
Female 60° - Reusable Tail for R1/R2/
R5

DP1BTM-RU


P891



Straight Connector BSPT Male
60° - Reusable Tail for R1/R2/R5

DP4BPF-RU


P892



45° Elbow Connector BSPP Swivel
Female 60° - Reusable Tail for R1/
R2/R5

DP9BPF-RU


P893



90° Swept Elbows BSPP Swivel
Female 60° - Reusable Tail for R1/R2/
R5

DP9JCF-RU

P894



90° Swept Elbows JIC Swivel Female
- Reusable Tail for R1/R2/R5



DPF1T-RU

Ferrule, Reusable 1 Wide

D

P

F

1T

RU

Company

Hose Fitting

Connection Type

Hose Structure

Hose Fitting Type

DME

Hose Fitting

Female

1 Wire

Reusable

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DPF1T-RU

Product Type:

Hose Fitting

Hose Fitting Type:

Reusable

Available Hoses:

100 R1

Thread Type:


UNF 60°Cone

Structure:

Straight

Connection Type:

Female

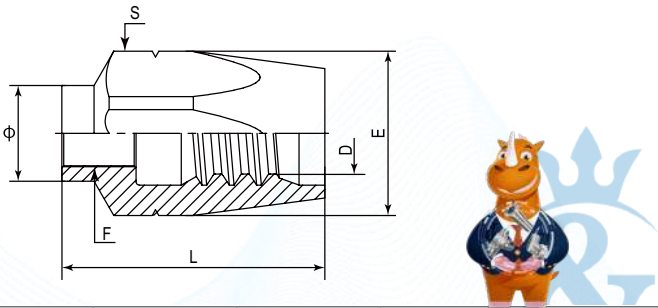

PART NUMBER	F (Thread)	D	Ø	E	L	S
#	UNF	mm	mm	mm	mm	mm
DPF1T-RU-04	1/4"-19	11.50	14.80	24.50	41.00	22
DPF1T-RU-05	1/2"-20	13.50	17.00	24.30	43.00	22
DPF1T-RU-06	9/16"-18	15.60	19.00	26.50	47.80	24
DPF1T-RU-08	5/8"-18	18.10	21.00	30.20	48.80	27
DPF1T-RU-10	3/4"-18	20.50	24.00	30.00	49.00	27
DPF1T-RU-12	7/8"-18	26.40	29.00	40.00	57.50	36
DPF1T-RU-16	1-3/16"-16	33.00	38.00	51.10	75.10	46



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DPF2T-RU

Ferrule, Reusable 2 Wide

D

P

F

2T

RU

Company

Hose Fitting

Connection Type

Hose Structure

Hose Fitting Type

DME

Hose Fitting

Female

2 Wire

Reusable

German Technology Equipment

SHIELD FLEX

New-Standard

DME&JDE Code:

DPF2T-RU

Product Type:

Hose Fitting

Hose Fitting Type:

Reusable

Available Hoses:


100 R2

Connection Type:

Female

Thread Types:

UNF

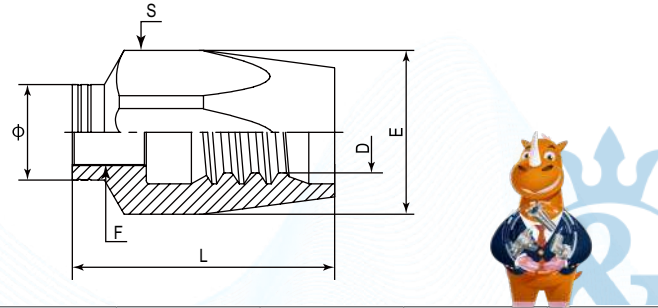

PART NUMBER	F (Thread)	D	Ø	E	L	S
#	UNF	mm	mm	mm	mm	mm
DPF2T-RU-04	7/16"-20	12.60	14.80	24.50	40.70	22
DPF2T-RU-06	9/16"-18	17.00	19.00	26.50	47.80	24
DPF2T-RU-08	5/8"-18	19.50	21.50	30.00	49.00	27
DPF2T-RU-10	3/4"-18	23.70	24.50	35.00	52.60	32
DPF2T-RU-12	7/8"-18	26.50	29.00	40.00	57.00	36
DPF2T-RU-16	1-3/16"-16	35.00	35.00	50.00	75.20	46



Certificate:

ISO 9001

ISO 14001

MSHA

DAKKS

CE

UK CA

DP1JCM-RU

Straight Connector JIC Male 60° – Reusable Tail for R1/R2/R5

D

P

1

JC

M

RU

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

JIC UNF

Male

Reusable

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1JCM-RU

Product Type:

Hose Fitting

Hose Fitting Type:

Reusable

Available Hoses:

100 R1, 100 R2 or 100 R5

Thread Type:


UNF 74° Cone × UNF

Structure:

Straight

Connection Type:

Male

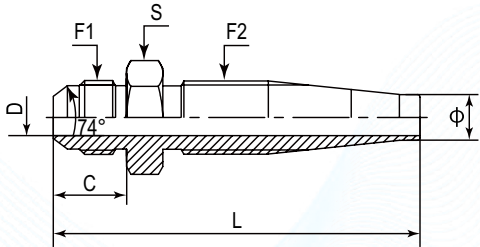

PART NUMBER	F1 (Thread)	F2 (Thread)	Ø	C	D	L	S
#	UNF	UNF	mm	mm	mm	mm	mm
DP1JCM-RU-0404	7/16"-20	7/16"-20	6.00	14.00	4.00	62.70	15
DP1JCM-RU-0606	9/16"-18	9/16"-18	8.80	14.10	8.80	70.60	19
DP1JCM-RU-0808	3/4"-16	5/8"-18	11.50	16.70	9.30	78.80	24
DP1JCM-RU-1010	7/8"-14	3/4"-18	14.80	19.30	12.30	82.00	27
DP1JCM-RU-1212	1-1/16"-12	7/8"-18	18.10	21.90	15.00	97.20	32
DP1JCM-RU-1616	1-5/16"-12	1-3/16"-16	23.80	23.10	19.80	110.10	36



Certificate:



DP1NPM-RU

Straight Connector NPTF Male 60° – Reusable Tail for R1/R2/R5

D

P

1

NP

M

RU

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

NPTF

Male

Reusable

 German Technology Equipment



New-Standard

DME&JDE Code:

DP1NPM-RU

Product Type:

Hose Fitting

Hose Fitting Type:

Reusable

Available Hoses:

100 R1, 100 R2 or 100 R5

Thread Type:


NPTF 60° Cone × UNF

Structure:

Straight

Connection Type:

Male

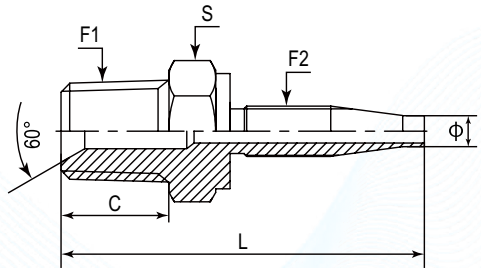

PART NUMBER	F1 (Thread)	F2 (Thread)	Ø	C	L	S
#	NPTF	UNF	Inch	mm	mm	mm
DP1NPM-RU-0404	1/4"-18	9/32"-32	4.30	15.00	50.50	17
DP1NPM-RU-0806	1/2"-14	9/16"-18	8.80	19.50	79.10	22
DP1NPM-RU-0808	1/2"-14	5/8"-18	11.50	19.50	81.60	22
DP1NPM-RU-1210	3/4"-14	3/4"-18	14.80	19.50	82.20	27
DP1NPM-RU-1212	3/4"-14	7/8"-18	18.10	19.50	94.20	27



Certificate:



DP1JCF-RU

Straight Connector JIC Swivel Female – Reusable Tail for R1/R2/R5

D

P

1

JC

F

RU

Company

Hose Fitting

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

JIC UNF

Female

Reusable

 German Technology Equipment



New-Standard

- DME&JDE Code:

DP1JCF-RU
- Product Type:

Hose Fitting
- Hose Fitting Type:


Reusable
- Available Hoses:

100 R1, 100 R2 or 100 R5
- Thread Type:

UNF 74°Cone × UNF
- Structure:

Straight
- Connection Type:

Swivel Female

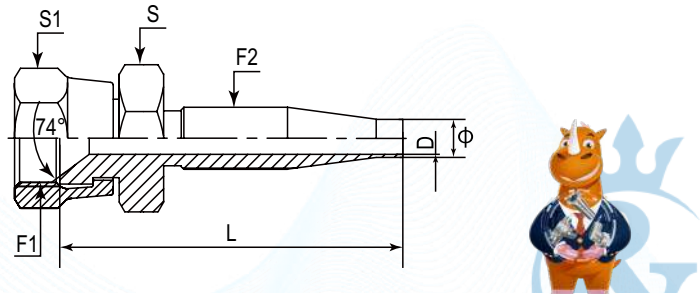

PART NUMBER	F1 (Thread)	F2 (Thread)	D	Ø	L	S	S1
#	UNF	UNF	mm	mm	mm	mm	mm
DP1JCF-RU-0404	7/16"-20	7/16"-20	4.00	6.00	57.00	15	17
DP1JCF-RU-0604	9/16"-18	7/16"-20	4.00	6.00	60.50	17	19
DP1JCF-RU-0605	9/16"-18	1/2"-20	6.90	9.00	62.50	19	19
DP1JCF-RU-0606	9/16"-18	9/16"-18	7.00	8.80	67.00	19	19
DP1JCF-RU-0806	3/4"-16	9/16"-18	7.00	8.80	71.00	24	24
DP1JCF-RU-0808	3/4"-16	5/8"-18	9.30	11.50	73.50	24	24
DP1JCF-RU-1008	7/8"-14	5/8"-18	9.30	11.50	76.50	27	27
DP1JCF-RU-1010	7/8"-14	3/4"-18	12.30	14.80	76.50	27	27
DP1JCF-RU-1212	1-1/16"-12	7/8"-18	15.00	18.10	89.00	32	32
DP1JCF-RU-1616	1-5/16"-12	1-3/16"-16	19.80	23.80	103.00	36	38

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP1BPF-RU

Straight Connector BSPP Swivel Female 60° – Reusable Tail for R1/R2/R5

D

P

1

BP

F

RU

Company

Hose Fitting

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

BSPP

Female

Reusable

 German Technology Equipment



New-Standard

- DME&JDE Code:

DP1BPF-RU
- Product Type:

Hose Fitting
- Hose Fitting Type:


Reusable
- Available Hoses:

100 R1, 100 R2 or 100 R5
- Thread Type:

BSPP 60° Cone × UNF
- Structure:

Straight
- Connection Type:

Swivel Female

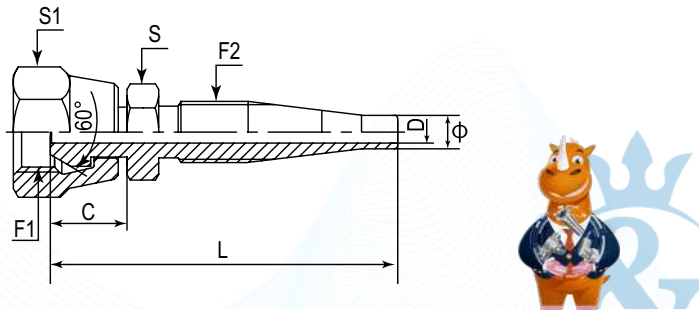

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	Ø	L	S	S1
#	BSPP	UNF	mm	mm	mm	mm	mm	mm
DP1BPF-RU-0404	1/4"-19	7/16"-20	10.50	4.00	6.00	59.20	15	19
DP1BPF-RU-0606	3/8"-19	9/16"-18	11.70	7.00	8.80	68.20	19	22
DP1BPF-RU-0808	1/2"-14	5/8"-18	13.50	9.30	11.50	75.60	24	27
DP1BPF-RU-1010	5/8"-14	3/4"-18	14.00	12.30	14.80	76.70	27	30
DP1BPF-RU-1212	3/4"-14	7/8"-18	14.60	15.00	18.10	89.90	32	32
DP1BPF-RU-1616	1"-11	1-3/16"-16	17.50	19.80	23.80	104.50	36	41

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



Certificate:



DP1BTM-RU

Straight Connector BSPT Male 60° – Reusable Tail for R1/R2/R5

D

P

1

BT

M

RU

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

BSPT

Male

Reusable

German Technology Equipment

New-Standard

DME&JDE Code:

DP1BTM-RU

Product Type:

Hose Fitting

Hose Fitting Type:

Reusable

Available Hoses:

100 R1, 100 R2 or 100 R5

Thread Type:


BSPT 60° Cone × UNF

Structure:

Straight

Connection Type:

Male

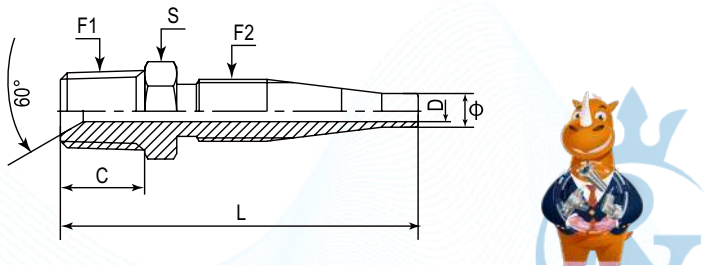

PART NUMBER	F1 (Thread)	F2 (Thread)	C	D	Ø	L	S
#	BSPT	UNF	mm	mm	mm	mm	mm
DP1BTM-RU-0404	1/4"-19	7/16"-20	14.50	4.00	6.00	63.20	15
DP1BTM-RU-0606	3/8"-19	9/16"-18	15.00	7.00	8.80	71.50	19
DP1BTM-RU-0808	1/2"-14	5/8"-18	20.00	9.30	11.50	82.10	24
DP1BTM-RU-1212	3/4"-14	7/8"-18	19.50	15.00	18.10	94.80	32
DP1BTM-RU-1616	1"-11	1-3/16"-16	25.50	19.80	23.80	112.50	36



Certificate:

DP4BPF-RU

45° Elbow Connector BSPP Swivel Female 60° – Reusable Tail for R1/R2/R5

D

P

4

BP

F

RU

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

45° Elbow

BSPP

Swivel Female

Reusable

German Technology Equipment

New-Standard

DME&JDE Code:

DP4BPF-RU

Product Type:

Hose Fitting

Hose Fitting Type:

Reusable

Available Hoses:

100 R1, 100 R2 or 100 R5

Thread Type:


BSPP 60° Cone × UNF

Structure:

45° Elbow

Connection Type:

Swivel Female

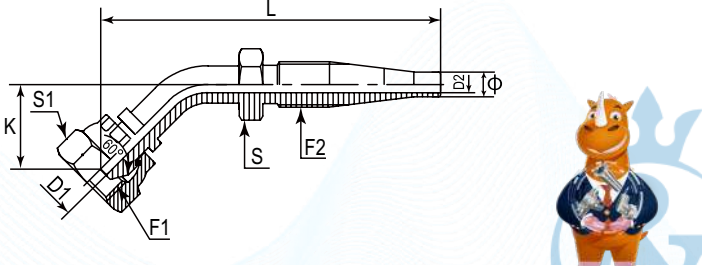

PART NUMBER	F1 (Thread)	F2 (Thread)	D1/D2	Ø	K	L	S	S1
#	BSPP	UNF	mm	mm	mm	mm	mm	mm
DP4BPF-RU-0404	1/4"-19	7/16"-20	4.00	6.00	20.00	83.00	15	19
DP4BPF-RU-0606	3/8"-19	9/16"-18	7.00	8.80	22.60	94.00	19	22
DP4BPF-RU-0808	1/2"-14	5/8"-18	9.30	11.50	26.00	112.00	24	27
DP4BPF-RU-1212	3/4"-14	7/8"-18	15.00	18.10	31.80	140.50	32	32
DP4BPF-RU-1616	1"-11	1-3/16"-16	19.80	23.80	35.00	161.00	36	41



Certificate:

DP9BPF-RU

90° Swept Elbows BSPP Swivel Female 60° – Reusable Tail for R1/R2/R5

D

P

9

BP

F

RU

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

90° Swept Elbows

BSPP

Swivel Female

Reusable

German Technology Equipment

New-Standard

DME&JDE Code:

DP9BPF-RU

Product Type:

Hose Fitting

Hose Fitting Type:

Reusable

Available Hoses:

100 R1, 100 R2 or 100 R5

Thread Type:


BSPP 60° Cone × UNF

Structure:

90° Swept Elbows

Connection Type:

Swivel Female

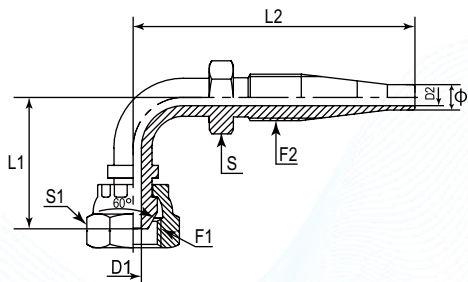

PART NUMBER	F1 (Thread)	F2 (Thread)	D1	D2	Ø	L1	L2	S	S1
#	BSPP	UNF	mm	mm	mm	mm	mm	mm	mm
DP9BPF-RU-0404	1/4"-19	7/16"-20	4.00	4.00	6.00	30.00	76.00	15	19
DP9BPF-RU-0606	3/8"-19	9/16"-18	7.00	7.00	8.80	43.00	82.50	19	22
DP9BPF-RU-0808	1/2"-14	5/8"-18	9.30	9.30	11.50	51.00	92.00	24	27
DP9BPF-RU-1212	3/4"-14	7/8"-18	15.00	15.00	18.10	66.00	126.50	32	32
DP9BPF-RU-1616	1"-11	1-3/16"-16	19.80	19.80	23.80	73.80	146.00	36	41



Certificate:

DP9JCF-RU

90° Swept Elbows JIC Swivel Female – Reusable Tail for R1/R2/R5

D

P

9

JC

F

RU

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

90° Swept Elbows

JIC UNF

Swivel Female

Reusable

German Technology Equipment

New-Standard

DME&JDE Code:

DP9JCF-RU

Product Type:

Hose Fitting

Hose Fitting Type:

Reusable

Available Hoses:

100 R1, 100 R2 or 100 R5

Thread Type:


UNF × UNF

Structure:

90° Elbows

Connection Type:

Swivel Female



PART NUMBER	F1 (Thread)	F2 (Thread)	Ø	L	K	S1	S2
#	UNF	UNF	Inch	mm	mm	mm	mm
DP9JCF-RU-0404	7/16"-20	7/16"-20	6.00	74.00	29.00	17	15
DP9JCF-RU-0606	9/16"-18	9/16"-18	8.80	84.50	32.50	19	17
DP9JCF-RU-0808	3/4"-16	5/8"-18	11.60	88.00	31.00	24	24
DP9JCF-RU-1010	7/8"-14	3/4"-18	14.80	109.70	52.00	27	27
DP9JCF-RU-1212	1-1/16"-12	7/8"-18	18.10	133.10	58.00	32	32
DP9JCF-RU-1616	1-5/16"-12	1-3/16"-16	23.80	144.50	71.00	38.10	36



Certificate:



Hose Fitting

Suction »

DASTH128M P897 Straight Connector Suction Tail for Rubber Hose - NPTF Male 60°	DASTH107M P898 Straight Connector Suction Tail for Rubber Hose - BSPT Male 60°	DASTH1525 P899 Straight Suction Tail for Rubber Hose - Metric Male + O Ring Seal	DASTH106Q P900 Straight Connector Suction Tail for Rubber Hose - BSPP Male + O Ring + Retaining Ring
DASTH428M P901 45° Elbow Suction Tail for Rubber Hose - NPTF Male 60°	DASTH4305 P902 45° Adjustable Elbow Suction Tail for Rubber Hose - SAE Male + O Ring	DASTH928M P903 90° Elbow Suction Tail for Rubber Hose - NPTF Male 60°	DASTH907M P904 90° Elbow Suction Tail for Rubber Hose - BSPT Male 60°
DASTH1305 P905 Straight Connector Suction Tail for Rubber Hose - SAE Male + O Ring	DASTH906Q P906 90° Adjustable Elbow Suction Tail for Rubber Hose - BSPP Male + O Ring + Retaining Ring	DASTH9305 P907 90° Adjustable Elbow Suction Tail for Rubber Hose - SAE Male + O Ring	

DASTH128M

Straight Connector Suction Tail for Rubber Hose – NPTF Male 60°

D

A

STH

1

28

M

Company

Product Range

Adaptor Type

Fitting Structure

Thread Types

Connection Type

DME

Adaptor

Suction Tail

Straight

NPTF

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DASTH128M

Product Type:

Hydraulic adaptor

Hose Fitting Type:

Suction Tail

Thread Type:


NPTF 60° Cone

Structure:

Straight

Connection Type:

Male

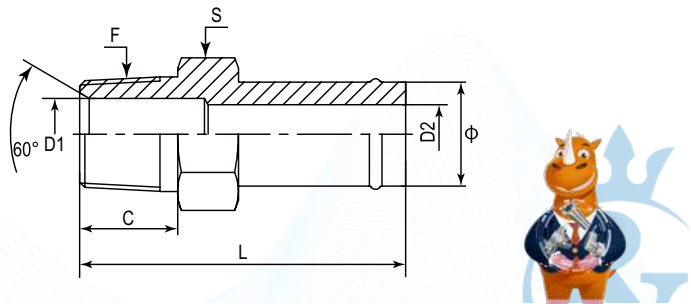

PART NUMBER	F (Thread)	Ø	C	D1	D2	L	S
#	NPTF	Inch	mm	mm	mm	mm	mm
DASTH128M-0402	1/8"-27	6.35	9.65	4.78	4.80	55.10	11.10
DASTH128M-0404	1/4"-18	6.35	14.22	7.14	4.80	59.70	14.30
DASTH128M-0502	1/8"-27	7.94	9.65	4.78	6.40	55.12	11.10
DASTH128M-0504	1/4"-18	7.94	14.22	6.40	6.40	60.20	15.88
DASTH128M-0602	1/8"-27	9.53	9.65	4.78	7.54	55.10	14.27
DASTH128M-0604	1/4"-18	9.53	14.22	7.14	7.14	59.44	15.88
DASTH128M-0606	3/8"-18	9.53	14.22	10.31	7.54	59.72	19.05
DASTH128M-0806	3/8"-18	12.70	14.22	10.31	10.31	59.50	19.05
DASTH128M-0808	1/2"-14	12.70	19.05	13.49	10.30	66.05	23.81
DASTH128M-0812	3/4"-14	12.70	19.05	18.26	10.30	67.80	28.58
DASTH128M-1006	3/8"-18	15.87	14.22	10.31	12.70	59.72	22.22
DASTH128M-1008	1/2"-14	15.87	19.05	12.70	12.70	66.04	23.80
DASTH128M-1012	3/4"-14	15.88	19.05	18.26	12.70	68.38	28.58
DASTH128M-1208	1/2"-14	19.05	19.05	13.49	15.90	66.05	25.40
DASTH128M-1212	3/4"-14	19.05	19.05	18.26	15.90	67.85	28.57
DASTH128M-1216	1-11"	19.05	23.88	23.83	15.90	73.30	34.93
DASTH128M-1608	1/2"-14	25.40	19.05	13.49	21.44	69.00	31.75
DASTH128M-1612	3/4"-14	25.39	19.05	18.26	21.40	67.85	31.75
DASTH128M-1616	1-11"	25.40	23.88	23.83	21.44	72.68	34.93
DASTH128M-1620	1-1/4"-11	25.40	24.64	31.75	21.44	74.94	44.45
DASTH128M-2016	1"-11	31.75	23.88	23.83	27.80	72.60	34.93
DASTH128M-2020	1-1/4"-11	31.75	24.64	31.75	27.80	74.94	44.45
DASTH128M-2024	1-1/2"-11	31.75	25.40	38.10	27.80	77.99	50.80
DASTH128M-2420	1-1/4"-11	38.10	24.64	31.75	34.10	74.94	44.45
DASTH128M-2424	1-1/2"-11	38.10	25.40	34.10	34.10	76.20	50.80
DASTH128M-3232	2"-11	50.80	26.16	49.23	46.80	82.76	63.50

Certificate:

DASTH107M

Straight Connector Suction Tail for Rubber Hose – BSPT Male 60°

D

A

STH

1

07

M

Company

Product Range

Adaptor Type

Fitting Structure

Thread Types

Connection Type

DME

Adaptor

Suction Tail

Straight

BSPT

Male

German Technology Equipment

New-Standard

DME&JDE Code:

DASTH107M

Product Type:

Hydraulic adaptor

Hose Fitting Type:

Suction Tail

Thread Type:


BSPT 60° Cone

Structure:

Straight

Connection Type:

Male

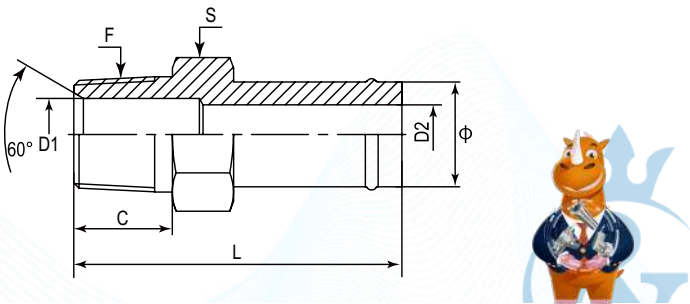

PART NUMBER	F (Thread)	Ø	C	D1	D2	L	S	Cross Number
#	BSPT	Inch	mm	mm	mm	mm	mm	-
DASTH107M-0808	1/2"-14	12.70	19.00	10.30	12.00	65.60	24	BTM1-0808L
DASTH107M-1208	1/2"-14	19.05	19.00	15.90	12.00	66.00	23.80	BTM1-0812L
DASTH107M-1212	3/4"-14	19.05	20.00	15.90	16.70	67.00	28.60	BTM1-1212L
DASTH107M-1216	1"-11	19.05	24.00	15.90	22.20	71.00	34.90	BTM1-1612L
DASTH107M-1608	1/2"-14	25.40	19.00	21.40	12.00	67.85	31.75	BTM1-0816L
DASTH107M-1612	3/4"-14	25.40	20.00	21.40	16.70	67.00	31.75	BTM1-1216L
DASTH107M-1616	1"-11	25.40	24.00	21.40	23.83	72.00	34.93	BTM1-1616L
DASTH107M-1620	1-1/4"-11	25.40	25.00	21.40	28.60	75.70	44.50	BTM1-2016L
DASTH107M-1624	1-1/2"-11	25.40	25.00	21.40	33.30	77.00	50	BTM1-2416L
DASTH107M-2012	3/4"-14	31.75	20.00	27.80	16.70	68.50	36	BTM1-1220L
DASTH107M-2016	1"-11	31.75	24.00	27.80	23.83	73.00	34.93	BTM1-1620L
DASTH107M-2024	1-1/2"-11	31.75	25.00	27.80	33.30	77.00	50.80	BTM1-2420L
DASTH107M-2416	1"-11	38.10	24.00	33.00	23.83	75.00	46	BTM1-1624L
DASTH107M-2420	1-1/4"-11	38.10	25.00	34.10	28.60	75.50	46	BTM1-2024L
DASTH107M-2424	1-1/2"-11	38.10	25.00	33.30	33.30	77.00	50.80	BTM1-2424L
DASTH107M-2432	2"-11	38.10	30.00	34.10	46.00	85.00	65	BTM1-3224L
DASTH107M-3224	1-1/2"-11	50.80	25.00	46.80	33.30	80.50	60	BTM1-2432L
DASTH107M-3232	2"-11	50.80	28.40	46.80	49.00	82.54	66.68	BTM1-3232L

Certificate:



DASTH1525

Straight Suction Tail for Rubber Hose – Metric Male + O Ring Seal

D

A

STH

1

525

Company

Product Range

Adaptor Type

Fitting Structure

Connection Type

DME

Adaptor

Suction Tail

Straight

Metric Male + O Ring Seal

German Technology Equipment

New-Standard

DME&JDE Code:

DASTH1525

Product Type:

Hydraulic adaptor

Hose Fitting Type:

Suction Tail

Thread Type:

Metric + O Ring Seal

Structure:


Straight

Connection Type:

Male

Sealing Method:

O Rings

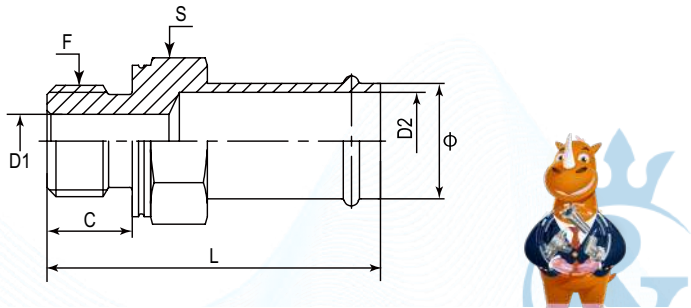

PART NUMBER	F (Thread)	Ø	C	D1	D2	L	S	Cross Number
#	Metric	mm	mm	mm	mm	mm	mm	-
DASTH1525-1018	M18X1.5	17.55	12.50	11.00	12.70	62.20	24.00	4679-1018

DASTH106Q

Straight Connector Suction Tail for Rubber Hose – BSPP Male + O Ring + Retaining Ring

D

A

STH

1

06

Q

Company

Product Range

Adaptor Type

Fitting Structure

Thread Types

Connection Type

DME

Adaptor

Suction Tail

Straight

BSPP

Male + O Ring + Retaining Ring

German Technology Equipment

New-Standard

DME&JDE Code:

DASTH106Q

Product Type:

Hydraulic adaptor

Hose Fitting Type:

Suction Tail

Thread Type:

BSPP + O Ring + Retaining Ring

Structure:


Straight

Connection Type:

Male

Sealing Method:

O Ring + Retaining Ring

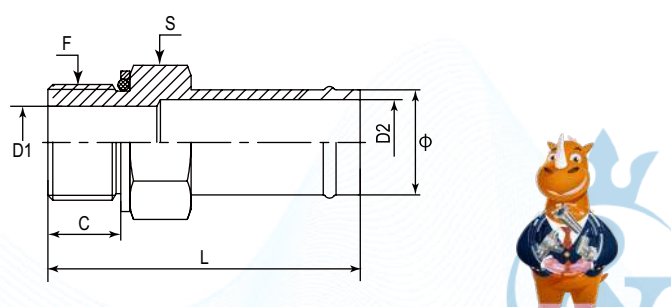

PART NUMBER	F (Thread)	Ø	C	D1	D2	L	S	Cross Number
#	BSPP	Inch	mm	mm	mm	mm	mm	-
DASTH106Q-1212	3/4"-14	19.05	14.50	15.50	15.50	67.60	32	BPM1-1212L
DASTH106Q-1216	1"-11	19.05	18.60	21.50	15.90	71.00	41	BPM1-1612L
DASTH106Q-1612	3/4"-14	25.40	14.50	15.50	21.40	67.60	32	BPM1-1216L
DASTH106Q-1616	1"-11	25.40	18.60	21.40	21.40	71.00	41	BPM1-1616L
DASTH106Q-1620	1-1/4"-11	25.40	18.60	27.50	21.40	72.50	50	BPM1-2016L
DASTH106Q-2012	3/4"-14	31.75	14.50	15.50	27.80	66.50	36	BPM1-1220L
DASTH106Q-2016	1"-11	31.75	18.60	21.50	27.80	68.00	41	BPM1-1620L
DASTH106Q-2020	1-1/4"-11	31.75	18.60	27.50	27.50	76.00	50	BPM1-2020L
DASTH106Q-2416	1"-11	38.10	18.60	21.50	34.10	73.50	46	BPM1-1624L
DASTH106Q-2420	1-1/4"-11	38.10	18.60	27.50	34.10	76.00	50	BPM1-2024L
DASTH106Q-2424	1-1/2"-11	38.10	18.60	33.00	33.00	76.00	55	BPM1-2424L
DASTH106Q-3220	1-1/4"-11	50.80	18.60	27.50	46.80	75.20	60	BPM1-2032L
DASTH106Q-3224	1-1/2"-11	50.80	18.60	33.00	46.80	75.20	60	BPM1-2432L
DASTH106Q-3232	2"-11	50.80	18.60	45.00	46.80	75.20	70	BPM1-3232L

DASTH428M

45°Elbow Suction Tail for Rubber Hose – NPTF Male60°

D

A

STH

4

28

M

Company

Product Range

Adaptor Type

Fitting Structure

Thread Types

Connection Type

DME

Adaptor

Suction Tail

45° Elbow

NPTF


Male

 German Technology Equipment



New-Standard

- DME&JDE Code: DASTH428M
- Product Type: Hydraulic adaptor
- Hose Fitting Type: Suction Tail
- Thread Type: NPTF 60° Cone
- Structure: 45° Elbow
- Connection Type: Male

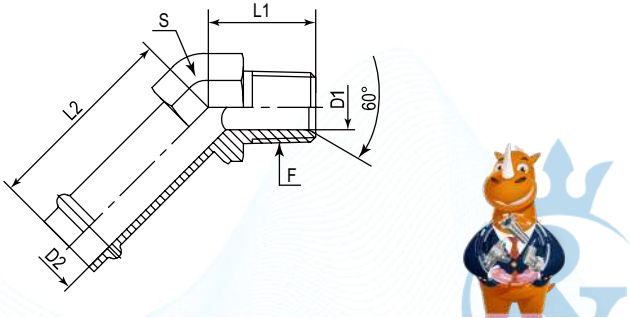

PART NUMBER	F (Thread)	Ø	D1	D2	L1	L2	S	Cross Number
#	NPTF	Inch	mm	mm	mm	mm	Inch	-
DASTH428M-0402	1/8"-27	6.35	4.78	4.80	16.30	38.00	7/16"	4503-0402
DASTH428M-0404	1/4"-18	6.35	7.14	4.80	21.80	38.00	9/16"	4503-0404
DASTH428M-0604	1/4"-18	9.53	7.14	7.50	21.00	40.00	9/16"	4503-0604
DASTH428M-0606	3/8"-18	9.53	10.31	7.50	24.13	45.50	3/4"	4503-0606
DASTH428M-0806	3/8"-18	12.70	10.31	10.31	23.50	43.00	3/4"	4503-0806
DASTH428M-0808	1/2"-14	12.70	13.49	10.31	29.72	44.20	7/8"	4503-0808
DASTH428M-1006	3/8"-18	15.87	10.31	12.70	24.13	44.20	7/8"	4503-1006
DASTH428M-1008	1/2"-14	15.87	13.49	12.70	29.70	46.48	7/8"	4503-1008
DASTH428M-1012	3/4"-14	15.88	18.26	12.70	31.24	43.64	1-1/16"	4503-1012
DASTH428M-1208	1/2"-14	19.05	13.49	15.90	29.71	46.89	7/8"	4503-1208
DASTH428M-1212	3/4"-14	19.05	18.26	15.90	31.24	43.64	1-1/16"	4503-1212
DASTH428M-1216	1"-11-1/2	19.05	23.83	15.90	31.24	43.64	1-5/16"	4503-1216
DASTH428M-1612	3/4"-14	25.39	18.26	21.44	31.00	43.65	1-1/16"	4503-1612
DASTH428M-1616	1"-11-1/2	25.40	23.83	21.44	37.60	48.00	1"5/16	4503-1616
DASTH428M-2020	1-1/4"-11-1/2	31.75	31.75	27.80	41.00	48.50	1"5/8	4503-2020
DASTH428M-2424	1-1/2"-11-1/2	38.10	38.10	34.10	44.96	54.50	1"7/8	4503-2424
DASTH428M-3232	2"-11-1/2	50.80	49.23	46.80	50.80	53.60	1"1/2	4503-3232

Certificate:



DASTH4305

45° Adjustable Elbow Suction Tail for Rubber Hose – SAE Male + O Ring

D

A

STH

4

30

5

Company

Product Range

Adaptor Type

Fitting Structure

Thread Types

Connection Type

DME

Adaptor

Suction Tail

45° Elbow

SAE UNF


Male + O Ring

 German Technology Equipment



New-Standard

- DME&JDE Code: DASTH4305
- Product Type: Hydraulic adaptor
- Hose Fitting Type: Suction Tail
- Thread Type: SAE UNF + O Ring
- Structure: 45° Elbow
- Connection Type: Adjustable Male
- Sealing Method: O Rings

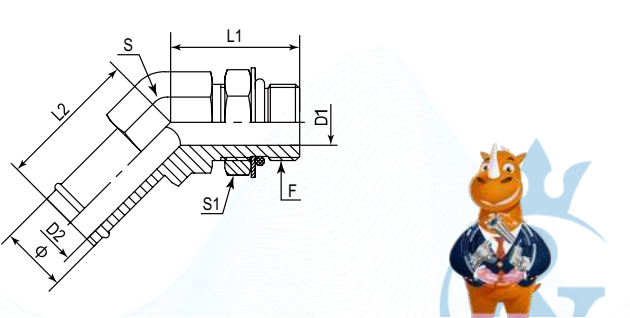

PART NUMBER	F (Thread)	Ø	D1	D2	L1	L2	S	S1	Cross Number
#	UNF	Inch	mm	mm	mm	mm	mm	mm	-
DASTH4305-0404	7/16"-20	6.35	4.37	4.80	26.19	44.45	12.70	14.29	4603-0404
DASTH4305-0406	9/16"-18	6.35	7.54	4.80	31.75	46.02	15.88	17.46	4603-0406
DASTH4305-0604	7/16"-20	9.52	4.37	7.54	30.23	45.97	11.11	14.29	4603-0604
DASTH4305-0606	9/16"-18	9.52	7.54	7.54	31.75	46.02	15.88	17.46	4603-0606
DASTH4305-0608	3/4"-16	9.52	9.93	7.54	37.34	48.01	20.64	25.40	4603-0608
DASTH4305-0806	9/16"-18	12.70	7.54	10.31	46.02	48.41	20.64	17.46	4603-0806
DASTH4305-0808	3/4"-16	12.70	9.93	10.31	36.91	48.41	20.64	22.22	4603-0808
DASTH4305-1008	3/4"-16	15.87	9.93	12.70	36.83	48.26	20.64	22.22	4603-1008
DASTH4305-1010	7/8"-14	15.87	12.29	12.70	43.26	49.99	23.81	25.40	4603-1010
DASTH4305-1012	1-1/16"-12	15.87	15.47	12.70	49.02	52.58	28.58	31.75	4603-1012
DASTH4305-1208	3/4"-16	19.05	9.93	15.90	36.83	52.00	20.64	25.40	4603-1208
DASTH4305-1210	7/8"-14	19.05	12.29	15.90	44.00	56.00	22.22	27.00	4603-1210
DASTH4305-1212	1-1/16"-12	19.05	15.47	15.90	49.20	52.40	28.58	31.75	4603-1212
DASTH4305-1216	1-5/16"-12	19.05	21.44	15.90	51.82	55.63	34.93	38.10	4603-1216
DASTH4305-1608	3/4"-16	25.39	9.93	21.44	40.64	52.07	28.58	22.22	4603-1608
DASTH4305-1612	1-1/16"-12	25.39	15.47	21.44	49.53	51.31	28.58	31.75	4603-1612
DASTH4305-1614	1-3/16"-12	25.39	18.26	21.44	50.80	53.59	31.75	34.93	4603-1614
DASTH4305-1616	1-5/16"-12	25.40	21.44	21.44	52.07	56.50	33.32	38.10	4603-1616
DASTH4305-1620	1-5/8"-12	25.39	27.38	21.44	57.15	59.44	44.45	47.63	4603-1620
DASTH4305-2012	1-1/16"-12	31.74	15.47	27.80	50.80	60.96	41.27	31.75	4603-2012
DASTH4305-2016	1-5/16"-12	31.75	21.44	27.80	51.80	58.90	34.93	38.10	4603-2016
DASTH4305-2020	1-5/8"-12	31.74	27.38	27.80	56.90	66.40	44.45	47.63	4603-2020
DASTH4305-2024	1-7/8"-12	31.74	33.32	27.80	60.96	63.50	50.80	53.98	4603-2024
DASTH4305-2416	1-5/16"-12	38.11	21.44	34.10	60.45	65.30	41.27	38.10	4603-2416
DASTH4305-2420	1-5/8"-12	38.11	27.38	34.10	60.00	66.50	44.45	47.63	4603-2420
DASTH4305-2424	1-7/8"-12	38.10	33.32	34.10	60.70	68.50	47.63	53.98	4603-2424
DASTH4305-3232	2-1/2"-12	50.80	45.24	46.80	50.35	55.40	63.50	69.85	4603-3232

Certificate:



DASTH928M

90° Elbow Suction Tail for Rubber Hose – NPTF Male 60°

D

A

STH

9

28

M

Company

Product Range

Adaptor Type

Fitting Structure

Thread Types

Connection Type

DME

Adaptor

Suction Tail

90° Elbow

NPTF

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DASTH928M

Product Type:

Hydraulic adaptor

Hose Fitting Type:

Suction Tail

Thread Type:


NPTF 60° Cone

Structure:

90° Elbow

Connection Type:

Male



PART NUMBER	F (Thread)	Ø	D1	D2	L1	L2	S	Cross Number
#	NPTF	Inch	mm	mm	mm	mm	mm	-
DASTH928M-0402	1/8"-27	6.35	4.78	4.80	19.81	46.53	11.11	4501-0402
DASTH928M-0404	1/4"-18	6.35	7.14	4.80	27.69	48.84	14.27	4501-0404
DASTH928M-0504	1/4"-18	8.00	7.14	6.43	27.40	31.80	14.27	4501-0504
DASTH928M-0602	1/8"-27	9.53	4.78	7.54	22.90	46.00	14.27	4501-0602
DASTH928M-0604	1/4"-18	9.53	7.14	7.50	27.69	48.84	14.27	4501-0604
DASTH928M-0606	3/8"-18	9.53	10.31	7.50	30.99	52.10	19.05	4501-0606
DASTH928M-0608	1/2"-14	9.52	13.49	7.54	37.30	51.80	22.20	4501-0608
DASTH928M-0806	3/8"-18	12.70	10.31	10.31	34.54	52.10	19.05	4501-0806
DASTH928M-0808	1/2"-14	12.70	13.49	10.31	37.34	54.44	22.23	4501-0808
DASTH928M-0812	3/4"-14	12.70	18.26	10.30	40.39	56.19	26.97	4501-0812
DASTH928M-1006	3/8"-18	15.87	10.31	12.70	34.54	54.44	19.05	4501-1006
DASTH928M-1008	1/2"-14	15.87	13.49	12.70	37.34	54.44	22.23	4501-1008
DASTH928M-1012	3/4"-14	15.88	18.26	12.70	40.39	56.20	26.98	4501-1012
DASTH928M-1206	3/8"-18	19.05	10.31	15.90	31.90	54.44	22.22	4501-1206
DASTH928M-1208	1/2"-14	19.05	13.49	15.90	37.34	54.44	22.23	4501-1208
DASTH928M-1212	3/4"-14	19.05	18.26	15.90	42.00	56.00	26.90	4501-1212
DASTH928M-1216	1"-11-1/2	19.05	23.83	15.90	50.04	61.84	33.32	4501-1216
DASTH928M-1612	3/4"-14	25.39	18.26	21.44	42.39	56.19	26.97	4501-1612
DASTH928M-1616	1"-11-1/2	25.40	23.83	21.44	50.00	60.80	33.33	4501-1616
DASTH928M-1620	1-1/4"-11-1/2	25.39	34.14	21.40	60.45	63.50	41.27	4501-1620
DASTH928M-2016	1"-11-1/2	31.75	23.83	27.80	50.29	58.00	34.93	4501-2016
DASTH928M-2020	1-1/4"-11-1/2	31.74	31.75	27.80	60.45	66.93	41.27	4501-2020
DASTH928M-2420	1-1/4"-11-1/2	38.10	31.75	34.10	60.00	65.50	47.62	4501-2420
DASTH928M-2424	1-1/2"-11-1/2	38.11	38.10	34.10	67.06	71.11	47.63	4501-2424
DASTH928M-3232	2"-11-1/2	50.80	49.23	46.80	76.20	77.70	63.50	4501-3232

Certificate:



DASTH907M

90° Elbow Suction Tail for Rubber Hose – BSPT Male 60°

D

A

STH

9

07

M

Company

Product Range

Adaptor Type

Fitting Structure

Thread Types

Connection Type

DME

Adaptor

Suction Tail

90° Elbow

BSPT

Male

 German Technology Equipment



New-Standard

DME&JDE Code:

DASTH907M

Product Type:

Hydraulic adaptor

Hose Fitting Type:

Suction Tail

Thread Type:


BSPT 60° Cone

Structure:

90° Elbow

Connection Type:

Male



PART NUMBER	F (Thread)	Ø	D1	D2	L1	L2	S	Cross Number
#	BSPT	Inch	mm	mm	mm	mm	mm	-
DASTH907M-0808	1/2"-14	12.70	12.00	10.31	37.30	52.00	22.22	BTM9-0808L
DASTH907M-1012	3/4"-14	15.88	18.00	12.70	40.30	56.20	26.97	BTM9-1210L
DASTH907M-1208	1/2"-14	19.05	12.00	15.90	40.40	56.20	26.98	BTM9-0812L
DASTH907M-1216	1"-11	19.05	22.20	15.90	50.00	60.10	33.32	BTM9-1612L
DASTH907M-1220	1-1/4"-11	19.05	28.60	15.90	60.50	60.00	41.30	BTM9-2012L
DASTH907M-1612	3/4"-14	25.40	18.00	21.40	40.30	52.30	28.70	BTM9-1216L
DASTH907M-1616	1"-11	25.40	22.20	21.40	50.00	54.00	33.30	BTM9-1616L
DASTH907M-1620	1-1/4"-11	25.40	28.60	21.40	60.50	66.90	41.30	BTM9-2016L
DASTH907M-2012	3/4"-14	31.75	16.70	27.80	56.30	65.20	41.30	BTM9-1220L
DASTH907M-2016	1"-11	31.75	22.20	27.80	60.30	65.20	41.30	BTM9-1620L
DASTH907M-2024	1-1/2"-11	31.75	33.30	27.80	62.29	67.30	47.63	BTM9-2420L
DASTH907M-2420	1-1/4"-11	38.10	28.60	34.10	60.50	66.90	47.60	BTM9-2024L
DASTH907M-2424	1-1/2"-11	38.10	33.30	34.10	67.00	66.00	47.63	BTM9-2424L
DASTH907M-3224	1-1/2"-11	50.80	33.30	46.80	71.00	77.70	63.50	BTM9-2432L
DASTH907M-3232	2"-11	50.80	46.00	46.80	75.00	77.70	63.50	BTM9-3232L

Certificate:




DASTH1305

Straight Connector Suction Tail for Rubber Hose – SAE Male + O Ring

D	A	STH	1	30	5
Company	Product Range	Adaptor Type	Fitting Structure	Thread Types	Connection & Sealing Method
DME	Adaptor	Suction Tail	Straight	SAE UNF	Male + O Ring



DME&JDE Code:	DASTH1305
Product Type:	Hose Fitting
Hose Fitting Type:	Suction Tail
Thread Type:	SAE UNF + O Ring
Structure:	Straight
Connection Type:	Male
Sealing Method:	O Rings

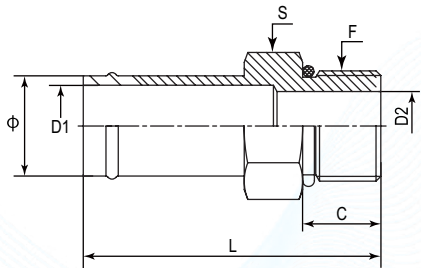

PART NUMBER	F (Thread)	Ø	C	D1	D2	L	S
#	UNF	Inch	mm	mm	mm	mm	mm
DASTH1305-0404	7/16"-20	6.35	9.14	4.37	4.37	55.04	14.27
DASTH1305-0406	9/16"-18	6.35	9.93	7.54	4.80	56.64	17.46
DASTH1305-0604	7/16"-20	9.53	9.14	4.37	7.50	55.00	14.27
DASTH1305-0606	9/16"-18	10.95	9.93	7.50	9.53	57.00	17.46
DASTH1305-0608	3/4"-16	9.53	11.13	9.93	7.50	59.70	22.22
DASTH1305-0806	9/16"-18	12.70	9.93	7.54	10.30	57.00	17.46
DASTH1305-0808	3/4"-16	12.70	11.13	9.93	10.31	59.69	22.22
DASTH1305-1008	3/4"-16	15.88	11.13	9.93	12.70	58.50	22.22
DASTH1305-1010	7/8"-14	15.88	12.70	12.29	12.70	63.00	25.40
DASTH1305-1012	1-1/16"-12	15.88	15.09	15.47	12.70	65.80	31.75
DASTH1305-1208	3/4"-16	19.05	11.13	9.93	15.90	62.20	25.40
DASTH1305-1210	7/8"-14	19.05	12.70	12.29	15.90	62.00	25.40
DASTH1305-1212	1-1/16"-12	19.05	15.09	15.47	15.47	66.00	26.98
DASTH1305-1216	1-5/16"-12	19.05	15.09	21.44	19.05	66.05	38.10
DASTH1305-1608	3/4"-16	25.40	11.13	9.93	21.44	62.80	31.75
DASTH1305-1612	1-1/16"-12	25.40	15.09	15.47	21.40	66.04	31.75
DASTH1305-1616	1-5/16"-12	25.40	15.09	21.40	21.40	66.50	38.10
DASTH1305-1620	1-5/8"-12	25.40	15.09	27.38	21.44	68.60	47.63
DASTH1305-2012	1-1/16"-12	31.75	15.09	15.47	27.80	66.10	38.10
DASTH1305-2016	1-5/16"-12	31.75	15.09	21.44	27.80	69.00	38.10
DASTH1305-2020	1-5/8"-12	31.75	15.09	27.38	27.38	67.90	47.60
DASTH1305-2024	1-7/8"-12	31.75	15.09	33.32	27.80	70.40	53.97
DASTH1305-2416	1-5/16"-12	38.10	15.09	21.44	33.32	66.80	42.88
DASTH1305-2420	1-5/8"-12	38.10	15.09	27.38	38.10	68.90	47.63
DASTH1305-2424	1-7/8"-12	38.10	15.09	33.32	33.32	70.40	53.97
DASTH1305-3220	1-5/8"-12	50.80	15.09	27.38	46.80	74.00	57.15
DASTH1305-3224	1-7/8"-12	50.80	15.09	33.32	46.80	70.80	57.15
DASTH1305-3232	2-1/2"-12	50.80	15.09	45.25	46.80	74.68	69.85




DASTH906Q

90° Adjustable Elbow Suction Tail for Rubber Hose – BSPP Male + O Ring + Retaining Ring

D	A	STH	9	06	Q
Company	Product Range	Adaptor Type	Fitting Structure	Thread Types	Connection Type
DME	Adaptor	Suction Tail	90° Elbow	BSPP	Male + O Ring + Retaining Ring



DME&JDE Code:	DASTH906Q
Product Type:	Hydraulic adaptor
Hose Fitting Type:	Suction Tail
Thread Type:	BSPP + O Ring + Retaining Ring
Structure:	90° Elbow
Connection Type:	Adjustable Male
Sealing Method:	O Ring + Retaining Ring



PART NUMBER	F (Thread)	Ø	D1	D2	L1	L2	S	S1	Cross Number
#	BSPP	Inch	mm	mm	mm	mm	mm	mm	-
DASTH906Q-1212	3/4"-14	19.05	15.50	15.90	50.00	49.20	28.58	36	BPM9-1212L
DASTH906Q-1612	3/4"-14	25.40	15.50	21.44	50.00	56.56	28.57	36	BPM9-1216L
DASTH906Q-1616	1"-11	25.40	21.50	21.40	53.00	55.50	33.30	41	BPM9-1616L
DASTH906Q-2012	3/4"-14	31.75	15.50	27.80	56.00	65.00	41.27	36	BPM9-1220L
DASTH906Q-2016	1"-11	31.75	21.50	27.80	53.00	56.50	41.30	41	BPM9-1620L
DASTH906Q-2020	1-1/4"-11	31.75	27.50	27.80	58.00	66.40	41	50	BPM9-2020L
DASTH906Q-2024	1-1/2"-11	31.75	33.00	27.80	60.70	68.00	47.60	55	BPM9-2420L
DASTH906Q-2416	1"-11	38.10	21.50	34.10	60.00	65.00	47.63	41	BPM9-1624L
DASTH906Q-2420	1-1/4"-11	38.10	27.50	34.10	60.70	68.00	48	50	BPM9-2024L
DASTH906Q-2424	1-1/2"-11	38.10	33.00	34.10	66.50	71.10	47.60	55	BPM9-2424L
DASTH906Q-3220	1-1/4"-11	50.80	27.50	46.80	75.00	77.70	63.50	50	BPM9-2032L
DASTH906Q-3224	1-1/2"-11	50.80	33.00	46.80	75.00	77.70	63.50	55	BPM9-2432L
DASTH906Q-3232	2"-11	50.80	45.00	46.80	75.00	77.70	63.50	70	BPM9-3232L



DASTH9305

90° Adjustable Elbow Suction Tail for Rubber Hose – SAE Male + O Ring

D

A

STH

9

30

5

Company

Product Range

Adaptor Type

Fitting Structure

Thread Types

Connection Type



Adaptor

Suction Tail

90° Elbow

SAE UNF

Male + O Ring


 German Technology Equipment



New-Standard

DME&JDE Code:

DASTH9305

Product Type:

Hydraulic adaptor

Hose Fitting Type:

Suction Tail

Thread Type:


SAE UNF + O Ring

Structure:

90° Elbow

Connection Type:

Adjustable Male



PART NUMBER	F (Thread)	Ø	D1	D2	L1	L2	S	S1	Cross Number
#	UNF	Inch	mm	mm	mm	mm	mm	mm	-
DASTH9305-0404	7/16"-20	6.35	4.37	4.80	26.19	44.45	12.70	14.29	4601-0404
DASTH9305-0406	9/16"-18	6.35	7.54	4.80	31.75	46.02	15.88	17.46	4601-0406
DASTH9305-0604	7/16"-20	9.52	4.37	7.54	30.23	45.97	11.11	14.29	4601-0604
DASTH9305-0606	9/16"-18	9.52	7.54	7.54	31.75	46.02	15.88	17.46	4601-0606
DASTH9305-0608	3/4"-16	9.52	9.93	7.54	37.34	48.01	20.64	25.40	4601-0608
DASTH9305-0806	9/16"-18	12.70	7.54	10.31	46.02	48.41	20.64	17.46	4601-0806
DASTH9305-0808	3/4"-16	12.70	9.93	10.31	36.91	48.41	20.64	22.22	4601-0808
DASTH9305-1008	3/4"-16	15.87	9.93	12.70	36.83	48.26	20.64	22.22	4601-1008
DASTH9305-1010	7/8"-14	15.87	12.29	12.70	43.26	49.99	23.81	25.40	4601-1010
DASTH9305-1012	1-1/16"-12	15.87	15.47	12.70	49.02	52.58	28.58	31.75	4601-1012

Certificate:
 














DASTH9305-1208	3/4"-16	19.05	9.93	15.90	36.83	52.00	20.64	25.40	4601-1208
DASTH9305-1210	7/8"-14	19.05	12.29	15.90	44.00	56.00	22.22	27.00	4601-1210
DASTH9305-1212	1-1/16"-12	19.05	15.47	15.90	49.20	52.40	28.58	31.75	4601-1212
DASTH9305-1216	1-5/16"-12	19.05	21.44	15.90	51.82	55.63	34.93	38.10	4601-1216
DASTH9305-1608	3/4"-16	25.39	9.93	21.44	40.64	52.07	28.58	22.22	4601-1608
DASTH9305-1612	1-1/16"-12	25.39	15.47	21.44	49.53	51.31	28.58	31.75	4601-1612
DASTH9305-1614	1-3/16"-12	25.39	18.26	21.44	50.80	53.59	31.75	34.93	4601-1614
DASTH9305-1616	1-5/16"-12	25.40	21.44	21.44	52.07	56.50	33.32	38.10	4601-1616
DASTH9305-1620	1-5/8"-12	25.39	27.38	21.44	57.15	59.44	44.45	47.63	4601-1620
DASTH9305-2012	1-1/16"-12	31.74	15.47	27.80	50.80	60.96	41.27	31.75	4601-2012
DASTH9305-2016	1-5/16"-12	31.75	21.44	27.80	51.80	58.90	34.93	38.10	4601-2016
DASTH9305-2020	1-5/8"-12	31.74	27.38	27.80	56.90	66.40	44.45	47.63	4601-2020
DASTH9305-2024	1-7/8"-12	31.74	33.32	27.80	60.96	63.50	50.80	53.98	4601-2024
DASTH9305-2416	1-5/16"-12	38.11	21.44	34.10	60.45	65.30	41.27	38.10	4601-2416
DASTH9305-2420	1-5/8"-12	38.11	27.38	34.10	60.00	66.50	44.45	47.63	4601-2420
DASTH9305-2424	1-7/8"-12	38.10	33.32	34.10	60.70	68.50	47.63	53.98	4601-2424
DASTH9305-3220	1-5/8"-12	50.80	27.38	46.80	73.40	77.70	63.50	47.63	4601-3220
DASTH9305-3224	2-1/2"-12	50.80	33.32	46.80	73.40	77.70	63.50	53.98	4601-3224
DASTH9305-3232	2-1/2"-12	50.80	45.24	46.80	73.40	77.70	63.50	69.85	4601-3232

Certificate:
 



















Hose Fitting

One Piece »

DP1JCMF


P911



Straight Connector JIC Male 74°
Cone - One Piece

DP1JCFF


P912



Straight Connector JIC Female 74°
Cone - One Piece

DP4JCFF


P913



45° Elbow JIC Female 74° - One
Piece

DP9JCFF


P914



90° Elbow JIC Female 74° Cone -
One Piece

DP1FLF


P915



Straight Connector SAE Flange
Code 61 (3000 PSI) - One Piece

DP4FLF


P916



45° Elbow SAE Flange Code 61
(3000 PSI) - One Piece

DP9FLF


P917



90° Elbow SAE Flange Code 61
(3000PSI) - One Piece

DP1FSF


P918



Straight Connector SAE Flange
Code 62 (6000 PSI) - One Piece

DP4FSF


P919



45° Elbow SAE Flange Code 62
(6000 PSI) - One Piece

DP9FSF


P920



90° Elbow SAE Flange Code 62
(6000 PSI) - One Piece

DP1NPMF


P921



Straight Connector NPTF Male 60°
Cone - One Piece

DP10RMF


P922



Straight Connector ORFS Male
Cone- One Piece

DP10RFF


P923



Straight Connector ORFS Female
Cone - One Piece

DP40RFF


P924



45° Elbow ORFS Female Cone -
One Piece

DP90RFF

P925



90° Elbow ORFS Female Cone -
One Piece

DP1JCMF

Straight Connector JIC Male 74° Cone – One Piece

D

P

1

JC

M

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

JIC UNF

Male

One Piece

 German Technology Equipment



No-Skiving

DME&JDE Code:

DP1JCMF

Product Type:

Hose Fitting

Hose Fitting Type:

One Piece

Thread Type:


UNF 74° Cone

Structure:

Straight

Connection Type:

Male

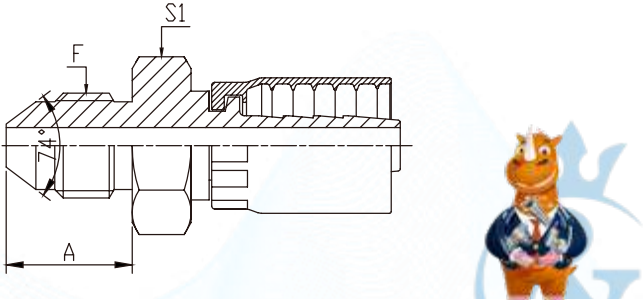

PART NUMBER	F (Thread)	Ø	A	S1
#	UNF	Inch	mm	mm
DP1JCMF-0404	7/16"-20	6.00	51.00	14.28
DP1JCMF-0505	1/2"-20	8.00	57.00	15.00
DP1JCMF-0606	9/16"-18	10.00	60.00	17.00
DP1JCMF-0808	3/4"-16	12.00	68.00	22.00
DP1JCMF-1010	7/8"-14	16.00	77.00	24.00
DP1JCMF-1212	1-1/16"-12	20.00	81.00	30.00
DP1JCMF-1616	1-5/16"-12	25.00	92.00	36.00
DP1JCMF-2020	1-5/8"-12	32.00	101.00	46.00
DP1JCMF-2424	1-7/8"-12	40.00	119.00	50.00
DP1JCMF-3232	2-1/2"-12	50.00	127.00	60.00

Certificate:



DP1JCFF

Straight Connector JIC Female 74° Cone – One Piece

D

P

1

JC

F

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

JIC UNF

Female

One Piece

 German Technology Equipment



No-Skiving

DME&JDE Code:

DP1JCFF

Product Type:

Hose Fitting

Hose Fitting Type:

One Piece

Thread Type:


UNF 74° Cone

Structure:

Straight

Connection Type:

Female

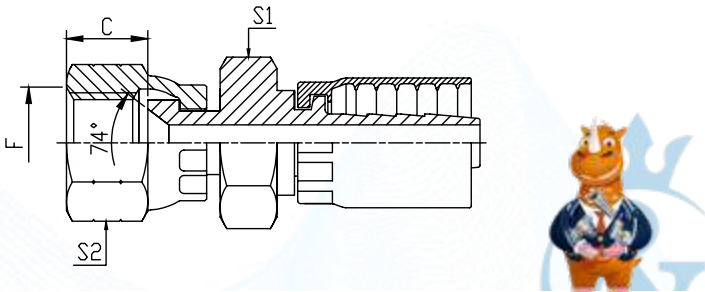

PART NUMBER	F (Thread)	Ø	C	S1	S2
#	UNF	Inch	mm	mm	mm
DP1JCFF-0404	7/16"-20	6.00	9.00	14.00	15.00
DP1JCFF-0505	1/2"-20	8.00	9.50	15.00	17.00
DP1JCFF-0606	9/16"-18	10.00	10.50	17.00	19.00
DP1JCFF-0808	3/4"-16	12.00	11.00	22.00	24.00
DP1JCFF-1010	7/8"-14	16.00	13.00	24.00	27.00
DP1JCFF-1212	1-1/16"-12	20.00	15.00	30.00	32.00
DP1JCFF-1414	1-3/16"-12	22.00	15.00	32.00	36.00
DP1JCFF-1616	1-5/16"-12	25.00	16.00	36.00	41.00
DP1JCFF-2020	1-5/8"-12	32.00	17.00	46.00	50.00
DP1JCFF-2424	1-7/8"-12	40.00	20.00	50.00	55.00
DP1JCFF-3232	2-1/2"-12	50.00	23.50	65.00	75.00

Certificate:



DP4JCFF

45° Elbow JIC Female 74° – One Piece

D

P

4

JC

F

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

45° Elbow

JIC UNF

Female

One Piece

 German Technology Equipment



No-Skiving

DME&JDE Code:

DP4JCFF

Product Type:

Hose Fitting

Hose Fitting Type:

One Piece

Thread Type:


JIC UNF 74° Cone

Structure:

45° Elbow

Connection Type:

Female

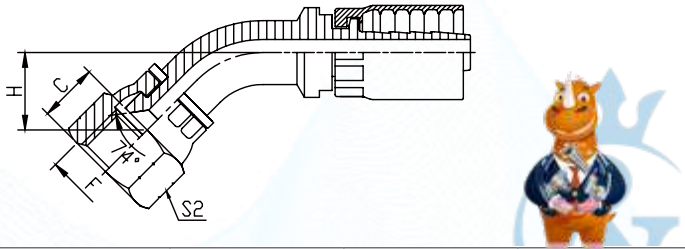

PART NUMBER	F (Thread)	Ø	C	H	S2
#	UNF	Inch	mm	mm	mm
DP4JCFF-0404	7/16"-20	6.00	9.00	18.10	15
DP4JCFF-0505	1/2"-20	8.00	9.50	19.30	17
DP4JCFF-0606	9/16"-18	10.00	10.50	20.00	19
DP4JCFF-0808	3/4"-16	12.00	11.00	23.50	24
DP4JCFF-1010	7/8"-14	16.00	13.00	25.30	27
DP4JCFF-1212	1-1/16"-12	20.00	15.00	30.00	32
DP4JCFF-1616	1-5/16"-12	25.00	16.00	31.50	41
DP4JCFF-2020	1-5/8"-12	32.00	17.00	36.60	50
DP4JCFF-2424	1-7/8"-12	40.00	20.00	41.60	55
DP4JCFF-3232	2-1/2"-12	50.00	23.50	49.50	75



Certificate:



DP9JCFF

90° Elbow JIC Female 74° Cone – One Piece

D

P

9

JC

F

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

90° Elbow

JIC UNF

Female

One Piece

 German Technology Equipment



No-Skiving

DME&JDE Code:

DP9JCFF

Product Type:

Hose Fitting

Hose Fitting Type:

One Piece

Thread Type:


JIC UNF 74° Cone

Structure:

90° Elbow

Connection Type:

Female

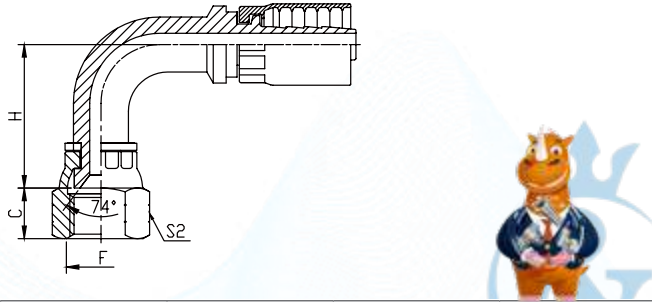

PART NUMBER	F (Thread)	Ø	C	H	S2
#	UNF	Inch	mm	mm	mm
DP9JCFF-0404	7/16"-20	6.00	9.00	33.50	15
DP9JCFF-0505	1/2"-20	8.00	9.50	37.00	17
DP9JCFF-0606	9/16"-18	10.00	10.50	39.30	19
DP9JCFF-0808	3/4"-16	12.00	11.00	47.00	24
DP9JCFF-1010	7/8"-14	16.00	13.00	52.50	27
DP9JCFF-1212	1-1/16"-12	20.00	15.00	63.50	32
DP9JCFF-1616	1-5/16"-12	25.00	16.00	70.00	41
DP9JCFF-2020	1-5/8"-12	32.00	17.00	82.50	50
DP9JCFF-2424	1-7/8"-12	40.00	20.00	97.50	55
DP9JCFF-3232	2-1/2"-12	50.00	23.50	118.80	75



Certificate:



DP1FLF

Straight Connector SAE Flange Code 61 (3000 PSI) – One Piece

D

P

1

FL

F

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

SAE Flange Code 61 (3000 PSI)

One Piece

 German Technology Equipment



No-Skiving

DME&JDE Code:

DP1FLF

Product Type:

Hose Fitting

Hose Fitting Type:


One Piece

Structure:

Straight

Connection Type:

Flange Code 61



PART NUMBER	Flange	Ø	A	C	D	L
#	Size	Inch	mm	mm	mm	mm
DP1FLF-0808	1/2"	12.00	46.00	30.20	24.00	6.00
DP1FLF-1212	3/4"	20.00	48.00	38.10	32.00	6.00
DP1FLF-1616	1"	25.00	52.00	44.40	38.00	8.00
DP1FLF-2020	1-1/4"	32.00	58.00	50.80	43.00	8.00
DP1FLF-2424	1-1/2"	40.00	68.00	60.30	50.00	8.00
DP1FLF-3232	2"	50.00	70.00	71.40	62.00	9.53

Certificate:



DP4FLF

45° Elbow SAE Flange Code 61 (3000 PSI) – One Piece

D

P

4

FL

F

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting Type

DME

Hose Fitting

45° Elbow

SAE Flange Code 61 (3000 PSI)

One Piece

 German Technology Equipment



No-Skiving

DME&JDE Code:

DP4FLF

Product Type:

Hose Fitting

Hose Fitting Type:


One Piece

Structure:

Straight

Connection Type:

Flange Code 61

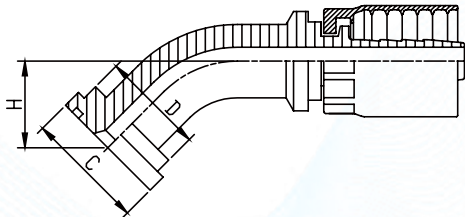

PART NUMBER	Flange	Ø	C	D	H
#	Size	Inch	mm	mm	mm
DP4FLF-0808	1/2"	12.00	30.20	24.00	23.00
DP4FLF-1212	3/4"	20.00	38.10	32.00	28.00
DP4FLF-1616	1"	25.00	44.40	38.00	29.00
DP4FLF-2020	1-1/4"	32.00	50.80	43.00	33.00
DP4FLF-2424	1-1/2"	40.00	60.30	50.00	39.00
DP4FLF-3232	2"	50.00	71.40	62.00	46.00

Certificate:





DP9FLF

90° Elbow SAE Flange Code 61 (3000PSI) – One Piece

D

P

9

FL

F

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting Type

DME

Hose Fitting

90° Elbow

SAE Flange Code 61 (3000 PSI)

One Piece

 German Technology Equipment



No-Skiving

DME&JDE Code:

DP9FLF

Product Type:

Hose Fitting

Hose Fitting Type:


One Piece

Structure:

90° Elbow

Connection Type:

Flange Code 61

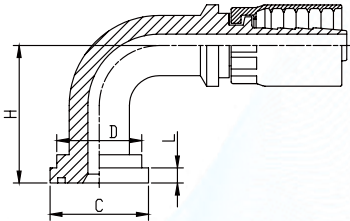

PART NUMBER	Flange	Ø	C	D	H
#	Size	Inch	mm	mm	mm
DP9FLF-0808	1/2"	12.00	30.20	24.00	47.00
DP9FLF-1212	3/4"	20.00	38.10	32.00	62.00
DP9FLF-1616	1"	25.00	44.40	38.00	67.00
DP9FLF-2020	1-1/4"	32.00	50.80	43.00	78.00
DP9FLF-2424	1-1/2"	40.00	60.30	50.00	94.00
DP9FLF-3232	2"	50.00	71.40	60.00	114.00

Certificate:



DP1FSF

Straight Connector SAE Flange Code 62 (6000 PSI) – One Piece

D

P

1

FS

F

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

SAE Flange Code 62 (6000 PSI)

One Piece

 German Technology Equipment



No-Skiving

DME&JDE Code:

DP1FSF

Product Type:

Hose Fitting

Hose Fitting Type:


One Piece

Structure:

Straight

Connection Type:

Flange Code 62

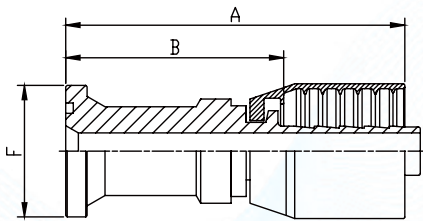

PART NUMBER	FLANGE	Ø	A	B	F
#	SIZE	Inch	mm	mm	mm
DP1FSF-1212	3/4"	20.00	104.60	68.00	1-5/8"
DP1FSF-1612	1"	25.00	78.70	42.20	1-7/8"
DP1FSF-1616	1"	25.00	122.20	81.00	1-7/8"
DP1FSF-2016	1-1/4"	32.00	91.70	50.50	2-1/8"
DP1FSF-2020	1-1/4"	32.00	127.30	84.30	2-1/8"

Certificate:





DP4FSF

45° Elbow SAE Flange Code 62 (6000 PSI) – One Piece

D

P

4

FS

F

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting Type

DME

Hose Fitting

45° Elbow

SAE Flange Code 62 (6000 PSI)

One Piece

 German Technology Equipment



No-Skiving

DME&JDE Code:

DP4FSF

Product Type:

Hose Fitting

Hose Fitting Type:


One Piece

Structure:

45° Elbow

Connection Type:

Flange Code 62

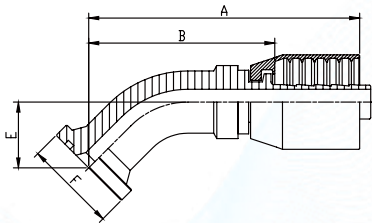

PART NUMBER	FLANGE	Ø	A	B	E	F
#	SIZE	Inch	mm	mm	mm	mm
DP4FSF-1212	3/4"	3/4"	97.00	60.50	25.90	1-5/8"
DP4FSF-1616	1"	1"	118.40	77.20	32.00	1-7/8"
DP4FSF-2016	1 1/4"	1"	16.10	74.90	26.90	2-1/8"

DP9FSF

90° Elbow SAE Flange Code 62 (6000 PSI) – One Piece

D

P

9

FS

F

Company

Product Range

Fitting Structure

Connection Type

Hose Fitting Type

DME

Hose Fitting

90° Elbow

SAE Flange Code 62 (6000 PSI)

One Piece

 German Technology Equipment



No-Skiving

DME&JDE Code:

DP9FSF

Product Type:

Hose Fitting

Hose Fitting Type:


One Piece

Structure:

90° Elbow

Connection Type:

Flange Code 62



PART NUMBER	FLANGE	Ø	A	B	E	F
#	SIZE	Inch	mm	mm	mm	mm
DP9FSF-1212	3/4"	3/4"	89.20	52.60	57.90	1-5/8"
DP9FSF-1612	1"	3/4"	88.60	52.10	57.90	1-7/8"
DP9FSF-1616	1"	1"	108.70	67.60	70.10	1-7/8"
DP9FSF-2016	1 1/4"	1"	108.70	67.60	70.10	2-1/8"
DP9FSF-2020	1 1/4"	1 1/4"	129.30	86.40	90.00	2-1/8"

DP1NPMF

Straight Connector NPTF Male 60° Cone – One Piece

D

P

1

NP

M

F

Company

Hose Fitting

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

Hose Fitting

Straight

NPTF

Male

One Piece

German Technology Equipment

No-Skiving

DME&JDE Code:

DP1NPMF

Product Type:

Hose Fitting

Hose Fitting Type:

One Piece

Thread Type:


NPTF 60° Cone

Structure:

Straight

Connection Type:

Male

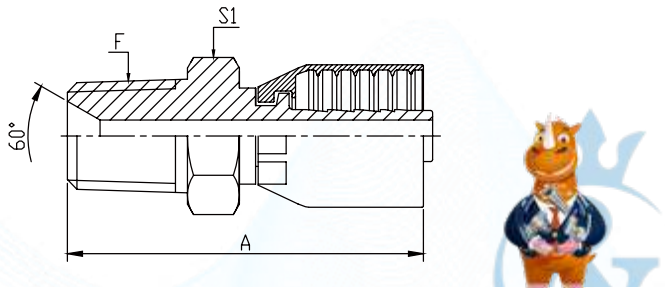

PART NUMBER	F (Thread)	Ø	A	S1
#	NPTF	Inch	mm	mm
DP1NPMF-0204	1/8"-27	6.00	46.00	9/16"
DP1NPMF-0404	1/4"-18	6.00	51.00	9/16"
DP1NPMF-0405	1/4"-18	8.00	49.00	11/16"
DP1NPMF-0406	1/4"-18	10.00	58.00	3/4"
DP1NPMF-0604	3/8"-18	6.00	47.00	11/16"
DP1NPMF-0605	3/8"-18	8.00	49.00	11/16"
DP1NPMF-0606	3/8"-18	10.00	60.00	3/4"
DP1NPMF-0608	3/8"-18	12.00	66.00	7/8"
DP1NPMF-0610	3/8"-18	16.00	66.00	15/16"
DP1NPMF-0804	1/2"-14	6.00	54.00	7/8"
DP1NPMF-0806	1/2"-14	10.00	61.00	7/8"
DP1NPMF-0808	1/2"-14	12.00	72.00	7/8"
DP1NPMF-0810	1/2"-14	16.00	77.00	15/16"
DP1NPMF-0812	1/2"-14	20.00	77.00	1-1/16"
DP1NPMF-1208	3/4"-14	12.00	68.00	1-1/16"
DP1NPMF-1210	3/4"-14	16.00	73.00	1-1/16"
DP1NPMF-1212	3/4"-14	20.00	78.00	1-1/16"
DP1NPMF-1216	3/4"-14	25.00	86.00	1-3/8"
DP1NPMF-1612	1"-11	20.00	78.00	1-3/8"
DP1NPMF-1616	1"-11	25.00	66.00	1-3/8"
DP1NPMF-2020	1-1/4"-11	32.00	104.00	1-3/4"
DP1NPMF-2424	1-1/2"-11	40.00	89.00	2"
DP1NPMF-3232	2"-11	50.00	103.00	2-1/2"

Certificate:

DP10RMF

Straight Connector ORFS Male Cone– One Piece

D

P

1

OR

M

F

Company

Hose Fitting

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

Hose Fitting

Straight

ORFS

Male

One Piece

German Technology Equipment

No-Skiving

DME&JDE Code:

DP10RMF

Product Type:

Hose Fitting

Hose Fitting Type:

One Piece

Thread Type:


UNF

Structure:

Straight

Connection Type:

Male

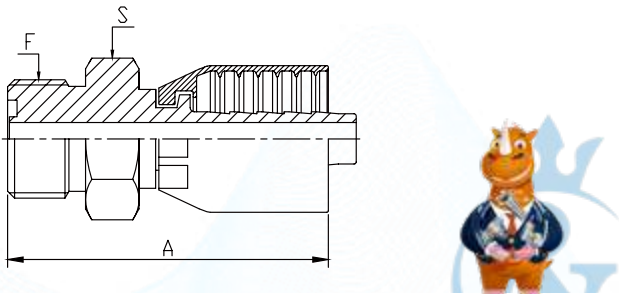

PART NUMBER	F (Thread)	Ø	A	S
#	UNF	Inch	mm	mm
DP10RMF-0404	9/16"-18	1/4"	44	5/8"
DP10RMF-0606	11/16"-16	3/8"	53	3/4"
DP10RMF-0806	13/16"-16	3/8"	56	7/8"
DP10RMF-0808	13/16"-16	1/2"	61	7/8"
DP10RMF-1008	1"-14	1/2"	66	1-1/16"
DP10RMF-1010	1"-14	5/8"	69	1-1/16"
DP10RMF-1210	1-3/16"-12	5/8"	73	1-1/4"
DP10RMF-1212	1-3/16"-12	3/4"	74	1-1/4"
DP10RMF-1612	1-7/16"-12	3/4"	74	1-1/2"
DP10RMF-1616	1-7/16"-12	1"	84	1-1/2"
DP10RMF-2020	1-11/16"-12	1-1/4"	84	1-3/4"

Certificate:

DP10RFF

Straight Connector ORFS Female Cone – One Piece

D

P

1

OR

F

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

Straight

ORFS

Female

One Piece

 German Technology Equipment



No-Skiving

DME&JDE Code:

DP10RFF

Product Type:

Hose Fitting

Hose Fitting Type:

One Piece

Thread Type:


UNF

Structure:

Straight

Connection Type:

Female

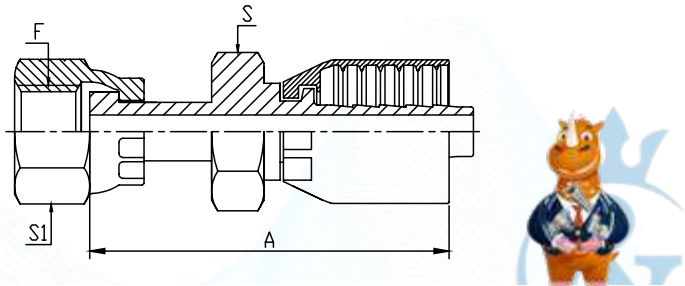

PART NUMBER	F (Thread)	Ø	A	S
#	UNF	Inch	mm	mm
DP10RFF-0404	9/16"-18	1/4"	53	11/16"
DP10RFF-0406	9/16"-18	3/8"	56	11/16"
DP10RFF-0604	11/16"-16	1/4"	54	13/16"
DP10RFF-0606	11/16"-16	3/8"	58	13/16"
DP10RFF-0608	11/16"-16	1/2"	64	13/16"
DP10RFF-0806	13/16"-16	3/8"	64	15/16"
DP10RFF-0808	13/16"-16	1/2"	67	15/16"
DP10RFF-0810	13/16"-16	5/8"	72	15/16"
DP10RFF-1008	1"-14	1/2"	73	1-1/8"
DP10RFF-1010	1"-14	5/8"	78	1-1/8"
DP10RFF-1012	1"-14	3/4"	78	1-1/8"
DP10RFF-1210	1-3/16"-12	5/8"	81	1-3/8"
DP10RFF-1212	1-3/16"-12	3/4"	84	1-3/8"
DP10RFF-1612	1-7/16"-12	3/4"	86	1-5/8"
DP10RFF-1616	1-7/16"-12	1"	92	1-5/8"
DP10RFF-2016	1-11/16"-12	1"	92	1-7/8"
DP10RFF-2020	1-11/16"-12	1 1/4"	96	1-7/8"
DP10RFF-2424	2"-12	1 1/2"	99	2-1/4"

Certificate:



DP40RFF

45° Elbow ORFS Female Cone – One Piece

D

P

4

OR

F

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

DME

Hose Fitting

45° Elbow

ORFS

Female

One Piece

 German Technology Equipment



No-Skiving

DME&JDE Code:

DP40RFF

Product Type:

Hose Fitting

Hose Fitting Type:

One Piece

Thread Type:


UNF

Structure:

45° Elbow

Connection Type:

Female

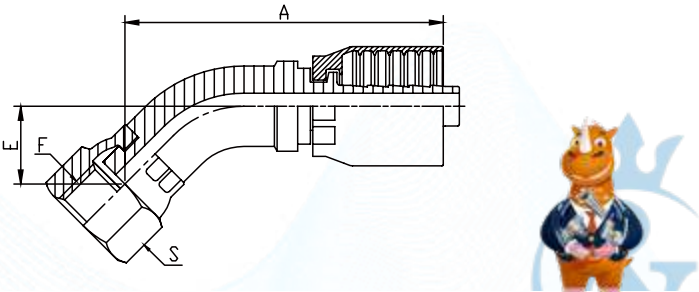

PART NUMBER	F (Thread)	Ø	A	E	S
#	UNF	Inch	mm	mm	mm
DP40RFF-0404	9/16"-18	1/4"	50	10	11/16"
DP40RFF-0406	9/16"-18	3/8"	57	10	11/16"
DP40RFF-0604	11/16"-16	1/4"	53	11	13/16"
DP40RFF-0605	11/16"-16	5/16"	60	11	13/16"
DP40RFF-0606	11/16"-16	3/8"	59	11	13/16"
DP40RFF-0608	11/16"-16	1/2"	68	11	13/16"
DP40RFF-0806	13/16"-16	3/8"	64	15	15/16"
DP40RFF-0808	13/16"-16	1/2"	72	15	15/16"
DP40RFF-0810	13/16"-16	5/8"	78	15	15/16"
DP40RFF-1008	1"-14	1/2"	74	16	1-1/8"
DP40RFF-1010	1"-14	5/8"	81	16	1-1/8"
DP40RFF-1012	1"-14	3/4"	85	16	1-1/8"
DP40RFF-1210	1-3/16"-12	5/8"	92	21	1-3/8"
DP40RFF-1212	1-3/16"-12	3/4"	92	21	1-3/8"
DP40RFF-1612	1-7/16"-12	3/4"	102	24	1-5/8"
DP40RFF-1616	1-7/16"-12	1"	111	24	1-5/8"
DP40RFF-2016	1-11/16"-12	1"	115	25	1-7/8"
DP40RFF-2020	1-11/16"-12	1 1/4"	121	25	1-7/8"
DP40RFF-2424	2"-12	1 1/2"	119	27	2-1/4"

Certificate:



DP90RFF

90° Elbow ORFS Female Cone – One Piece

D

P

9

OR

F

F

Company

Product Range

Fitting Structure

Thread Types

Connection Type

Hose Fitting Type

Hose Fitting

90° Elbow

ORFS

Female

One Piece

German Technology Equipment

No-Skiving

DME&JDE Code:

DP90RFF

Product Type:

Hose Fitting

Hose Fitting Type:

One Piece

Thread Type:


UNF

Structure:

90° Elbow

Connection Type:

Female



PART NUMBER	F (Thread)	Ø	A	E	S
#	UNF	Inch	mm	mm	mm
DP90RFF-0404	9/16"-18	1/4"	45	21	11/16"
DP90RFF-0406	9/16"-18	3/8"	52	21	11/16"
DP90RFF-0604	11/16"-16	1/4"	49	23	13/16"
DP90RFF-0605	11/16"-16	5/16"	57	23	13/16"
DP90RFF-0606	11/16"-16	3/8"	56	23	13/16"
DP90RFF-0608	11/16"-16	1/2"	64	23	13/16"
DP90RFF-0806	13/16"-16	3/8"	58	29	15/16"
DP90RFF-0808	13/16"-16	1/2"	66	29	15/16"
DP90RFF-0810	13/16"-16	5/8"	71	29	15/16"
DP90RFF-1008	1"-14	1/2"	70	32	1-1/8"
DP90RFF-1010	1"-14	5/8"	75	32	1-1/8"
DP90RFF-1012	1"-14	3/4"	78	32	1-1/8"
DP90RFF-1210	1-3/16"-12	5/8"	89	48	1-3/8"
DP90RFF-1212	1-3/16"-12	3/4"	78	48	1-3/8"
DP90RFF-1612	1-7/16"-12	3/4"	103	56	1-5/8"
DP90RFF-1616	1-7/16"-12	1"	109	56	1-5/8"
DP90RFF-2016	1-11/16"-12	1"	118	65	1-7/8"
DP90RFF-2020	1-11/16"-12	1-1/4"	124	64	1-7/8"
DP90RFF-2424	2"-12	1-1/2"	140	68	2-1/4"

Certificate:

Hose Fitting

One Piece



IMAGE & VIDEO GALLERY

Corporate & Workshop

With years of experience, DME&JDE have developed and is continuously developing. Step into the Corporate and workshop, and know more about DME&JDE spirit, culture and strength.



Office Building



Flexible Hoses Workshop



Fluid Connector Workshop



Raw Material Area



Waste Area



Working Principles



Quality Control Center



Ready-to-Package Area



Warehouse



Warehouse



Meeting



Team Discussing

Production Line

Advanced equipment, strict working principle guarantee the flexible hoses, fluid connector and hose assembly accurate dimensions and comply and even exceed international standard.



Inner Tube Production



Steel Wire Preparation



Reinforcement Layer Production



Outer Cover Production.



Fiber Reinforcement Wrapping



Labeling



Packaging



Fiber Reinforcement Wrapping



CNC Workshop



CNC Machine



Worker Operating



Fluid Connector Producing



Semi-Products



Laser Marking



O ring installation



Manual Assembling



Machine Assembling



Package

Quality Control

Strict quality control system guarantee our products are qualified and even exceed industrial standard to reduce defective rate, reduce downtime and enhance equipment performance.





Package & Warehouse

Perfect standard package guarantee the perfect condition of products. Flexible custom package make more possibilities to suit different distributors and customers requirements and eliminate worries.



Sulfuring Testing



Tensile Testing



Mooney Viscosity Testing



Impulse Testing



Ozone Resistance Testing



Salt Spray Testing



Trilinear Coordinates Test



Coordinate Projection Test



Automatic Image Inspection



Roughness Test



Hardness Test



Spectrometer Material Testing



Roll Package



Carton Package



Pallet Package – Fluid Connector



Pallet Package – Flexible Hoses



Reel Package – Hydraulic Hose



Carton Package – Fluid Connector

BECOME A DISTRIBUTOR

DME&JDE has the ability to develop a global footprint because we have extensive manufacturing capacities, large and smart stock warehouse and rich and enough technical support.

Browse what we can supply for our distributors...



National exclusive agency

Distributor owns the exclusive agency of our DME brand hose connectors, JDE brand flexible hoses and DME&JDE OEM solutions.




Material Support

We will provide free materials, including brochure, manual, advertising specialty and clothing, demonstrating enterprise value and expanding market easily.



Unified VI Support

DME&JDE has a complete set of distributor advertisement, new product posters and other unified VI designs to let your publicity more professional.

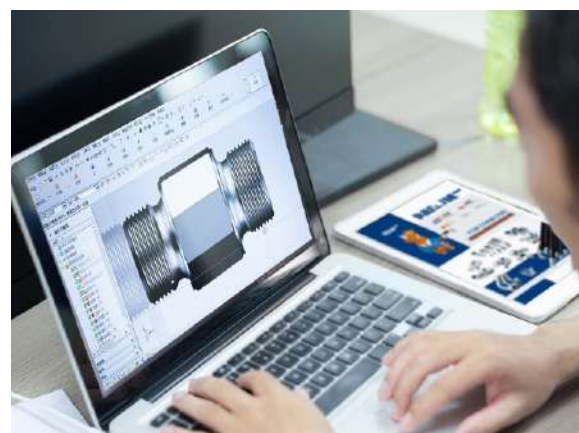

Technical Support


DME&JDE will continuously develop new products according to your market demanding to help you catch your seize market opportunities and exploit potential market

DME&JDE not only supplies qualified products, but also provides marketing, customer care, total publicity planning, competitive price and professional technical support.



Customer Support

DME&JDE adopts multiple promotion channel, including enterprise website promotion, Alibaba, Facebook, LinkedIn and Tik Tok, as well as exhibition. All customer resources will be allocated to the distributors of the corresponding region, helping distributors to expand the source

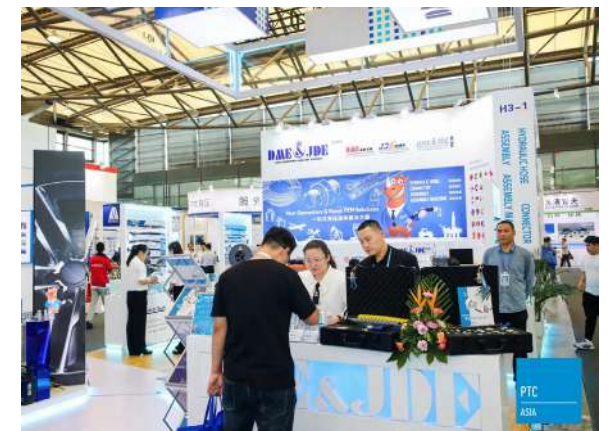

Exhibition Support

DME&JDE will attend professional exhibitions including international, regional exhibitions, distributors can stand for enterprise to chat with exhibition customers. Several local exhibition, we can supply material supply for distributors.



Price & Payment Support

Distributor price helps distributors make more profits and owns absolute advantage at local market



Other Support

Distributors information including location, E-mail and phones will be displayed on our enterprise website, brochures and exhibitions.